MIL-F-12869H(MU)
20 April 1971
Superceding
MIL-F-12869G(MU)
21 August 1970

MILITARY SPECIFICATION

FUZE, POINT DETONATING, M524A6
PARTS FOR

1. SCOPE

1.1 This specification covers the parts for the point detonating fuze, M524A6.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-2550 - Ammunition and Special Weapons General Specification For
MIL-I-45607 - Inspection Equipment, Supply and Maintenance of
MIL-F-45465 - Fuze, PD, M524A6, Loading, Assembling and Packing

STANDARDS

FEDERAL

FED-STD-151 - Metals; Test Methods

MILITARY

MIL-STD-105 - Sampling Procedures and Tables For Inspection by Attributes (ABC-STD-105)
MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-331 - Fuze and Fuze Components, Environmental and Performance Tests For
MIL-STD-1167 - Ammunition Data Card
MIL-STD-1168 - Lot Numbering of Ammunition

FSC: 1390

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

MIL-STD-1169 - Packaging, Packing and Marking for Shipment of Inert Ammunition Components
MIL-STD-1235 - Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes

COMMERCIAL

ASTM - 1968, Part 7

DRAWINGS

ORDNANCE CORPS

9215606 - Fuze, PD, M524A6 Assembly (MP)

PUBLICATIONS

ORDNANCE CORPS

ET-9200706 - Equipment Tabulation

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material.-Materials and parts shall be in accordance with applicable drawings and specifications.

3.2 Parts.-the metal parts shall comply with the requirements specified on the drawings see (dwg. 9215606) and with all requirements specified in applicable specifications.

3.3 Winding of arming mechanism assemblies (dwg. 8797534) - A slip clutch type torque wrench shall be employed, during all winding and rewinding operations performed in the manufacture, inspection and testing of the assembly, to insure that the torque applied does not exceed twenty (20) ounce-inches maximum.

3.4 Torque test of the arming mechanism assembly (dwg. 8797534).-The arming mechanism assembly shall show no signs of slippage when a torque of 19.5 plus or minus 0.5 ounce-inches is applied to the rotor (see 4.3.3.16).

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:27Z
Check the source to verify that this is the current version before use.

3.5 Plunger Density Test.-The density of the machined plunger shall be 7.7 grams per cu. cm. as a minimum (dwg. 9205738) (see 4.3.3.14). (Not required for die cast plungers).

3.6 Plunger and Safety Pin Retention Test.-The plunger (dwg. 9205738 or 9255370) shall retain the shank of the plunger safety pin when the pull wire assembly (dwg. 9205733) is pulled with sufficient force to separate the plunger safety pin, at the slit, from the remainder of the pull wire assembly (see 4.3.3.17).

3.7 Arming Delay at Cold Temperature.-The arming mechanism assembly (dwg. 8797534) shall arm in not less than 1.2 seconds nor more than 5.0 seconds at minus 40 F or colder (see 4.3.3.19).

3.8 Spring Embrittlement.-The plated springs shall not break when pulled to the minimum (min.) point of permanent distortion (see 4.3.3.1).

3.9 Jolt and Jumble.-The assembly shall comply with the requirements of Tests No. 101 and 102 of MIL-STD-331 when tested as specified in 4.3.3.23. Except that breakdown and inspection will be conducted after culmination of both tests.

3.10 Proving Ground.-The fuzes shall comply with the following requirements prior to acceptance of the lot when tested in accordance with para 4.3.3.24, 4.3.3.25, and 4.3.3.26.

3.11 Functioning.-The fuze shall cause the shell to function high order when tested as specified in 4.3.3.24.

3.12 Premature Burst.-The fuze shall show no evidence of a premature burst when tested as specified in 4.3.3.24. A premature burst is defined as the functioning of the assembly in the mortar tube, or in flight before impact.

3.13 Arming Delay.-The fuze shall not function on impact against a plywood screen when tested as specified in 4.3.3.26.

3.14 Workmanship.-All parts shall be finished and assembled in a thorough, workmanlike manner. They shall be free of burrs, chips, sharp edges, cracks, unblended radii, surface defects, dirt, grease, rust, corrosion products and other foreign matter. The cleaning method used shall not be injurious to any part, nor shall the parts be contaminated by the cleaning agent. All required markings shall be neat and sharply defined.

3.15 Die Castings.-The die castings shall be of uniform quality, free of cold shuts, blowholes, porosity and shrinkage defects. The castings must be dry, clean, and free from chips. All unfilled castings shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:27Z
Check the source to verify that this is the current version before use.

3.15.1 Flash Removal.-All flash must be completely removed from parting lines, internal and external profiles, cored holes and ejector pin marks, except as noted on the drawings.

3.15.2 Gates.-All waste material remaining from the gate must be removed except when so noted on the drawings.

3.15.3 Surface Porosity.-Surface porosity shall be limited to not more than one pore .020" X .050 X .020" deep max. in any area .250" square. Surface is defined as to any surface visible prior to sectioning. Furthermore, there shall be no porosity or surface defects of any kind on any sealing surface (see 4.3.3.15).

3.15.4 Internal Porosity and/or Sponginess.-Internal porosity or sponginess shall be limited to a maximum of 5 pores in an area .250" square on any random cross section plane. No pore shall exceed .020" X .020" X .020" max., and no pore shall be less than .030" from any exterior or cored surface (see 4.3.3.15).

3.15.5 Identification Marking.-The manufacturer's name or trade mark, together with cavity identification number, shall be cast into each die casting. The identification marking shall be so located as not to be machined off in finishing the casting to required dimensions.

3.15.6 Remelted Scrap.-No scrap shall be used other than sprews, gates, and rejected die castings of the particular alloy required by the item print and produced in the manufacturer's own plant. The rejected die castings used shall be free from finishes paint, or anything else which may contaminate the alloy.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.-Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to Standard MIL-STD-109 in order to define terms used herein. The provisions of Specification MIL-A-2550 shall apply.

4.1.1 Submission of product.-At the time each completed lot of items deliverable under the contract is submitted to the Government for acceptance, the contractor shall supply the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

following information accompanied by a certificate which attests that the information provided is correct and applicable to the product being submitted:

a. A statement that the lot complies with all of the quality assurance provisions specified in this specification.
b. Drawing and specification number and date, together with identification and date of changes thereto.
c. A statement that all material purchased by the contractor meets requirements, when such material is controlled by Government or commercial specifications referenced in any of the contractual documents, and that certificates of conformance are on file and available for review.
d. Number of items in the lot.
e. Date submitted

The certificate shall be signed by responsible agent of the certifying organization. The initial certificate submitted shall be substantiated by evidence of the agent's authority to bind his principal. Substantiation of the agent's authority will not be required with subsequent certificates unless, during the course of the contract, this authority is vested in another agent of the certifying organization.

4.2 Initial Production Inspection

4.2.1 Submission.-Prior to the start of regular production, the contractor shall submit an initial production sample to a Government approved facility as designated by the contracting officer (see 6.6) for evaluation for conformity to drawing and specification requirements contained in 4.2.2. The initial production sample shall consist of 25 completed assemblies and 25 complete sets of parts (i.e., 25 each of every component and every subassembly) together with 316 complete fuze assemblies (dwg. 9215606) less safety pull wires, with test plug (dwg. 9234597) installed in the plungers. The booster cups should be installed but not torqued. The initial production sample must have been produced by the contractor or furnished by a supplier and manufactured using the same production processes, procedures, and equipment which will be used in fulfilling the contract. All parts and materials, including packaging and packing, shall be obtained from the same sources of supply as will be used in regular production. The sample shall be accompanied by certificates of analysis for materials. An initial production sample, or portion thereof, as directed by the contracting officer, shall also be submitted whenever there is a lapse in production for a period in excess of 90 days or whenever a change occurs in manufacturing process, material used, drawing, specification or source of supply as to significantly affect product uniformity as determined by the Government. Prior to submission, the contractor shall inspect the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

sample to the degree necessary to assure that it conforms to the requirements of the contract and submit a record of this inspection with the sample. A sample containing known defects will not be submitted unless specifically authorized by the contracting officer. The above note concerning the "25 each of every component", applies to machined parts only. The sample for die cast and machined parts shall be 25 each min. which shall include three (3) parts from every cavity. For those components produced by the die cast method and not machined; the sample size shall be "three parts from every cavity". Furthermore, whenever a die requires repair or replacement, another initial production sample will be submitted from that particular cavity after repair or replacement is made.

4.2.2 Inspections to be Performed.-Assemblies and components will be subjected by the Government to any or all of the examinations or tests specified in this specification and any or all requirements of the applicable drawings. The 316 sets of parts, less safety pull wires, will be assembled and subjected to the arming test of the complete fuze assembly (para. 4.4.21). If more than two of the assemblies fail to arm or align, the lot shall be rejected.

4.2.3 Rejection.-If any assembly or component fails to comply with any or all of the applicable requirements, the initial production sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of the assembly or component in the sample to comply with any or all of the stated requirements. In the event of rejection, the Government reserves the rights to require the contractor to take corrective action and submit a new initial production sample or portion thereof. Until an initial production sample is accepted, the contractor is in no way authorized by the Government to initiate regular production unless otherwise directed by the contracting officer.

4.2.4 Die Castings.-In addition to the initial production samples required in para. 4.2.1, those contractors supplying fuzes containing the optional die cast components, are required to supply for test, the below listed additional quantities of assemblies and fuze components sufficient to perform the following tests. Packaging of these assemblies and components shall be as specified in Section 5 of this specification.

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:27Z
Check the source to verify that this is the current version before use.

Item	Test		Quantity
1. Arming Mech Assy (8797534)	Arming Delay		150 each
2. Complete Fuze Assy	Jolt & Jumble		50 each
3. Complete Fuze Assy	TV & Function	(145°F)	52 each
		(-40°F)	48 each
4. Complete Fuze Assy	Arming Delay (Proving Ground)		100 each
5. Complete Fuze Assy	Function	(145°F)	200 each
		(-40°F)	200 each
		(70°F)	200 each

4.2.4.1 Inspections to be Performed upon Paragraph 4.2.4 Parts.-In addition to the above tests, the assemblies and components will be subjected by the Government to any or all of the examinations or tests specified in this specification, and any or all requirements of the applicable drawings. With the exception of the arming mechanism assembly, all fuze components shall be loaded, assembled and tested, or conditioned and tested as specified. Samples for TV shall be tested as specified in MIL-STD-331 and fired ballistically. Acceptability for the tests listed in the above Paragraph will be determined as follows:

Test	Defect	Accept	Reject
a. Arming Delay (see 4.4.18)	Critical	0	1
	Major	1	2
b. Jolt & Jumble (see 4.4.23)	Critical	0	1
	Major	0	1
c. Arming Delay (see 4.4.25)	Critical	0	1
d. TV & Function			
d.1 TV (145° and -40°F)	Critical	0	1

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:27Z
Check the source to verify that this is the current version before use.

Test	Defect	Accept	Reject
d.2 Functioning			
145°F			
SQ | D 0 | 13 | 13 9 | 13 | 13	Critical (Premature burst)	0	1
-40°F	Major	2	3
SQ | D 0 | 12 | 12 9 | 12 | 12	(Failure to Function High Order)		
e. Function (see 4.4.24)			
145°F			
SQ | D 0 | 50 | 50 9 | 50 | 50	Critical (Premature burst)	0	1
	Major (Failure to Function High Order)	6	7
-40°F			
SQ | D 0 | 50 | 50 9 | 50 | 50	Critical (Premature burst)	0	1
	Major (Failure to Function High Order)	7	8
70°F			
SQ | D 0 | 50 | 50 9 | 50 | 50	Critical (Premature burst)	0	1
	Major (Failure to Function High Order)	6	7

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:27Z
Check the source to verify that this is the current version before use.

NOTE: The rejection provisions of Paragraph 4.2.3 also apply to material submitted in accordance with requirements of Paragraph 4.2.4.

4.3 Inspection Provisions

4.3.1 Lot Formation.-The term "inspection lot" as used in this specification is defined as an essentially homogeneous collection of units of product from which a representative sample is drawn and inspected to determine conformance with applicable requirements. The sample selected shall represent only that quantity of units from which the sample was drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision, and complies with the provisions for submission of product as specified in MIL-STD-105. Changes to the process, specification, or drawing not affecting safety, performance, interchangeability, or storage, as determined by the Government, shall not be deemed to alter the homogeneity of an inspection lot. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein regardless of the type of sampling procedure which is being applied to determine conformance with requirements. Lot numbering, as required, shall be in accordance with MIL-STD-1168.

4.3.2 Examination.-Inspection for critical defects shall be 100 percent except where sampling is permitted by this specification. Sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105 except that continuous sampling plans in accordance with Standard MIL-STD-1235 may be used if approved by the procuring activity. Also, at the option of the procuring activity, AQL's and sampling plans may be applied to individual characteristics listed using an AQL of 0.65 percent for each Minor defect and an AQL of 0.40 percent for each Major defect. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

4.3.2.1 Cup, booster (see dwg. 8797516 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection
Critical:	None defined.	
Major:	AQL 1.00 percent	
101.	Pitch diameter of thread, max.	Gage
102.	Inside diameter at bottom, min.	Gage
103.	Thickness of wall	Gage
104.	Concentricity of inside diameter with thread including perpendicularity	Gage
105.	Evidence of cold shuts	Visual
Minor:	AQL 2.50 Percent	
201.	Depth of cavity	Gage
202.	Pitch diameter of thread, min.	Gage
203.	Major diameter of thread, min.	Gage
204.	Length of threaded flange, min.	Gage
205.	Thickness of bottom	Gage
206.	Evidence of poor workmanship (see 3.14)	Visual

4.3.2.2 Liner, booster (see dwg. 8797519 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection
Critical:	None defined.	
Major:	None defined	
Minor:	AQL 2.50 percent	
201.	Outside diameter, max	Gage
202.	Length, min	Gage
203.	Inside dimeter, min	Gage
204.	Thickness of bottom	Gage
205.	Crack	Visual
206.	Evidence of poor workmanship (see 3.14)	Visual

4.3.2.3 Cap, detonator (see dwg. 8797533 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

Critical: None defined.

Major:	AQL 0.65 percent.	
101.	Diameter of detonator cavity, min.	Gage
102.	Pitch diameter of thread, max.	Gage
103.	Flash hole obstructed.	Visual
Minor:	AQL 4.00 percent	
201.	Pitch diameter of thread, min.	Gage
202.	Major diameter of thread, min.	Gage
203.	Depth of detonator cavity, max.	Gage
204.	Diameter of flash hole, min.	Gage
205.	Diameter of thread pilot, max.	Gage
206.	Total length, max.	Gage
207.	Length to forward end of thread, max.	Gage
208.	Length of thread pilot, min.	Gage
209.	Slot missing.	Visual
210.	Evidence of poor workmanship (see 3.14).	Visual

4.3.2.4 Arming mechanism assembly (see dwg. 8797534 covering a detail of dwg. 9215606).

NOTE: Inspection for the below listed criticals must be performed upon assemblies in the unarmed position, afer all other work and testing of the mechanism has been completed and directly before conducting the non-arming test in para 4.4.22.

Categories	Defects	Method of Inspection
Critical:		
1.	Component missing from timing device.	Visaul
2.	Trigger or trigger spring improperly assembled.	Visual
3.	Segment spring damaged or improperly assembled.	Visual
4.	Mechanism arms before trigger stops rotation of segment or segment fails to return to original position.	Visual-Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

Major:	AQL 0.40 Percent	
101.	Retaining plate inverted or loose	Visual-Manual
102.	No clearance between rear frame and rotor	Visual-Manual
Minor:	AQL 1.50 Percent	
201.	Length to top of creep pin, max	Gage
202.	Rotor in armed position prior to testing	Visual
203.	Evidence of poor workmanship (see 3.14)	Visual

4.3.2.5 Body, arming mechanism (see dwg. 8797535 or 9255358 covering a detal of dwg. 9215606).

Categories	Defects	Method of Inspection
Critical:	None defined.	
Major:	AQL 1.50 Percent	
101.	Depth of pull wire relief cavity, min	Gage
102.	Diameter of set back device assembly screw holes, max	Gage
103.	Location of locating pin slot with respect to stop pin slot	Gage
104.	Location of booster lead cavity	Gage
105.	Large diameter of booster lead cavity, min	Gage
106.	Small diameter of booster lead cavity, min	Gage
107.	Depth of large diameter booster lead cavity	Gage
108.	Depth of rotor cavity, min	Gage
109.	Concentricity of retaining plate diameter with outside diameter	Gage
110.	Diameter of creep pin cavity	Gage
111.	Finish improper in rotor cavity	Visual
112.	Diameter of rotor trunion cavity	Gage
113.	Distance between rotor trunion cavity and timer holes	Gage
114.	Location of rotor stop pin slot, max	Gage

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:27Z
Check the source to verify that this is the current version before use.

115. Length of body.....Gage
116. Diameter of booster cup end of body, max.....Gage
117. Diameter of body, max.....Gage
118. Any operation missing.....Visual

Minor: AQL 2.50 Percent
201. Large diameter of booster lead cavity, max.....Gage
202. Small diameter of booster lead cavity, max.....Gage
203. Depth of rotor cavity, max.....Gage
204. Length to shoulder.....Gage
205. Diameter of booster cup end of body, min.....Gage
206. Diameter of body, min.....Gage
207. Evidence of poor workmanship (see 3.14).....Visual

4.3.2.6 Pin creep (see dwg. 8797536 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection

Critical: None defined.

Major: None defined

Minor: AQL 2.50 percent
201. Diameter of head.....Gage
202. Diameter of shank.....Gage
203. Total length, min.....Gage
204. Finish improper.....Visual
205. Chamfer missing.....Visual
206. Evidence of poor workmanship (see 3.14).....Visual

4.3.2.7 Plate, retaining (see dwg. 8797537 covering a detail of dwg. 9215606).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

Categories	Defects	Method of Inspection
Critical:	None defined.	
Major:	AQL 0.40 percent	
101.	Concentricity of inside diameter with outside diameter	Gage
102.	Radius of tongue	Gage
Minor:	AQL 0.65 percent	
201.	Evidence of poor workmanship (see 3.14)	Visual

4.3.2.8 Spring, creep (see dwg. 8797541 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection
Critical:	None defined.	
Major:	AQL 0.40 percent	
101.	Load at test height	Gage
102.	Load at assembled height	Gage
Minor:	AQL 1.50 percent	
201.	Outside diameter of small end, max	Gage
202.	Outside diameter of large end, max	Gage
203.	Inside diameter of large end, min	Gage
204.	Evidence of poor workmanship (see 3.14)	Visual

4.3.2.9 Rotor assembly (see dwg. 8797542 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection
Critical:		
1.	Length of rotor stop pin protrusion after push test	Gage
Major:	AQL 0.40 Percent	
101.	Spring pin missing	Visual
102.	Flash hole obstructed	Visual

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:27Z
Check the source to verify that this is the current version before use.

Minor: AQL 1.00 Percent
201. Length of spring pin, max.....Gage
202. Evidence of poor workmanship (see 3.14).....Visual

4.3.2.10 Pin, rotor stop (see dwg. 8797543 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection
Critical: None defined.		
Major: None defined.		
Minor:	AQL 1.0 percent	
201.	Protective coating damaged exposing base metal.....	Visual
202.	Evidence of poor workmanship (see 3.14).....	Visual

4.3.2.11 Rotor and timing gear assembly (see dwg. 8797544 covering a detail of dwg. 9215606)

Categories	Defects	Method of Inspection
Critical:		
1.	Timing gear loose or staked improperly.....	Visual-Manual
Major:	AQL 0.65 percent	
101.	Location of stop pin hole.....	Gage
102.	Pitch diameter of timing gear over wire.....	Gage
103.	Concentricity of timing gear to small OD.....	Gage
Minor:	AQL 1.00 percent	
201.	Location of toothless segment of timing gear.....	Gage
202.	Evidence of poor workmanship (see 3.14).....	Visual

4.3.2.12 Rotor (see dwg. 8797546 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

Critical: None defined.

Major:	AQL 1.00 Percent
101.	Diameter of detonator cavity, min.....Gage
102.	Pitch diameter of thread, min.....Gage
103.	Length of thread, min.....Gage
104.	Location of detonator cavity with slot.....Gage
105.	Location of spring pin cavity.....Gage

Minor:	AQL 4.00 Percent
201.	Diameter of detonator cavity, max.....Gage
202.	Pitch diameter of threads, max.....Gage
203.	Minor diameter of threads, max.....Gage
204.	Distance from bottom to detonator cap shoulder, max.....Gage
205.	Length of rotor body.....Gage
206.	Length to retaining plate shoulder.....Gage
207.	Concentricity of detonator cavity with thread.....Gage
208.	Concentricity of retaining plate surface and rotor pivot.....Gage
209.	Diameter of rotor pivot, min.....Gage
210.	Thickness through bottom of plunger cavity, max.....Gage
211.	Diameter of plunger cavity.....Gage
212.	Diameter of creep pin hole, max.....Gage
213.	Diameter of flash hole, min.....Gage
214.	True position of detonator threads..Gage
215.	Evidence of poor workmanship (see 3.14).....Visual

4.3.2.13 Setback device assembly (see dwg. 8797547 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection
Critical:		
1.	Rear frame loose after peening	Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

Major: AQL 0.40 Percent
101. Distance between front and rear frame, min.....Gage

Minor: AQL 0.65 Percent
201. Evidence of poor workmanship (see 3.14).....Visual

4.3.2.14 Frame front (see dwg. 8797552 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection
Critical: None defined.		
Major:	AQL 0.40 Percent	
101.	Length of staking tabs, min.....	Gage
Minor:	AQL 0.65 Percent	
201.	Evidence of poor workmanship (see 3.14).....	Visual

4.3.2.15 Segment (see dwg. 8797562 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection
Critical: None defined.		
Major:	AQL 0.65 Percent	
101.	External profile.....	Gage
102.	Position of hole.....	Gage
103.	Dimensions of hole.....	Gage
104.	Thickness of segment.....	Gage
Minor:	AQL 0.65 Percent	
201.	Evidence of poor workmanship (see 3.14).....	Visual

4.3.2.16 Spring, striker (see dwg. 8797592 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

Critical: None defined.

Major: None defined.

Minor:	AQL 1.00 Percent
201.	Evidence of poor workmanship (see 3.14).....Visual
202.	Protective coating damaged exposing base metal.....Visual

4.3.2.17 Plug, test (see dwg. 9234597).

Categories	Defects	Method of INspection
Critical:	None defined.	
Major:	AQL 0.65 Percent	
101.	Diameter of large diameter	Gage
102.	Diameter of small diameter	Gage
103.	Overall length of plug	Gage
Minor:	AQL 1.00 Percent	
201.	Length of small diameter	Gage
202.	Evidence of poor workmanship (see 3.14)	Visual

4.3.2.18 Striker assembly (see dwg. 8797603 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection
Critical:	None defined.	
Major:	AQL 0.65 Percent	
101.	Height of firing pin, max	Gage
102.	Finish improper	Visual
103.	Sealing compound missing	Visual
Minor:	AQL 1.00 percent	
201.	Protective coating damaged exposing base metal	Visual
202.	Evidence of poor workmanship (see 3.14)	Visual

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:27Z
Check the source to verify that this is the current version before use.

4.3.2.19 Striker (see dwg. 8797604 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection
Critical: None defined.		
Major:	AQL 1.00 percent	
101.	Concentricity of flange with body	Gage
102.	Location of firing pin holes	Gage
103.	Location of boss	Gage
104.	Location of setting slot	Gage
105.	Location of guide pin slot	Gage
106.	Angular width of boss	Gage
Minor:	AQL 2.50 percent	
201.	Diameter of plug cavity, max	Gage
202.	Diameter of flange, min	Gage
203.	Length of boss and flange, max	Gage
204.	Length from boss to bottom of firing pin counterbore, max	Gage
205.	Diameter of body, min	Gage
206.	Length of guide pin slot, min	Gage
207.	Evidence of poor workmanship (see 3.14)	Visual

4.3.2.20 Pin Firing (see dwg. 8798605 covering a detail of dwg. 9215606).

Categories	Defects	Method of Inspection
Critical: None defined.		
Major:	AQL 0.40 Percent	
101.	Profile of firing pin point after assembly to the striker	Gage
Minor:	AQL 0.65 Percent	
201.	Evidence of poor workmanship (see 3.14)	Visual

4.3.2.21 Body and striker assembly (see dwg. 9205730 covering a detail of dwg. 9215606).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

Categories	Defects	Method of Inspection
Critical:		
1.	Safety pin missing or protrusion under min.	Gage
Major:	AQL 0.65 percent	
101.	Length of flange to striker boss	Gage
102.	Protrusion of arming mechanism locating pin	Gage
103.	Protrusion of safety pin, max.	Gage
104.	Any component missing	Visual
Minor:	AQL 2.50 Percent	
201.	Stake missing	Visual
202.	Marking missing or improperly positioned	Visual
203.	Crimps improper	Visual
204.	Protective coating damaged exposing base metal	Visual
205.	Evidence of poor workmanship (see 3.14)	Visual

4.3.2.22 Body, Fuze (see dwg. 9205731 covering a detail of dwg. 9215606)

Categories	Defects	Method of Inspection
Critical: None defined		
Major:	AQL 2.50 Percent	
101.	Concentricity of striker hole with plunger cavity	Gage
102.	Concentricity of arming mechanism cavity with plunger cavity	Gage
103.	Concentricity of arming mechanism cavity with booster cup thread	Gage
104.	Diameter of plunger cavity	Gage
105.	Diameter of arming mechanism cavity	Gage

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:27Z
Check the source to verify that this is the current version before use.

106. Location of safety pin hole.....Gage
107. Location of mechanism locating pin hole.....Gage
108. Location of set back safety pin hole.....Gage
109. Location of striker guide pin hole.....Gage
110. Length between inner steps of fuze body.....Gage
111. Length from flange to large datum diameter.....Gage
112. Concentricity of "O" ring and retainer holes with plunger safety pin hole.....Gage
113. Finish on striker hole, sealing ring, or plunger cavity surface improper....Visual
114. Location of plunger safety pin hole...Gage
115. Surface cracks, seams or laps.....Visual
116. Pitch diameter of shell thread, max.....Gage
117. Length to flange.....Gage
118. Length to booster cup thread, min.....Gage
119. Diameter of shell thread pilot, max.....Gage
120. Length from flange to bottom of arming mechanism cavity.....Gage
121. Diameter of arming mechanism locating pin hole.....Gage
122. Concentricity of nose with shell thread when smouldered against gage...Gage
123. Depth of plunger safety pin hole, min, after assembly of retainer seal and safety pin plunger seal.....Gage

Minor: AQL 6.50 percent

201. Pitch diameter of shell thread, min...Gage
202. Pitch diameter of booster cup thread..Gage
203. Major diameter of shell thread, min...Gage
204. Minor diameter of booster cup thread, max.....Gage
205. Length of shell thread pilot, max.....Gage
206. Diameter of flange, min.....Gage
207. Diameter of booster cup thread counterbore, min.....Gage
208. Depth of setting slot, min.....Gage
209. Length of shell thread undercut, max..Gage
210. Length of flange to small datum diameter.....Gage
211. Width of setting slot, min.....Gage
212. Diameter of set back safety pin seal relief cavity.....Gage

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:27Z
Check the source to verify that this is the current version before use.

213. Concentricity of booster cup thread with shell thread when shouldered against gage.....Gage
214. Diameter of striker hole, max.....Gage
215. Diameter of guide pin hole, max.....Gage
216. Diameter of set back safety wire hole, min.....Gage
217. Diameter of arming mechanism locating pin hole, max.....Gage
218. Diameter of plunger safety pin hole...Gage
219. Distance across wrench slots, max.....Gage
220. Evidence of poor workmanship (see 3.14).....Visual

4.3.2.23 Pull Wire Assembly (See Dwg. 9205733 covering a detail of Dwg. 9215606)

Categories	Defects	Method of Inspection
Critical: None defined.		
Major:	AQL 0.40 percent	
	101. Pins assembled improperly	Visual
Minor:	AQL 1.00 percent	
	201. Protective coating damaged	Visual
	202. Evidence of poor workmanship (see 3.14)	Visual

4.3.2.24 Pin, Plunger, Safety (see Dwg. 9205734 covering a detail of dwg. 9215606)

Categories	Defects	Method of Inspection
Critical:		
	1. Length from under head to end, min.	Gage
Major:	AQL 0.40 percent	
	101. Outside diameter of grooves	Gage
Minor:	AQL 2.50 percent	
	201. Length from under head to end, max.	Gage
	202. Width of head	Gage
	203. Position of hole	Gage
	204. Slot missing	Visual
	205. Protective coating damaged	Visual
	206. Outside diameter of shank, min.	Gage
	207. Evidence of poor workmanship (see 3.14)	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

4.3.2.25 Pin Setback Safety (See Dwg. 9205735 covering a detail of Dwg. 9215606)

Categories	Defects	Method of Inspection
Critical:		
	1. Length from under head to end, min.	Gage
Major: None defined.		
Minor:	AQL 1.00 percent	
	201. Length from under head to end	Gage
	202. Evidence of poor workmanship (see 3.14)	Visual

4.3.2.26 Wire, Pull (see Dwg. 9205736 covering a detail of Dwg. 9215606)

Categories	Defects	Method of Inspection
Critical: None defined.		
Major:	AQL 0.40 percent	
	101. Contour after assembly of plunger and setback safety pins	Gage
Minor:	AQL 0.65 percent	
	201. Evidence of poor workmanship (see 3.14)	Visual

4.3.2.27 Plunger (see dwg. 9205738 or 9255370 covering a detail of dwg. 9215606)

Categories	Defects	Method of Inspection
Critical: None defined.		
Major:	AQL 2.50 percent	
	101. Pitch diameter of thread	Gage
	102. Location of striker boss relief cavity	Gage
	103. Location of firing pin relief cavity	Gage
	104. Location of detonator cavity	Gage
	105. Location of safety slot	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

Categories	Defects	Method of Inspection
106.	Location of drive slot	Gage
107.	Diameter of rotor end, max	Gage
108.	Diameter of safety pin relief surface, max	Gage
109.	Diameter of creep pin hole	Gage
110.	Diameter of detonator cavity, min	Gage
111.	Concentricity of creep pin hole and outside diameter	Gage
112.	Alignment of creep pin hole, drive pin slot, flash holes, delay cavity and detonator cavity	Gage
113.	Location of detonator cap cavity	Gage
114.	Total length, max	Gage
115.	Outside diameter, max	Gage
116.	Depth of detonator cap cavity	Gage
117.	Depth of detonator cavity	Gage
118.	Width of drive pin slot, max	Gage
119.	Flash hole missing or obstructed	Visual
120.	Major diameter of teeth	Gage
121.	Porosity on safety teeth	Visual
122.	Porosity or cracks at intersection of two smaller diameters	Visual
123.	Chips or foreign matter in delay element hole	Visual
124.	Chamfer or radius of detonator cavity, max	Gage
125.	Concentricity between delay cavity and delay element threads	Gage
Minor:	AQL 6.50 percent	
201.	Outside diameter, min	Gage
202.	Depth of safety slot, min	Gage
203.	Pitch diameter of thread, max	Gage
204.	Minor diameter of thread, max	Gage
205.	Width of safety slot	Gage
206.	Length of thread, min	Gage
207.	Depth of striker boss relief cavity, min	Gage
208.	Depth of delay cavity	Gage
209.	Depth of creep pin hole	Gage
210.	Profile of detonator cap relief cavity	Gage
211.	Total length, min	Gage
212.	Length to rotor diameter shoulder max	Gage
213.	Length to safety pin relief diameter shoulder, max	Gage

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:27Z
Check the source to verify that this is the current version before use.

214. Diameter of detonator, cavity, max..Gage
215. Width of drive pin slot, min.....Gage
216. Length (large) to exterior datum diameter.....Gage
217. Concentricity of forward datum diameter with datum, surface.....Gage
218. Concentricity of rear datum diameter with datum surfaces.....Gage
219. Concentricity of safety pin relief surface with datum surfaces.....Gage
220. Finish improper.....Visual
221. Evidence of poor workmanship (see 3.14).....Visual
222. Chamfer missing in creep pin hole...Visual

4.3.2.28 Retainer, Seal (see Dwg. 9205739 covering a detail of dwg. 9215606)

Categories	Defects	Method of Inspection
Critical: None defined.		
Major:	AQL 0.40 percent	
101.	Concentricity of outside diameter with inside diameter	Gage
Minor:	AQL 1.50 percent	
201.	Outside diameter	Gage
202.	Inside diameter	Gage
203.	Thickness	Gage
204.	Evidence of poor workmanship (see 3.14)	Visual

4.3.2.29 Rotor (see Dwg. 9255359 covering a detail of Dwg. 9215606)

Categories	Defects	Method of Inspection
Critical:		
1.	Lugs missing or incomplete	Visual
2.	Length of rotor stop lug protrusion	Gage
Major:	AQL 1.50 percent	
101.	Diameter of rotor trunion	Gage
102.	Diameter of detonator cavity, min.	Gage
103.	Pitch diameter of thread, min.	Gage

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:27Z
Check the source to verify that this is the currenversion before use.

104. Length of thread, min.....Gage
105. Concentricity of detonator cavity with threads.....Gage
106. Location and contour of stop lug....Gage
107. Location of plunger drive lug.....Gage
108. Location of detonator flash hole....Gage
109. Diameter of flash hole, min.....Gage
110. Concentricity of retaining plate diameter with rotor trunion.....Gage
111. Concentricity of gear teeth and rotor trunion.....Gage
112. Concentricity of outside diameter and retaining plate diameter.....Gage
113. Length from retaining plate shoulder to bearing surface.....Gage
114. Concentricity of plunger cavity with retaining plate diameter.....Gage
115. Concentricity of creep pin hole with trunion diameter.....Gage
116. Perpendicularity of bottom with trunion.....Gage
117. Angular location of gear train.....Gage
118. Location of detonator threads.....Gage

Minor: AQL 4.00 percent
201. Length of plunger drive lug.....Gage
202. Pitch diameter of threads, max.....Gage
203. Minor diameter of threads, max.....Gage
204. Distance from bottom to detonator cap shoulder, max.....Gage
205. Thickness through bottom of plunger cavity, max.....Gage
206. Diameter of plunger cavity.....Gage
207. Location of spring slot.....Gage
208. Diameter of creep pin hole.....Gage
209. Evidence of poor workmanship (see 3.14).....Visual

4.3.2.30 Plate, Index (see Dwg. 8886950 covering a detail of Dwg. 9215606)

Categories	Defects	Method of Inspection
Critical:	None defined.	
Major:	AQL 0.40 percent	
	101. Straightness of plate	Gage
	102. Height of dimples	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

Minor: AQL 0.65 percent

201. Evidence of poor workmanship (see 3.14).....Visual

4.3.2.31 Sealed Container (see 5.1.1)

Categories	Defects	Method of Inspection

Critical: None defined.

Major: AQL 0.65 percent

101. Container damaged or cut.....Visual
102. Sealing tape improper and incomplete.....Visual
103. Flaps insecure.....Visual

Minor: AQL 1.00 percent

201. Marking misleading or unidentifiable.....Visual
202. Evidence of poor workmanship (see 3.14).....Visual

4.3.3 Testing

4.3.3.1 Embrittlement of Plated Springs - Striker Spring (dwg. 8797592) - and pull wire (dwg. 9205733) - Critical defects.- The sampling plan for both springs shall be code letter H and AQL of 0.25 percent, single plan (see 4.4.1).

4.3.3.2 Push Test of Rotor Stop Pin (dwg. 8797542) - Critical defect.-This test shall be performed 100 percent. If any rotor stop pin fails to meet the requirement, the rotor assembly shall be removed from the lot (see 4.4.2).

4.3.3.3 Pull Test of Setback Device Assembly (dwg. 8797547) Critical defect.-The sampling plan for this test shall be Code Letter L and AQL of 0.065 percent, single plan (see 4.4.3).

4.3.3.4 Creep Pin Retention Test (dwg. 8797536) - Major defect.-The sampling plan for this test shall be Code Letter H and AQL of 0.25 percent (see 4.4.4).

4.3.3.5 Firing Pin Push Test (dwg. 8797603 - Major defect.

4.3.3.5.1 Beginning with the first lot and continuing until three consecutive lots have complied with the requirement, the sampling plan for this test shall be Code Letter M and AQL of 0.40 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

4.3.3.5.2 After three consecutive lots have met the criteria, the sampling plan shall change to Code Letter L and AQL of 0.40 percent (see 4.4.5).

4.3.3.6 Balance Assembly Pallets Push Test (dwg. 8797568) Critical Defect.-The sampling plan for this test shall be Code Letter L and AQL 0.065 percent, single plan (see 4.4.6).

4.3.3.7 Drive Shaft Assembly Torque Test (dwg. 8797573) Critical Defect.-The sampling plan for this test shall be Code Letter L and AQL 0.065 percent, single plan (see 4.4.7).

4.3.3.8 Escape Wheel Assembly Push Test (dwg. 8797578) Critical Defect.-The sampling plan for the test shall be Code Letter L and AQL 0.065 percent, single plan (see 4.4.8).

4.3.3.9 Lever Assembly Push Test (dwg. 8797558) Critical Defect.-The sampling plan for this test shall be Code Letter L and AQL 0.065 percent, single plan (see 4.4.9).

4.3.3.10 Segment Assembly Push Test (dwg. 8797561) Critical Defect.-The sampling plan for this test shall be Code Letter L and AQL 0.065 percent, single plan (see 4.4.10).

4.3.3.11 Striker Guide Pin Push Test (dwg. 9205730) - Critical defect.-The sampling plan for this test shall be Code Letter H and AQL of 0.25 percent, single plan (see 4.4.11).

4.3.3.12 Striker Load and Striker Assembly Alignment Test (dwg. 9205730) - Major Defect.

4.3.3.12.1 Beginning with the first lot produced and continuing until three consecutive lots have complied with the requirement, the sampling plan for this test shall be in accordance with Code Letter L. An AQL 0.40 percent shall apply to the load requirement and an AQL 0.40 percent shall apply to the striker assembly alignment requirement (see 4.4.12).

4.3.3.12.2 After three consecutive lots have met the criteria, the sampling plan shall change to Code Letter K. An AQL 0.40 percent shall apply to the load requirement and an AQL 0.40 percent shall apply to the striker assembly alignment requirement (see 4.4.12).

4.3.3.13 Striker Torque Test (dwg. 9205730) - Major defect.- The sampling plan for this test shall be in accordance with Code Letter J and AQL of 0.65 percent (see 4.4.13).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

4.3.3.14 Plunger Density Test (dwg. 9205738) - Major defect.- A sample of thirteen (13) machined plungers shall be randomly selected from each lot for testing. If one or more plungers fail to meet the requirement, the lot shall be rejected (see 4.4.14).

4.3.3.15 Exterior and Interior Porosity - Rotor (dwg. 9255359) - Major defect - Body, Arming Mechanism (dwg. 9255358) - Major defect - Plunger (dwg. 9255370) - Major defect.-The sampling plan for this test, for each of the above listed components, shall be in accordance with Code Letter F and AQL of 0.65 percent. The samples for each of the above components shall include specimens from each cavity (see 4.4.15).

4.3.3.16 Arming Mechanism Assembly Torque Test (dwg. 8797534) - Critical defect.-This test shall be performed 100 percent on all arming mechanisms produced. Any assembly showing evidence of slippage shall be classified defective and removed from the lot (see 4.4.16).

4.3.3.17 Plunger and Safety Pin Retention Test - Critical defect - Plunger (dwg. 9205738 or 9255370) and Pull Wire (dwg. 9205733).

4.3.3.17.1 Beginning with the first lot produced and continuing until three consecutive lots have complied with the requirement, the sampling plan for the plunger and the safety pin test shall be in accordance with Code Letter H and AQL of 0.25 percent.

4.3.3.17.2 After three consecutive lots have met the criteria, the sampling plan shall change to Code Letter G and AQL of 0.40 percent (see 4.4.17).

4.3.3.18 Arming Delay Test (dwg. 8797534) - Critical defect - for assemblies arming in less than 1.2 seconds and Major defect - for assemblies arming in more than 2.5 seconds.

4.3.3.18.1 Beginning with the first lot produced and continuing until three consecutive lots have complied with the requirement, the sampling plan for both Critical and Major defects shall be in accordance with Code Letter M. The AQL for the Major defect shall be 0.40 percent. One or more Critical defects shall reject the lot. Testing for both defects shall be conducted upon the same sample.

4.3.3.18.2 After three consecutive lots have met the criteria, the sampling plan for both defects shall change to Code Letter L. The AQL for the Major defect shall be 0.40 percent. One or more Critical Defects shall reject the lot. Testing for both defects shall be conducted upon the same sample (see 4.4.18).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

4.3.3.19 Arming Delay Test at Cold Temperature (dwg. 8797534) Critical defect - for assemblies arming in less than 1.2 second and Major defect - for assemblies arming in more than 5.0 seconds. The sampling plan for the Major defect shall be in accordance with Code Letter G and AQL of 1.5 percent. No critical defects shall be permitted (see 4.4.19).

4.3.3.20 Arming Test of Arming Mechanism Assembly (dwg. 8797534) - Major defect.-The test shall be performed 100 percent. Any assembly which fails to arm shall be classified defective and removed from the lot (see 4.4.20).

4.3.3.21 Arming Test of Complete Fuze Assemblies (dwg. 9215606) - Major defect.-NOTE: The samples for this test must be drawn concurrently with the ballistic sample (see 4.3.3.24).

4.3.3.21.1 Beginning with the first lot produced and continuing until three consecutive lots have complied with the requirement, the sampling plan for this test shall be Code Letter L and AQL of 0.40 percent.

4.3.3.21.2 After three consecutive lots have met the criteria, the sampling size shall be one hundred seventy-five (175). If three or more fuze assemblies fail to meet the criteria the lot shall be rejected (4.4.21).

4.3.3.22 Non-Arming Test of Arming Mechanism Assembly (dwg. 8797534) - Critical defect.-This test shall be performed 100 percent. Any assembly that arms shall be classified defective and removed from the lot (see 4.4.22). NOTE: This test must be conducted after all other work and testing of the arming mechanism has been completed.

4.3.3.23 Jolt and Jumble Test (see 3.9) - Critical defect - for safety deficiencies and Major defect - for operational deficiencies.-The tests shall be performed on each lot in accordance with Code Letter G and AQL of 0.40 percent, single plan, for both Critical and Major defects. As a minimum requirement for Critical defects:

a. The assembly shall not be broken or become disassembled to any degree (exclusive of broken creep pin).
b. The pull wire assembly shall not be broken or become disengaged from the assembly to any degree.
c. The pallets shall not be bent, cracked, broken or missing from the balance assembly.
d. The plunger shall not be cracked or broken.
e. The striker guide pin shall not have moved past the lock stake.

As a minimum inspection equipment for Major defects:

a. The retaining plate shall not be loose.
b. The setback screws shall not be loose or disengaged.
c. The striker plug shall not be loose or disengaged from the striker.
d. The firing pin shall not be disengaged, either partially or fully, from the striker. The test shall be performed as specified in 4.4.23.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

4.3.3.24 Proving Ground.-The samples for the "arming test of the complete fuze assembly", para. 4.3.3.21, together with the samples for the "Functioning" and "Arming Delay" tests, para. 4.3.3.25 and 4.3.3.26, must be randomly and concurrently selected. The fuzes for the ballistic test will then be loaded in accordance with the latest revision of specification MIL-F-45465 (MU). The fuzes shall then be sent to a later designated proving ground, assembled to the appropriate round and tested according to instructions in 4.4.24. The fuzes shall be observed for compliance with the requirements as classified in Table I.

TABLE I

		Defect Classification
a.	Premature burst (see 3.12)	Critical
b.	Failure to Function High Order (see 3.11)	Major
c.	Arming Delay (see 3.13)	Critical

4.3.3.25 Functioning.-Two hundred (200) fuze shall be randomly selected from each lot (in accordance with instructions in para. 4.3.3.24). If five or more of the fuze assemblies fail to function the shell high order or if a premature burst occurs at any time, the lot shall be rejected (see 4.4.24).

4.3.3.26 Arming Delay.-Twelve (12) fuze assemblies shall be randomly selected from each lot (in accordance with instructions in para. 4.3.3.24) for the purpose of ballistically testing for arming delay in accordance with 4.4.25. If one or more of the fuzes fail to meet the requirement os para. 3.13, the lot shall be rejected.

4.3.3.27 Segment Spring Torque Test (dwg. 8797549) - Major Defect.

4.3.3.27.1 Beginning with the first lot produced and continuing until three consecutive lots have complied with the requirement, the sampling plan for this test shall be in accordance with Code Letter M and AQL 0.40 percent (see 4.4.26).

4.3.3.27.2 After three consecutive lots have complied with the requirement, the sampling plan for this test shall be in accordance with Code Letter L and AQL 0.40 percent (see 4.4.26).

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:27Z
Check the source to verify that this is the current version before use.

4.3.4 Inspection Equipment.-Equipment Tabulation Number ET-9200706 identifies the equipment lists upon which inspection equipment required to perform the examinations and tests prescribed in this action are cited. Those equipment lists coded with the letter F on the ET require the Contractor to supply designs for inspection equipment per paragraph 6.3.

4.3.4.1 Government Rights to Documentation.-Inspection equipment drawings and lists provided and revised in accordance with the requirements of the ET may be used by DOD activities for design, procurement, manufacture, testing, evaluation, production and receiving inspection, overhaul, shipping, storage, identification of stock, ordering and storage of replacement parts, inspection of items at overhaul, general maintenance of equipment, construction, survey and whenever inspection equipment drawings are needed.

4.3.4.2 Supply and Maintenance.-Supply and maintenance of the equipment listed on the ET shall be in accordance with Specification MIL-I-45607.

4.3.4.3 Government Use of Contractor's Inspection Equipment.-The contractor shall make available to the Government all inspection equipment necessary for determining conformance with contract requirements. Personnel for operating the equipment and verification of its accuracy shall be supplied by the contractor for the performance of examination or test by the Government.

4.4 Test Methods and Procedures

4.4.1 Spring Embrittlement.-The spring shall be stretched along its longitudinal axis until the spring no longer returns to its original position. When the spring no longer returns to its original length or profile, it shall be considered permanently distorted. Any spring that breaks prior to this point shall be classified defective. Springs subjected to this test shall not be returned to the lot.

4.4.2 Rotor Stop Pin Push Test.-The assemblies shall be tested utilizing the equipment specified in 4.3.4.

4.4.3 Setback Device Assembly Pull Test.-The assembly shall be assembled in the applicable equipment (see 4.3.4) and the min. load applied without impact. After the test, the assembly shall be examined for evidence of failure to comply with the requirements. Assemblies subjected to this test shall not be returned to the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

4.4.4 Creep Pin Retention Test.-The creep pin shall be inserted to the required depth in a .0975 inch diameter hole in a steel plate. A circular disc of the required weight guided so that only vertical motion is possible shall be placed without impact on the head of the pin. After placement of the disc, the pin shall be observed for any downward motion as evidence of failure to comply with the requirement. Test equipment shall be in accordance with 4.3.4. Pins subjected to this test shall not be returned to the lot.

4.4.5 Firing Pin Push Test.-The assembly shall be tested utilizing the equipment specified in 4.3.4.

4.4.6 Balance Assembly Pallets Push Test.-The assemblies shall be tested utilizing the equipment specified in 4.3.4. Subassemblies subjected to this test shall not be returned to the lot.

4.4.7 Drive Shaft Assembly Torque Test.-The assemblies shall be tested utilizing the equipment specified in 4.3.4. Subassemblies subjected to this test shall not be returned to the lot.

4.4.8 Escape Wheel Assembly Push Test.-The assemblies shall be tested utilizing the equipment specified in 4.3.4. Subassemblies subjected to this test shall not be returned to the lot.

4.4.9 Lever Assembly Push Test.-The assemblies shall be tested utilizing the equipment specified in 4.3.4. Assemblies subjected to this test shall not be returned to the lot.

4.4.10 Segment Assembly Push Test.-The assemblies shall be tested utilizing the equipment specified in 4.3.4. Assemblies subjected to this test shall not be returned to the lot.

4.4.11 Striker Guide Pin Push Test.-The assemblies shall be tested utilizing equipment specified in 4.3.4. The required force shall be applied separately to both ends of every pin. If the stake fails to retain the pin under the applied pressure, the assembly will have failed the test. Subassemblies subjected to this test shall not be returned to the lot.

4.4.12 Striker Load and Striker Assembly Alignment Test.-This test shall be performed in both the SQ and Delay settings on all test specimens. The assemblies shall be tested utilizing the equipment specified in 4.3.4.

4.4.13 Striker Torque Test.-The assemblies shall be tested utilizing the equipment specified in 4.3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

4.4.14 Plunger Density Test.-The plunger density shall be tested as specified in Standard Method of Test, ASTM-B-328-60. If the samples are to be returned to the lot after the test has been performed, the oil must be removed from the sample in a soxhlet apparatus using toluole or petroleum either as a solvent. After extraction, residual solvent shall be removed as specified in the ASTM Test Standard.

4.4.15 Surface Porosity and Interior Porosity or Sponginess.-Inspection for both surface porosity and interior porosity or sponginess may be performed upon the same sample. For the purpose of interior porosity inspection, the location of the sections shall be determined by the Government. Observation shall be made for compliance with the requirements specified in paragraphs 3.15.3 and 3.15.4.

4.4.16 Arming Mechanism Assembly Torque Test.-A slip clutch torque wrench shall be used to engage the top of the rotor assembly (dwg. 8797542 or 9255359). Turn the torque wrench until the rotor assembly has revolved to a position where the timing gear has engaged the pinion gear of the drive shaft and the rotor stop pin or lug is visible and unobstructed by any other component. Immobilize the timing device assembly (dwg. 8797564) by applying finger pressure to the protruding end of the balance (dwg. 8797607). Rotate the torque wrench until the clutch slips. Non-movement of the rotor after the balance has been immobilized and the torque clutch has slipped indicates compliance with 3.4.

4.4.17 Plunger and Safety Pin Test.-A plunger and plunger safety pin shall be placed in a fixture designed to simulate the identical conditions the test specimens experience when a fuze assembly arms. After the test specimens are in a proper position in the fixture, the plunger shall be rotated in counterclockwise direction until the serrations on the plunger contact the serrations on the safety pin. The torque which drives the plunger may not exceed 15.0 oz. inch. Sufficient manual axial pulling force shall then be exerted upon the pull wire assembly (dwg. 9205733) to determine compliance with the requirement in para. 3.6. After being subjected to this test, the plunger shall be visually inspected for breaks, cracks and mutilations. If found free of such defects, it may be returned to the lot; if not, it shall be removed.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:27Z
Check the source to verify that this is the current version before use.

4.4.18 Arming Delay.-The assembly shall be mounted in a fixture containing electrical contacts arranged to start a timing instrument when the rotor starts to turn from the unarmed position and to stop the timing instrument when the rotor turns to within 60 degrees of the armed position. The assembly shall be activated manually with the max. of 5 degrees rotation of the rotor permitted prior to starting the timing device. The assembly shall be examined to determine compliance with the drawing requirement. The assemblies shall be tested utilizing the equipment specified in 4.3.4.

4.4.19 Arming Delay at Cold Temperature, Prior to Testing the Arming Mechanism Assembly (dwg. 8797534).-The segment assembly shall be locked in the open position by link locking (dwg. 8797553); the rotor assembly shall then be oriented to the same unarmed position as shown on arming mechanism (dwg. 8797534), and immobilized in such a manner as to inhibit functioning of the main drive spring. The arming mechanism assembly shall then be inserted into a suitable temperature conditioning chamber, maintained to a temperature of -40 F or colder for a period of not less than four hours. After temperature conditioning, the mechanism shall be timed by equipment graduated in tenths of a second.

If the arming mechanism is removed from the chamber for timing, the operation must be accomplished within a period of 15 seconds max. after removal from the chamber. Observation shall then be made for compliance with the requirements specified in para. 3.7. If condensation is permitted to form on the arming mechanism assembly, this test shall be considered destructive, and the sample shall not be returned to the lot.

4.4.20 Arming Test of Arming Mechanism Assembly.-The assembly in the unarmed position (dwg. 8797534) shall be mounted in the centrifuge with the rotor end toward the center of rotation. A simulated pull wire shall be inserted to lock the setback device assembly. The assembly shall then be rotated at a speed to produce a centrifugal force of 390-10 gravities (g's) at the center of the segment shaft. The simulated pull wire shall then be extracted from the assembly, after which the angular velocity shall remain constant within the limits specified for a minimum of one second. The centrifuge shall then be decelerated uniformly to a stop and the assembly examined as follows to assure that the assembly has armed:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

a. The detonator flash hole in the rotor must be aligned with the booster lead cavity in the arming mechanism body.

b. The segment assembly of the setback device assembly must be restrained by the locking link in a position which will permit the lever assembly to swing freely above the segment shaft.

4.4.21 Complete Fuze Assembly Arming and Firing Pin Alignment.-An aluminum test plug, in accordance with dwg. 9234597, shall be installed in the plunger SQ detonator hole of all fuzes subjected to this test. All fuzes shall be set in the SQ position. The plunger safety pin (dwg. 9205734) shall be fully inserted into the assembled position in the fuze body. It shall be removed prior to starting the test. The assembly in the unarmed position (dwg. 9215606) with the booster cup torqued to 50-75 lbs/in and without pull wire assembly (dwg. 9205733) shall be mounted in a centrifuge with the striker end toward the center of rotation. A simulated pull wire shall be inserted to lock the setback device assembly. The assembly shall then be rotated at a speed to produce a centrifugal force of 390-10 g's at the center of the segment shaft. The simulated pull wire shall then be extracted from the assembly, after which angular velocity shall remain constant within the limits specified for a minimum of one second. The centrifuge shall then be decelerated uniformly to a stop and the fuze examined for arming while still in the centrifuge fixture. Examination for arming and alignment shall consist of the following:

Depress the striker as far as possible, one time only, and with sufficient force for the firing pin point to leave an impression upon the test plug. After the striker has been depressed, remove the fuze from the centrifuge and disassembly the fuze assembly into components as before the test (see disassembly instructions in Section 6) and examine the test plug for evidence of the impression of the firing pin point. The impression of the firing pin point must be evidence on top of the test plug within the periphery of the .080 + .006 diameter (hereafter referred to as the target area) for a fuze to be considered acceptable. If the point of firing pin misses the target area but the side of the firing pin leaves an impression upon the side of the target area, or if the firing pin, for any reason, has not struck the target area, the fuze shall be rejected. After determination has been made, remove the test plug from the plunger and destroy it. Any fuze which arms after the centrifuge has stopped, or at any time during subsequent handling, shall be considered defective.

Source: https://assist.dla.mil -- Downloaded: 20260-17T23:27Z
Check the source to verify that this is the current version before use.

After the above has been accomplished, the arming mechanism assemblies shall be reset to the unarmed position. Critical Inspection Numbers 2, 3, and 4 of paragraph 4.3.2.4 of this specification shall then be performed, after which the non-arming test of paragraph 4.4.22 shall be performed upon the arming mechanisms before returning the fuze components to the lot.

4.4.22 Non-Arming.-The assembly, in the unarmed position, (dwg. 8797534) shall be mounted in a centrifuge with the rotor end toward the center of rotation. A simulated pull wire shall be inserted to lock the setback device assembly. The assembly shall be rotated at a speed to produce a centrifugal force of 240 plus 10 g's at the center of the segment shaft. The simulated pull wire shall then be extracted from the assembly, after which the angular velocity shall remain constant within the limits specified for a minimum of one second. The centrifuge shall be stopped and the assembly examined as follows to assure that it has not armed:

a. The detonator flash hole in the rotor must be positioned over the timing device assembly.
b. All components of the setback device assembly must be positioned as depicted on dwg. 8797534 with shaft, lever dwg. 8797560, preventing the rotor assembly from unwinding.

The assemblies shall be tested utilizing the equipment specified in 4.3.4.

NOTE: The non-arming test is to be conducted after all work and other testing of the arming mechanism has been completed.

4.4.23 Jolt and Jumble Test.-The test shall be performed upon complete fuze assemblies (dwg. 9215606) set in the unarmed position. The test shall be conducted in accordance with procedures outlined in MIL-STD-331, except that the fuze shall not be loaded; and after completion of the jolt test, the assemblies shall not be disassembled but shall be subjected to the jumble test utilizing a jumble fixture as specified in paragraph 4.3.4 of this specification. Assemblies subjected to this test shall not be returned to the lot.

4.4.24 Functioning (Proving Ground).-The rounds shall be fired from an 81mm Mortar at between 45° and 75° elevation. One half of the sample rounds shall be fired at 0 propellant increment phase and the balance fired at 9 propellant increment phase with fifty (50) assemblies set SQ and fifty (50) assemblies set Delay in each increment phase.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

4.4.25 Arming Delay (Proving Ground).-The fuze assemblies shall be assembled to inert filled, appropriate projectiles, set SQ and fired at charge zone zero from an 81mm Mortar. They shall be fired against a 1/4 inch screen set at a distance of 200 feet plus or minus one inch. The muzzle velocity of each round shall be reported in the official firing record.

4.4.26 Segment Spring Torque Test.-The spring shall be tested for torque at the assembly position and maximum working range position utilizing the equipment specified in 4.3.4.

5. PREPARATION OF DELIVERY

5.1 Preservation and Packaging

5.1.1 Level C

5.1.1.1 Fuze parts shall be packaged in accordance with the requirements of Specification MIL-STD-1169 and paragraphs 5.1.1.2 and 5.1.1.3 of this specification.

5.1.1.2 Pull Wire Assembly.-Fifty (50) assemblies shall be slid over the exterior surface of a paper tube. The contour of each assembly shall conform with that of the preceding assembly in a nesting position. The tube shall be convolute or spiral wound commercial grade paperboard, approximately 15 inches long, with a minimum 3/32 inch wall thickness. The outside diameter of the tube shall be equal to the inside diameter of the pull wire assembly plus 1/32 inch. Springs shall slip tightly over the tube.

5.1.1.3 Each arming mechanism assembly shall be inserted into a 3 by 5 inch barrier bag in accordance with instructions on dwg. 8797534. Two hundred and fifty (250) bagged assemblies shall be packed creep pin down, in a fiberboard box complete with filler pads, cushion pads, and half-slotted partitions assembled to form 50 individual cells per layer in a 10 by 5 arrangement; 5 layers per box. A filler pad followed by a cushion pad shall be placed on the bottom of the box; a filler pad followed by a cushion pad shall be placed on top of each layer of assemblies. One or more filler pads shall be placed on the top layer to assure a tight package. The fiberboard box shall be constructed in accordance with Specification PPP-B-636 for a Type RSC box. The box, filler pads, and partitioned cells

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:27Z
Check the source to verify that this is the currentversion before use.

shall be made of Type CF, Class Domestic, Variety SW, Grade 200, B-Flute fiberboard conforming to PPP-F-320. The cusion pad shall be PPP-C-843, Type I, Class A material approximately 1/8 inch thick. The inside dimensions of the box shall be approximately 16 3/16 by 8 1/16 by 8 7/8 inches in depth. The cell size shall be 1 1/2 inches square by 1 1/2 inches deep, inside dimensions. The filler pad and cushion pad shall be approximately 16 1/8 by 8 inches. Top and bottom flaps of the box shall be secured with PPP-T-45, Type III, Grade B tape, 2 inch width applied over the full length of the top and bottom center seam of the box with approximately 2 inch extension of tape onto the end panels of the box. All corners of the box shall be blunted and the box inserted into a barrier bag conforming to MIL-B-117 for a Type 1, Class E Style 1 bag. All excess air shall be exhausted from the bag and the bag closed by means of heat sealing. The seal shall meet the heat-seal test of Specification MIL-P-116. Each bagged box shall be over-packed in a fiber box conforming to the same requirements as the inner fiber box. Closure of the box shall be by application of 2 inch wide gummed kraft tape, PPP-T-45 Type III, Grade B over the full length of all top and bottom box seams with an approximate 2 inch extension of tape around all corners and onto the end panel of the box. Barrier bag shall be approximately 18 1/2 by 27 inches inside dimensions. The fiber box size shall be approximately 9 1/2 by 8 1/4 by 17 7/8 inches in depth inside dimensions.

5.2 Packing

5.2.1 Level C.-The outer fiber box of the unit package shall serve as the shipping container.

5.3 Marking.-Unit and exterior containers and barrier bags shall be marked in accordance with the marking requirements of MIL-STD-1169. Marking is not required on the 3 by 5 inch barrier bag.

6. NOTES

6.1 Ordering Data.-Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Data Cards.-Data cards shall be prepared for each lot in accordance with the information specified in Standard MIL-STD-1167.

6.2 Either Drawing Group F9205738, F8797535 and D8797542 or Drawing Group F9255370, F9255358 and D9255359 must be used in its entirety.

6.3 Inspection Equipment.-The contractor shall design inspection equipment as required by the inspection Equipment Lists (EL) referenced on the applicable ET in accordance with the instructions of paragraphs 6.3.1 through 6.3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

6.3.1 Inspection Equipment Lists (EL).-Inspection Equipment Lists indicate the availability of inspection equipment designs by showing in the "number" column of the list of inspection equipment (Form SMUPA 1010) the numbers of drawings or Federal Stock Numbers of existing equipment designs, or codes as indicated in paragraph 6.3.2. Design action required of the contractor is described in paragraphs 6.3.3 and 6.3.4. The contractor will be required to prepare detailed drawings in accordance with 6.3.4 for all the equipment coded as "Contractor Design" in the number column. These contractor designs must be approved by the Government prior to fabrication or procuring of the equipment. Designs shall be submitted for approval as specified in 6.3.5.

6.3.2 Inspection Equipment List Codes.-The inspection equipment as defined in 6.3.3 and 6.3.4 will be designated in the EL by the following codes:

CD - Contractor design on controlled contractor format and/or commercial equipment.
MU - Army design, mandatory for use.

6.3.3 Army Designs.-Army designs are reflected on detailed drawings which completely depict all the information necessary for the fabrication of the item of inspection equipment. The contractor need provide no design when an Army design is listed for an item of inspection equipment. Army designs fall into two basic classifications; mandatory (designated "MU") and non-mandatory (indicated by drawing or Federal Stock Number). When an inspection equipment list references mandatory Army designs, the contractor shall comply with, and use these designs accordingly. The contractor may, however, in connection with non-mandatory designs and with the approval of the Government, design alternate inspection equipment or use comparable commercial equipment to facilitate his operations. Such contractor prepared designs or commercial equipment selections must be approved by the Government prior to fabrication or procuring of the equipment. Designs shall be submitted for approval as specified in 6.3.5.

6.3.4 Contractor Designs.-Contractor designs are designs of inspection equipment for which the Government has assigned design responsibility to the contractor. Contractor designs shall be supported by detailed drawings which depict all information necessary to completely fabricate, calibrate, and operate an item of inspection equipment. This requires that the necessary views, dimensions, materials, finish, notes, operating and calibration instructions be properly depicted in accordance with approved practices to the extent that further calculation or clarification will not be required. Unless otherwise specified, contractor designs may be developed on the format the contractor normally employs in his equipment design procedure provided such

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

format reflects the detail and information specified above subject to the following controls: All submitted contractor designs shall conform to MIL-D-1000, Category E, Form 2. For inspection equipment designs, the contractor shall refer to MIL-HDBK-204. Legibility and reproducibility shall permit conventional making of clearly understandable, high contrast reproductions. Contractors shall submit three copies of final designs as a flat set. Designs shall be submitted for approval as specified in 6.3.5.

6.3.5 Submission of Contractor Designs.-All submitted designs shall contain a reference to the appropriate component or assembly drawing number and revision letter to which the specific design applies. Unless otherwise specified on the EL, all designs of equipment for inspection of defects classified as Critical and Major shall be submitted for approval to the Commanding Officer, Picatinny Arsenal, ATTN: SMUPA-ND. All other designs of inspection equipment shall be approved by the inspection element of the agency administering the contract; submission of inspection equipment designs is permissible and encouraged. However, the Arsenal completion date for review will be based on the date of the final submission of designs. Picatinny Arsenal design review will be accomplished normally within one month after receipt.

6.4 To manually lock the setback device in the armed position, an arming tool similar to that shown in Figure 1 may be used as follows: With the mechanism assembly in a vertical position (rotor on top) insert the prong of the arming tool over the trigger of the setback device and set the tapered hole in the head of the arming tool over the tapered end of the setback device segment shaft. Rotate the tool in a clockwise direction (thereby depressing the trigger and rotating the segment shaft) until the segment is stopped by the leg of the setback device frame. The locking link of the setback device should then fall into place over the segment shaft, thereby locking the setback device assembly in the armed position. All burrs and sharp edges should be removed from all tools used for arming and unarming the setback device.

6.5 INSTRUCTIONS FOR DISASSEMBLY OF ARMED COMPLETE FUZE ASSEMBLIES

a. Remove the booster cup.

b. Carefully pull the arming mechanism assembly toward the rear of the fuze until the rotor becomes disengaged from the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

plunger and the locating pin slot of the arming mechanism assembly becomes disengaged from the arming mechanism locating pin in the fuze body.

c. Insert probe through the booster lead hole of the arming mechanism assembly until it extends through the rotor and into the detonator cavity of the plunger, always keeping the arming mechanism assembly and plunger barely disengaged.

d. Holding the component and probe in the position described above, rotate them to the right for approximately one quarter turn. At this point, the plunger safety slot will become aligned with the plunger safety pin, and the arming mechanism and plunger assembly will be released from the fuze body.

e. Carefully disengage the plunger from the rotor to a height which will permit the jaws of a needle-nose pliers (modified as below sketch) to grasp the creep pin. When the creep pin has been immobilized by the pliers, remove the plunger from the creep pin by turning the plunger in the direction in which the coils of the pin are wound. At the same time, raise the plunger from the pin, always being careful not to bend or mutiliate the creep pin. Also, do not completely compress the creep spring as the spring coils may become fouled in the rotor hub, which will interfere with further performance of the arming mechanism assembly.


f. After disassembly, visually inspect all components for damage or mutilations, paying special attention to insure that the creep pin has not been distorted, and that the creep spring is free. If any of the above conditions are found, the mechanism should be rejected.

g. The contractor shall maintain a positive process control which will prevent the application of torque in excess of twenty (20) ounce-inches, maximum from being applied to the arming mechanism assemblies during all winding operations. The arming mechanism assemblies shall be set to the unarmed position.

h. After all other work has been accomplished, the arming and non-arming test, in accordance with the requirements of this specification, shall be conducted 100% upon all arming mechanism assemblies.

NOTE: It is recommended that a needle-nose pliers, modified as indicated in below sketch, be used when removing the plunger from the creep pin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

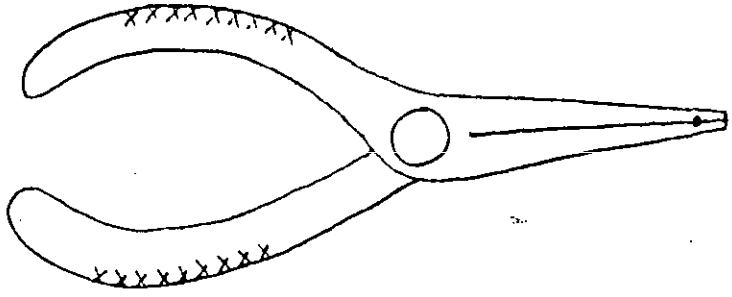

6.6 Submission of Initial Production Samples.-Instructions as to the location for evaluation of initial production shall be obtained from the contracting officer. Upon receipt of such request, the contracting officer shall advise Picatinny Arsenal and instructions will be issued accordingly. All inquiries should be forwarded to: Commanding Officer, Picatinny Arsenal, ATTN: SMUPA-NI, Dover, New Jersey.


Custodian:
Army-MU

Preparing Activity:
Army-MU

Project Number: 1390-A-798

☆U.S. GOVERNMENT PRINTING OFFICE:1971-714-137/12357

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

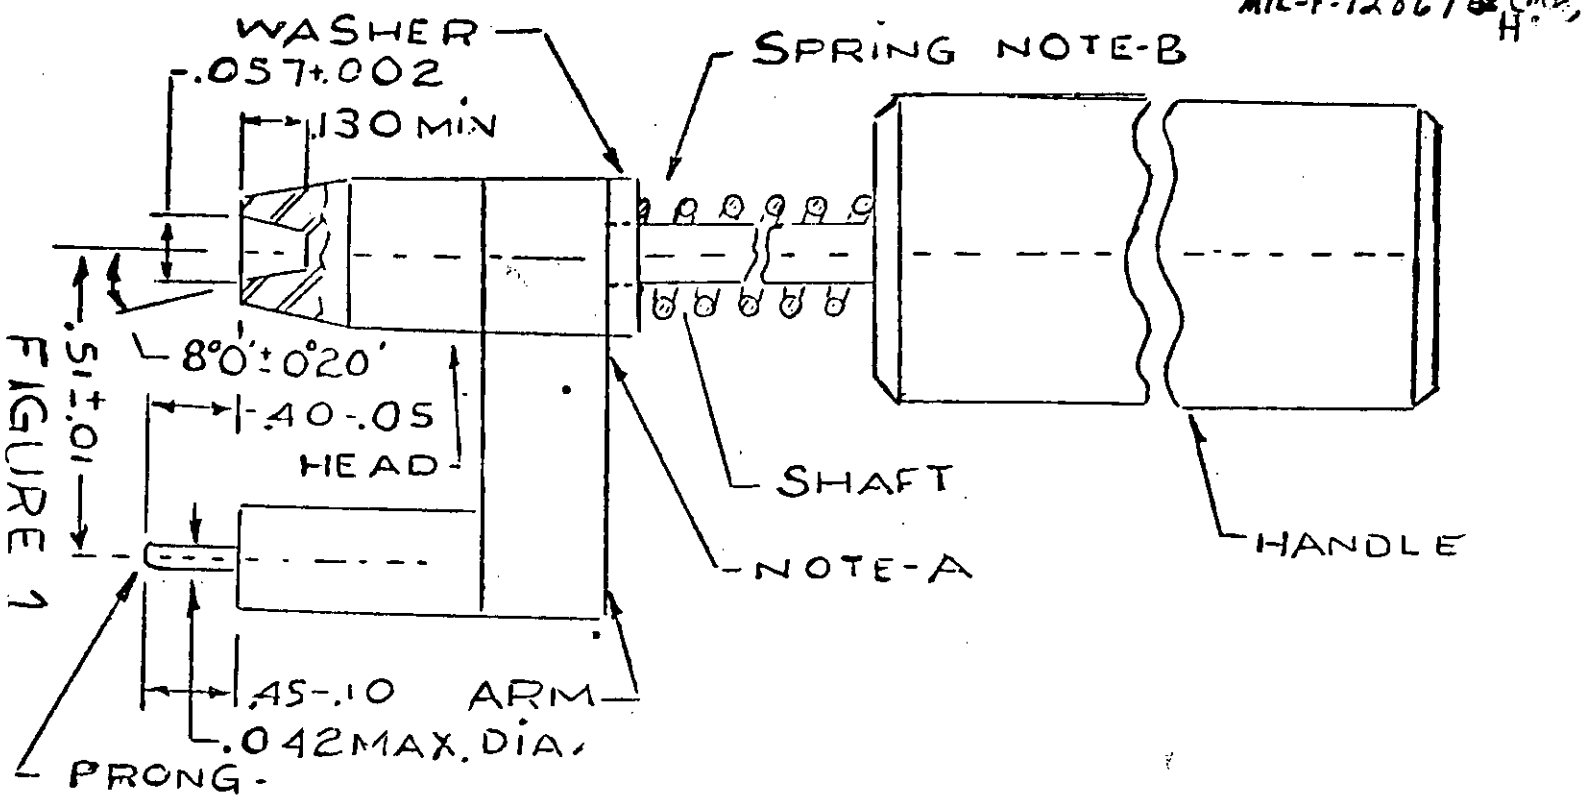

NOTES:-

A- ARM AND WASHER TO BE FREE FIT ON SHAFT.

B- ADJUST SPRING TENSION TO PRODUCE A FRICTIONAL TORQUE OF APPROXIMATELY .1 INCH POUND BETWEEN ARM AND HEAD

C- REMOVE ALL BURRS AND SHARP CORNERS FROM HEAD AND PRONG.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

ORGANIZATION | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
PICATINNY ARSENAL
DOVER, NEW JERSEY 07801

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

COMMANDING OFFICER
United States Army
Picatinny Arsenal
ATTN: SMUPA-ND
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.