MIL-F-12869H (PA)
AMENDMENT 2
3 April 1975
SUPERSEDING
AMENDMENT 1
18 September 1974

MILITARY SPECIFICATION

FUZE, POINT DETONATING, M524A6

PARTS FOR

This Amendment forms a part of Military Specification MIL-F-12869H (MU), 20 April 1971 and is approved for use by all Departments and Agencies of the Department of Defense.

1. Para. 3.5: delete para. 3.5 in its entirety.

2. Para. 3.6: second line: delete "9205738".

3. Para. 3.15.4: delete para. 3.15.4 in its entirety and substitute:

"3.15.4 Internal porosity - Internal porosity shall be limited to not more than three pores in an area .250 inch square. No pore shall exceed 1/16 x 1/16 x 1/16 inch max. No two pores shall be closer than 1/64 inch to each other, nor shall any pore be closer than 1/32 inch to any cored or cast surface (see 4.3.3.15)."

4. Para. 4.2.1: delete para. 4.2.1 in its entirety and substitute:

"4.2.1 Submission - Prior to the start of regular production, the contractor shall submit an initial production sample to a Government approved facility as designated by the contracting officer (see 6.6) for evaluation for conformity to drawing and specification requirements contained in 4.2.2. The initial production sample for the die cast and machined parts shall consist of, as a minimum, 25 of each component which shall include three (3) parts from every cavity and 25 of each subassembly and for the die cast and not machined components shall consist of three (3) parts from every cavity and 25 of each subassembly together with 316 complete fuze assemblies (dwg. 9215606), with test plug (dwg. 9234597) installed in the plungers. The booster cups shall be installed but not torqued. The initial production sample must have been produced by the contractor or furnished by a supplier and manufactured using the same production process, procedures and equipment which will be used in fulfilling the contract. All parts and materials including packaging and packing, shall be obtained from the same sources of supply as will be used in regular production. The sample shall be accompanied by certificates of analysis for materials. An initial production sample, or portion thereof, as directed by the contracting officer, shall also be submitted, whenever

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

there is a lapse in production for a period in excess of 90 days or whenever a change occurs in manufacturing process, material used, drawing, specification or source of supply to significantly affect production uniformity as determined by the Government. Also, whenever a die requires repair or replacement, another initial production sample will be submitted from the particular cavity after repair or replacement is made. Prior to submission, the contractor shall inspect the sample to the degree necessary to assure that it conforms to the requirements of the contract and submit a record of this inspection with the sample. A sample containing known defects will not be submitted unless specifically authorized by the contracting officer."

5. Para. 4.2.4: delete "those contractors supplying fuzes containing the optional die cast components" and substitute "contractors supplying fuzes with die cast components".

6. Para. 4.3.2.4, Critical 2: add "(excluding assembly of trigger spring under rear frame)".

7. Para. 4.3.2.4, Critical 3: add "(excluding assembly of segment spring under front frame)".

8. Para. 4.3.2.4, Minor category: add "204 Trigger spring or segment spring assembled under rear or front frame (see Figure II and III)...Visual"

9. Para. 4.3.2.5: delete "8797535" and substitute "9287560".

10. Para. 4.3.2.9: delete para. 4.3.2.9 in its entirety.

11. Para. 4.3.2.10: delete para. 4.3.2.10 in its entirety.

12. Para. 4.3.2.11: delete para. 4.3.2.11 in its entirety.

13. Para. 4.3.2.12: delete para. 4.3.2.12 in its entirety.

14. Para. 4.3.2.19, Minor category: add "208 Depth of setting slot, min...Gage".

15. Para. 4.3.2.19, Minor category: add "209 Width of setting slot, min...Gage".

16. Para. 4.3.2.20: delete "8798605" and substitute "8797605".

17. Para. 4.3.2.22, Major 121: add "min".

18. Para. 4.3.2.22, Minor category: delete Minor 208 in its entirety.

19. Para. 4.3.2.22, Minor category: delete Minor 211 in its entirety.

20. Para. 4.3.2.25, Minor categroy: delete Minor 201 in its entirety.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

21. Para. 4.3.2.27: delete "9205738".

22. Para. 4.3.2.27:, Major 101: add "min".

23. Para. 4.3.2.27, Minor 222: delete "Chamfer" and substitute "Counterbore".

24. Para. 4.3.3.1, second line: delete "dwg. 9205733" and substitute "dwg. 9205736".

25. Para. 4.3.3.2: delete para. 4.3.3.2 in its entirety.

26. Para. 4.3.3.14: delete para. 4.3.3.14 in its entirety.

27. Para. 4.3.3.17: delete "9205738".

28. Para. 4.3.3.18, second line: delete "1.2" and substitute "1.25".

29. Para. 4.3.3.18, third line: delete "2.5" and substitute "2.50".

30. Para. 4.3.3.19, second line: delete "1.2" and substitute "1.25".

31. Para. 4.3.3.19, third line: delete "5.0" and substitute "5.05".

32. Para. 4.3.3.19: add "Testing for both defects shall be conducted upon the same sample".

33. Para. 4.3.3.23, Critical category, subpara. a: delete "(exclusive of broken creep pin)" and substitute "(exclusive of broken creep pin and rotor drive lug)".

34. Para. 4.3.3.25, first line: after "fuze" and before "shall" add "assemblies".

35. Para. 4.4.2: delete para. 4.4.2 in its entirety.

36. Para. 4.4.14: delete para. 4.4.14 in its entirety.

37. Para. 4.4.15: delete para. 4.4.15 in its entirety and substitute:

"4.4.15 Surface porosity and interior porosity - Inspection for surface and interior porosity may be performed on the same sample. Sectioning of the arming mechanism body for inspecting porosity shall be through the locating slot, creep pin hole and booster lead hole. The rotor shall be sectioned through the detonator hole, creep pin hole and plunger drive lug. Sectioning of the plunger shall be through the M2 delay and SQ detonator hole. Also, at the discretion of the Government inspector, an additional cross section may be taken."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

38. Para. 4.4.16, third line: delete "8797542".

39. Para. 4.4.21, second para., eighth line: delete "evidence" and substitute "evident".

40. Para. 6.2: delete para. 6.2 in its entirety.

41. Add Figure II to "Notes" section.

42. Add Figure III to "Notes" section.

43. Para. 2.1, Specifications section: add "MIL-D-1000 - Drawings, Engineering and Associated Lists".

44. Para. 2.1, Standard section: add "MIL-STD-100 - Engineering Drawing Practices".

45. Para. 2.1, Publications section: delete

"Publications
Ordnance Corps
ET-9200706 - Equipment Tabulation"

and substitute:

"Handbooks
MIL-HDBK-20: - Inspection Equipment Design"


46. Para. 4.3.4: delete para. 4.3.4 in its entirety and substitute "4.3.4 Inspection Equipment - The inspection equipment required to perform the examinations and tests prescribed herein is described in the "Method of Inspection" column starting with paragraph 4.3.2.1 and the "Test Methods and Inspection Procedures" starting with paragraph 4.4.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See section 6 of this specification for general provisions applicable to inspection equipment design".

47. Para. 4.3.4.1, third line: delete "of the ET".

48. Para. 4.3.4.2, second line: delete "the equipment listed on the ET" and substitute "inspection equipment".

49. Para. 6.3: delete para. 6.3 in its entirety and substitute "6.3 Inspection Equipment Designs - Inspection equipment designs are of two types - Government Special Inspection Equipment (SIE) designs and contractor designs. SIE designs are designated by drawing numbers under the "Method of Inspection" column starting with paragraph 4.3.2.1 and the "Test Methods and Inspection Procedures"

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

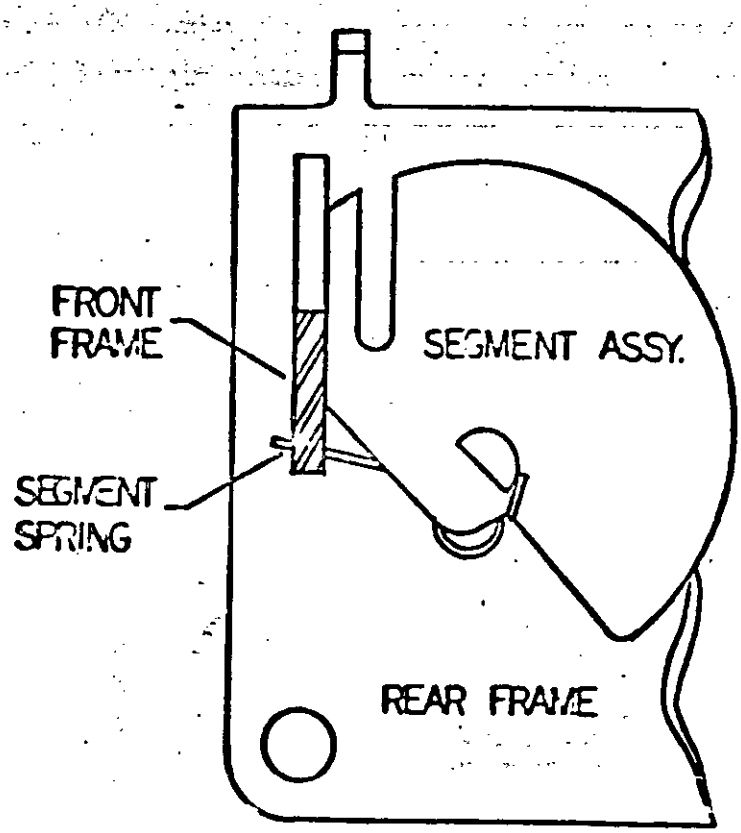

NOTE: FRONT AND REAR FRAME SHOWN SECTIONED FOR CLARITY

FIGURE III

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

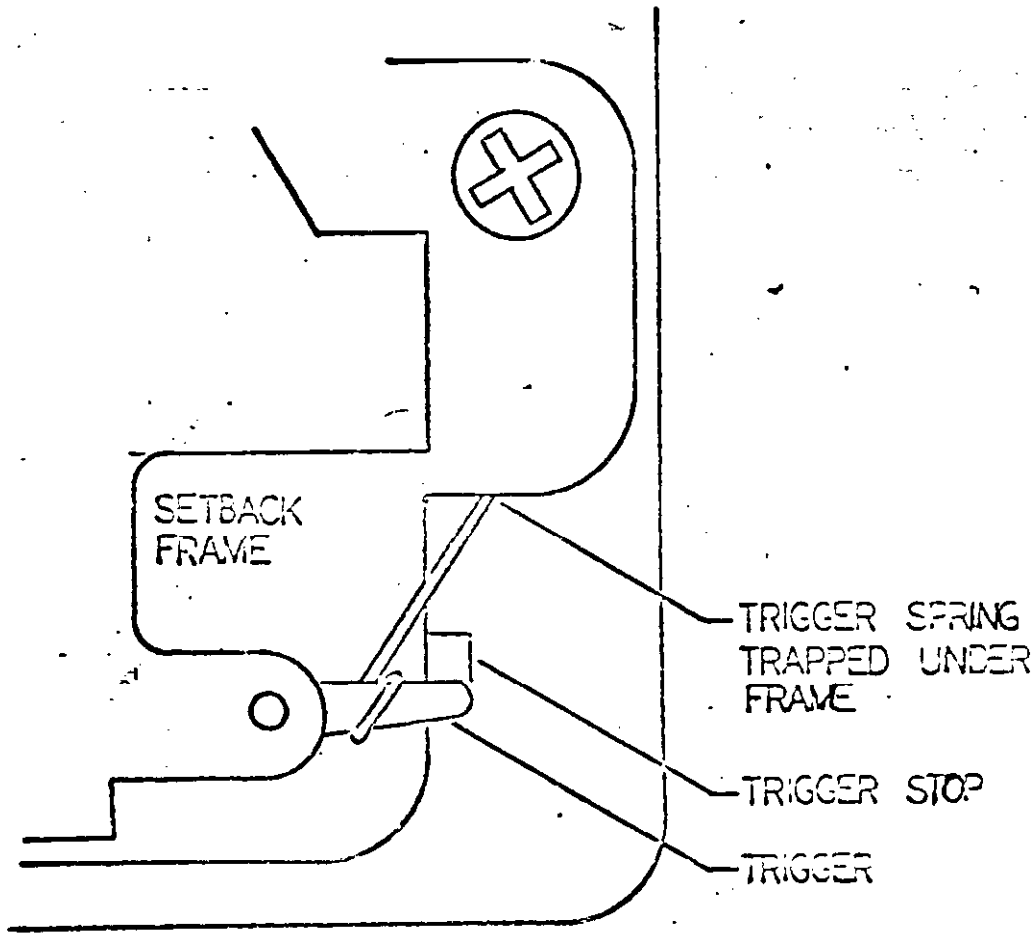


FIGURE II

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

starting with paragraph 4.4.1. Design responsibility for all other inspection equipment is assigned to the contractor. The contractor shall not furnish any design when a complete Government SIE design is provided. Unless otherwise specified, however, the contractor may submit alternate or modified contractor designs of SIE in accordance with 6.3.2 and 6.3.3 should he elect to do so".

50. Para. 6.3.1: delete para. 6.3.1 in its entirety and substitute "6.3.1 SIE Designs - SIE designs may consist of any of the following:

a. Detailed drawings which completely depict all information necessary for the fabrication and use of the item of inspection equipment.

b. A source control drawing or a specification control drawing as defined in MIL-STD-100.

c. An envelope drawing, as defined in MIL-STD-100 which establishes the criteria which a detailed design shall meet. When envelope drawings are specified, the contractor shall prepare designs which comply with the criteria therein".

51. Para. 6.3.2: delete para. 6.3.2 in its entirety and substitute "6.3.2 Contractor Designs - Contractor designs are required for all inspection equipment for which SIE designs are not specified and may include commercial equipment which the contractor proposes to use. (Commercial equipment is defined as unmodified equipment which is cataloged and available for purchase by the general public). Contractor designs shall include appropriate operating instructions, calibration procedures and maintenance procedures. Commercial equipment shall be fully described by catalog listings or other means which provide sufficient information to permit identification and evaluation by the Government and may include illustrations and engineering data. Designs shall be prepared for any special fixture(s) required to be used with commercial equipment, or with SIE designs if not otherwise covered thereby (see 6.3.1c). Designs shall be of the category and form (per MIL-D-1000) specified in the Contract Data Requirements Lists (DD Form 1423). The contractor is referred to MIL-HDBK-204 "Inspection Equipment Design" for guidance. This specification number, paragraph number and defect number from Section 4 shall be referenced on each contractor design together with the component or assembly drawing number, revision letter and date to which the specific design applies".

52. Para. 6.3.3: delete para. 6.3.3 in its entirety and substitute "6.3.3 Submission of Designs for Approval - Contractor designs shall be approved by the Government prior to fabrication or procuring the equipment. Designs shall be submitted for approval in accordance with the stipulations, time frame and distribution specified in the Contract Data Requirements Lists (DD Form 1423). Partial submission of inspection equipment designs is

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.

permissible and encouraged. However, the completion date for design review will be based on the date of the final submission of designs and the required delivery schedule as stipulated in the contract. Submit equipment designs, as required, to Commander, Picatinny Arsenal, ATTN: SARPA-QA-T-T, Dover, New Jersey 07801".

53. Para. 6.3.4: delete para. 6.3.4 in its entirety.

54. Para. 6.3.5: delete para. 6.3.5 in its entirety.

Custodian:
Army-PA

Preparing Activity
Army-PA

Project Number: 1390-A-084

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:27Z
Check the source to verify that this is the current version before use.