MIL-P-335J
18 August 1986
SUPERSEDING
MIL-P-335H
27 September 1984

MILITARY SPECIFICATION

PAVING MACHINE, BITUMINOUS MATERIAL:

CRAWLER-MOUNTED,DIESEL-ENGINE-DRIVEN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a crawler-mounted, bituminous material, paving machine (hereinafter referred to as paver).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

VV-F-800 - Fuel Oil, Diesel.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3895
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-V-173	- Varnish, Moisture-and-Fungus Resistant, (For Treatment of Communications, Electronic, and Associated Equipment).
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-L-2104	- Lubricating Oil, Internal Combustion Engine, Tactical Service.
MIL-T-3351	- Tractor, Full-Tracked, Low-Speed; Tractor, Wheeled, Agriculture; and Tractor, Wheeled, Industrial: and Their Attachments, Packaging of.
MIL-F-3541	- Fittings, Lubrication.
MIL-G-3859	- Grease Guns, Hand, High Pressure, Lever Operated; Cartridge and Bulk Loading (14 Ounce and 21 Ounce Capacity).
MIL-S-8660	- Silicone Compound.
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-C-13486	- Cable, Special Purpose, Electrical; Low-Tension, Heavy Duty Single-Conductor and Multi-Conductor.
MIL-C-46168	- Coating, Aliphatic Polyurethane, Chemical Agent Resistant.

STANDARDS

MILITARY

MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-209	- Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.
MIL-STD-838	- Lubrication of Military Equipment.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.
MIL-STD-1472	- Human Engineering Design Criteria for Military System, Equipment and Facilities.
MIL-STD-1474	- Noise Limits for Army Material.
MS3367	- Strap, Tiedown, Adjustable, Self-Clinching, Plastic, Type I, Class 1.
MS27142	- Connector, Plug, Electrical - Pin Contact No. 12, 14, and 16 A.W.G., Waterproof.
MS27143	- Connector, Plug, Electrical - Socket Contact, No. 12 A.W.G., Waterproof.
MS27144	- Connector, Plug, Electrical - Socket Contact, No. 14 and 16 A.W.G., Waterproof.
MS27145	- Connector, Plug, Electrical - No. 14 A.W.G., Double Contact, Waterproof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

MS27146	Connector, Receptacle, Electrical: Double Contact, Waterproof.
MS27147	Adapter, Connector - 3 Way No. 12, 14 and 16 A.W.G., Waterproof.

HANDBOOKS

MILITARY

MIL-HDBK-113	Guide for the Selection of Lubricants, Fluids, Preservatives and Specialty Products for Use in Ground Equipment Systems.

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified,the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1 - Structural Welding Code - Steel.

(Application for copies should be addressed to the American Welding Society, Inc., 550 Northwest Le Jeune Road, Miami, FL 33135.)

NATIONAL FIRE PROTECTION ASSOCIATION

National Electrical Code.

(Application for copies should be addressed to the National Fire Protection Association, 60 Batterymarch Street, Boston, MA 02110.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (except for MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The paver shall be self-propelled and crawler mounted with an 8-foot basic paving width and shall lay, compact, and finish bituminous concrete strips, 6 to 16 feet wide. The paver shall consist essentially of a receiving hopper, spreader, compaction unit, a screed with the capability of being extended, and cutoff shoes.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3). Any changes or deviations of the paving machine from the approved first article during production will be subject to the approval of the contracting officer. Approval of the first article will not relieve the contractor of his obligation to furnish paving machines conforming to this specification.

3.3 Material. Material shall be as specified herein. Material not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration prevention and control. The paver shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operation and storage environment to which the paver may be exposed.

3.3.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.3 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.4 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the paver may be newly fabricated from recovered materials to the maximum extent practicable,

Source: https://assist.dla.mil -- Downloaded: 202610-16T07:02Z
Check the source to verify that this is the current version before use.

provided the paver produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the paver.

3.5 Safety.

3.5.1 Safety. All rotating or reciprocating parts and other parts subject to high operational temperatures that are of such a nature or are so located as to be a hazard to operating personnel, shall be guarded or insulated to the extent necessary to eliminate the hazard. All walking surfaces shall be provided with an anti-skid surface. Operator visibility shall be adequate to permit safe operation in forward and reverse travel. All platforms, steps, and handholds shall permit unhampered and nonhazardous entrance and exit from the paver. All exhausts shall be directed so as not to endanger personnel or obstruct the view of the operator. Fuel tanks shall be located in a manner which will not allow spills and overflows to run on to the engine, exhaust or electrical equipment. Electrical equipment shall be insulated, fully enclosed, or guarded. Nonfunctional sharp edges, projecting points and protruding length of more than two full threads of fastening devices shall be avoided.

3.6 Human factors engineering. The paver shall conform to Human Factors Engineering Design Criteria as specified in MIL-STD-1472. Special design emphasis shall be given, but not limited to 4 (General requirements), 5.1 (Control/Display Integration), 5.2 (Visual displays), 5.4 (Controls), 5.5 (Labeling), 5.6 (Anthropometry), 5.9 (Design for Maintainability), 5.12 (Operational and Maintenance Ground/Shipboard Vehicles), 5.13 (Hazards and Safety) of MIL-STD-1472, as applicable.

3.7 Noise limits. The noise produced by the paver shall conform with MIL-STD-1474 requirements when tested in accordance with 4.5.2.12. The provisions of MIL-STD-1474, 4.3 and 4.4 shall be provided if and only if MIL-STD-1474, 5.1.1.2 procedures have been pursued and documented to the satisfaction of the procuring activity and written permission to exceed the 85 dB(A) limit is obtained from the procuring activity (see 6.2). Hazard signs shall conform with MIL-STD-1474, 4.3 and be readable at the distance indicated on the sign.

3.8 Maintainability. Design for maintainability shall be in accordance with 3.6. All major assemblies and installed attachments shall be accessible for maintenance, repair, and replacement with minimum removal of other major assemblies and installed attachments. Covers or plates which must be removed for component adjustment, or daily maintenance, shall be equipped with quick-disconnect fastenings. Drain outlets shall be accessible and provide for drainage directly into a receptacle. Ease of maintenance provisions shall incorporate features insuring operating clearances for handtools and lubricating equipment, and the accessibility for service operations such as adding oil to the engine crankcase and adding oil to gear cases. Each maintenance, assembly, or disassembly operation required during testing in accordance with 4.4 shall be accomplished by no more than two men (except a hoist and operator may be used as necessary) using special tools furnished with the paver and common tools. After completion of any maintenance operation, the paver shall operate as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

3.9 Performance. The paver shall receive from dump trucks paving material mixed with bituminous concrete, and shall lay, compact, and finish the material to form a strip of pavement. The bituminous strip laid shall be laterally and longitudinally smooth within a tolerance of plus or minus 1/8 inch measured with a 12-foot straight-edge. The paver shall lay a basic 8-foot width without screed extensions or cutoff shoes, shall be extendable to a paving width of 16 feet by adding screed extensions or extending the screed, and shall be reducible to a 6-foot width by the use of cutoff shoes. When the recieving hopper is filled to capacity, the paver shall have the capability of pushing a fully loaded 71,000 pound GVW dump truck up a 5 percent grade at no less than 9 feet per minute while simultaneously laying a paving strip 16 feet wide.

3.10 Crawlers. The paver shall be mounted on full crawlers with self-cleaning type treads not less than 10 inches wide, and with not less than 6 feet between center of sprocket and center of idler. Each crawler shall be independently steered. Means shall be provided to adjust the tension of the crawler tracks.

3.11 Hydrostatic drive. The paver shall be provided with a hydrostatic drive capable of propelling the paver during paving operations at infinitely variable speeds ranging from 0 to not less than 100 feet per minute at governed engine speed. The maximum forward and reverse travel speeds shall be not less than 240 feet per minute. The hydrostatic propulsion systems shall be equipped with filters, cooler, and pressure relief bypasses as recommended by the component manufacturer for applications of this type. The hydrostatic drive system shall be independent of all other hydraulic systems. A gage that indicates the temperature of the hydraulic fluid shall be provided and shall be mounted on the engine instrument panel.

3.12 Operator's platform and controls. An operator’s platform shall be provided and shall be located so that the operator shall have adequate view of all operations. The platform shall have an anti-skid surface. All controls (except the screed controls) necessary for operation shall be provided, shall be accessible to the operator, and shall be located so that the operator can control all operations from both the right and left sides of the platform. The operator’s platform and controls shall conform to the provisions of 3.6. An operator’s seat with a backrest shall be provided. The seat and the backrest shall be padded and shall have waterproof coverings. Provisions shall be made to mount the seat on the right and on the left side of the operator’s platform.

3.13 Hopper. The receiving hopper shall have a capacity of not less than 4-1/2 cubic yards and shall receive material from dump trucks. The hopper shall have a dumping clearance of not more than 24 inches above the ground surface, and shall be equipped with adjustable gates to control the flow of material to the spreading mechanism. The side walls of the hopper shall be equipped with hydraulic rams that lower the side walls to provide clearance for low dumping trucks and shall raise the side walls to provide a positive material flow to completely empty the hopper of all materials. The front end of the hoper shall have a means to prevent material from spilling off the hopper. The front end of the hopper shall be equipped with a push-bar that shall permit the paver to

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

push a 71,000 GVW dump truck. The push-bar shall be pivotally mounted and shall be equipped with steel rollers. The hopper shall have dual-bar feeders to deliver material to the spreader screws at an even rate. Each side of each feeder shall operate independently of the other side.

3.14 Compaction. Compaction shall be accomplished by tamping, electric vibration, or hydraulic-actuated vibration, or hydraulic-mechanical actuated vibration.

3.14.1 Tamping. When tamping is employed, the machanism shall have a nominal vertical stroke of 1/8 inch, and an operating frequency of not less than 1,500 strokes per minute at governed engine speed. Tamper bars shall be replaceable, and extensions shall be provided to accommodate screed extensions.

3.14.2 Electric vibration. When electric vibration is employed, the screed shall be vibrated by not less than four vibrators operating at a constant vibration of 3,600 vibrations per minute at governed engine speed. The vibrators shall be protected against the entrance of moisture and dust. The intensity of vibration shall be controlled by rheostats. Screed extensions shall receive the same vibration as the screed.

3.14.3 Hydraulic-actuated vibration. When hydraulic-actuated vibration is employed, an oscillating screed and a vibrating compacting unit shall be provided. The screed shall oscillate at not less than 600 strokes per minute at governed engine speed with a stroke of not less than 1/4 inch. The compacting unit shall vibrate at not less than 2,000 cycles per minute at governed engine speed. Compacting-unit extensions equal in length to screed extensions shall receive the same vibration as the compacting unit.

3.14.4 Hydraulic-mechanical actuated vibration. The screed shall be vibrated by not less than four mechanical vibrators. Vibrators shall be mechanically inter-locked and capable of control by the operator through a frequency range of 2,000 to 4,000 cycles per minute. Screed extensions shall recieve the same vibration as the screed.

3.15 Spreader screws. The spreader screws shall distribute the bituminous material evenly to the whole width of the compacting unit and across either half of the compacting unit as independent operations. The spreader screws shall operate in conjunction with the bar feeders and shall have automatic controls with manual override.

3.16 Screed. Provisions shall be made for heating the screed to prevent the bitument from adhering. The screed shall be raised and lowered by power-operating hydraulic hoist. A mechanical locking device that will hold the screed in the raised position during traveling shall be provided. A steel platform with antiskid surface shall be provided for the screed operator. The screed shall incorporate adjustments to control the thickness of the pavement strip. Sufficient adjustment shall be provided to lay pavement at any thickness between 1/2 inch and 6 inches. The screed shall be capable of providing negative crown to not less than 1/2 inch and positive crown to not less than 2-1/2 inches of the finished mat on a 10 foot width.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

3.17 Screed burner. The paver shall be provided with one or more screed burners. The burner(s) shall burn fuel oil conforming to VV-F-800, grade DF2, at a rate sufficient to provide even distribution of heat over the entire area of the screed and the screed extensions, When hydaulic-actuated vibration is employed, the heat shall be applied to the compacting unit and its extensions in place of heating the screed. The burner shall be ignited and controlled from the screed operator's platform. A fuel tank (if needed), a fuel pump, an air blower, a fuel sediment bowl, and fuel lines shall be furnished with the burner.

3.17.1 Screed burner fuel tank. a separate fuel tank if needed, conforming to the contractor's commercial standard, except as specified herein, shall be provided. The tank shall have a capacity of not less than 5 gallons. The filler opening shall include a removable strainer and have a chain-secured filler cap. A warning plate stating "DIESEL FUEL ONLY" shall be affixed in a conspicuous place near the fuel-tank filler opening. The fuel tank shall be provided with an air vent and a drain. A fuel-line shutoff valve shall be attached directly to the fuel tank. The valve shall be provided with a double-ended arrow showing direction of operation and labeled at each end to indicate the functional result (i.e. open, close, etc.). The fuel tank shall be located or positioned to minimize fire hazard resulting from spillage, overflow, or drainage. The engine fuel tank may be used in lieu of a separate screed burner fuel tank to fuel the screed burner. If the engine fuel tank is used to fuel the screed burner, a fuel-line shut-off valve shall be attached directly to the engine fuel tank.

3.17.2 Fuel sediment bowl. A removable, clear-glass sediment bowl shall be provided between the fuel tank and the burner.

3.17.3 Fuel lines. Fuel lines shall be either steel or oil and fuel resistant hose. Fuel lines shall be supported and secured to prevent vibration and chafing.

3.17.4 Oil spray system. The paver shall be provided with a fuel resistant hose and spray nozzle which shall be used for paver wash down. The hose shall be pressurized and shall be of sufficient length to reach all exterior points of the paver. Provisions shall be provided to securely store the hose on the paver when the hose is not in use.

3.18 Diesel engine. The paver shall be powered by an industrial diesel engine having horsepower, torque and speed characteristics to satisfactorily meet all performance requirements specified herein without exceeding the engine manufacturer's intermittent rated horsepower of the engine furnished. The engine's governed speed shall be set and sealed in accordance with the engine manufacturer's recommendations. The engine shall be capable of operating continuously at rated load in an ambient temperature of 120°F without exceeding the maximum allowable heat temperatures established by the engine manufacturer. The engine shall be furnished with the following accessories:

a. Fuel filter
b. Oil filter

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

c. Air cleaner, dry type with airflow restriction indicator.
d. High temperature cut off switch.

3.18.1 Engine instrument panel. The instrument panel shall be equipped with lights-controlled by a weatherproof switch. The instrument panel shall be located in a position visible from both operator stations and shall be in accordance with 3.6. The instrument panel shall be equipped with the following instruments:

a. Engine lubricating oil pressure gage.
b. Engine coolant temperature indicator.
c. Engine tachometer.
d. Battery charging ammeter or voltmeter.
e. Engine hourmeter.
f. Indicator, fuel quantity.

The instrument panel shall be protected from vandals by a cover plate fitted with a lock hasp that shall accommodate a padlock that has a 3/8 inch diameter shackle.

3.18.2 Engine cranking system. Unless otherwise specified (see 6.2), the engine shall be equipped with a 12 volt electrical cranking system. The electric cranking system shall include but not be limited to the following: an electric starter, alternator, voltage regulator, battery and all other accessories required to complete the cranking system. The circuits shall be numbered and identified by band markers.

3.18.3 Engine fuel. The diesel engine furnished shall operate on fuel oil conforming to VV-F-800, grade DF2.

3.18.4 Engine lubrication. The engine lubricating oil shall be in accordance with MIL-L-2104.

3.18.5 Engine oil sampling valve. An oil sampling valve shall be provided on the engine. The valve shall be manually operated and shall automatically close after release. It shall be made of material resistant to corrosion such that it will not contaminate the sample. The discharge port of the valve shall be covered with a captive chained cap conforming to SAE J514. The valve shall be located in such a way to insure that personnel will not be exposed to danger when taking oil samples with the engine running. The location of the oil tap shall be such that when samples are taken, it shall be a true representation of oil that is flowing while the engine is running.

3.18.6 Engine fuel tank. A fuel tank conforming to the contractor's commerical standards, except as specified herein, shall be provided. The tank capacity shall be sufficient for 8 hours of operation at the maximum fuel rating of the engine. The tanks filler opening shall include a removable strainer and have a chain-secured filler cap. The tank shall be stenciled: "DEISEL FUEL ONLY". The tank shall be provided with a fuel level indicator and with flexible fuel lines to the engine. Provisions shall be made to drain the fuel into a hand held container.

Source: https://assist.dla.mil -- Downloaded: 202610-16T07:02Z
Check the source to verify that this is the current version before use.

3.18.7 Batteries and battery box.

3.18.7.1 Batteries. Unless otherwise specified (see 6.2), the paver shall be furnished with batteries that are charged and dry. A pictorial diagram showing battery connections shall be provided with the battery box and shall be readable when the battery box is open.

3.18.7.2 Battery box. The batteries shall be contained in a weatherproof box fabricated of steel not less than 0.0747 inch (USS 14 gage) in thickness or in a waterproof compartment on the paver provided the compartment meets the requirements specified herein. When the batteries are installed in the box, with all electrical connections completed and with the battery-box lid in the closed position, no uninsulated electrical conductor shall be within 1 inch of any point with the battery box at top of the box, and drains shall be provided in the bottom. The box shall have built-in restraints and holddowns, constructed so that pressure will be applied to the outer battery case only. The box shall be located so that the batteries will be accessible for maintenance, servicing with a hydrometer and syringe, removal, and replacement. Grommets shall be furnished to protect the battery lead-in cables. All interior surfaces of the box, including the restraints and holddowns, shall be treated with acid-resistant paint.

3.18.7.3 Battery cables. Battery cables shall be coded near the ends which connect to the battery. The positive cable shall be coded black, and marked “+" and the negative cable shall be coded red and marked “-". The cables shall be provided with insulated battery terminal covers.

3.18.8 Wiring. Unless otherwise specified (see 6.2), the manufacturer’s standard commercial wiring system shall be furnished. When specified (see 6.2), the wiring shall conform to MIL-C-13486 and shall be sized in accordance with the National Electrical Code recommendation for the current capacity required. The cables shall be bound together by wraps conforming to MS3367-1 placed at 3-inch intervals or inclosed in spiral cut plastic tubing. Grommets shall be furnished to prevent chafing where the cable passes through sheet metal or structural members, and clips shall be used for support. Wiring connectors shall conform to MS27142, MS27143, MS27144, MS27145, MS27146, or MS27147, as applicalbe. Prior to assembly, connectors shall be lubricated with electrical insulation compound conforming to MIL-S-8660.

3.19 Drives.

3.19.1 Chain drives. Chain drives, if used, shall be provided with means for tension adjustment. Safety guards shall be provided for all exposed chain drives.

3.19.2 V-belt drives. V-belt drives, if used, shall be provided with means for tension adjustment. Safety guards shall be provided for all exposed belt drives

3.20 Accessories. Each paver shall be provided with screed extensions, cut off shoes and flood lamps.

Source: https://assist.dla.mil -- Downloaded: 202610-16T07:02Z
Check the source to verify that this is the current version before use.

3.20.1 Screed extensions. Screed extensions shall increase the paving width increments of 6 inches from 8 feet to 16 feet. A combination screed extensions and cutoff shoes may be used to attain increments of 6 inches. Extensions shall be attached to screed by bolting or by quick-acting type clamps. When hydraulic-actuated vibration is employed, screed extensions shall be provided for the compacting unit as well as for the oscillating screed.

3.20.2 Expendable screed. In lieu of screed extensions an extendable screed shall be acceptable. The expendable screed shall have an infinite number of paving width settings from 8 feet to 16 feet. The expencable screed shall be an integral part of the basic screed (see 3.16) and shall be provided with heat and vibration. Means shall be provided to control mat thickness and crown through the extended width up to 16 feet (see 3.16). Means shall be provided to install cutoff shoes specified in 3.20.3.

3.20.3 Cutoff shoes. Cutoff shoes shall reduce the paving width in increments of 6 inches from 8 feet to 6 feet.

3.20.4 Floodlamps. Six floodlamps and mounting brackets shall be installed on the paver. Three lamps shall be mounted on each side of the paver and located to prevent blinding of the operator, Each horizontally-opposed pair of lights shall be protected by a circuit breaker conforming to SAE J553, type II and controlled by a weatherproof switch. The lamps shall be directed as follows:

a. One pair of lamps directed into the receiving hopper and feeders.
b. One pair of lamps directed to illuminate the area behind the compacting unit.
c. One pair of lamps directed into the spreader screw area.

3.21 Electrical systems. When electrical vibration is employed, a separate 115/230-volt system shall be provided. This system shall be independent of and completely isolated from the paver basic electrical system. Overload protective devices shall be installed in the 115/230-volt system.

3.22 Electromagnetic interference. When specified (see 6.2), the electro-magnetic interference emission and susceptibility characteristics of the paver shall meet the recommended limits specified in SAE J551 when measured in accordance with SAE J551.

3.23 Lubrication. All surfaces requiring lubrication shall be provided with a means for lubricating.

3.23.1 Lubricants. The paver shall operate as specified herein when lubricated with military lubricants (see 6.4). When specified (see 6.2), the paver shall operate as specified herein, when lubricated as recommended by the manufacturer, with commercial lubricants.

3.23.2 Lubrication fittings. Lubrication fittings shall conform to MIL-F-3541, type I, II, or III. Fittings shall be located in a protected position and shall be accessible to a lever-operated, hand-type grease gun conforming to MIL-G-3859

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

with a 10-inch flexible extension. Accessibility to fittings shall be provided without the removal or adjustment of accessories or parts. Panels and plates equipped with hand-operable, quick-disconnect fasteners may be removed to provide accessibility to lubrication fittings.

3.23.3 Pressure-release device. An automatic pressure-release device shall be provided where pressure lubricating equipment will damage grease seals or other parts.

3.23.4 Filling, draining, and checking provisions. Enclosures such as gear cases and transmission housings which contain a reservoir of lubricants for the lubrication of the parts enclosed shall be equipped with either dipsticks, check plugs not less than l/2-inch pipe size, or sight gages to determine the level of the lubricant. Dipsticks shall be marked in accordance with SAE J614b. Each enclosure shall be equipped with a means for filling the enclosure with lubricant and for draining. The drain outlets, except outlets fitted with extensions for accessibility, shall be fitted with a magnetic drain plug. The drain outlet shall be located so that removal of the plug will result in complete drainage of the lubricant from the enclosure when the paver is parked in its normal service position. Integral tubes or troughs may be used to convey the lubricant from the drain outlet to a hand held container. Accessibility to the drain plug, the filling means, and the lubricant-level checking device shall be provided.

3.23.5 Grease lubrication. All grease lubrication points shall be with grease conforming to MIL-G-10924. The paver shall be assembled, run-in, tested, and delivered with these greases. Each component shall be tagged in a conspicuous place to indicate that military grease has been used.

3.23.6 Oil lubrication. Unless otherwise preserved for packaging, all components shall be filled to the operating level with military oils designated for use in the temperature of 0 °F to 32 °F. Each component shall be tagged in a conspicuous place to indicate the temperature range and grade of lubricant used.

3.24 Fungus and moisture resistance. Unless otherwise specified (see 6.2), the electrical circuitry, including all components and connections except as specified below, shall be protected from the effects of fungus growth and moisture by an overall treatment with a varnish conforming to MIL-V-173, composition as specified in 3.24.1.

a. Components or circuit elements that are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.
b. Components or circuit elements whose functions will be adversely affected by the varnish coating shall not be treated.

When used, the varnish shall be applied by spray, brush, or a combination of both to give a dry-film thickness of not less than 1 mil to component or element surfaces previously cleaned and prepared so that the surfaces are free from all foreign matter which would interfere with the adherence or function of the varnish.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

3.24.1 Composition. Composition I shall be used unless composition II must be used in order to comply with local air pollution regulations in the application of the varnish. When composition II is used, the contractor shall provide evidence to the Government that the use of composition II is required.

3.25 Slinging attachments. Permanently affixed attachments that enable the paver to be lifted in its normal travel position shall be provided. Each attachment shall meet the requirements specified in MIL-STD-209, for type II equipment, class 1 or 3 provisions. Slinging attachments may also be used as tiedown attachments when such attachments meet the requirements specified in 3.26.

3.26 Equipment tiedown attachments. Permanently affixed attachments that permit fastening the paver to the floor or deck of a transportation medium shall be provided. The tiedown attachments shall meet the requirements specified in MIL-STD-209, for type II equipment, class 2 or 3 provisions.

3.27 Railroad transportation. When specified (see 6.2), the paver shall withstand a rail impact test as specified in 4.5.2.10, without permanent deformation to the paver. When commercial facilities are not available to conduct a rail hump test as specified, testing may be conducted at a Government facility. The paver, when prepared for transportation, shall meet the clearance dimensions shown on figure 1 when loaded atop a 50-inch (1270 mm) high rail car and be capable of negotiating a 15-degree ramp.

3.28 Highway transportation. The paving machine shall be highway transportable by the Army's M172A1 semitrailer, lowbed; 25 ton, 4 wheel. See figure 2 for dimensional limitations.

3.29 Identification marking. The paver shall be identified in accordance with MIL-STD-130. The marking shall be applied to the paver on plates conforming to MIL-P-514, type I, style 1, composition C, of type I, grade A, class 1 material. When specified (see 6.2), the identification plates will be furnished by the contracting officer to be filled in by the manufacturer. Plates shall be attached by screws, bolts, or rivets in a conspicuous protected location.

3.30 Shipping data plate. The shipping data plate shall conform to MIL-P-514, type III, composition C, of type I, grade A, class 1 material and, in addition, shall show the silhouette of the paver in transport position indicating the center of gravity locations in all three axes and the location and capacity of the lifting and tiedown attachments, and the approach and departure clearance angles. The plates shall be attached as specified in 3.29.

3.31 Control identification, information, safety, and warning plates. A plate shall be furnished for each switch, gage, and controls and at points that require special attention for safe and efficient operation of the paver. The plates shall be labeled by lettering or other appropriate marking with information such as function, the direction the control is to be moved, neutral position, safety instructions, and other warnings or instructions as necessary. The plates

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

shall conform to MIL-P-514, type III, composition C, of type I, grade A, class 1 material. Plates shall be attached as specified in 3.30, and labeling shall be in accordance with 3.6. Plates describing safety measures or warning against operations detrimental to the paver shall be distinguished by the words "CAUTION" or “WARNING” in red lettering.

3.32 Treatment and painting. The portions of the paver normally painted internally and externally shall be cleaned, treated, and painted in accordance with MIL-T-704, type F or G, as applicable. Unless otherwise specified (see 6.2) top coat color shall be camouflage green 383 conforming to MIL-C-46168. The paver shall then be overcoated in accordance with the Government furnished camouflage patterns with MIL-C-46168 top coat of the colors specified in the camouflage patterns.

3.33 Stenciling. The gross weight of each paver shall be stenciled on each side of the paver. "Lift" and "Tiedown", as applicable shall be stenciled adjacent to their respective tiedown and slinging attachment. All stenciling shall be in black-type letters not less than 1 inch high and shall be lusterless black in color.

3.34 Toolbox. A weatherproof closed compartment or toolbox shall be provided to carry those tools required to operate and maintain the paver. Toolboxes, when furnished , shall be made of steel not less than 0.0747 inch (USS 14 gage) in thickness. The toolbox shall have a hinged lid and not less than two tension hook-type fasteners that will keep the lid closed when the toolbox is subject to vibration. The toolbox lid shall open at least 90 dgrees from the closed position and shall remain in the fully open position either by its own weight or by a holding device. A hasp that will accommodate a padlock with a 3/8-inch shackle shall be provided on the toolbox. The toolbox shall be fastened to the paver in a protected position. A drain hole shall be provided in the bottom of the toolbox. When a weatherproof compartment is built iinto the paver body to carry those tools required to operate the paver, a portion of the operator's platform may serve as the compartment lid and need not be hinged to the compartment. the compartment lid shall be provided with a hasp that will accommodate a padlock with a 3/8-inch shackle. A drain hole shall be provided in the bottom of the compartment. When specified (see 6.2), the manufacturere's standard toolbox shall be provided.

3.35 Workmanship. All parts, components, and assemblies of the paver including castings, forgings, molded parts, stampings, bearings, seals, machined surfaces, and welded parts shall be clean and free from sand, dirt, fins, pits, sprues, scale, flux, and other harmful, extraneous material. All exposed edges shall be rounded or beveled except where sharp edges and comers are required.

3.35.1 Steel fabrication. Steel used in the fabrication of the paver shall provide original quality surface finish and shall be free from kinks and sharp bends. Steel having an eroded surface is not acceptable. The forming of material shall be done by methods that will not cause damage to the metal. Shearing and clipping shall be done neatly and accurately. Corners shall be square and true. Burned surfaces of flamecut material shall be free of slag. Precaution shall be taken to avoid overheating, and heated metals shall be

Source: https://assist.dla.mil -- Downloaded: 202610-16T07:02Z
Check the source to verify that this is the current version before use.

allowed to cool slowly except where heat treatment is required. All bends of a major character shall be made with metal dies or fixtures to insure uniformity of size and shape.

3.35.2 Welding. The surfaces of parts being welded shall be free from rust, scale, paint, grease and other foreign matter. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading. Welding shall be in accordance with AWS D1.1 Structural Welding Code - Steel. The welding process used in the fabrication of the paving machine shall be at the option of the contractor.

3.35.3 Welders and welding operators. Before assigning any welder or welding operator to welding work covered by this specification, the contractor shall obtain certification that the welder or welding operator has passed qualification tests as prescribed by the welding code AWS D1.1 for the types of welding operations to be performed and that such qualification is effective as defined by the AWS D1.1. Certification shall be made available for review by the contracting officer or designated representative.

3.36 Data for camouflage patterns. The contractor shall generate the camouflage pattern data (see 6.2).

3.37 Government-furnished property. The following property will be furnished by the Government (see 6.6):

Item No.	Description	Identification	Quantity
1	Pattern drawings	Camouflage patterns	As required

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program, The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material,

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection comparison (see 4.6).
d. Inspection of packaging (see 4.7).

4.3 First article inspection.

4.3.1 Examination. The paver shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Test. The paver shall be tested as specified in 4.5.2.1 through 4.5.2.13. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Examination. Each paver shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Test. Each paver shall be tested as specified in 4.5.2.2. Failure of the test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The paver shall be examined for the following defects:

101. Material not as specified (see 3.3).
102. Materials not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration for the applicable storage and operating environments (see 3.3.1).
103. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other (see 3.3.2).
104. Contractor does not have documentation available for identification of material, material finishes, or treatment (see 3.3.3).
105. Used, rebuilt or remanufactured components, pieces, or parts incorporated in the paver (see 3.4).
106. Safety features not as specified (see 3.5).
107. Human factors Engineering not as specified (see 3.6).
108. Maintainability features not as specified (see 3.8).
109. Crawlers not as specified (see 3.10).
110. Hydrostatic drive system not as specified (see 3.11).
111. Operator’s platform and controls not as specified (see 3.12).
112. Receiving hopper not as specified (see 3.13).
113. Compaction system not as specified (see 3.14)
114. Spreader screws not as specified (see 3.15).
115. Screed not as specified (see 3.16).
116. Screed burner not as specified (see 3.17).
117. Screed burner fuel tank not as specified (see 3.17.1).
118. Fuel sediment bowl not as specified (see 3.17.2].

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

119. Fuel lines not as specified (see 3.17.3).
120. Oil spray system not as specified (see 3.17.4).
121. Diesel engine and accessories not as specified (see 3.18).
122. Engine instrument panel not as specified (see 3.18.1).
123. Engine cranking system not as specified (see 3.18.2).
124. Engine does not operate on fuel specified (see 3.18.3).
125. Engine oil-sampling valve not as specified (see 3.18.5).
126. Engine fuel tank not as specified (see 3.18.6).
127. Batteries, battery box and battery cables not as specified (see 3.18.7).
128. Wiring not as specified (see 3.16.8).
129. Chain drives or V-belt drives not as specified (see 3.19).
130. Screed extensions not as specified (see 3.20.1 or 3.20.2).
131. Cut off shoes not as specified (see 3.20.3).
132. Floodlamps not as specified (see 3.20.4).
133. Electrical system (when provided) not as specified (see 3.21).
134. Lubrication and lubricants not as specified (see 3.18.4, 3.23, 3.23.1, 3.23.5, and 3.23.6).
135. Lubrication fittings not as specified (see 3.23.2).
136. Pressure-release device not as specified (see 3.23.3).
137. Filling, draining, and checking provisions not as specified (see 3.23.4).
138. Fungus and moisture resistance not as specified (see 3.24).
139. Slinging attachments not as specified (see 3.25).
140. Equipment tiedown attachments not as specified (see 3.26).
141. Paver transport clearance dimensions not as specified (see 3.27).
142. Identification marking not as specified (see 3.29).
143. Shipping data plates not as specified (see 3.30).
144. Control identification, information, safety and warning plates not as specified (see 3.31).
145. Treatment and painting not as specified (see 3.32).
146. Nonconformance with railway clearance dimensions (see figure 1).
147. Nonconformance with highway transportability dimensional limitations (see figure 2)
148. Paint color not as specified (see 3.32).
149. Stenciling not as specified (see 3.33).
150. Toolbox not as specified (see 3.34).
151. Workmanship not as specified (see 3.35).
152. Steel fabrication not as specified (see 3.35.1).
153. Camouflage patterns not as specified (see 3.36).
154. Camouflage pattern data not as specified (see 3.36.1).
155. Welding not as specified (see 3.35.2).
156. Welders/welding operators not as specified (see 3.35.3).

4.5.2 Tests

4.5.2.1 Test conditions. Prior to any operational test, all routine service and maintenance operations shall be performed. During the test operations the paver shall operate as specified herein without maintenance other than the contractor's recommended normal scheduled maintenance as established by a maintenance schedule prepared and submitted by the contractor prior to test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

4.5.2.2 Operation test. Raise and block the paver so that the tracks, screed (and extensions), and other operating components are off the ground or place the paver on a lubricated steel plate. Start the engine and set all operating components in motion and operate at low speed for not less than 30 minutes. Manipulate all controls. Turn on floodlamps. During this test, ignite the screed burner and operate for 3 minutes.

4.5.2.2.1 Failure criteria. Inability to manipulate all controls; evidence of excessive heating of gear cases, bearings, and bushings; failure of any lamp to bum throughout the test; or uneven distribution of heat over the entire screed area shall constitute failure of this test.

4.5.2.3 Crown. Adjust the screed (including the compacting unit when hydraulic vibration is employed) to the maximum negative crown. Then adjust to the maximum positive crown.

4.5.2.3.1 Failure criteria. Nonconformance to 3.16 shall constitute failure of this test.

4.5.2.4 Paving width. Using the cutoff shoes, reduce the paving width in the specified increments through the range specified in 3.20.3. Then using the screed extensions or a combination of screed extensions and cutoff shoes, extend the screed in the specified increments through the range specified in 3.20.1.

4.5.2.4.1 Failure criteria. Nonconformance to 3.20.1, 3.20.2 or 3.20.3 shall constitute failure of this test.

4.5.2.5 Performance. Operate the paver to lay hot bituminous concrete. The strip shall be approximately 750 feet long, 1-inch thick, and at the maximum specified extended width. The mat shall contain well-graded aggregate with 100 percent passing a 1/2-inch-square screen opening. The hopper shall recieve the bituminous concrete from a 71,000 GVW dump truck.

4.5.2.5.1 Failure criteria. Evidence of malfunction, slippage, or digging-in of the paver tracks while pushing the truck; evidence of tearing, shoving, or gouging of the surface; or failure to produce a surface both laterally and longi-tudinally smooth with the tolerance specified in 3.9 shall constitute failure of this test.

4.5.2.6 Power rating. Adjust the paver for laying material at the maximum specified width; place a full capacity load of hot-mix bituminous concrete in the hopper; operate the paver to push a dump truck loaded to 71,000 GVW up the specified maximum grade of not less than 5 percent while laying a strip of the material 1 inch thick by not less than 80 feet long. This test may be performed concurrently with the test specified in 4.5.2.5.

4.5.2.6.1 Failure criteria. Inability to drive the paver under the conditions specified shall constitute failure of this test.

4.5.2.7 Paving and travel speeds. Operate the paver on an improved level surface and determine the following:

Source: https://assist.dla.mil -- Downloaded: 202610-16T07:02Z
Check the source to verify that this is the current version before use.

a. Minimum paving speed.
b. Maximum paving speed.
c. Maximum forward travel speed.
d. Maximum reverse travel speed.

4.5.2.7.1 Failure criteria. Nonconformance to 3.11 shall constitute failure of this test.

4.5.2.8 Slinging attachments.

4.5.2.8.1 Test procedures.

a. Lift the paver and hold in suspension in its normal travel position using slings that converge not more than 24 feet above the lowest extremity of the paver. Determine the true angle of each sling leg relative to the vertical. Measure the clearance between each sling and the paver. Measure eye openings and clearance dimensions of the attachments.
b. Restrain the paver by anchoring the main frame and subject each provision to a force equal to the load factor specified in MIL-STD-209 times the load it carried in a. above. An alternate method of test is to lift the paver as in a. above and add weights to the main frame until the required force is obtained. Hold the paver under either of the above loading conditions for at least 90 seconds.

4.5.2.8.2 Failure criteria. Weld failure or permanent deformation caused by lifting or failure to meet requirements of MIL-STD-209, shall constitute failure of this test.

4.5.2.9 Equipment tiedown attachments.

4.5.2.9.1 Test procedure. With the paver anchored by means other than the attachment being tested, apply the proportion of the static loads as specified in MIL-STD-209 to each attachment. Measure dimensions of the tiedowns.

4.5.2.9.2 Failure criteria. Failure to meet the requirements of MIL-STD-209 shall constitute failure of this test.

4.5.2.10 Rail impact test. When required (see 6.2), the paving machine shall successfully complete a rail impact test as specified in Appendix A of MIL-STD-1186. After each impact, the paver shall be inspected for permanent deformation of its components, or other evidence of possible failure. After completion of the railroad impact test, an operational checkout of the paver will be conducted.

4.5.2.10.1 Failure criteria. Weld failure or permanent deformation of the paver components or its tiedown attachment, or failure of the paver to operate after the test shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

4.5.2.11 Electromagnetic interference. When specified (see 6.2), the paver shall be tested in accordance with SAE J551. A report tabulating the allowable maximum interference and the measured interference shall be furnished with the first article test reports.

4.5.2.11.1 Failure criteria. Failure to meet the requirements of SAE J551, shall constitute failure of this test.

4.5.2.12 Noise level test. Noise levels shall be measured in accordance with MIL-STD-1474 requirements and reported in the format indicated by MIL-STD-1474, Figure 7. As a minimum, noise levels shall be measured when equipment is oprerating under full load. MIL-STD-1474, 2.1.2.4 contours shall be taken at not fewer than 12 equal (horizontal) arc increments, one increment shall include data from the noisiest position. Additionally, the noise level at the typical operating position shall be provided as dB(A) level.

4.5.2.12.1 Failure criteria. Failure to comply with MIL-STD-1474 requirements (see 3.7) shall constitute failure of this test.

4.5.2.13 Compaction. Operate the paver to lay hot bituminous concrete in the same manner as specified in 4.5.2.5. Based upon the method used for compaction (see 3.14), measure and record the vibration criteria as required in 3.14.1, 3.14.2, 3.14.3, or 3.14.4. This test may be performed concurrently with the test specified in 4.5.2.5.

4.5.2.13.1 Failure criteria. Failure to meet the vibration requirements specified in 3.14.1, 3.14.2, 3.14.3, or 3.14.4 shall constitute failure of this test.

4.6 Inspection comparison. The Government may select pavers at any time during the contract production period and subject these to the examination specified in 4.5.1 and the test specified in 4.5.2 thru 4.5.2.13 to determine conformance to the requirements of this specification. The inspection will be performed by the Government, at a site selected by the Government, on until selected at random from those which have been accepted by the Government and will not include the previously inspected first article pavers. In addition to any test specified as part of the inspection comparison, the Government reserves the right to conduct any and all other tests contained in this specification as part of the inspection comparison and failure of such additional tests shall have the same effect as failure of those tests specified as inspection comparison.

4.6.1 Inspection failure. Failure of an inspection comparison paver to meet any requirement specified herein during and as a result of the examination and tests specified in 4.6 shall be cause for rejection of the inspection comparison pavers and shall be cause for refusal by the Government to continue acceptance of production pavers until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on pavers previously accepted and produced under the contract. Any deficiencies found as a result of the inspection comparison will be considered

Source: https://assist.dla.mil -- Downloaded: 202610-16T07:02Z
Check the source to verify that this is the current version before use.

prima facie evidence that all pavers accepted prior to completion of inspection comparison are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.7 Inspection of packaging. Unless otherwise specified (see 6.2), the preservation, packing, and marking of the paving machine shall be examined and tested to determine compliance with the quality assurance provisions of MIL-T-3351.

5. PACKAGING

5.1 Preservation, packing, and marking. The paving machine components shall be preserved, packed and marked in accordance with MIL-T-3351, as specified for type II, unboxed (mobile) equipment. The degree of preservation shall be level A, level B, or commercial and the degree of packing shall be level A, level B, or commercial as specified (see 6.2). In addition, when level A or B preservation is specified the burner shall be drained and the interior surfaces of the pump, piping, valves and burners coated with preservative as specified for priming pumps in MIL-T-3351. Paving machine components not specifically specified in MIL-T-3351 shall be preserved as specified for similar type components. When commercial packaging is specified, it shall be in accordance with ASTM D 3951.

6. NOTES

6.1 Intended use. The paver is intended to receive mixed bituminous material from trucks and to lay bitumious material for road and airfield construction.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Date of issue of DoDISS applicable and exceptions thereto (see 2.1.1).
c. When a first article is not required (see 3.2).
d. Time frame required for submission of first article and number of pavers required (see 3.2).
e. When the Government will conduct any or all of the first article examination and tests (see 3.2). When the Government will conduct some but not all of the first article examination and tests the contracting officer shall specify which examination and test will be conducted by the Government and which examination and test will be conducted by the the contractor (see 3.2).
f. Qualification requirements for adequate research for noise reduction requirements (see 3.7).
g. When the engine cranking system shall be other than as specifed (see 3.18.2).
h. When the batteries shall be other than as specified (see 3.18.7.1).
i. When other than the manufacturer's standard commercial wiring shall be used (see 3.18.8).
j. When electromagnetic interference emission shall be measured in accordance with SAE J551 (see 3.22 and 4.5.2.11).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

k. When commercial lubricants shall be used (see 3.23.1).
l. When fungus and moisture resistance treatment is not required (see 3.24).
m. When a rail impact test is required (see 3.27 and 4.5.2.10).
n. When identification plates will be furnished by the contracting officer (see 3.30).
o. When treatment and painting shall be other than as specified (see 3.33).
p. When color shall be other than specified (see 3.33).
q. When commercial treatment and painting shall be provided as specified (see 3.33).
r. When manufacturer's standard toolbox shall be provided (see 3.35).
s. When first article inspection of packaging is not required (see 4.7).
t. Degree of preservation and degree of packing required (see 5.1).
u. Time frame when camouflage pattern data (see 3.36) is required.

6.2.2 Data requirements. When this specification is used for an acquisition which incorporates a DD Form 1423, contract data requirements list (CDRL), the data requirements identified below shall be developed as specified by an approved data item description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DOD FAR Supplement, Part 27, Sub-Part 27.410.6 are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs:

Paragraph No.	Data requirements	Applicable DID No.
a. 3.36	Color, Photograph Prints.	DI-MISC-80192
b. 3.36	Camouflage, Line Art Data	DI-MISC-80176

6.3 First article. When a first article inspection is required, the items should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests, and approval of the first article test results and disposition of the first article.

6.4 Lubricants. MIL-STD-838, Lubrication of Military Equipment, prescribes the policy for using specification-type products wherever possible and provides specific requirements for potential use of non-standard proprietary products. MIL-STD-838 is implemented by MIL-HDBK-113, Guide for the Selection of Lubricantss, Fluids, Preservatives and Speciality Products for Use in Ground Equipment Systems. The contracting officer should note that unless otherwise authorized by the US Army Belvoir Research, Development, and Engineering Center (ATTN STRBE-VF), Fort Belvoir, VA 22060-5606, lubricants, fluids, and greases for ground equipment systems must be restricted to those listed under MIL-HDBK-113, chapter 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

6.5 First article pack. Any changes or deviations of the production pack from the approved first article pack will be subject to the approval of the contracting officer. Approval of the first article pack will not relieve the contractor of his obligation to preserve, package, pack, and mark the pavers in accordance with this specification.

6.6 Government furnished property. The contracting officer should arrange to furnish the property listed in 3.37.

6.7 Subject term (key word) listing.

Asphalt-paver
Bituminous material paver
Crawler mounted
Cutoff shoes
Paver
Screeds
Track mounted

6.8 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - ME
Navy - YD

Review activity:
Army - AT

Preparing activity:
Army - ME

Project 3895-0282

Source: https://assist.dla.mil -- Downloaded: 202610-16T07:02Z
Check the source to verify that this is the current version before use.


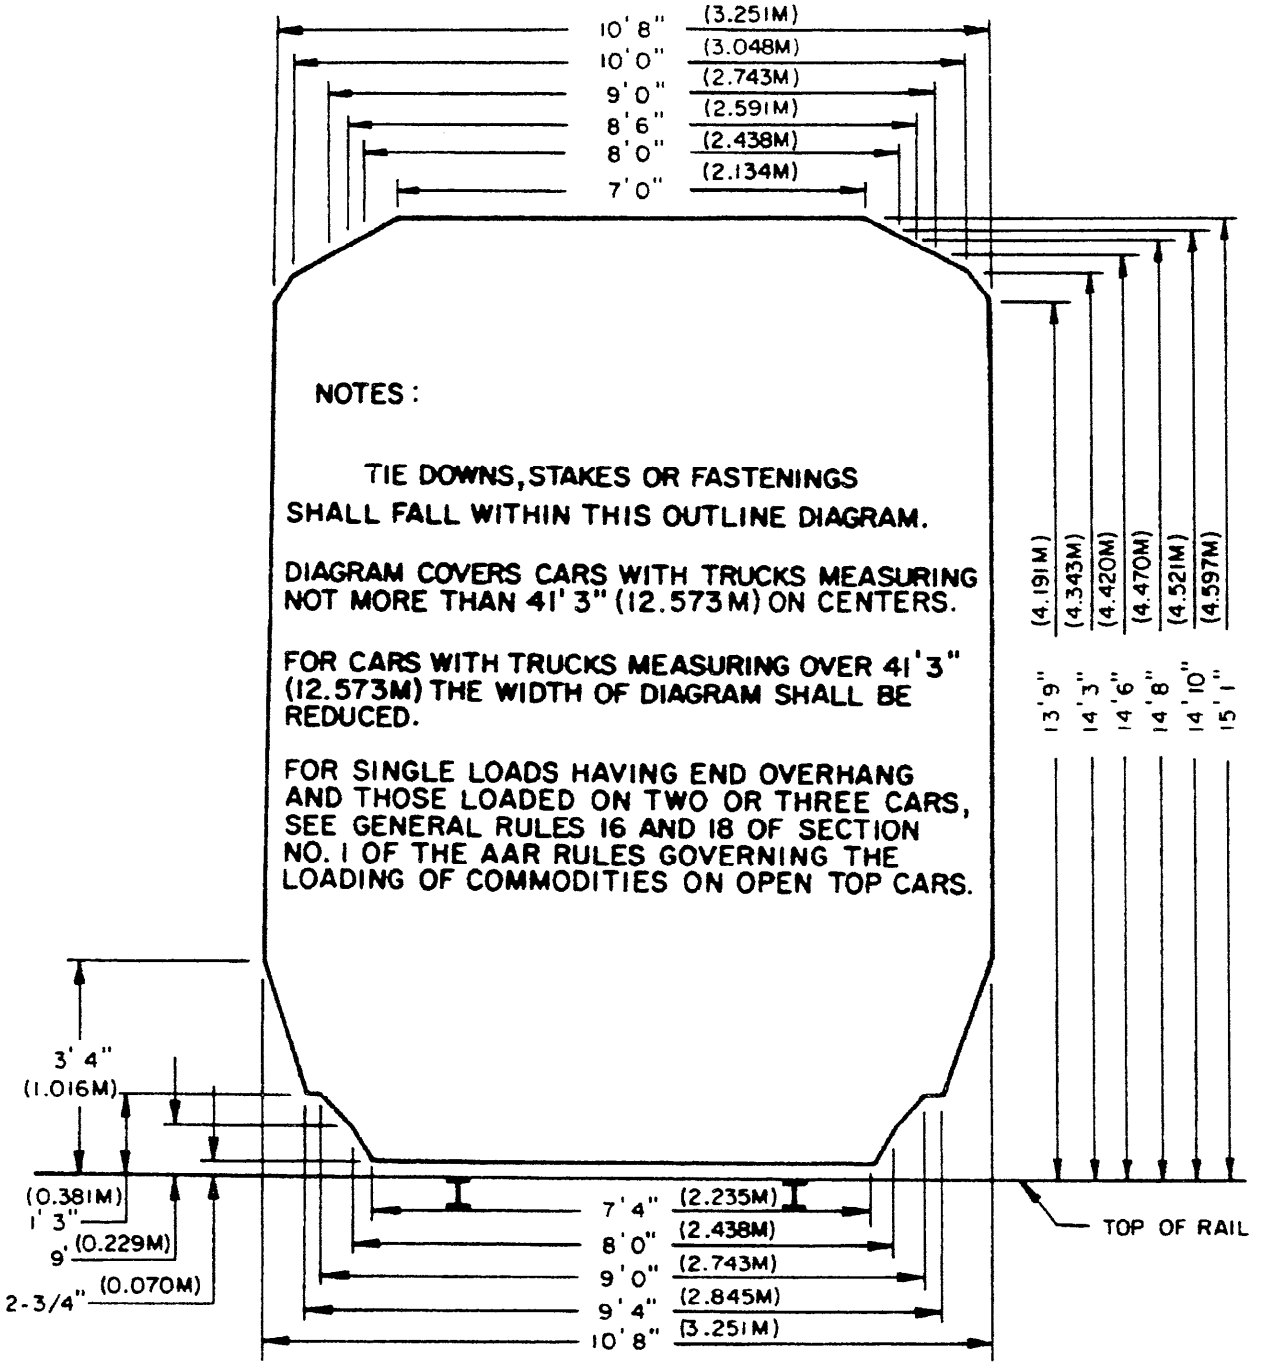


FIGURE 1. Outline diagram for single loads, without end overhang, on open top cars.

X-4106

Source: https://assist.dla.mil -- Downloaded: 202640-16T07:02Z
Check the source to verify that this is the current version before use.

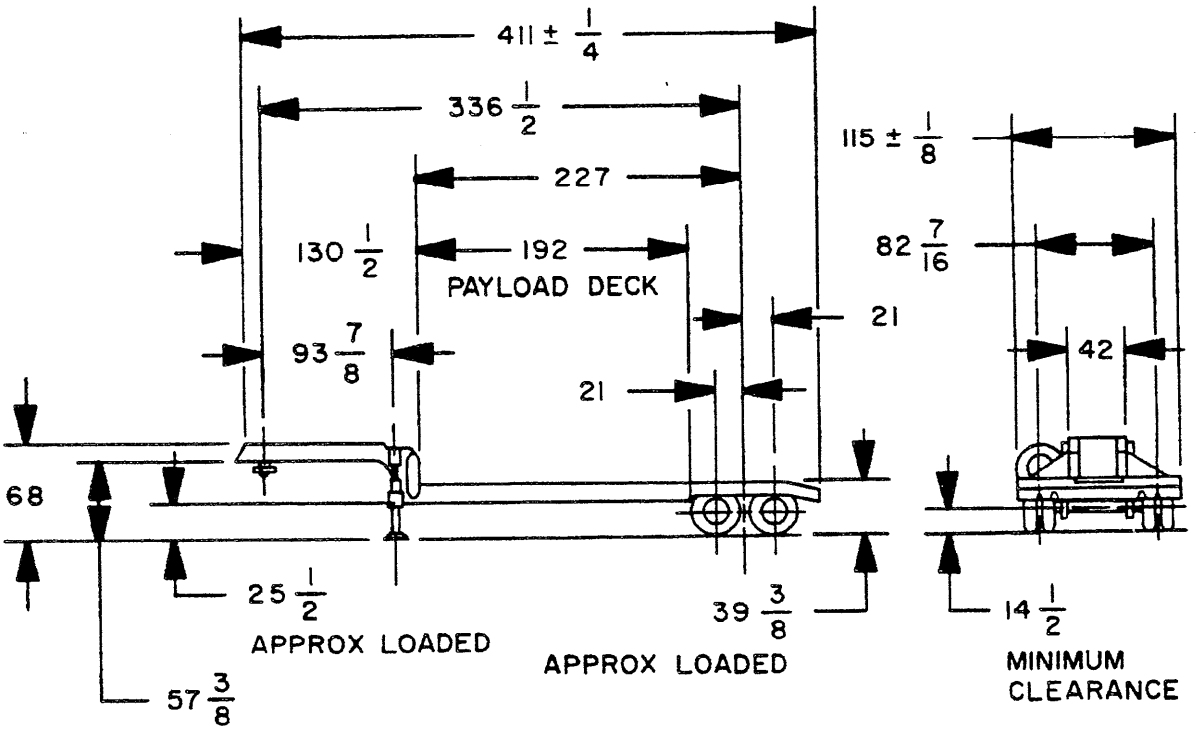

VEHICLE CHARACTERISTICS

WEIGHT DISTRIBUTION

KING PIN	5,090 LBS.
AXLE	11,510 LBS.
LANDING GEAR	7,110 LBS.
AXLE	9,490 LBS.

MAX. WEIGHT: INCLUDING BODY AND PAYLOAD EVENLY DISTRIBUTED

	LOADED
KING PIN	24,994 LBS.
AXLE	41,606 LBS.
	66,600 LBS.

CARGO TIEDOWN: (19) 6 EACH SIDE (2) ON TOP GOOSENECK. (2) FRONT AND (3) REAR

FIGURE 2. SEMITRAILER, LOW BED 25-TON, 4 WHEEL, M172A1

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

X-4509

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

DEPARTMENT OF THE ARMY
U.S. Army Belvoir Research,
Development and Engineering Center
ATTN: STRBE-TSE
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-P-335J	Paving Machine, Bituminous Mate5ial: Crawler-Mounted, Diesel-Engine-Driven

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-16T07:02Z
Check the source to verify that this is the current version before use.