MILITARY SPECIFICATION

MICRO-REPRODUCTION SYSTEM FOR ENGINEERING CHANGE PROPOSALS, REQUESTS FOR DEVIATIONS, AND REQUESTS FOR WAIVERS

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the procedure and requirements for: microfilming Engineering Change Proposals (ECPs)(including Value Engineering Change Proposals (VECPs)), Requests for Deviations (RFDs), and Requests for Waivers (RFWs); key punching, verifying, interpreting and sequencing aperture and tabulating cards, and mounting microfilm images into aperture cards for the Engineering Data Micro-Reproduction System.

1.2 Definitions. For definitions of words and phrases used in this specification, see 6.3.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-M-9868	-	Microfilming of Engineering Documents, 35mm, Requirements for.
MIL-C-9877	-	Card, Aperture.
MIL-M-38761	-	Microfilming and Photographing of Engineering Technical Data and Related Documents: PCAM Card Preparation, Engineering Data Micro-reproduction System, General Requirements for, Preparation of.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-ESC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check https://assist.dla.mil to verify this is the correct version of this document.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

STANDARDS

MILITARY

MIL-STD-804	-	Format and Coding of Tabulating and Aperture Cards for Engineering Data Micro-reproduction Systems.

2.1.2 Other Government documents. The following other Government documents form a part of this specification to the extent specified herein.

FORMS AND CATALOGS

DD Form 1562	-	Dual Purpose Engineering Document Card (Card Code H/T)
DD Form 1692	-	Engineering Change Proposal, Page 1
DD Form 1692-1	-	Engineering Change Proposal, Page 2
DD Form 1692-2	-	Engineering Change Proposal, Page 3
DD Form 1692-3	-	Engineering Change Proposal, Page 4
DD Form 1692-4	-	Engineering Change Proposal, Page 5
DD Form 1692-5	-	Engineering Change Proposal, Page 6 (Milestone Chart)
DD Form 1693	-	Engineering Change Proposal (Short Form)
DD Form 1694	-	Request For Deviation/Waiver
DD Form 1695	-	Notice of Revision (NOR)
H4/H8	-	Cataloging Handbook - Commerical and Government Entity
Form 147	-	ARDEC Technical Evaluation Transmittal Form

(Copies of specifications, standards, handbooks, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specifications sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. Each approved/rejected ECP/RFD/RFW shall be microfilmed and the processed film mounted on aperture cards prepared as described in this specification.

a. The sheets of the document shall be placed in a package in accordance with appendix B and sequenced as described in paragraph 3.12.

b. The assembled package shall be inspected and marked as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

(1) The ECP/RFD/RFW identification number, including any revision and/or correction level designation, shall appear in the upper right-hand corner of each sheet in the package. If it does not already appear, it shall be written on the sheet in black ink.

(2) The sheets of the assembled package shall be numbered consecutively, and the number centered at the bottom of each sheet using black ink. DD Form 1692/1693/1694 is always sheet 1. The first sheet will be marked "1 of nnn" where "nnn" is the number of the last sheet in the package.

NOTE: Where only corrected sheets of a previously approved and microfilmed document are being processed for distribution, sheets shall be identified with the same sheet number as in the original microfilm package being corrected.

c. Information for card keypunching shall be extracted to 80 column worksheets from the original documents. (See 3.9 and appendix A.)

d. Cards shall be punched, verified, and interpreted as specified herein.

e. Original documents shall be microfilmed and the processed film mounted on aperture cards as described herein. The number of camera exposures and aperture card sets required are described in 3.6.

3.2 Preproduction sample. A minimum of 500 finished tabulating nonaperture and 500 aperture cards from the first roll of film processed shall be furnished for Government inspection and approval prior to the start of full production.

3.3 Class of microfilm. Microfilm shall be Type 1, Class 1, silver hallide camera microfilm (negative-type) with clear line image. Reduction ratios used shall be in accordance with MIL-M-9868.

3.4 Class and format of aperture cards. Aperture cards shall be Type 1, Cold Seal, Pressure Sensitive Microfilm Carrier, Class 1, Microfilm Carrier on Face, in accordance with MIL-C-9877. Card format, DD Form 1562, per MIL-STD-804, shall be surface-printed in black ink on the face of the cards.

3.5 Mounting.

a. Mounting requirements set forth in MIL-M-38761 shall apply. Each frame of microfilm (except erroneously repeated, defaced, punched out, or illegible frames), shall be mounted in a properly identified aperture card.

b. To ensure compliance with MIL-M-9868, targets shall be microfilmed at the beginning and end of every roll of film. The processed target microfilm shall be mounted on unpunched aperture cards and submitted to the Government for resolution verification.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

3.6 Sets of aperture cards. (See 6.2.) The dual purpose engineering document cards, DD Form 1562, card code T (lower legend) that are the end product shall be furnished in discrete sets for each sheet/frame of a document as follows:

a. ECPs:

(1) One card, plain, without color striping, nonaperture.

(2) Four cards, solid salmon color, aperture.

b. RFDs/RFWs:

(1) One card, plain, without color striping, nonaperture.

(2) Two cards, solid salmon color, aperture.

3.7 Illegible frames of microfilm. Erroneously repeated, punched out, or illegible frames of microfilm shall be removed from the roll during the mounting operation. The contractor shall assure the replacement of the illegible frame of microfilm.

3.8 Card punching, verifying, reproduction, and interpreting.

a. An 80 column nonaperture master card, using the 80 column (3.1.c) as a data source, shall be punched in accordance with Appendix A for each sheet/frame in the ECP//RFD/RFW package being processed for distribution.

NOTE: Sheets larger than 34 x 44 inches shall be microfilmed using more than one frame or camera exposure. A separate card with a unique sheet/frame identification shall be punched for each frame of a multi-frame sheet.

b. The full 80-columns of each master card shall be key-verified.

c. The set of master cards for each package shall be mechanically reproduced into salmon-colored aperture cards the required number of times (3.6) with column-80 of the reproduced sets being punched with a unique set number. The reproducer shall be wired to detect errors and to signal the operator when an error occurs.

d. All cards shall be interpreted in accordance with Appendix A.

3.9 Data fields. Detailed information for data fields is as follows:

a. Type of document (columns 1-2). Enter the appropriate type of document code as follows:

Code	Document
CP	ECP (Engineering Change Proposal)
RD	RFD (Request for Deviation)
RW	RFW (Request for Waiver)

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:29Z
Check the source to verify that this is the currentversion before use.

b. Document number (columns 3-9, full field). Enter the identifying number of the ECP/RFD/RFW on each card included in the package. Enter the identifying number of the document. Do not include revision correction level identification in this field.

EXAMPLES: Engineering Change Proposal W3A2000 - enter as W3A2000
Revised/Corrected ECP W3A2000 R1C1 - enter as W3A2000

c. Columns 10-17. Leave blank.

d. Commercial and Government Entity (CAGE) (columns 18-22, full field). Enter the CAGE code (formerly the Federal Supply Code for Manufacturers (FSCM)) of the Government design agency responsible for approving the change action.

e. Sheet number (columns 23-25, right justified, zero filled). Enter the discrete sheet number assigned to each sheet in the ECP/RFD/RFW package. (See 3.1.b.(2).)

f. Revision (column 26). If the ECP is revised, enter the digit identifying the revision level (value = 1-9) on each card. If the ECP has not been revised, or if the package is an RFD/RFW, leave the column blank.

NOTE: Revision/correction columns 26 and 27 are to be treated as a single field, with revision in the high-order position. If the revision is punched, the correction (low-order) must also be punched, using (value = zero) when no correction applies.

g. Correction (column 27). If the current revision level of the ECP has been corrected, enter the digit identifying the correction level (value = 1-9) on every card affected.

(1) If the ECP has been neither revised nor corrected, or if the package is an RFD/RFW, leave blank.

(2) If the ECP has been corrected, but not revised, enter the correction level (value = 1-9).

(3) If the ECP has been revised, but no correction applies to the current revision, enter a zero to complete the field.

EXAMPLES: Data entry for card colums 26-27

ECP identification	Col 26	Col 27
A4A1111	blank	blank
A4A1111 C1	blank	1
A4A1111 R1	1	0
A4A1111 R1C1	1	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

h. Number of sheets (columns 28-30, right justified, zero filled). Enter the sheet number assigned to the last (highest numbered) sheet in the ECP/RFD/RFW package. Complete this field for the cards of Sheet 1 only.

i. Frame number (columns 31-32, right justified, zero filled). Enter the frame number of each frame in the series. A single frame shall be frame number 1.

j. Number of frames (columns 33-34, right justified, zero filled). Enter the number of the frames in the series. A single frame shall be frame number 1.

k. Document date (columns 35-40, full field). Enter the approved date of the document as a six-digit number. The first two digits represent the month. The digit for the first nine months will be preceded by a zero. The second two digits represent the day of the month. The first nine days of the month will be preceded by a zero. The last two digits will be the last two numerals of the year. Dates to be entered for ECPs/RFDs/RFWs appear on forms as follows:

(1) Engineering Change Proposal, Page 1 - DD Form 1692, block 24

(2) Engineering Change Proposal (Short Form) - DD Form 1693, block 23

(3) Request for Deviation/Waiver - DD Form 1694, block 27

l. Columns 41-46. Leave blank.

m. Rights (column 47, full field). Enter the rights status of the information on the document. The rights status codes are as follows:

(1) U-Code. "U" signifies that the Government has an unlimited right to use the document so coded.

(2) L-Code. "L" signifies that the Government has only a limited right to use the document so coded.

n. Control activity (columns 48-49, full field). Enter the code "DM."

o. Document size (column 50, full field). Enter the drawing size letter shown on the drawing. Documents such as SQAPs and associated lists which are 8-1/2 by 11 inches will be coded as "A." Computer prepared parts lists will be coded as "B."

p. Card code (column 51, full field). Code T shall be entered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

q. Security classification (column 52, full field). The security classification of the microfilm image in an aperture card, or of the document identified in the non-aperture card, shall be entered here utilizing the following codes:

(1) N - Unclassified

(2) C - Confidential

(3) M - Confidential - Modified Handling Authorized

(4) S - Secret

(5) T - Top Secret

(6) E - Confidential Restricted Data

(7) F - Secret Restricted Data

(8) G - Top Secret Restricted Data

(9) H - Confidential - Formerly Restricted Data

(10) J - Secret - Formerly Restricted Data

(11) K - Top Secret - Formerly Restricted Data

NOTE: Aperture cards mounted with images of classified documents must be clearly marked for identification as specified in 3.11.

r. Columns 53-60. Leave blank.

s. Type document affected (columns 61-62, full field). Enter blank, or the applicable document prefix code for the document defined by DD Form 1695 in ECP packages. Leave blank for RFDs/RFWs.

Prefix	Description or title
Blank	Drawings
ED	List of equipment - depot installed
EM	List of equipment - manufacturer installed
ET	List of equipment - troop installed
PD	Purchase description
PE	Performance specification
MI	Military specification
MS	Military standard
SQ	Quality Assurance Provision (QAP) (formerly Supplementary Quality Assurance Provision (SQAP))

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

Prefix	Description or title
IL	Index List
LI	*Index of inspection equipment lists
EL	*List of inspection equipment
DL	Data list
PL	Parts list
PS	Packaging data sheets
GL	*Gage List

*Old prefix - Document still in use.

t. Document affected (columns 63-76, left justified). Enter the numeric identifier of the document defined by DD Form 1695 in ECP packages. Leave blank for RFDs/RFWs.

Examples:

Ordnance drawing number	81-29-4022
Ordnance drawing number	10577331
Ordnance engr std dwg BFAX number	BFAX11.7
MS drawing number	MS50082
List	7653421

u. Columns 77-79. Leave blank.

v. Set or deck identification code (column 80, full field). Enter a digit to identify the cards of a set/deck as follows:

(1) ECPs:

SET CODE

0	Dual purpose engineering document card - Plain, without aperture
1	Dual purpose engineering document card - Solid, salmon color, with aperture
2	Dual purpose engineering document card - Solid, salmon color, with aperture
3	Dual purpose engineering document card - Solid, salmon color, with aperture
5	Dual purpose engineering document card - Solid, salmon color, with aperture

(2) RFDs/RFWs:

SET CODE

0	Dual purpose engineering document card - Plain, without aperture
2	Dual purpose engineering document card - Solid salmon color, with aperture
3	Dual purpose engineering document card - Solid, salmon color, with aperture

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:29Z
Check the source to verify that this is the current version before use.

3.10 Interpretation. Information punched into data fields shall be interpreted in accordance with interpreter bar assignments delineated in appendix A. All aperture cards shall be interpreted prior to mounting the microfilm. All non-aperture cards shall be interpreted.

3.11 Identification of cards containing classified information. Cards containing classified information shall meet the requirements of MIL-STD-804 for security markings.

NOTE: Classified images shall be mounted in special aperture card stock and clearly identified as required by 4.2, 4.4, and 4.8 of MIL-STD-804.

3.12 Sequencing of cards. Cards shall be sequenced as follows:

	Sorting Sequence No.	Data	Field From To	Format Alpha/Numerical	Columns (Sorting)
Minor:	1	Deck Code	80 - 80	Numerical	80
	2	Frame number	31 - 32	Numerical	31 32
	3	Sheet number	23 - 25	Numerical	23 25
	4	Type of document	1 - 2	Alpha	1 2
Major:	5	Document number	3 - 9	Alpha	3
				Numerical	4
				Alpha	5
				Numerical	6 9

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance provisions shall be in accordance with MIL-M-38761.

5. PACKAGING

5.1 Preservation, packing, and packaging. Preservation, packing, and packaging shall be level C in accordance with MIL-M-38761.

6. NOTES

6.1 Intended use. The end item documentation and related services are intended for use in the Engineering Data Micro-reproduction System (EDRS) which includes use of automated microfilm storage and retrieval equipment.

6.2 Data requirements list and cross-reference. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL), the data requirements identified below shall be developed as specified by an approved Data Item Description (DID) (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DOD FAR Supplement, Part 27, Sub-part 27.410-6 are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order. Deliverable data required by this specification is cited in the following paragraphs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

Paragraph no.	Data requirement title	Applicable DID no.
3.5, 3.6, 3.7, 3.8, 3.9, 3.10, 3.11, 3.12	Aperture Cards (Engineering Changes, Deviations, and Waivers)	DI-EDRS-80461

(Copies of DIDs required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Definitions. The following definitions apply to words and phrases used in this specification and to the FSC/EDRS Military specifications and standards listed in 2.1. Additional definitions to micrographic words and phrases are contained in National Micrographics Association (NMA) Standard MS-100-1971.

6.3.1 Aperture card. An aperture card is a tabulating card with a rectangular hole specifically prepared for the mounting of a frame of microfilm.

6.3.2 Camera card. A camera card is a tabulating card containing unexposed and unprocessed microfilm which will be exposed and processed for the express purpose of producing or creating a micro-image from an original document.

6.3.3 Copy card. A copy card is a tabulating card with a frame of unexposed and unprocessed microfilm mounted in or over a rectangular hole for subsequent exposure and development of the microfilm which is mounted in the card.

6.3.4 Data field. A data field consists of one or more columns on an aperture, copy, or tabulating card reserved for specific information entered in a specified manner.

6.3.5 EAM card. An EAM card is an Electronic Accounting Machine card.

6.3.6 Engineering Data Micro-reproduction System (EDMS). The EDMS is a DOD program established to standardize and implement a common micro-reproduction system to be used throughout the Army, Navy, Air Force, Defense Supply Agency, and industrial suppliers to DOD in the preparation of 16 and 35mm microfilm, 105mm and microfiche film copies of engineering/technical data and related documents and the preparation of PCAM (aperture, camera, copy, and tabulating) cards.

6.3.7 Non-aperture card. A non-aperture card is a tabulatory and card without a rectangular hole specifically prepared for the mounting of a frame of film.

6.3.8 PCAM card. A PCAM card is a Punch Card Accounting Machine card.

6.3.9 Tabulating card. A tabulating card is a PCAM (EAM) card on which data are entered by use of punched holes or other means that can be sensed by a machine so that it can sort, collate, list, total, or otherwise manipulate the card or the data.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

6.4 Subject term (key word) listing.

Aperture card
Engineering Change Proposal (ECP)
Request for Deviation/Waiver
Engineering Release Record (ERR)
Microfilm
Notice of Revision (NOR)

6.5 Changes from previous issues. Asterisks or vertical lines are not used in this revision to identify changes with respect to previous issues due to the extensiveness of the changes.

6.6 Previous issues. MIL-M-70500A (AR) and associated amendments were for U.S. Army Armament Research, Development and Engineering Center use only, and were not forwarded to the Naval Publications and Forms Center for publication.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:29Z
Check the source to verify that this is the current version before use.

APPENDIX A

CARD PUNCHING AND INTERPRETING REQUIREMENTS

10. SCOPE

10.1 Scope. This appendix provides guidance for dual purpose engineering document cards (code T), DD Form 1562, per MIL-STD-804, and is a mandatory part of this specification. The information contained herein is intended for compliance.

20. APPLICABLE DOCUMENTS

This section is not applicable to this appendix.

30. DESCRIPTION AND REQUIREMENTS

Data description	Card punching columns Nonaperture	Aperture	Interpreting 60-BAR	80-BAR
Type of document code	01-02	01-02	01-02	02-03
Document number	03-09	03-09	04-10	06-12
CAGE (code identification)	18-22	18-22	54-58	73-77
Sheet number	23-25	23-25	21-23	29-31
Revision level	26-27	26-27	19-20	26-27
* Number of sheets	28-30	28-30	25-27	34-36
Frame number	31-32	31-32	29-30	39-40
Number of frames	33-34	33-34	31-32	42-43
Document date - Month	35-36	35-36	34-35	53-54
- Day	37-38	37-38	37-38	55-56
- Year	39-40	39-40	40-41	57-58
Rights	47	47	50	67
Control activity	48-49	48-49	51-52	68-69
Document size	50	50	46	61
Card code T	51	51	—	—
Security classification	52	52	60	80
Revised code	53	53	—	—
Type document affected	61-62	—	—	—
Document number affected	63-76	—	—	—
Deck code	80	—	—	—

* Number of sheets is punched and interpreted only for sheet 001.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:29Z
Check the source to verify that this is the current version before use.

APPENDIX A

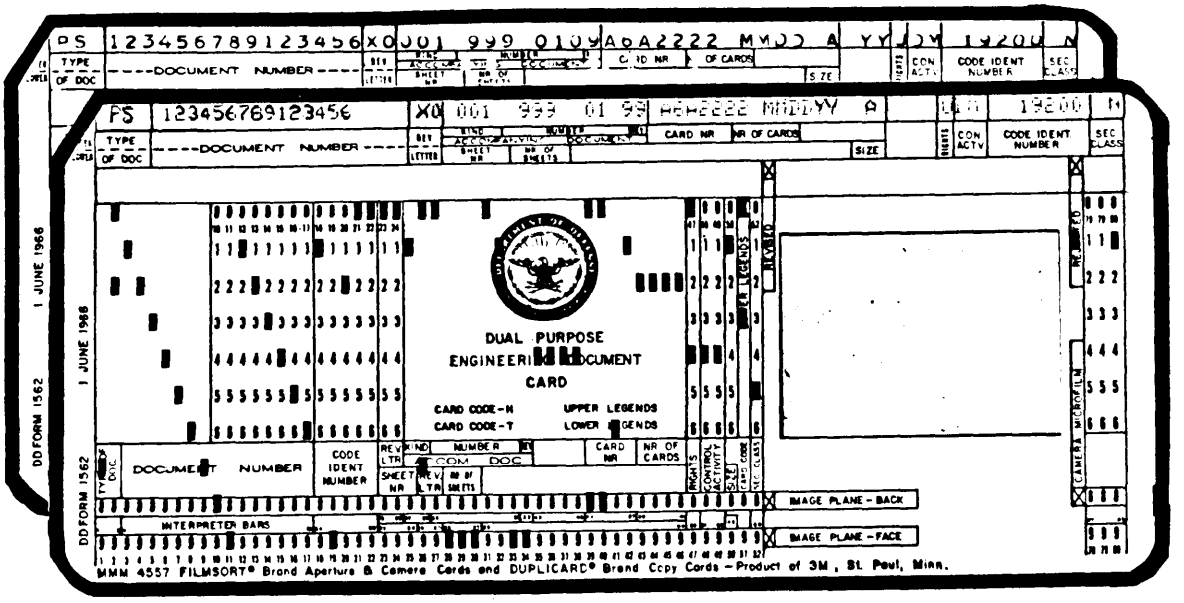


Figure 1. Interpreting example.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:29Z
Check the source to verify that this is the current version before use.

APPENDIX B

PLACEMENT OF REQUIRED DOCUMENTS

10. SCOPE

10.1 Scope. This appendix provides guidance for the mandatory placement of documents within ECP/RFD/RFW packages, and is a mandatory part of this specification. The information contained herein is intended for compliance.

20. APPLICABLE DOCUMENTS

20.1 Government documents.

This section is not applicable to this appendix.

30. TYPES OF REQUIRED DOCUMENTS

30.1 ECPs.

DD Form 1692 or 1693 (short form, with cost analysis data)
DD Form 1692-1.
DD Form 1692-2.
DD Form 1692-3.
DD Form 1692-4.
DD Form 1692-5.
DD Form 1695 (NOR) - Each complete with attachments such as sketches and marked-up copies of drawings.
Any other documents to be included in package.
ARDEC Technical Evaluation Transmittal Form (Form 147).
AMCCOM CCB Evaluation Sheet.

30.2 RFDs/RFWs.

DD Form 1694.
Letters, DFs, TWX, etc., in chronological order by date.
Sketches, by document size, starting with A.
Drawings, by document size.
Engineering lists, by document size.
Associated documents, by document size.
ARDEC Technical Evaluation Transmittal Form (Form 147).
AMCCOM CCB Evaluation Sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

Custodian:

Army - AR

Preparing Activity:

Army - AR

(Project EDRS-A111)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY ARDEC
ATTN: SMCAR-ESC-S
PICATINNY ARSENAL, NJ 07806-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-70500B	Micro-reproduction System for Engineering Change Proposals

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
Request for deviations and Request for waivers	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.