MILITARY SPECIFICATION

CONTROL, RADIO SET C-2459A(*)/ARC-27A and CONTROL, RADIO SET C-3657(*)/ARC-27A

This specification has been approved by the Bureau of Naval Weapons, Department of the Navy.

1. SCOPE

1.1 Scope - The equipment covered by this specification shall provide prime control of the Receiver-Transmitter RT-178/ARC-27. It shall provide for selection of any one of 20 predetermined main frequencies, or the guard frequency, or manual selection of any one of the 1750 available frequencies in addition to full control of all other functions of the radio set. Control, Radio Set C-2459A/ARC-27A is to be used in conjunction with Indicator, Frequency Channel ID-572/ARC, while Control, Radio Set C-3657 ARC-27A is to be used in conjunction with Indicator, Frequency Channel ID-660/ARC.

2. APPLICABLE DOCUMENTS

2.1 General - The following documents of the issue in effect on the date of invitation for bids form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-W-5088	Wiring; Aircraft, Installation of
MIL-E-5400	Electronic Equipment, Aircraft, General Specification for
MIL-T-5422	Testing, Environmental, Aircraft Electronic Equipment
MIL-I-6181	Interference Control Requirements, Aircraft Equipment
MIL-C-6781	Control Panel: Aircraft Equipment, Rack or Console Mounted
MIL-P-17555	Preparation for Delivery of Electronic, Electrical, and Electro-Mechanical Equipment and Associated Repair Parts
MIL-T-18303	Test Procedures; Preproduction and Inspection, For Aircraft Electronic Equipment, Format for
MIL-N-18307	Nomenclature and Nameplates for Aeronautical Electronic and Associated Equipment
SAR-300	Material Changes and Material Bulletins, Preparation of

FSC 5821

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:08Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-704	Electric Power, Aircraft, Characteristics and Utilization of
MS 25245	Connections, Input Power Airborne Electronic Equipment; 28-Volt DC, 115-Volt Single Phase AC, or 115/200 Volt 3-Phase AC, or Combinations

DRAWINGS

Bureau of Naval Weapons

DL61A36-1	List of Drawings for Control, Radio Set C-2459A/ARC-27A
DL61A44-1	List of Drawings for Control, Radio Set C-3657/ARC-27A

2.2 Availability of Documents

(1) When requesting specifications, standards, drawings, and publications refer to both title and number. Copies of this specification and applicable specifications required by contractors in connection with specific procurement functions may be obtained upon application to the Commanding Officer, Naval Supply Depot, Code CDS, 5801 Tabor Avenue, Philadelphia 20, Pennsylvania.

(2) Copies of applicable drawings may be obtained upon application to the Commanding Officer, U. S. Naval Avionics Facility, Indianapolis 18, Indiana.

3. REQUIREMENTS

3.1 Parts and Materials - In the selection of parts and materials, fulfillment of major design objectives shall be the prime consideration. In so doing the following shall govern:

(1) Parts and materials requirements shall conform to Specification MIL-E-5400.

(2) Nonrepairable subassemblies, as outlined in specification MIL-E-5400, shall be used when practicable. The general size of the subassembly, and the amount of circuitry to be included therein shall be approved by the procuring activity. Nonrepairable subassemblies must be reliable. A mean-time-to failure of more than 5000 hours should be the goal of each.

(3) When previously produced models of this equipment did not use nonrepairable subassemblies, the design shall not be changed to employ nonrepairable assemblies without the approval of the procuring activity.

3.1.1 Nonstandard Parts and Material Approval - Approval for the use of nonstandard parts and materials shall be obtained as outlined in Specification MIL-E-5400.

3.2 Design and Construction

3.2.1 General - The equipment shall conform with all the applicable requirements of Specification MIL-E-5400 for design, construction, and workmanship, unless otherwise specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:08Z
Check the source to verify that this is the current version before use.

3.2.2 Total Weight - The total weight of the equipment, excluding cables, shall be a minimum consistent with good design and shall not exceed 5.3 pounds.

3.2.3 Operating Life - Operating life is determined primarily by the number of times frequencies are set into the various channels and the number of times the channel selection switch is operated. For test purposes, a cycle of operation will be defined as one setting of a different frequency, chosen at random, into all channels and each setting followed by 50 revolutions of the channel selector switch. The frequency knobs shall be left in a different position, chosen at random, during each cycle. In addition, the four-position selector switch shall be rotated 25 times through all positions and return, and the volume and sensitivity controls shall be rotated 25 times each.

3.2.3.1 Total Operating Life - The equipment shall have a minimum total operating life of 80 cycles with reasonable servicing and replacement of parts. Parts requiring replacement within this interval and the life of such parts shall be specified by the manufacturer.

3.2.3.2 Mean Operating Time Between Failures - The equipment shall have a minimum of 40 cycles of mean operating time between failures. A failure shall be defined as any malfunctioning which causes the equipment to fail to meet the minimum performance requirements specified for the equipment.

3.2.4 Cabling and Connections -

3.2.4.1 Cables and Connectors - The equipment shall provide for the use of cables and connectors in accordance with Specification MIL-E-5400.

3.2.4.2 Interconnection Cabling - The equipment shall be capable of satisfactory operation using external wiring in accordance with the applicable requirements of Specification MIL-W-5088. The external wiring shall be unshielded, except that a minimum number of the individual wires may be shielded when demonstrated as necessary to meet interference control requirements and provided the assembly of the cable to its plugs may be easily accomplished. External cables and that portion of the connectors attached to the cables shall not be supplied as part of the equipment.

3.2.4.3 Input Power Connection - Input power connections shall be in accordance with MS 25245.

3.2.5 Control Panels - All rack or console mounted control panels shall conform to the applicable requirements of Specification MIL-C-6781. The configuration of all control panels must be approved by the procuring activity prior to preproduction testing.

3.2.6 Interchangeability - The equipment shall meet the interchangeability requirements as defined in Specification MIL-E-5400.

3.2.7 Interference Control - The generation of radio interference by the equipment and the vulnerability of the equipment to radio interference shall be controlled within the limits of Specification MIL-I-6181.

3.2.8 Maintenance Provisions and Field Testing - Provisions for maintenance shall be as specified in Specification MIL-E-5400. Specific test points and test facilities shall be provided to the greatest extent practicable for ease of field testing and maintenance.

3.2.9 Nomenclature and Nameplates - Nomenclature assignment and nameplate approval for equipment identification shall be in accordance with Specification MIL-N-18307.

3.2.10 Standard Conditions - The following conditions shall be used to establish normal performance characteristics under standard conditions and for making laboratory bench tests.

Temperature	Room ambient (30° ± 10°C)
Altitude	Normal ground
Vibration	None
Humidity	Room ambient up to 90% relative humidity
Input power voltage	27.5 ± 0.5 V DC

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:08Z
Check the source to verify that this is the current version before use.

3.2.11 Service Conditions - The equipment shall operate satisfactorily under any of the environmental service conditions or reasonable combination of these conditions as specified in Specification MIL-E-5400 for Class 1 equipment, except as modified herein.

3.2.11.1 Vibration - The equipment shall operate satisfactorily when subjected to vibration having a double amplitude of 0.04 inch through the frequency range of 5 to 55 cps, and an acceleration of ± 3g through the frequency range of 55 to 500 cps. The channel selector knob should be turned at intervals during the test to avoid excessive wear of individual pins.

3.2.12 Warm-Up Time - The equipment shall require no warm-up time.

3.2.13 Primary Input Power Requirements - The equipment shall meet all applicable requirements of MIL-STD-704 and shall give specified performance from the following power sources with characteristics as defined in MIL-STD-704 having limits as specified therein. The power required shall not exceed the specified amounts.

DC Power 28V Category "B", 0.6 Amps

3.2.13.1 Undervoltage Protection - The equipment shall not be damaged by voltages below the minimum specified herein and shall automatically resume normal operation when the voltage returns within limits.

3.2.14 Switches - Rotary switch action shall be smooth and positive and free of false detents.

The channel selector switch, when tested as shown in figure 1, shall be capable of providing a torque curve similar to that shown in figure 1. The torque shall not decrease when the knob is rotated in either direction from the true detent position until maximum torque is reached at 8 to 16 pound inches, then the torque shall not increase again until the next true detent is reached. These measurements shall be made with all 20 channels plus G set at 286.4 megacycles and the frequency dials set at 324.0 megacycles.

3.3 Performance

3.3.1 General - Unless otherwise specified, values set forth to establish the requirements for satisfactory performance apply to performance under both standard and extreme service conditions. When reduced performance under the extreme conditions is acceptable, tolerances or values setting forth acceptable variations from the performance under the standard conditions will be specified.

3.4 Detail Requirements

3.4.1 Control, Radio Set C-2459A ARC-27A shall meet the following requirements:

3.4.1.1 Function - This unit shall provide prime control of the Receiver-Transmitter RT-178 ARC-27A. It shall provide for selection of any one of 20 predetermined main frequencies, or the guard frequency, or manual selection of any one of the 1750 available frequencies in addition to full control of all other functions of the radio set. A binary output

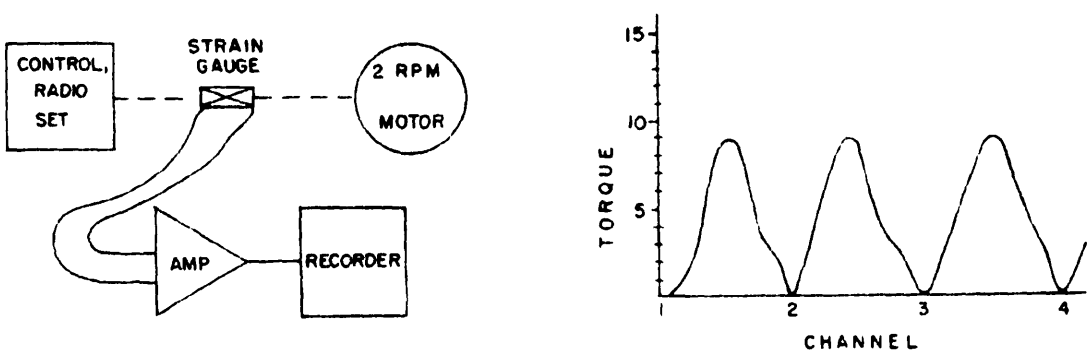


Figure 1. Channel Selector Torque Test

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:08Z
Check the source to verify that this is the current version before use.

suitable for operating Indicator, Channel Frequency ID-572/ARC shall be provided.

3.4.1.2 Form Factor and Mounting - This unit shall meet the requirements of Specification MIL-C-6781. All dimensions shall be in accordance with Specification MIL-C-6781 and shall not exceed 5-3/4 inches wide, 6-13/32 inches deep, and 4-1/8 inches long.

3.4.1.3 Weight - The weight of the radio set control and the necessary connector shall not exceed 5.3 pounds.

3.4.1.4 Contents of the Unit - This control unit shall contain all circuits necessary to control frequency selection, emission and reception, ADF operation, and primary power to the radio set, and to operate Indicator, Frequency Channel ID-572/ARC.

3.4.1.5 Controls - The following controls with identifying lettering as indicated shall be provided on the face of the radio set control:

(1) "CHAN" - A twenty-two position rotary switch type control for selecting any one of 20 predetermined main frequencies or the guard frequency, or a manual channel on which any of the 1750 available frequencies can be selected; and to operate the remote Frequency Channel Indicator ID-572/ARC.

(2) "OFF-T/R-T/R+G - ADF" - A four position rotary switch for controlling all primary input power to the equipment, and for selecting transmission and reception only on the main or guard frequency determined by the position of the twenty-two position switch, transmission on the main frequency determined by the position of the twenty-two position switch and reception on the same frequency and on the guard frequency, or automatic direction finding on the main or guard frequency determined by the position of the twenty-two position switch.

(3) "PUSH TO SET CHAN- UNLOCK" - A two-position non-locking push-button control for setting up new predetermined frequencies on the twenty-two position switch.

(4) Three concentric rotary switch type controls calibrated in frequency for manually selecting any of the 1750 frequencies and for presetting any of such frequencies to correspond to any of the positions of the twenty-two position switch.

(5) "VOL" - A rotary volume control for adjusting the amplitude of the audio signals delivered to the headset circuit.

(6) "SEN" - A rotary control for adjusting the sensitivity of the audio signals.

3.4.1.6 Electrical Connections - Extending from the side of the control unit directly opposite the face shall be a cable and pendant AN type connector (type AN-3106A-28-21P) for connection to Receiver-Transmitter RT-178/ARC-27, Indicator, Channel Frequency ID-572/ARC, microphone, headset, panel-lighting circuit, and Direction Finder Group AN/ARA-25, when used. (See the applicable drawings of EI-216).

3.4.2 Control, Radio Set C-3657/ARC-27A shall be identical to Control, Radio Set C-2459A/ARC-27A except that the binary output shall be suitable for operating Indicator, Frequency Channel ID-660/ARC. Operation shall be such that the frequency channel indicator will indicate channels 1 through 20, skip channels 21 and 22, and indicate M and G.

4. QUALITY ASSURANCE PROVISIONS

4.1 General - Items covered by this specification shall be subjected to the following tests to determine compliance with all applicable requirements:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:08Z
Check the source to verify that this is the current version before use.

(1) Preproduction Tests

(2) Production Sample Tests

(3) Acceptance Tests

(4) Life Tests

4.2 Preproduction Tests - Preproduction tests shall be made on one or more equipments representative of the production equipments to be supplied under the contract. Preproduction tests shall consist of the following:

(1) Contractor's Demonstration Tests

(2) Service Approval Tests

4.2.1 Contractor's Demonstration Tests - Contractor's demonstration tests shall be accomplished under the responsibility of the contractor and shall be conducted in accordance with the approved test procedure of 4.6. Data obtained by the contractor in conducting these tests shall be submitted to the procuring activity for review and approval prior to shipping the equipment to the specified destination for service approval tests. The government inspector and the procuring activity shall be advised when tests are to be conducted so that a representative may be designated to witness or supervise the tests when so desired. Contractors not having adequate facilities to conduct all required tests shall obtain the service of a commercial testing laboratory satisfactory to the procuring activity.

4.2.2 Service Approval Tests - At the completion of the contractor's demonstration tests and when requested by the procuring activity, the equipment shall be delivered to a specified government laboratory for additional testing. This additional testing may consist of duplicating tests previously conducted and such other tests as are deemed necessary to determine compliance with all applicable design and performance requirements.

4.2.2.1 Accessory Material - In addition to the complete equipment submitted for service approval tests, the contractor shall also submit the accessory material and design and test data specified in Specification MIL-E-5400. This information shall indicate the physical and electrical characteristics of the equipment and establish the equipment's compliance with applicable requirements.

4.2.3 Scope of Tests - Preproduction tests shall include all tests deemed necessary to determine that the equipment meets all the requirements of this specification and the contract. Preproduction tests shall include environmental tests in accordance with Specification MIL-T-5422 and interference tests in accordance with Specification MIL-I-6181.

4.2.4 Preproduction Approval - Approval of the preproduction model shall be by the procuring activity upon satisfactory completion of all tests. No production equipments shall be delivered prior to the approval of the preproduction model. Prefabrication of production equipment prior to the approval of the preproduction model is at the contractor's own risk. The approved preproduction model will be returned to the contractor for his use in the fabrication and testing of equipment to be submitted for acceptance. The preproduction model shall not be considered as one of the equipments under the contract; however, it may be reworked by the contractor and submitted for acceptance as a production equipment.

4.3 Production Sample Tests - When requested by the procuring activity, one equipment shall be selected from the first 10 production equipments submitted for acceptance and sent to a designated government laboratory for tests. The equipment shall be selected by the government inspector after the equipment has successfully passed all individual tests.

4.3.1 Scope of Tests - This equipment may be subjected to any and all tests the procuring activity deems necessary to assure that the production equipment is equivalent to the previously approved preproduction sample in design, construction and performance and that it meets all applicable requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:08Z
Check the source to verify that this is the current version before use.

4.3.2 Production Sample Approval - Approval of the production sample shall be by the procuring activity upon satisfactory completion of all tests. Any design, material or performance defect made evident during this test shall be corrected by the contractor to the satisfaction of the procuring activity. Upon failure of the production sample to pass any of the tests, delivery of equipment under the contract shall cease until proper corrective action is approved and accomplished. Corrective action shall also be accomplished on equipment previously accepted when requested by the procuring activity.

4.3.3 Reconditioning of Production Test Sample - On completion of the production sample test the equipment shall be reworked by the contractor by replacing all wear or damaged items. After reworking the contractor shall resubmit the equipment for acceptance.

4.4 Acceptance Tests - The contractor shall furnish all samples and shall be responsible for accomplishing the acceptance tests. All inspection and testing shall be under the supervision of the government inspector. Contractors not having testing facilities satisfactory to the procuring activity shall engage the service of a commercial testing laboratory acceptable to the procuring activity. The contractor shall furnish test reports showing quantitative results for all acceptance tests. Such reports shall be signed by an authorized representative of the contractor or laboratory, as applicable. Acceptance or approval of material during the course of manufacture shall not be construed as a guarantee of the acceptance of the finished product. Acceptance tests shall consist of the following:

(1) Individual Tests

(2) Sampling Tests

(3) Special Tests

4.4.1 Individual Tests - Each equipment submitted for acceptance shall be subjected to the individual tests. These tests shall be adequate to determine compliance with the requirements of material, workmanship, operational adequacy and reliability. As a minimum, each equipment accepted shall have passed the following tests:

(1) Examination of Product

(2) Operational Test

(3) Manufacturing Reliability Test

4.4.1.1 Examination of Product - Each equipment shall be examined carefully to determine that the material and workmanship requirements have been met. This examination shall also determine that the requirements of switch action (Par. 3.2.14) have been met.

4.4.1.2 Operational Test - Each equipment shall be operated long enough to check sufficient characteristics and record adequate data to assure satisfactory equipment operation.

4.4.1.3 Manufacturing Reliability Test - Each equipment shall be operated under the conditions specified herein without failure. A failure shall be defined as anything which causes malfunctioning of the equipment. Only those adjustments will be permitted which can be made by using such controls and adjustments that are accessible to the operator during the normal use of the equipment.

Temperature	Ambient room
Humidity	Ambient room
Vibration (10 minutes)	Any selected frequency within the range of 20 to 30 cps (excluding resonant points) and a minimum amplitude of ± 3 g's

Set each of the 20 channels plus G to 324.0 megacycles, then set the frequency dials to 286.4. Observe that the proper electrical circuits are established corresponding to these frequencies. The equipment shall be vibrated for ten minutes. During this period of vibration, the channel

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:08Z
Check the source to verify that this is the current version before use.

selection switch shall be rotated to the next channel every 30 seconds. Operation within the specification limits is required during the vibration period. The direction of vibration should be vertical to the normal mounting plane for 5 minutes and lateral to that plane for 5 minutes. Where it is not feasible to vibrate the equipment in two directions, the vertical direction shall be used. The electrical circuits initially set into the unit shall not change due to vibration either during or after the test. Should a failure occur, it should be repaired and the test started over. Should repetitive failure occur, corrective action shall be taken to eliminate this defect from future equipment. A record shall be kept of all failures.

4.4.2 Sampling Tests - Sampling tests shall be conducted on equipments which have successfully passed the individual tests. The following equipments shall be selected by the Government Inspector for sampling tests:

Quantity of Equipments Offered for Acceptance	Quantity to be Tested
First 10	1
Next 50	1
Next 75	1
Next 100	1
	1 for each additional 200 or fraction thereof

4.4.2.1 Scope of Tests - As a minimum, each equipment selected for sampling tests shall be subjected to the following tests:

(1) Complete operational test at ambient room conditions, making all necessary measurements to assure that all applicable specification requirements have been met.

(2) Operational test at certain environmental conditions. The conditions may vary for each equipment tested and should be based on results of the preproduction and special tests.

4.4.3 Special Tests - Special tests shall be conducted on a quantity of equipments for the purpose of checking the effect of any design or material change on the performance of the equipment and to assure adequate quality control. The equipment selected for special tests may be selected from equipments previously subjected to the sampling tests.

4.4.3.1 Special Tests Schedule - Selection of equipments for special tests shall be made as follows:

(1) On an early production equipment.

(2) On an equipment midway of the production run.

(3) On an early equipment after an engineering change.

(4) Whenever failure reports or other information indicate additional equipments should be tested. (This will be determined by the procuring activity.)

Exceptions from the above may be necessary when the number of equipments procured under contract or other factors affecting performance may require a variation to assure satisfactory control.

4.4.3.2 Scope of Tests - Special tests shall consist of such tests as are approved by the procuring activity. Test procedures previously approved for the preproduction and sampling tests shall be used where applicable. When not applicable, the contractor shall prepare a test procedure and submit it to the procuring activity for approval prior to conducting the tests. As a minimum, the following tests shall be made, except that for those equipments selected as a result of design changes and failure reports, only those tests required to check the characteristics

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:08Z
Check the source to verify that this is the current version before use.

in question need be conducted.

(1) Temperature - Altitude Tests

(2) Vibration Test (60 minutes cycling in each of 3 planes)

(3) Humidity Tests

4.4.4 Equipment Failure - Should a failure occur during either sampling or special tests, the following action shall be taken:

(1) Determine the cause of failure.

(2) Determine if the failure is an isolated case or design defect.

(3) Submit to the procuring activity for approval, proposed corrective action intended to reduce the possibility of the same failure(s) occuring in future tests.

(4) Where practical, include a test in the individual test to check all equipment for this requirement until reasonable assurance is obtained that the defect has been satisfactorily corrected.

4.5 Life Test - A 50-cycle life test shall be conducted at the contractor's plant on an early equipment representative of the current production. The life test shall be performed under the conditions specified in 4.5.1. The life test sample shall be selected by the government inspector in accordance with the following: When a production sample equipment is submitted to the procuring activity for test then the first equipment specified below need not be selected or subjected to this test. (Equipments which have successfully passed the sampling tests or special tests may be selected for life tests.)

Quantity of Equipments Offered for Acceptance	Quantity to be Tested
First 25	1
Next 175	1
Next 300	1
	1 for each additional 500 or fraction thereof

4.5.1 Test Conditions - The life test shall be conducted under the following simulated service conditions.

Temperature	Normal room
Altitude	Normal ground (0 - 5000 ft.)
Humidity	Room ambient
D. C. voltage	27.0 ± 2.0 volts

4.5.2 Test Periods - The test may be run continuously or intermittently.

4.5.3 Performance Check - At approximately 8-hour intervals during the test, a limited performance check shall be made. The performance check proposed by the contractor shall be subject to approval by the procuring activity.

4.5.4 Test Data - The contractor shall keep a daily record of the performance of the equipment, making particular note of any deficiencies or failures. In the event of part failures, the defective part shall be replaced and the operation resumed for the balance of the test period. A record shall be kept of all failures throughout the test, including all tube failures. This record

Source: https://assist.dla.mil -- Downloaded: 202640-19T14:08Z
Check the source to verify that this is the current version before use.

shall indicate the following:

(1) Part type number

(2) The circuit reference symbol number

(3) The part function

(4) Name of the manufacturer

(5) Nature of the failure

(6) The number of hours which the part operated prior to failure

4.5.4.1 Failure Report - In the event of a failure, the government inspector shall be notified immediately. A report shall be submitted to the procuring activity upon completion of the test. In this report, the contractor shall propose suitable and adequate design or material corrections for all failures which occurred. The procuring activity will review such proposals and determine whether they are acceptable.

4.5.5 Reconditioning of Life Test Samples - An equipment which has been subjected to the life test shall be reconditioned as follows:

(1) On completion of the life test, the equipment shall be reworked by the contractor by replacing all tubes and "wear" items. The "wear" items shall be determined by agreement between the contractor and the procuring activity.

(2) After reworking, the contractor may resubmit the equipment for acceptance.

4.6 Test Procedures - The procedures used for conducting preproduction tests, acceptance tests and life tests shall be prepared by the contractor and submitted to the procuring activity for review and approval. The right is reserved by the procuring activity or the government inspector to modify the tests or require any additional tests deemed necessary to determine compliance with the requirements of this specification or the contract. Specification MIL-T-18303 shall be used as a guide for preparation of test procedures. When test procedures are available from previous contracts such procedures may be used when approved by the procuring activity.

4.7 Presubmission Testing - No item, part or complete equipment shall be submitted by the contractor until it has been previously tested and inspected by the contractor and found to comply, to the best of his knowledge and belief, with all applicable requirements.

4.8 Rejection and Retest - Equipment which has been rejected may be reworked or have parts replaced to correct the defects and resubmitted for acceptance. Before resubmitting, full particulars concerning previous rejection and the action taken to correct the defects found in the original shall be furnished the government inspector. Units rejected after retest shall not be resubmitted without the specific approval of the procuring activity.

4.9 Equipment Changes - After approval of the preproduction model, no changes which affect weight, installation interchangeability and interchangeability of maintenance parts or assemblies shall be incorporated in the equipment unless approved by the procuring activity. To obtain procuring activity approval, the contractor shall submit an Engineering Change Proposal (ECP) giving the necessary information concerning the change. This shall apply for either a procuring activity's recommended change or a contractor's proposed change. When required, the contractor shall also prepare a Material Change (MC) and a Material Bulletin (MB) to cover the approved change. Engineering Change Proposals, Material Changes and Material Bulletins shall be prepared in accordance with SAR-300.

5. PREPARATION FOR DELIVERY

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:08Z
Check the source to verify that this is the current version before use.

5.1 General - All major units and parts of the equipment shall be preserved, packaged, packed and marked for the level of shipment specified in the contract or order in accordance with Specification MIL-P-17555.

6. NOTES

6.1 Test Values - Normal and limiting values of performance data shall be determined at an input voltage of 27.5 ± 0.5 V DC. These data are to be used in testing the equipment at installation points for compliance with minimum acceptable standard of performance.

6.2 Precedence of Documents - When the requirements of the contract, this specification, or applicable subsidiary specifications are in conflict, the following precedence shall apply:

(1) Contract - The contract shall have precedence over any specification.

(2) This Specification - This specification shall have precedence over all applicable subsidiary specifications and drawings. Any deviation from this specification or applicable drawings, or from subsidiary specifications where applicable, shall be specifically approved in writing by the procuring activity.

(3) Referenced Specifications - Any referenced specification shall have precedence over all applicable subsidiary specifications referenced therein. All referenced specifications shall apply to the extent specified.

6.3 Performance Objectives - Minimum size and weight, simplicity of operation, ease of maintenance, and an improvement in the performance and reliability of the specific functions beyond the requirements of this specification are objectives which shall be considered in the production of this equipment. Where it appears a substantial reduction in size and weight or improvement in simplicity of design, performance, ease of maintenance or reliability will result from the use of materials, parts and processes other than those specified in Specification MIL-E-5400 or the drawings listed in 2.1, it is desired their use be investigated. When investigation shows advantages can be realized, a request for approval shall be submitted to the procuring activity for consideration. Each request shall be accompanied by complete supporting information.

6.4 The parentheses (*), when used in the type designation, shall be replaced by either a number or letter furnished by the procuring activity upon application by the contractor for assignment of nomenclature in accordance with 3.2.9. The complete type number shall be used on nameplates, shipping records and instruction books, as applicable.

NOTICE - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:08Z
Check the source to verify that this is the current version before use.