INCH-POUND
MIL-P-70878 (AR)
10 March 1992

MILITARY SPECIFICATION

PRINTED WIRING BOARD ASSEMBLY, ENCODER-SMALL ARMS SPECIFICATION FOR

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for manufacture, inspection, packaging and acceptance of the Printed Wiring Board Assembly (PWBA), Encoder-Small Arms, part number 9359094.

1.2 Classification. For various small arms weapons transmitters (5.56mm, 7.62mm and 50 caliber small arms weapons).

1.2.1 Type I - PWBA part number 9359094-1, use for M16A1/M16A2 rifle transmitter.

Beneficial comments (recommendations, addition, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1265

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

1.2.2 Type II - PWBA part number 9359094-2, use for M60 and M240 machine gun transmitter.

1.2.3 Type III - PWBA part number 9359094-3, use for M2 heavy machine gun transmitter.

1.2.4 Type IV - PWBA part number 9359094-4, use for M85 heavy machine gun transmitter.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-13926	- Fire Control Materiel Manufacture and Inspection of, General Specification for
MIL-I-45607	- Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-W-63150	- Weapons and Support Materiel, Standard Quality Assurance Provisions for

STANDARDS

MILITARY

MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-454	- Standard General Requirements for Electronic Equipment
MIL-STD-810	- Environmental Test Methods
MIL-STD-1686	- Electrostatic Discharge Control Program for Protection of Electrical and Electronic Parts, Assemblies and Equipment (Excluding electrically initiated explosive devices)Electronic Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

MIL-STD-1695 - Environments, Working, Minimum Standards for
MIL-STD-2000 - Standard Requirements for Soldered Electrical and Electronic Assemblies
MIL-STD-45662 - Calibration System's Requirements

HANDBOOK

MILITARY

DoD-HBK-263 - Electrostatic Discharge Control Handbook for Protection of Electrical and Electronic Parts, Assemblies and ~~Equipment (Excluding electrically initiated explosive devices)~~ METRIC

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from: Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER.

PRODUCT DRAWINGS (CAGE CODE 19200)

9359094 - Printed Wiring Board, Encoder-Small Arms
9359096 - Schematic Diagram, Encoder-Small Arms

INSPECTION EQUIPMENT (CAGE CODE 19200)

11835285 - Test Set, Decoder (Ref.) (see 6.8)

PACKAGING DATA SHEET (CAGE CODE 19200)

SPI-P9359094 - Printed Wiring Board, Encoder-Small Arms

(Copies of other Government documents, drawings and publications required by the contractor in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this documentn shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item description. The encoder contains a microprocessor and associated logic circuitry which produce the coding word count, message count and timing for the appropriate weapon.

The board also contains special large ecale integrated (LSI) circuitry which serves to produce the signals necessary to control the energy to the laser and to fire the laser in synchronism with commands from the microprocessor. In addition, certain accessory and housekeeping functions are served by this special LSI circuitry. Among them are voltage regulation for the logic circuitry, generation of power-on reset and amplification of the microphone signal for weapons firing blank rounds. The various dash numbers to the basic part number, 9359094, signify minor variations to the PWBA to accommodate various weapons (see 1.2).

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.4.

3.3 Environmental stress screen (ESS). When specified in contract (see 6.2), all assemblies shall be subjected to an environmental stress screen prior to conformal coating consisting of temperature cycling and soaking between the temperatures -35°C and +85°C. After exposure to ESS, the characteristics of 3.4 shall not be degraded.

3.4 Characteristics.

3.4.1 Operating conditions. The operating conditions shall be in accordance with Table I, measured under quiescent conditions (unit not firing). For terminal and component designations called out in this specification, see drawing 9359096, Schematic Diagram, Encoder-Small Arms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

TABLE I. Operating Conditions.

Parameter	Terminal	Minimum	Nominal	Maximum	Unit
Ambient Temperature		-31.7	25	75	°C
Input (+) Power	5,6,7	6.5	8.0	10.0	Vdc
Return (-) Power	14,15,16 17,18,19				
Input Current	5	1.5	2.0	3.0	mA

3.4.2 Performance. Unless otherwise specified, the PWBA shall meet the requirements of this specification under the following conditions:

a.	Temperature	25° ± 10°C (77° ± 18°F)
b.	Relative humidity	50 ± 30 %
c.	Barometric pressure	725 + 50, -75mm Hg (28.5 + 2.0, -3.0 inches Hg)
d.	Input power and loads	See Figure 1

3.4.2.1 Current drain. With power applied to terminals 5(+) and 14(-), the Fire Indicator, CR2, shall not light and the current drain of the PWBA shall be between 1.5 and 3.0 mA inclusive.

3.4.2.2 False trigger. With power applied to terminals 5(+) and 14(-) and terminal 11 momentarily shorted to terminal 14, the assembly is in the false trigger mode and the Fire Indicator, CR2, shall not light.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

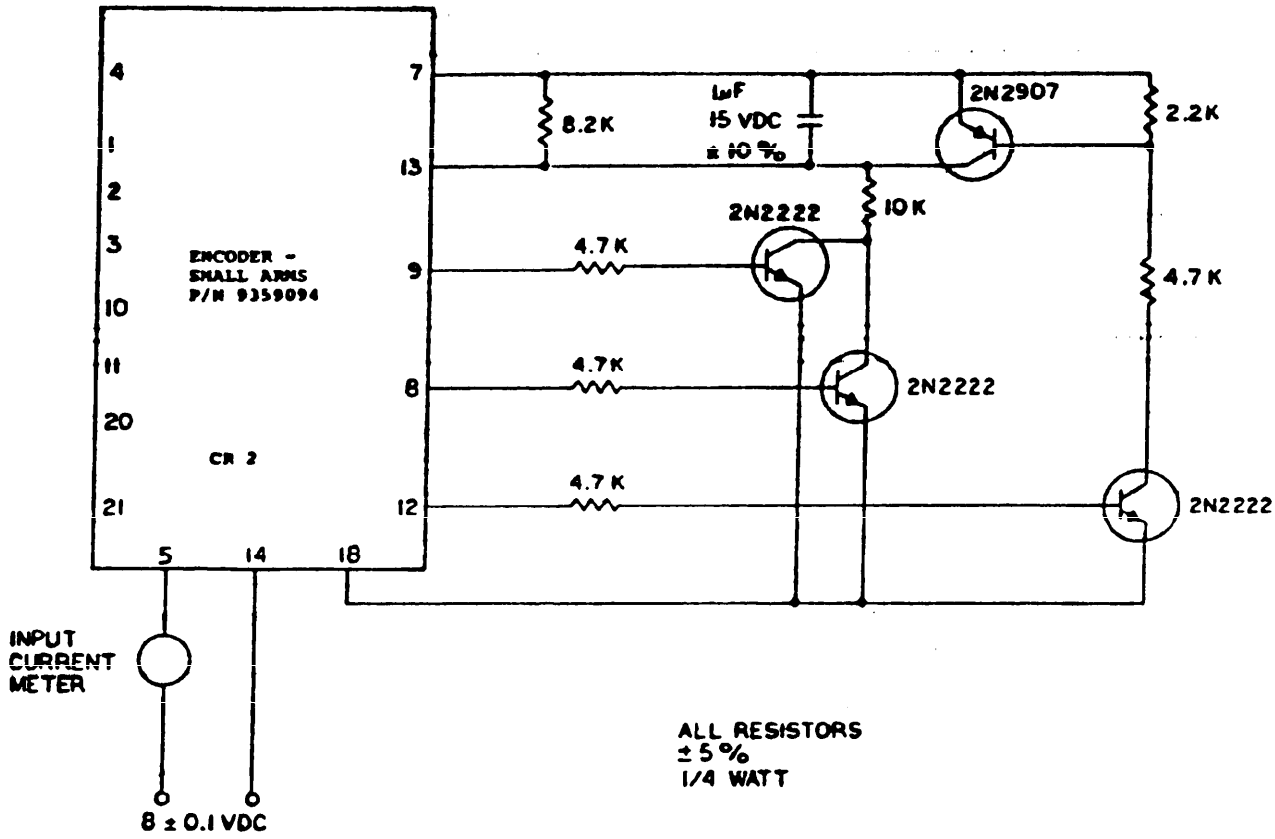


FIGURE 1. Encoder PWBA Power Source and Loads.

3.4.2.3 Dry fire mode. With power applied to terminals 5(+) and 14(-), terminals 20 (Type I only) and 2 shorted to terminal 14 and terminal 11 momentarily shorted to terminal 14, the assembly is in the dry fire mode and the Fire Indicator, CR2, shall not light.

3.4.2.4 Controller key. With power applied to terminals 5(+) and 14(-), terminal 1 shorted to terminal 14 and terminal 11 momentarily shorted to terminal 14, the asssembly is in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

controller key mode and the Fire Indicator, CR2, shall light for approximately 0.25 seconds.

3.4.2.5 Microphone mode. With power applied to terminals 5(+) and 14(-), terminal 1 shorted to terminal 14 and a single negative-going microphone pulse, amplitude 0.2 volts and pulse width of 1 msec, applied to terminal 4, the Fire Indicator, CR2, shall light for approximately 0.25 seconds.

3.4.2.6 Boresight mode. With power applied to terminals 5(+) and 14(-), terminals 2, 3 and 11 shorted to terminal 14, a continuous series of Boresight codes, as defined in Figure 2, shall be output at terminals 9 and 12. The Fire Indicator, CR2, shall light while the Boresight code is generated.

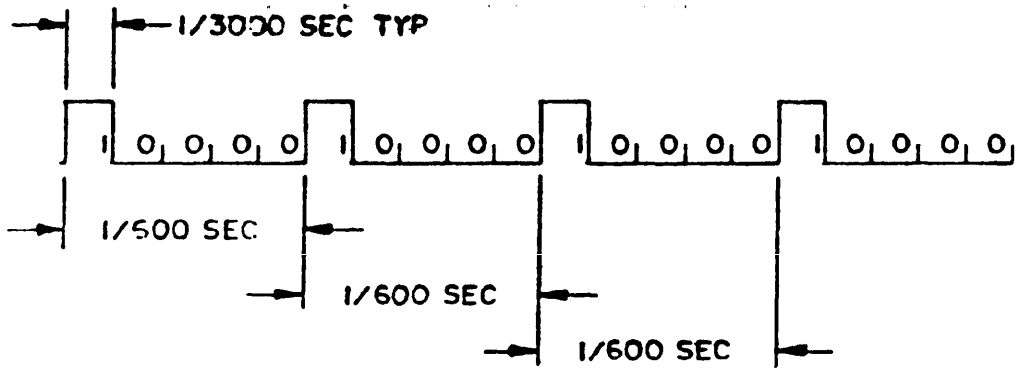


FIGURE 2. Boresight Code #32 Word.

3.4.2.7 Semi-automatic mode. This requirement applies to Type I (P/N 9359094-1) PWBA only. With power applied to terminals 5(+) and 14(-), terminals 2 and 10 shorted to terminal 14 and terminal 11 momentarily shorted to terminal 14, the following outputs shall be available for the semi-automatic mode:

a. 4 words of HIT code #27, as defined in Figure 3 at terminal 9.

b. 128 words of NEAR MISS Code #29, as defined in Figure 4 at terminal 8.

c. 4 words of HIT Code #27 and 128 words of NEAR MISS Code #29, as defined in Figure 5 at terminal 12.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:31Z
Check the source to verify that this is the currentversion before use.

97 Standard Measuring Equipment.

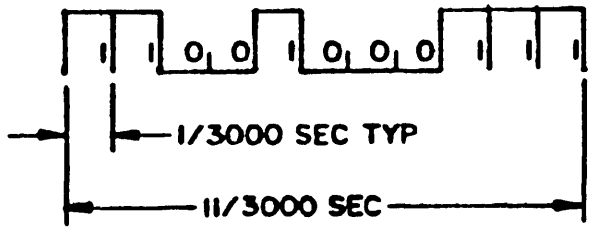


FIGURE 3. Hit Code #27 Word.

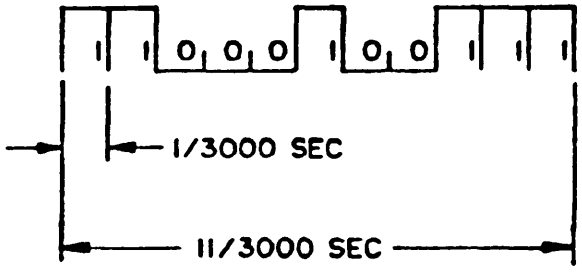


FIGURE 4. Near Miss Code #29 Word.

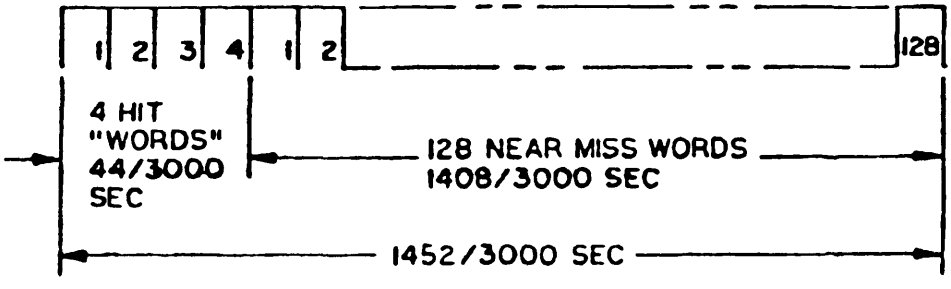


FIGURE 5. Semi-Automatic Mode (1 Round).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:31Z
Check the source to verify that this is the current version before use.

3.4.2.8 Automatic Mode. With power applied to terminals 5(+) and 14(-), terminals 2 and 20 shorted to terminal 14, and terminal 11 shorted to terminal 14 for the period indicated in the column labeled Time in Table II, the required output word sequences, at terminals 9, 8 and 12, shall be in accordance with Table II for the automatic mode.

TABLE II. Automatic Mode.

PWBA Type No.	Output Terminal	Time (secs)	Code		No. of Words per round		No. of rounds	Total No. of words	
			HIT	NEAR MISS	HIT	NEAR MISS		HIT	NEAR MISS
I	9	5	Fig.3	--	Fig.7	--	30	120	--
	8	5	--	Fig.4	--	Fig.7	30	--	600
	12	5	Fig.3	Fig.4	Fig.7	Fig.7	30	120	600
II	9	25	Fig.3	--	Fig.7	--	200	800	--
	8	25	--	Fig.4	--	Fig.7	200	--	4000
	12	25	Fig.3	Fig.4	Fig.7	Fig.7	200	800	4000
III, IV	9	5	Fig.6	--	Fig.7	--	30	120	--
	8	5	--	Fig.4	--	Fig.7	30	--	600
	12	5	Fig.6	Fig.4	Fig.7	Fig.7	30	120	600

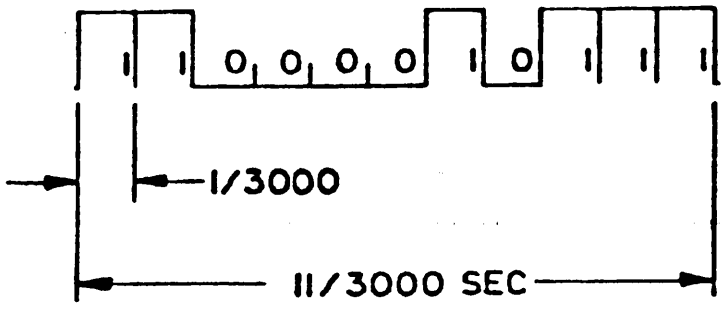


FIGURE 6. Hit Code #24 Word.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

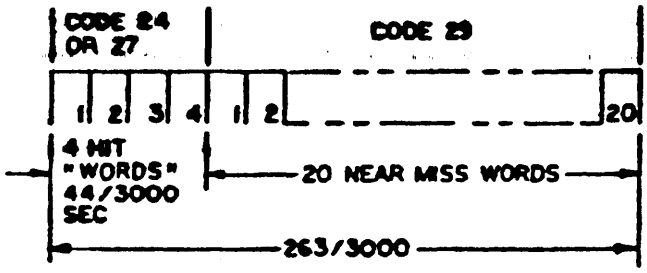


FIGURE 7. Automatic Mode (1 Round).

3.4.2.9 Laser tube protection circuit. With power applied to terminals 5(+) and 14(-), terminal 2 shorted to terminal 14, terminal 21 shorted to terminal 5 and terminal 11 momentarily shorted to terminal 14, the following conditions shall be observed for the laser tube protection circuit:

a. No output pulses of any type, at terminals 9 and 8.

b. Type I and II ONLY.

4 HIT Code 27 and 20 NEAR MISS Code 29 words, as defined in figures 3, 4 and 7, at terminal 12.

c. Type III and IV ONLY.

4 HIT Code 24 and 20 NEAR MISS Code 29 words as defined in figures 4, 5, and 7, at terminal 12.

3.4.3 Environmental requirements. Unless otherwise specified, the assembly shall be subject to the following environmental conditions and meet the stated requirements.

3.4.3.1 High temperature. The assembly shall not be damaged and shall meet the performance requirements of 3.4.2 when exposed to and after the following.

3.4.3.1.1 Operating temperature. The assembly shall operate up to a temperature of +75°C (+167°F).

3.4.3.1.2 Storage temperature. The assembly shall operate after exposure to a temperature of +85°C (+185°F) for a period of 48 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

3.4.3.2 Low temperature. The assembly shall not be damaged and shall meet the performance requirements of 3.4.2 when exposed to and after the following.

3.4.3.2.1 Operating temperature. The assembly shall operate down to a temperature of -31.7°C (-25°F) after exposure at -31.7°C for 4 hours.

3.4.3.2.2 Storage temperature. The assembly shall operate after exposure to a temperature of -34.4°C (-30°F) for a period of 24 hours.

3.4.3.3 Shock. The assembly shall meet the performance requirements of 3.4.2 after shocks with a nominal level of 40 g's terminal peak and nominal duration of 11 milliseconds as shown in Figure 8. Apply three shocks (18 total) in each direction of the three mutually perpendicular axes.

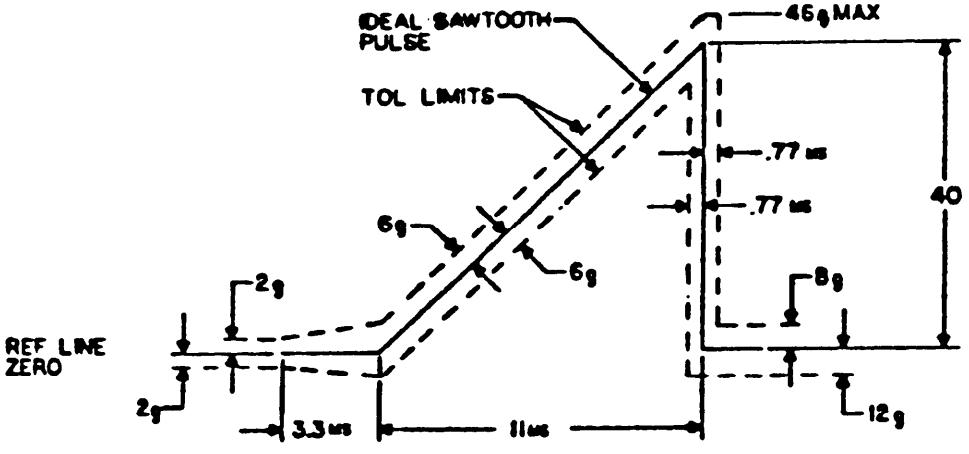


FIGURE 8. Shock Pulse.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

3.4.3.4 Vibration. The assembly shall meet the performance requirements of 3.4.2 after sinusoidal vibrations of frequency and amplitude given below and in Figure 9 on three mutually perpendicular axes. Total duration shall be 60 minutes per axis.

Frequency	Amplitude	Sweep rate
7-30 Hz	±1.5 g	7-500-7 Hz
30-50 Hz	0.033" DA	in 15 minutes
50-500 Hz	±4.2 g	

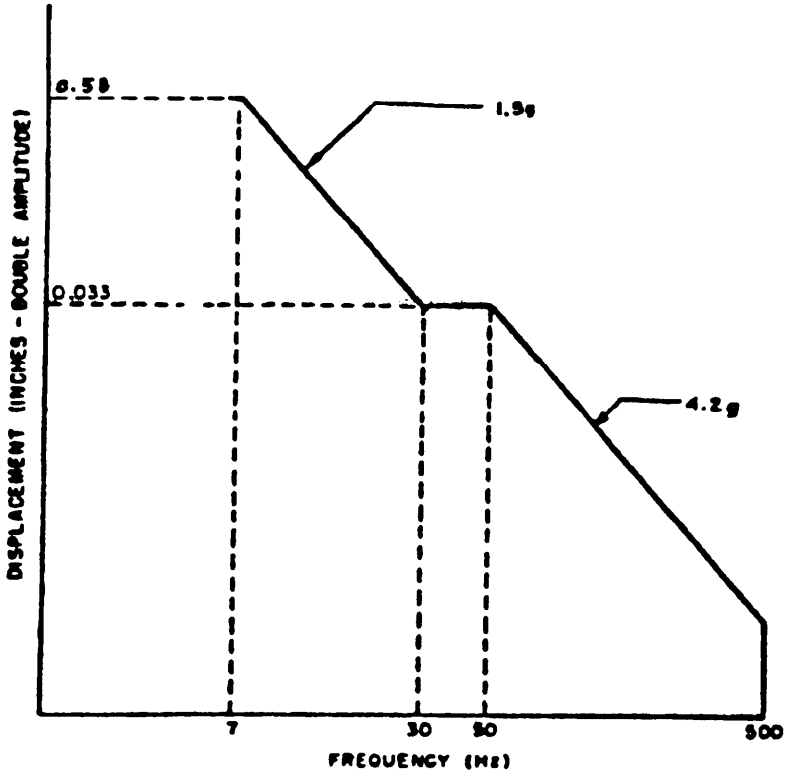


FIGURE 9. Vibration Test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

3.5 Design and construction. The PWBA shall be fabricated and assembled in accordance with drawings, parts lists, and other documents specified on drawing 9359094. The PWBA shall be manufactured and tested in a working environment in accordance with Table I, work area 5 of MIL-STD-1695.

3.5.1 Standards of manufacture. Handling of Electrostatic Sensitive Parts. This equipment contains semiconductor devices such as CMOS, mosfets, and microelectronic devices which may be degraded or damaged by an inadvertent discharge of static electricity. To prevent damage to these components, the supplier shall provide for adequate handling procedures and equipment in accordance with MIL-STD-1686 and DoD-HBK-263.

3.5.2 Soldering. Soldering shall be in accordance with the general requirements of section 4 of MIL-STD-2000.

3.5.3 Workmanship. General workmanship shall be in accordance with requirement 9 of MIL-STD-454.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Environmental Stress Screen (see 4.5).
c. Quality conformance inspection (see 4.6).
d. Packaging inspection (see 4.6.4).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the working environment specified in 3.5 and at standard ambient conditions defined in 3.4.2 using the methods of 4.8. and 4.9.

4.4 First article inspection.

4.4.1 Sample. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.4.2. The first article sample shall consist of three printed wiring board assemblies.

4.4.2 Inspections to be performed. First article inspections are listed in Tables III and IV. Each first article sample unit shall be inspected in accordance with Table III before being subjected to the environmental tests in Table IV in the sequence listed. As determined by the Government, the first article assemblies may be subjected to any or all of the examinations and tests specified in this detail specification and be inspected for compliance with any or all requirements of the applicable drawings.

4.4.3 Rejection. If any assembly fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate inspection upon any failure of any assembly to comply with any of the requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

TABLE III. Examination and Performance Tests. 1/2/

Class	Characteristics	Requirements Paragraph	Test/ Inspect Method	First Article Sample Size	Quality 3/ Conformance Inspection Sample Size/ Accept Criteria
101	Current Drain	3.4.2.1	4.8.1.1	3	32/Acc-0,Rej-1
102	False Trigger	3.4.2.2	4.8.1.2	3	32/Acc-0,Rej-1
103	Dry Fire Mode	3.4.2.3	4.8.1.3	3	32/Acc-0,Rej-1
104	Controller Key	3.4.2.4	4.8.1.4	3	32/Acc-0,Rej-1
105	Microphone Mode	3.4.2.5	4.8.1.5	3	32/Acc-0,Rej-1
106	Boresight Mode	3.4.2.6	4.8.1.6	3	32/Acc-0,Rej-1
107	Semi-Automatic Mode	3.4.2.7	4.8.1.7	3	32/Acc-0,Rej-1
108	Automatic Mode	3.4.2.8	4.8.1.8	3	32/Acc-0,Rej-1
109	Laser Tube Protective Circuit	3.4.2.9	4.8.1.9	3	32/Acc-0,Rej-1
201	Workmanship	3.5.3	Visual	3	125/Acc-0,Rej-1
202	Soldering 4/	3.5.2	Visual	3	125/Acc-0,Rej-1
203	Conformal Coating	3.5	Visual	3	125/Acc-0,Rej-1
204	Dim Characteristics	3.5	SME 5/	3	125/Acc-0,Rej-1
205	Comp Orientation	3.5	Visual	3	125/Acc-0,Rej-1
206	Comp and Board Identification	3.5	Visual	3	125/Acc-0,Rej-1

NOTES:
1/ ESS testing per 4.5 is required for all deliverable units.
2/ 200 class (minor characteristics) examinations required prior to 100 class (major characteristics) performance tests.
3/ For lot sizes less than 32 or 125 as listed, 100% inspection is required (see 4.6.5).
4/ Check before conformal coating is applied.
5/ Standard Measuring Equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

TABLE IV. Environmental Tests.

Class	Characteristic	Requirements Paragraph	Test Paragraph	First Article Sample Size	Quality Conformance Inspection Sample Size/ Accept Criteria
110	High Temp	3.4.3.1	4.9.1	3	1/Acc-0,Rej-1
111	Low Temp	3.4.3.2	4.9.2	3	1/Acc-0,Rej-1
112	Shock	3.4.3.3	4.9.3	3	1/
113	Vibration	3.4.3.4	4.9.4	3	1/

NOTE:
1/ Not required for quality conformance inspection.

4.5 Environmental stress screen. As required, an environmental stress screening program shall be conducted prior to quality conformance inspection, in accordance with the following (see 6.2). All units shall be subjected to a thermal stress screen in accordance with Table V and the procedure below.

TABLE V. ESS Temperature Cycling Requirements.

Low Temp	High Temp	Rate Change	Power	Monitor	Cycles/ Group A Test
-35°C	+85°C	15°C/minute	Off	No	20/Failure Free or Additional Cycle

4.5.1. Conformal coating. Thermal stress screen shall be performed prior to conformal coating unless another method is approved by the Government.

4.5.2 Chamber temperature. Chamber temperature cycling shall be from -35°C to +85°C (-31°F to +185°F) and the duration of one cycle to be 8 minutes up and 8 minutes down plus 4 minutes dwell at high temperature and 4 minutes at low temperature for a total thermal cycle duration of 24 minutes. The units shall begin and end the cycles at ambient temperature (see Figure 10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

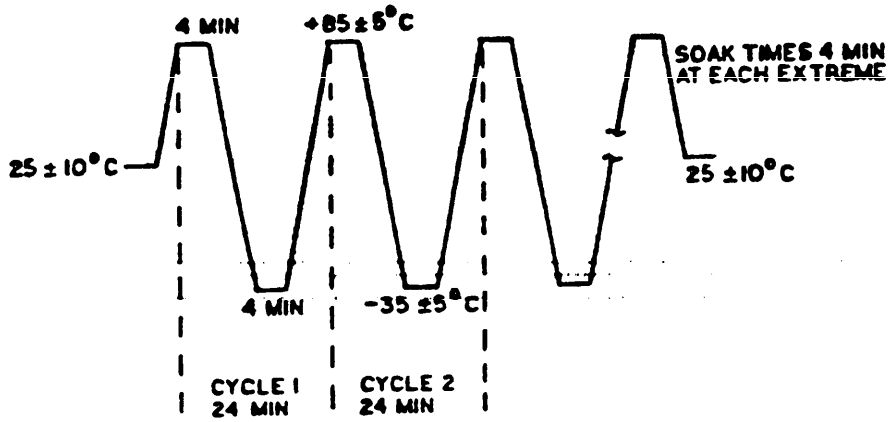


FIGURE 10. Environmental Stress Screen Temperature Profile.

4.5.3 Cycle frequency. A total of twenty thermal cycles are to be imposed on each unit.

4.5.4 Temperature cycles. Temperature cycling shall be conducted with units nonoperating and without power (static).

4.5.5 Test requirements. After the thermal stress screen, the units shall meet the Group A tests (4.6.2). If a unit is rejected, the unit shall be repaired for the failure (if possible) and be put through one additional cycle of ESS. The unit shall then undergo and pass the Group A tests.

4.6 Quality conformance inspection. Quality conformance inspection requirements are defined in 4.6.2 and 4.6.3.

4.6.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn of which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior of subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.6.2 Group A tests. Group A tests consist of examinations and performance tests listed in Table III in the quantities specified.

4.6.3 Group B tests. Group B tests shall consist of the tests indicated in Table IV and shall be conducted on one sample unit per inspection lot which has been subjected to, and passed, Group A tests (see 4.6.2).

4.6.4 Inspection of packaging. The sampling and inspection of the preservation, packing, and container marking shall verify that the units are packaged in accordance with the requirements of 5.1. During the period of first article inspection, one additional unit, packaged in accordance with 5.1, shall be examined to the requirements for quality conformance inspection listed below. Failure of packaging shall be cause for rejection of packaging. Two units per lot shall be examined for the following:

a. Verify that the outside bag is marked in accordance with MIL-STD-129 and is properly closed.

b. Verify that sleeve is around box and that foam properly surrounds inner bag.

c. Verify that the inner bag is properly sealed.

d. Verify that the unit is not damaged after the removal of all packaging materials.

4.6.5 Failure of sample. Should any one sample fail to meet any of the specified examinations and test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract (see 6.7).

4.7 Inspection equipment.

4.7.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607 and MIL-W-63150.

4.7.2 Contractor-furnished inspection equipment.

4.7.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAP/QARs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs (see 6.3.1).

4.7.2.2 Contractor design. The contractor shall design and ~~supply inspection equipment~~ compatible with the ~~Methods~~ of Inspection ~~specified in 4.8 and~~ 4.9 of this specification and with the component inspection procedures specified in Examination and Test Facilities requirements of MIL-F-13926, whenever Government designs are not specified (see 4.7.2.1). Since tolerance of test equipment is normally considered to be within ten percent of product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. When specified in contract or purchase order, the contractor shall submit inspection equipment designs for government review and evaluation (see 6.3).

4.7.2.3 Test equipment. In conjunction with 4.7.2.1 and 4.7.2.2, the test equipment listed in Table VI (Test equipment list) shall be used in the performance of the applicable test methods and procedures as specified in 4.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

TABLE VI. Test Equipment List. 1/

Power Supplies (DC)	Standard - capable of providing levels and limits stated in 4.8.1.
DC Voltmeter/Multimeter	Standard - capable of measuring voltages stated in 4.8.1.
Ammeter/Multimeter	Standard - capable of measuring currents stated in 4.8.1.
Timer	Standard - capable of measuring times stated in 4.8.1.
Pulse Generator with 50 ohm source impedance	Standard - capable of providing pulses stated in 4.8.1.
Decoder Test Set	Part Number 11835285 - listed in 4.8.1.6 to 4.8.1.9.

NOTE:
1/ Must be calibrated to the requirements of MIL-STD-45662 prior to use.

4.8 Methods of inspection. Unless otherwise specified in the contract, the following procedures shall be utilized to conduct specified tests. If the contractor chooses to use alternate test procedures, a detailed description of the set-up and procedure shall be submitted to the Government procuring agency for approval prior to use (see 4.7.2.2).

4.8.1 Performance tests. The following tests and examinations shall be performed to demonstrate compliance with 3.4.2. The PWBA shall be connected to the circuit specified in Figure 11. Apply power by turning ON S9 and leaving on until all tests have been completed. All other switches shall remain as shown unless otherwise specified in 4.8.1.1 through 4.8.1.9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

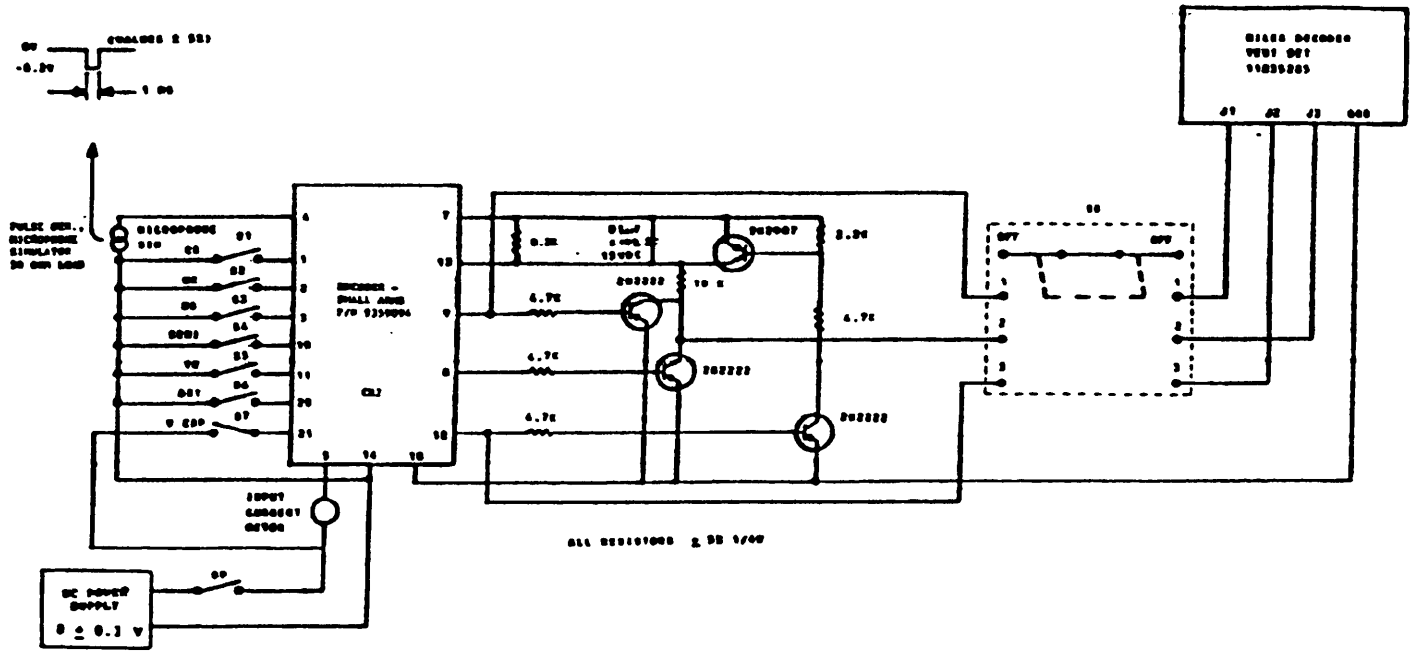


FIGURE 11. Test Circuit for Small Arms Encoder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

4.8.1.1 Current drain. Verify the quiescent current drain meets the requirements of 3.4.2.1 and the Fire Indicator, CR2, does not light.

4.8.1.2 False trigger. Verify the false trigger meets the requirements of 3.4.2.2 by proceeding as follows: Momentarily turn ON S5 to provide trigger, and verify that Fire Indicator, CR2, does not light.

4.8.1.3 Dry fire mode. Verify the dry fire mode meets the requirements of 3.4.2.3 by proceeding as follows: Turn ON S6 (Type I PWBA only) and S2. Momentarily turn ON S5 to provide trigger and verify that Fire Indicator, CR2, lights for approximately 0.25 seconds.

4.8.1.4 Controller key. Verify the operation of the controller key meets the requirements of 3.4.2.4 by proceeding as follows: Turn ON S1, momentarily turn ON S5 to provide trigger and verify that Fire Indicator, CR2, lights.

4.8.1.5 Microphone mode. Verify the microphone mode meets the requirements of 3.4.2.5 by proceeding as follows: Turn ON S1, apply the microphone simulator signal using the pulse generator (one pulse only), as specified in Figure 10, to terminals 4 (+) and 14 (-), and verify that the Fire Indicator, CR2, lights, for approximately 0.25 seconds.

4.8.1.6 Boresight mode. Verify the boresight mode meets the requirements of 3.4.2.6 by proceeding as follows: Turn ON S2, S3, S5 (to provide trigger), and the AC POWER and BORESIGHT MODE switches on the Decoder Test Set. Verify that Fire Indicator, CR2, lights. Set S8 to position 1 and then position 3 and verify that the Decoder Test Set Boresight Code LED is ON in both positions (see 6.8).

4.8.1.7 Semi-automatic mode. Verify the semi-automatic mode meets the requirements of 3.4.2.7 by proceeding as follows: Turn ON S2, S4 and Decoder Test Set AC Power and set S8 to position 2. Set Decoder Test Set HIT and NEAR MISS CODE SELECT thumbwheel switches to position 27 and 29 respectively, and COUNTER RESET switch to AUTO. Momentarily turn ON S5 to provide trigger and verify that the HIT counter reads 4 and the NEAR MISS counter reads 128 for 3.4.2.7, parts a and b. Set S8 to position 3, momentarily turn ON S5 to provide trigger and verify that the HIT counter reads 4 and the NEAR MISS counter reads 128 for 3.4.2.7, part c.

4.8.1.8 Automatic mode. Verify the automatic mode meets the requirements of 3.4.2.8 by proceeding as follows: Turn ON S2, S6 and Decoder Test Set AC Power and COUNTER RESET switch to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

AUTO. Depending upon the PWBA to be tested, set the Decoder Test Set HIT and NEAR MISS CODE SELECT thumbwheel switches, the test circuit switch S8, test circuit trigger switch S5 to provide trigger per Table VII and verify the code word counter readings per Table VII.

TABLE VII. Test for Automatic Mode.

PWBA Type	Code Select HIT	Code Select NEAR MISS	S8 position	Turn ON S5 for 1/	WORD COUNT HIT	WORD COUNT NEAR MISS
I	27	29	2	5 secs	120	600
I	27	29	3	5 secs	120	600
II	27	29	2	25 secs	800	4000
II	27	29	3	25 secs	800	4000
III, IV	24	29	2	5 secs	120	600
III, IV	24	29	3	5 secs	120	600

NOTE:
1/ Or until the WORD COUNT display stops changing.

4.8.1.9 Laser tube protection circuit. Verify the laser tube protection circuit meets the requirements of 3.4.2.9 by proceeding as follows: for the Decoder Test Set, turn ON the AC POWER IN, set the COUNTER RESET switch to AUTO, set the HIT code to #27 (Types I and II) or to #24 (Types III and IV), and set the NEAR MISS code to #29; turn ON S2 and S7; set S8 to position 2; momentarily turn ON S5 to provide trigger and verify the HIT and NEAR MISS COUNTER displays read zeros. Next, set S8 to position 3, momentarily turn ON S5 to provide trigger and verify the HIT and NEAR MISS COUNTER displays read 4 and 20, respectively.

4.9 Environmental tests.

a. Unless otherwise specified, environmental tests shall be conducted in accordance with test conditions and general test performance guidance of MIL-STD-810. Test facilities, chambers and apparatus used in conducting the tests required by this specification shall be capable of meeting the conditions specified.

b. Where necessary in the following tests, it shall be permissible to temporarily open chamber doors to permit access to and manipulation of test equipment and sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

4.9.1 High temperature. This satisfies the storage and operating conditions of high temperature requirements as specified in 3.4.3.

4.9.1.1 Storage and operating. The assembly shall be tested in accordance with MIL-STD-810, Method 501, using the following procedure:

a. Step 1 - Place the test item, configured for high temperature test, into the temperature chamber.

b. Step 2 - Raise the internal temperature to 85°C (185°F).

c. Step 3 - Maintain the internal chamber temperature for a period of 48 hours while insuring the relative humidity is not in excess of 15 percent.

d. Step 4 - Adjust the internal chamber temperature to 75°C (167°F), the highest operating temperature for which the test item is designed to operate, and maintain until temperature stabilization of the item is reached.

e. Step 5 - Operate the test item until the item is stabilized and perform the tests required in 4.8.1.

f. Step 6 - Return the test item, nonoperating, to standard ambient conditions and stabilize.

g. Step 7 - Visually inspect for physical damage and in the absence of physical damage, perform the tests required in 4.8.1.

4.9.2 Low temperature. This satisfies the storage and operating conditions of low temperature requirements as specified in 3.4.3.

4.9.2.1 Storage and operating. The assembly shall be tested in accordance with MIL-STD-810, Method 502, using the following procedure:

a. Step 1 - Place the test item, configured for low temperature test, into the temperature chamber.

b. Step 2 - Lower the internal chamber temperature to -34.4°C (-30°F) and maintain for a period of 24 hours after stabilization.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

the contract, all inspection equipment identified by drawing

c. Step 3 - Adjust the internal chamber temperature to -31.7°C (-25°F) and maintain the temperature for a period of 4 hours.

d. Step 4 - Operate the test item until the item is stabilized and perform the tests required in 4.8.1.

e. Step 5 - Return the test item, nonoperating, to standard ambient conditions and stabilize.

f. Step 6 - Visually inspect for physical damage and in the absence of physical damage, perform the tests required in 4.8.1.

4.9.3 Shock. The assembly, when mounted on a fixture that simulates its next higher assembly (see Figure 12), shall be tested in accordance with MIL-STD-810, Method 516.3, Section II, Procedure I, with the following modifications:

a. Step 3 - the assembly shall be in a non-operational mode.

b. The step 3 test transient shall be in accordance with 3.4.3.3.

c. Step 5 - the assembly inspection and functional verification shall not be conducted until shock has been completed in all three axes.

d. After shock testing the assembly shall not be damaged and shall be subjected to the performance tests specified in 4.8.1.

4.9.4 Vibration. The assembly, when mounted on a fixture that simulates its next higher assembly (see Figure 12), shall be tested in accordance with MIL-STD-810, Method 514.3, Section II, Procedure I, for a duration of 60 minutes with the following modifications:

a. Step 4 - mount the test item on vibration equipment.

b. Step 5 - expose the assembly to test level and durations as specified in 3.4.3.4.

c. Step 6 - does not apply.

d. Step 7 - the assembly inspection and functional verification shall not be conducted until vibration has been completed in all three axes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

e. After vibration testing the assembly shall not be damaged and shall be subjected to the performance tests specified in 4.8.1.

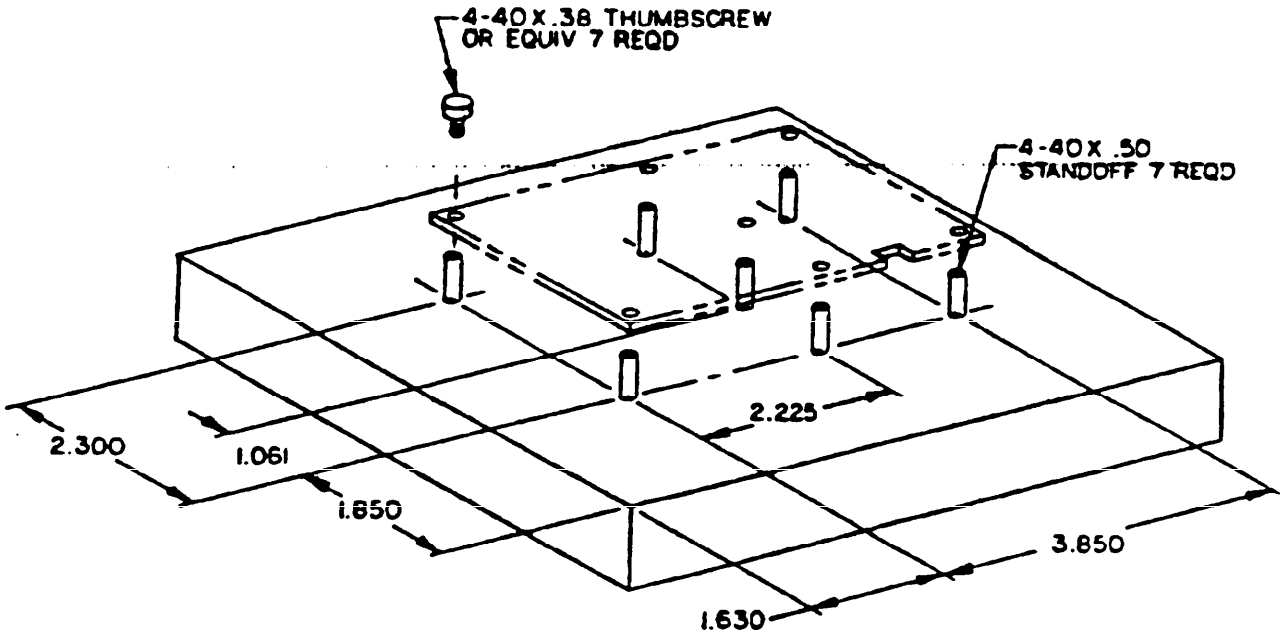


FIGURE 12. Mounting Configuration.

4.10 Certifications. Certification shall be provided that all units have been produced in accordance with the requirements of 3.5 and packaged in accordance with the requirements of 5.1.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with SPI-P9359094. The level of protection shall be A, B, or C, as defined by the procurement document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The Encoder-Small Arms PWBA is part of the Multiple Integrated Laser Engagement System.

6.2 Acquisition requirements. Acquisition documents shall specify the following:

a. Title, number and date of this specification (see page 1).

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).

c. Special tests and examinations required (see 4.2); the type of inspection required; and the activity responsible for testing, and its facility (see 4.1).

d. Whether a first article sample is required (see 3.2), and if so, pertinent details (see 4.4) including disposition of the first article sample.

e. Certification of conformance for each lot or shipment of product.

f. Whether Government-Loaned Property (Government Furnished inspection/test equipment) of 6.8 is available or will the contractor be required to furnish inspection equipment (see 4.7).

g. Applicable level(s) of preservation, packaging, packing and marking instructions (see 5.1).

6.3 Submission of contractor inspection equipment designs for approval. Unless otherwise specified, submit two copies of designs as required to: Commander, U.S. Army AMCCOM, ATTN: SMCAR-QAF-I, Picatinny Arsenal, NJ 07806-5000. The letter of submittal shall specify, the contractor; contract number; title, number and revision of this specification; item nomenclature; classification of defect and test paragraph.

6.4 Definitions.

6.4.1 Hit. Successful transmission of the weapon simulator kill code that results in a "hit" on the target, but that does

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

not "kill" the target. An audio alarm at the target signifies the hit.

6.4.2 Kill. Successful transmission of the weapon simulator kill code that results in the deactivation of or "kill" of the target. An audio alarm at the target signifies the kill.

6.4.3 MILES. Multiple Integrated Laser Engagement System.

6.4.4 Near Miss. Illumination of the target with the near miss laser message resulting in an audio indication to the target that it is under fire.

6.4.5 Round. A laser message that simulates the effects of a round from the weapon.

6.4.6 SME. Standard Measuring Equipment.

6.5 Drawings. Drawings listed in Section 2 of this specification under heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.6 Noncompliance. If a sample fails to pass group B inspection, the manufacturer shall notify the qualifying activity and the cognizant inspection activity of such failure and take corrective action on the materials or processes, or both, as warranted, and on all units of product which can be corrected and which were manufactured with essentially the same materials and processes, and which are considered subject to the same failure. Acceptance and shipment of the product shall be discontinued until corrective action, acceptable to the qualifying activity has been taken. After the corrective action has been taken, group B inspection shall be repeated on additional sample units (all tests and examinations, or the test which the original sample failed, at the option of the qualifying activity). Group A inspections may be reinstituted; however, final acceptance and shipment shall be withheld until the group B inspection has shown that the corrective action was successful. In the event of failure after reinspection, information concerning the failure shall be furnished to the cognizant inspection activity and the qualifying activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

6.7 Government-loaned property. Unless otherwise specified (see 6.2), the contracting officer should arrange to loan the following Government-furnished Inspection/Test equipment specified below:

P/N	Title	Ref. Paragraph
11835285	Test Set, Decoder	4.8.1.6 - 4.8.1.9

6.9 Subject term (key word) listing.

Fire Control
Multiple Integrated Laser Engagement System
Training Devices

Custodians:
Army - AR

Preparing activity:
Army - AR

(Project 1265-A036)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revisi letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-P-70878 (AR)	10 MARCH 1992

3. DOCUMENT TITLE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial (201) 724-6674	(2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S PICATINNY ARSENAL,NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:31Z
Check the source to verify that this is the current version before use.