MIL-S-55507E(CR)
11 February 1987
SUPERSEDING
MIL-S-55507D(EL)
25 April 1978

MILITARY SPECIFICATION

SHELTER, ELECTRICAL EQUIPMENT (WITH OR WITHOUT EQUIPMENT), PACKAGING OF

This specification is approved for use by Communications-Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers detailed requirements for packaging of Shelter, Electrical Equipment, with or without equipment, for shipment and intransit storage.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

T-T-871	-	Twine, Fibrous Cotton, Wrapping
QQ-S-781	-	Strapping, Steel, and Seals
PPP-B-601	-	Boxes, Wood, Cleated, Plywood
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-B-640	-	Boxes, Fiberboard, Corrugated, Triple-Wall
PPP-C-843	-	Cushioning Material, Cellulosic
PPP-F-320	-	Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to U.S. Army Communications-Electronics Command, ATTN: AMSEL-MMD-P, Fort Monmouth, New Jersey 07703-5006, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A AREA - PACK

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

PPP-B-40	-	Packaging and Packing of Hand Tools
PPP-P-291	-	Paperboard, Wrapping, and Cushioning
PPP-T-60	-	Tape, Packaging, Waterproof

MILITARY

MIL-P-116	-	Preservation, Methods of
MIL-C-3774	-	Crates, Wood, Open (12,000 and 16,000 Pound Capacity)
MIL-C-12000	-	Cable, Cord and Wire, Electric; Packaging of
MIL-C-16173	-	Corrosion Preventive Compound, Solvent Cutback, Cold Application
MIL-E-17555	-	Electronic and Electrical Equipment, Accessories, and Provisioned Items (Repair Parts): Packaging of
MIL-T-27260	-	Tie Down, Cargo, Aircraft, CGU-1/B
MIL-C-52950	-	Crates, Wood, Open and Covered
MIL-C-55442	-	Cable Assemblies and Cord Assemblies, Packaging of

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Preservation. Preservation shall be level A or B, as specified (see 6.1).

3.1.1 Level A.

3.1.1.1 Cleaning. Shelter and equipment shall be cleaned in accordance with process C-1 of MIL-P-116.

3.1.1.2 Drying. Shelter and equipment shall be dried in accordance with the applicable procedures of MIL-P-116.

3.1.1.3 Preservative application. Preservative application shall be as specified in 3.2.1.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

3.1.1.4 Unit packing. Each shelter and equipment shall be unit packed in accordance with the methods and submethods prescribed in MIL-P-116 and as specified herein.

3.1.1.4.1 Technical literature. Each technical literature shall be unit packed submethod IC-1.

3.1.1.4.2 Electronic and electrical equipment and associated parts. Unit pack each in accordance with MIL-E-17555.

3.1.1.4.3 Cable and cord assemblies. Unit pack each in accordance with MIL-C-55442.

3.1.1.4.4 Cable, cord, and wire. Unit pack each in accordance with MIL-C-12000.

3.1.1.4.5 Hand tools. Unit pack in accordance with the requirements of PPP-P-40.

3.1.1.4.6 Shelter. Each shelter with or without contents shall be unit packed method III. Prior to stowage of items and equipment in the shelter, position caps over cable connectors and secure. Close and secure all windows, blackout blinds, shields over louver vents, blower exhaust vents and heating intake and door. Position and secure the fire extinguishers. Close and secure mail slot covers.

3.1.1.4.6.1 Set, sling and installation hold-down assemblies. Unit pack each set in a close-fitting fiberboard box conforming to PPP-B-636, class domestic. Fill void space with cushioning conforming to PPP-C-843, type II. Close the box in accordance with the appendix of the box specification and stow in shelter. In the S-280( )/G Shelter, a 5/16 inch standard thread "eye" bolt shall be mounted in the threaded insert provided in the floor inside the door of the shelter. The packed set shall be secured to the "eye" bolt with 24-ply twine conforming to T-T-871; or equivalent, in a manner that will prevent movement within the shelter.

3.1.1.4.6.2 External components. When external components are secured to the outside of the shelter, such as air conditioning units, blocking and bracing as applicable shall be applied to provide adequate protection against damage.

3.1.1.4.7 Stowage within shelter.

3.1.1.4.7.1 Major components. Secure all fastenings, shock mounts, bolts, nuts, screws, and straps of all major and auxiliary units mounted on the floor, shelves or walls of the shelter. Place and secure all covers over equipments.

3.1.1.4.7.2 Other items. Stow items within designated compartments of cabinets and drawers to the maximum capacity.

3.1.1.4.7.3 Overflow items. After cabinets and drawers have been filled, the remaining items shall be stowed in boxes as follows: Group like items,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

bearing the same stock numbers, together and place them into a PPP-B-636, class domestic, fiberboard box. Close the box in accordance with the appendix of the box specification. Depending upon available floor space to be utilized, overpack overflow items in fiberboard boxes conforming to PPP-B-640, style E, class 2. Block and brace the contents of the box with fiberboard cells and pads conforming to PPP-F-320 to prevent movement during transit. Close the box in accordance with the appendix of the box specification.

3.1.1.4.7.4 Shelter interior blocking. Shock mounted equipment shall float free without blocking and bracing. Utilize the integral tie-downs to block, brace, secure, and immobilize the stowed load. Design and construct a blocking and bracing assembly, when built-in tie-downs are not available, to support and prevent the load from shifting. Fabricate the assembly of triple-wall, corrugated, weather-resistant fiberboard or a wood assembly conforming to PPP-F-320 and MIL-STD-731 respectively. Wood blocks may be used, as required, to supplement the fiberboard fabrication. Cushion wood blocks contacting equipment with PPP-P-291, type III, paperboard.

3.1.1.4.8 Stowage outside shelter.

3.1.1.4.8.1 Remaining items. Remaining items, not capable of being stowed within the shelter, shall be placed into wood boxes conforming to PPP-B-621, class 2, style 4; or PPP-B-601, overseas type. Block to prevent movement. Close the box in accordance with the appendix of the box specification.

3.1.1.4.8.2 Padlock and keys. Shelters for delivery shall be padlocked. Padlock keys shall be concealed by attaching to the underside of the door cover with tape conforming to PPP-T-60. The shipping document shall be so annotated. Attach the technical literature, unit packed as specified in 3.1.1.4.1, in a conspicuous position easily accessible on opening of shelter door. Close and secure the door with padlock.

3.1.2 Level B.

3.1.2.1 Cleaning, drying, preservative application and unit packing. Each shelter and equipment shall be cleaned, dried, preserved, and unit packed as specified in 3.1.1.

3.2 Packing. Packing shall be level A or B, as specified (see 6.1).

3.2.1 Level A.

3.2.1.1 Crate. Each shelter, unit packed as specified in 3.1, shall be packed in a crate conforming to MIL-C-3774, (modified) type II, bolted, fully demountable, skid base. The crate rubbing strips shall be made of nominal 4 inch thick lumber and shall be approximately the same width as the skids. When crates exceed 10 feet in length, the rubbing strip located at the center of gravity shall be increased to 34 inches (17 inches on each side of center) and the fork-lift openings on each side of the 34 inch center strip shall be 23 inches and 12 inches respectively (see figures 1, 2, 3, and 4). As an

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

alternate, shelter systems based on the S-250( )/G configuration may be packed in a crate conforming to MIL-C-52950 (modified), type V, style A, demountable. Load bearing floorboards shall be made of 2 by 4 inch (nominal) lumber.

3.2.1.1.1 Buttress blocking and bracing of shelter in crate. Wood blocks, 4 by 4 inch stock or two pieces, 2 by 4 inch stock, shall be securely fastened to the skid base with nails. The wood blocks (figures 3 and 4, item 2) shall be notched when required, to accommodate the towing eyes, bolts, rivet heads, etc., on the shelter to allow a full length bearing surface.

3.2.1.1.2 Skids and hold-downs. Crate skids shall be equipped with 3/8 inch diameter forged steel "U" bolts, 1/2 inch diameter forged steel "eye" bolts, or 1/2 inch diameter forged steel "nut eyes" and 1/2 inch diameter carriage bolts, treated to resist corrosion. Position the bolts on the skid to effect a 45 degree angle with the lifting eyes located at the top corners of the shelter. The bolts shall be of sufficient length to extend through the crate skids and accommodate washers and check nuts or nut eyes and nuts. After the bolt check nuts have been pulled tight, the bolt threads shall be upset and coated with a preservative conforming to MIL-C-16173, grade 1, to prevent loosening and corrosion. All check nuts, bolts, and carriage bolt heads on the underside of the skid shall be countersunk flush to prevent friction or drag.

3.2.1.1.3 Tie-downs. Attach CGU-1/B cargo tie-downs conforming to MIL-T-27260 as illustrated (see figure 9). Attach the fixed hook assembly to the lifting eyes located at the top corners of the shelter and secure the opposite end (45 degree angle) adjustable hook assembly to the hold-downs on the skid base. The straps shall be made semi-taut by first using the adjusting mechanism for strap length and then the tensioning mechanism using the procedure specified in MIL-T-27260. When tensioning operation is completed, wrap the excess strapping around the ratchet/tensioning mechanism and secure with tape conforming to PPP-T-60.

3.2.1.1.4 Blocking and bracing of shelter on flat car. Blocking, bracing and securing of shelters shall be as illustrated (see figures 5 and 6). When 4 inch thick wood is specified, two pieces, 2 by 4 inch stock may be substituted to facilitate nailing.

3.2.1.1.5 Wood boxes containing overflow items. Containers, as specified in 3.1.1.4.8.1, shall be secured with flat steel strapping conforming to QQ-S-781, type I, finish A in accordance with the appendix of the box specification. The wood box shall be blocked, braced and secured on the flat car in a manner to prevent movement in transit.

3.2.2 Level B.

3.2.2.1 Center of balance. When the center of balance lies within the center 1/3 of the forklift openings of the shelter, no packing is required. When the shelter does not meet the above criteria, a skid base only, as specified in 3.2.1, shall be required (see figures 3 and 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

3.2.2.2 Uncrated shelters. Uncrated shelters shall be blocked, braced and secured on rail cars as illustrated (see figures 7 and 8). When 4 inch thick wood is specified, two pieces, 2 by 4 stock may be substituted to facilitate nailing.

3.2.2.3 Clearance. A 5-1/2 inch minimum clearance shall be provided between uncrated shelters shipped on flat bed trucks. Wood blocking shall be secured to the bed of the truck between shelters to prevent movement. Tie-down devices shall be secured in a manner that will prevent scraping and chafing or otherwise damage the exterior of the shelter.

3.3 Marking. Marking shall be in accordance with the applicable provisions of MIL-STD-129. In addition, crated shelters shall be marked in accordance with the requirements of paragraph 60 of MIL-C-3774 and shall have the following notice stenciled on the exterior sides and ends of the crate with letters 3 inches high.

BOLTED DEMOUNTABLE REUSABLE CRATE
DO NOT DESTROY
USER TO RETAIN TIE-DOWN STRAPS AND
CRATE WITH HARDWARE FOR FUTURE SHIPMENTS

3.4 Package performance. Package testing shall be performed in accordance with MIL-P-116. The rough handling test will be performed only when invoked in the bid request or contract (see 6.1).

3.5 Workmanship. The quality of workmanship shall be such as to permit acceptance of the completed packaging requirements in accordance with the testing specified in section 4.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Quality conformance inspection of Section 3 requirements shall be in accordance with the Group A, Group B, and, when required (see 6.1c), the Group C (rough handling) requirements of MIL-P-116. Inspection lots shall be in accordance with MIL-P-116.

4.2.1 Materials inspection. All materials to be used in packaging shall be inspected in accordance with the applicable material specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

4.2.2 Preservation inspection. Inspection of preservation and interior markings shall be in accordance with group A and B Quality Conformance Inspection Requirements of MIL-P-116. Lot formation and sampling procedures shall be as specified therein.

4.2.3 Packing inspection. Inspection of packing and the marking for shipment and storage shall consist of the examinations specified in Table I, "Packing inspection provisions." Lot formation shall consist of all packs made of the same materials during an identifiable period and submitted at one time for acceptance. Sampling procedures shall be in accordance with MIL-STD-105, using a single sampling plan and acceptable quality level of 4.0 percent defective.

TABLE I. Packing inspection provisions.

NO.	CHARACTERISTIC	METHOD OF INSPECTION
101	Intermediate container not as specified	Visual
102	Improper closure of intermediate container	Visual
103	Shipping containers not in accordance with specification	Visual
104	Excessive cube	Visual
105	Improper blocking and bracing	Visual
106	Closure not in accordance with specification	Visual
107	Weight and size exceed container limitations	Weight and Measure
108	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
109	Marking omitted, incorrect, or illegible	Visual

5. PACKAGING

5.1 Packaging. Not applicable to this specification.

6. NOTES

6.1 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification and any amendment thereto.

b. Level A or B preservation and packing (see section 3).

c. When rough handling test is required (see section 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

6.2 In-transit storage. When in-transit periods exceed 30 days, refer to Technical Bulletin 43-0124.

6.3 Level B preservation. When level B preservation is specified, this level of protection will only be used under known favorable conditions during transportation, storage, and handling.

6.4 Environmental. Environmental pollution prevention measures are contained in the packaging material specifications referenced herein. Refer to material specifications or preparing activity for recommended disposability methods.

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue date to the extensiveness of the changes.

6.6 Subject terms (key word) list.

Packaging
Paperboard
Provisioned item
Tie-down, Cargo, Aircraft, CGU-1/B
Set, sling, and installation hold-down assembly
Overflow items
Fully demountable
Skid base
Rubbing strips
Stowed load
Buttress blocking and bracing
"U" bolts
Nut eyes
Check nuts
Center of balance
Bolted demountable reusable crate
Tie-down straps
Preservation inspection
In-transit storage


Custodian:
Army - CR

Review activity:
Army - SM

Preparing activity:
Army - CR

(Project PACK-A316)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

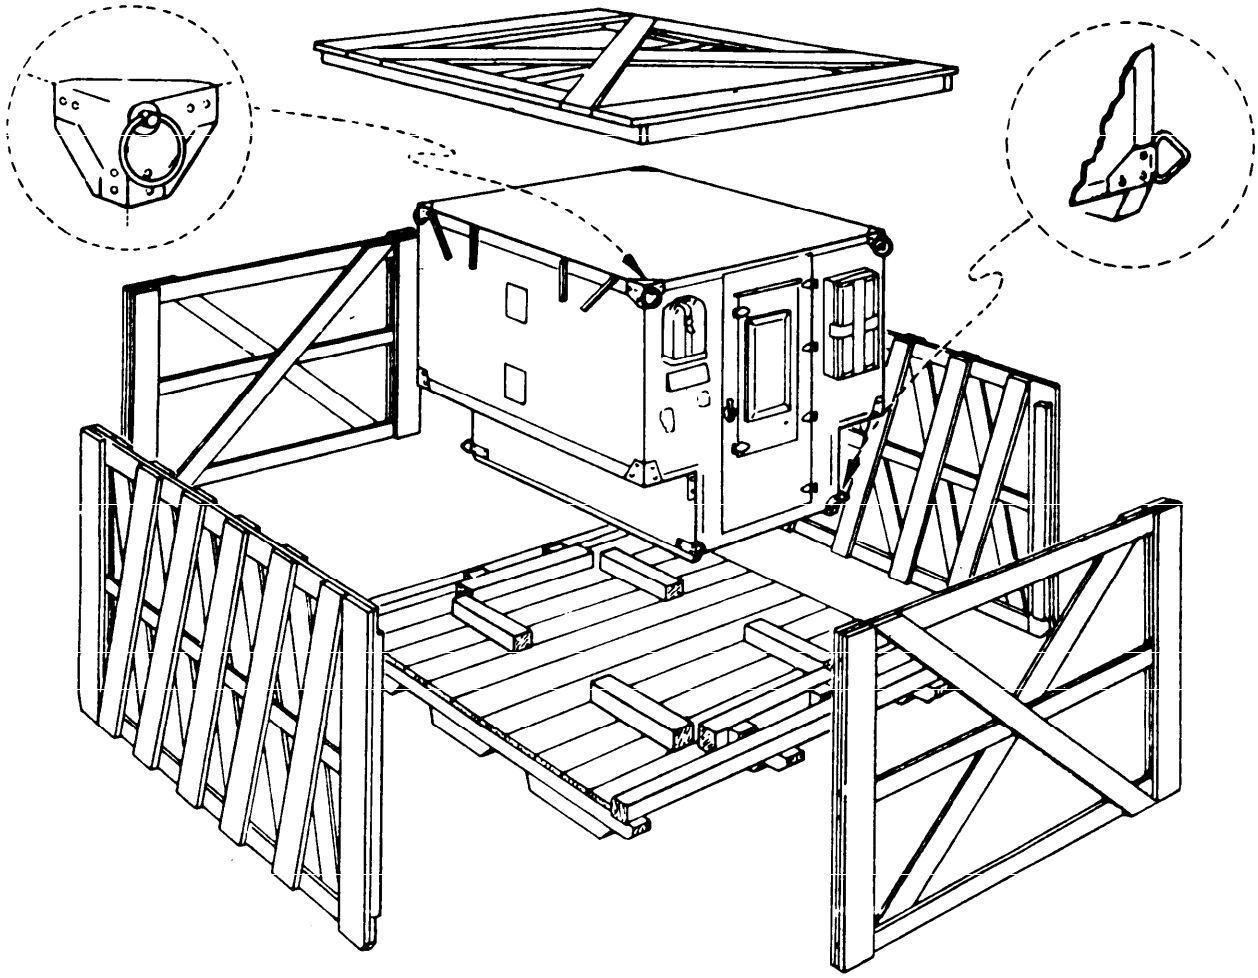

NOTE: Blocking at both ends of skid base is simulated to illustrate blocking requirements for shelters with projecting components.

FIGURE 1. Shelter crate components.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

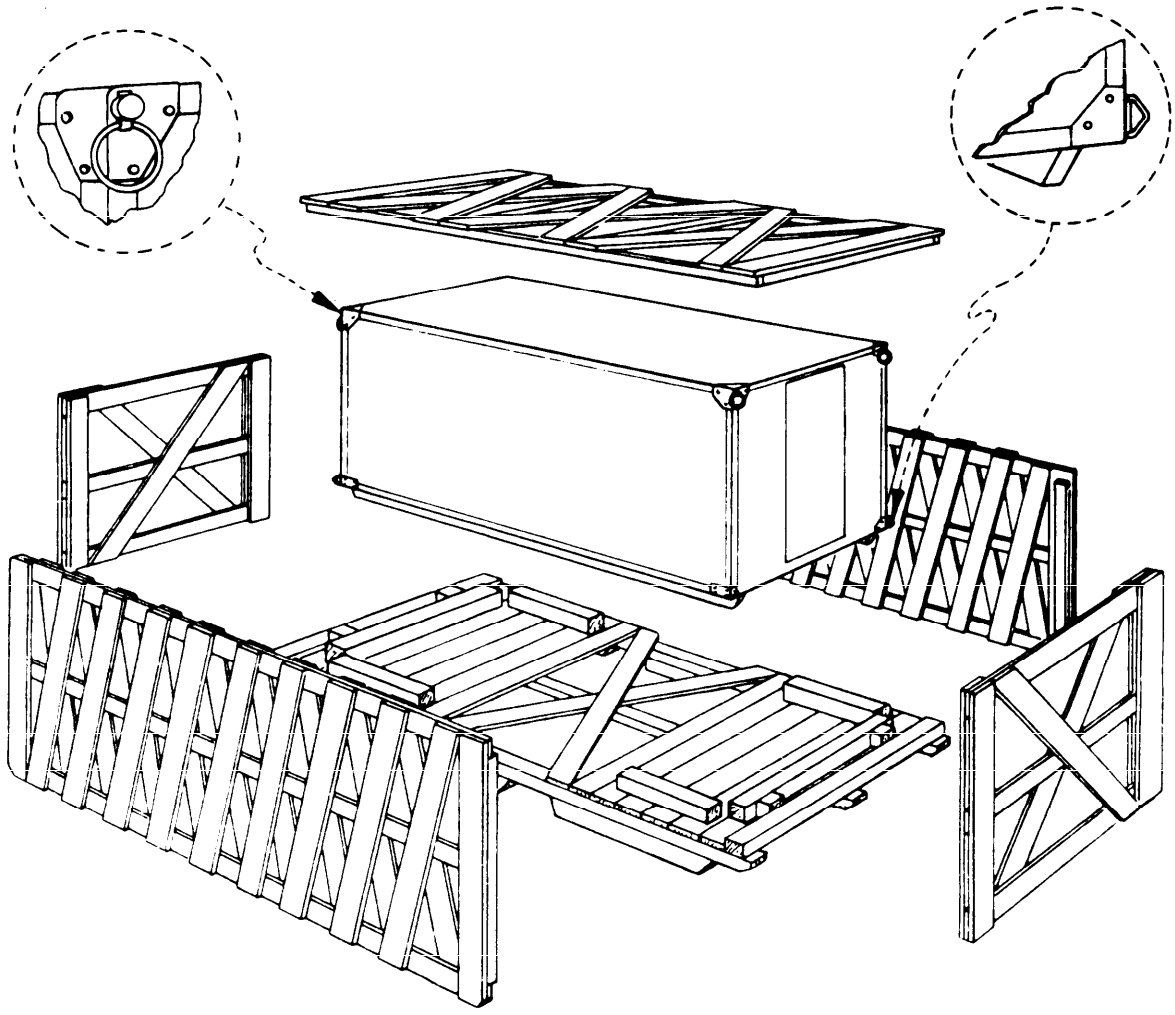

NOTE: Blocking at both ends of skid base is simulated to illustrate blocking requirements for shelters with projecting components.

FIGURE 2. Shelter crate components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

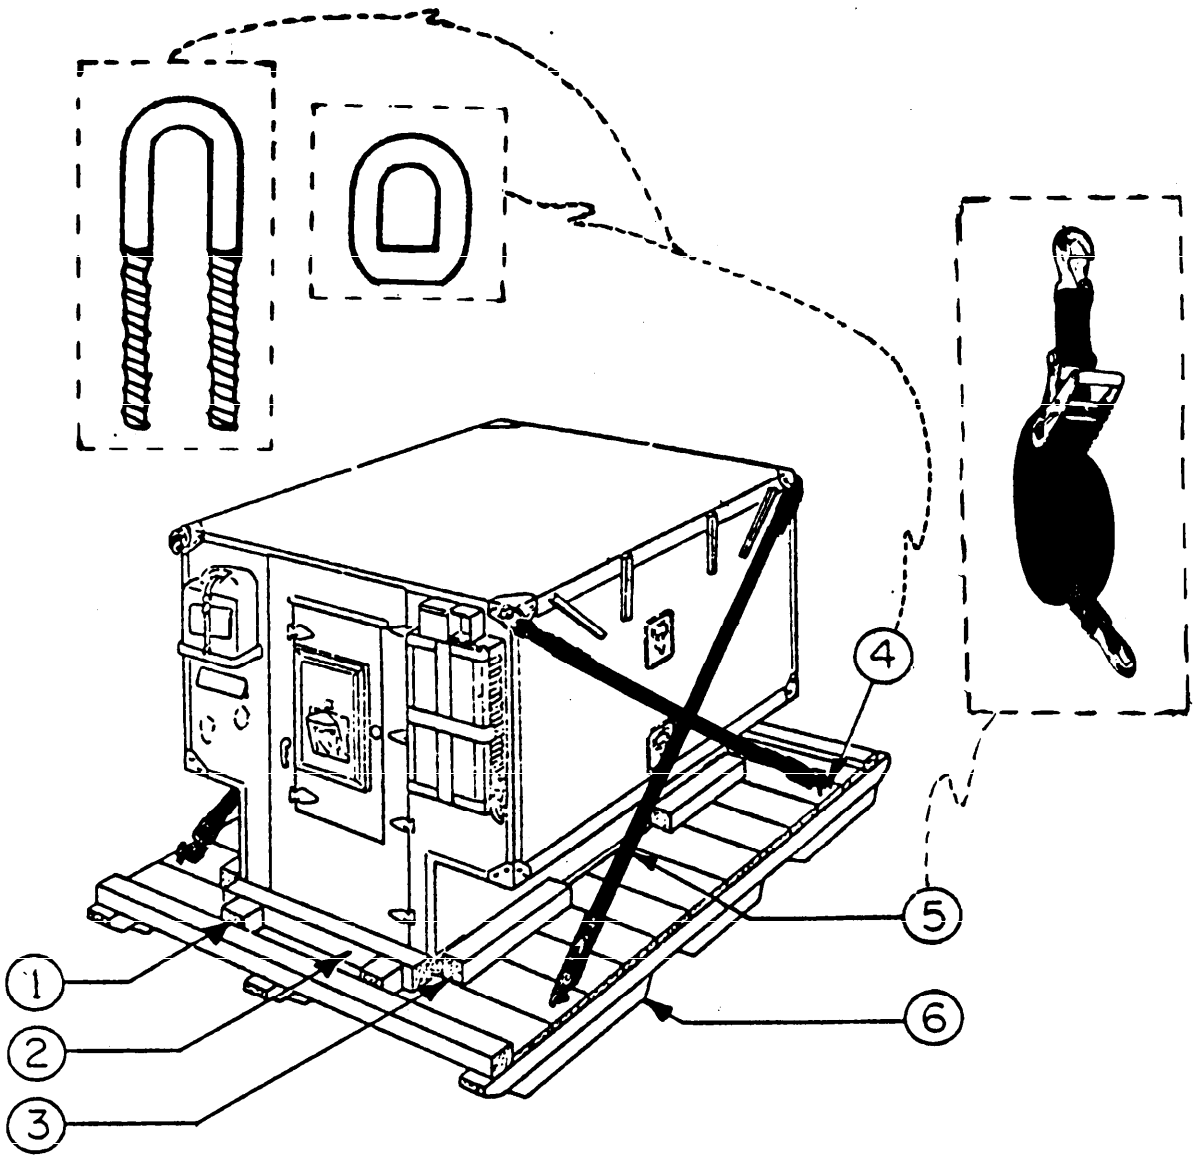


ITEM	REQ.	DESCRIPTION
1	4	4" x 4" wood block *
2	2	4" x 4" wood block (notched as reqd) *
3	4	4" x 4" wood block *
4	4	U-bolts or carriage bolts w/nut eyes
5	4	Tie-down straps
6	3	4" x 4" lumber - rubbing strips

*Two pieces of 2 by 4 inch stock may be substituted to facilitate nailing to base.

FIGURE 3. Shelter skid base with cargo tie-down straps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

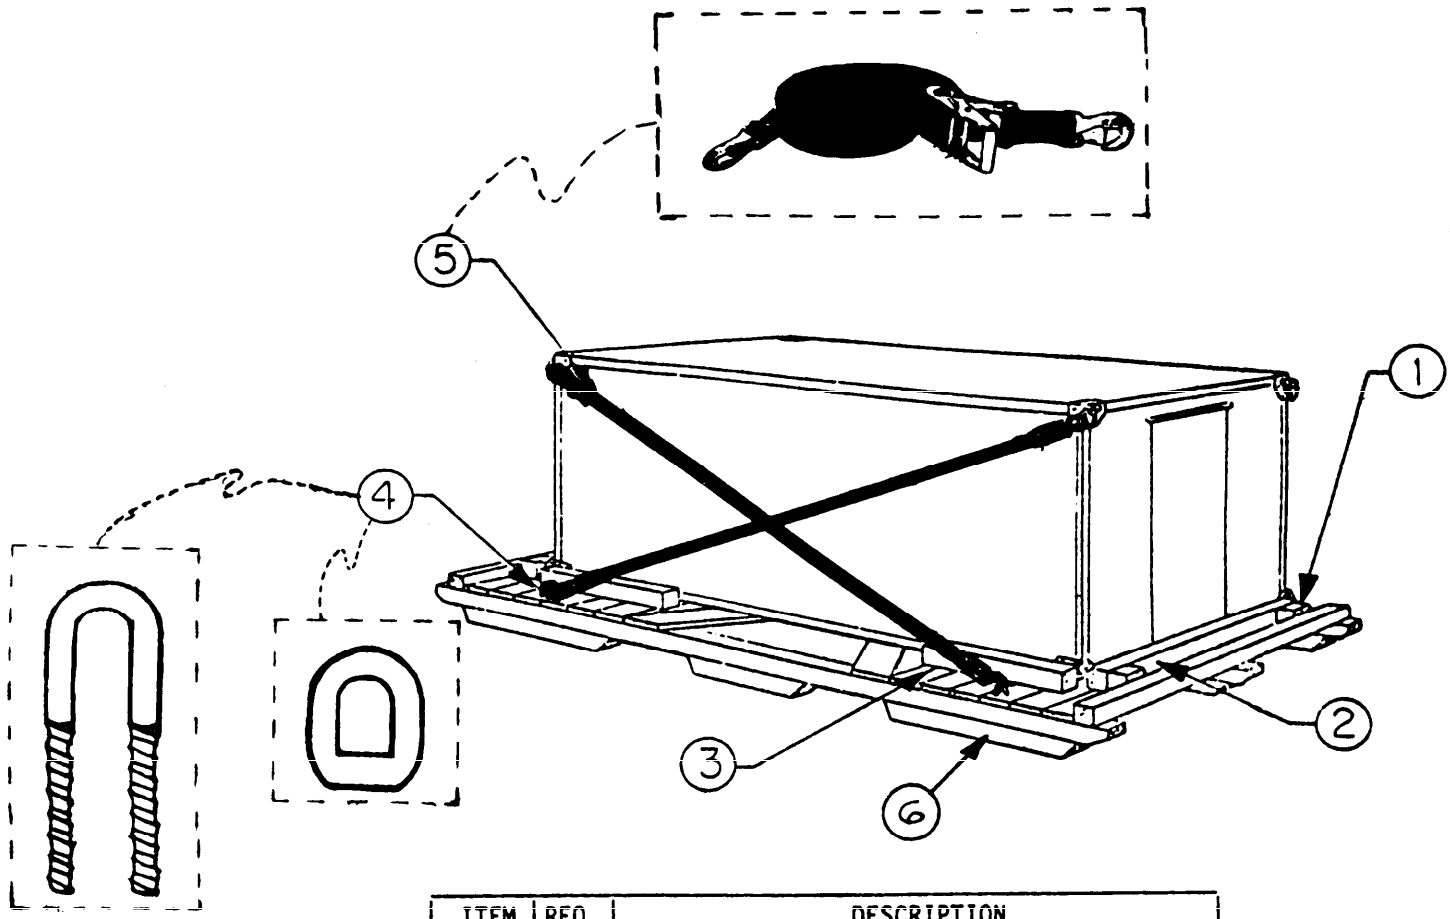


ITEM	REQ.	DESCRIPTION
1	4	4" x 4" wood block *
2	2	4" x 4" wood block (notched as required) *
3	4	4" x 4" wood block *
4	4	U-bolts or carriage bolts w/nut eyes
5	4	Tie-down straps
6	3	4" x 4" lumber - rubbing strips ea. skid

*Two pieces of 2 by 4 inch stock may be substituted to facilitate nailing to base.

FIGURE 4. Shelter skid base with cargo tie-down straps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

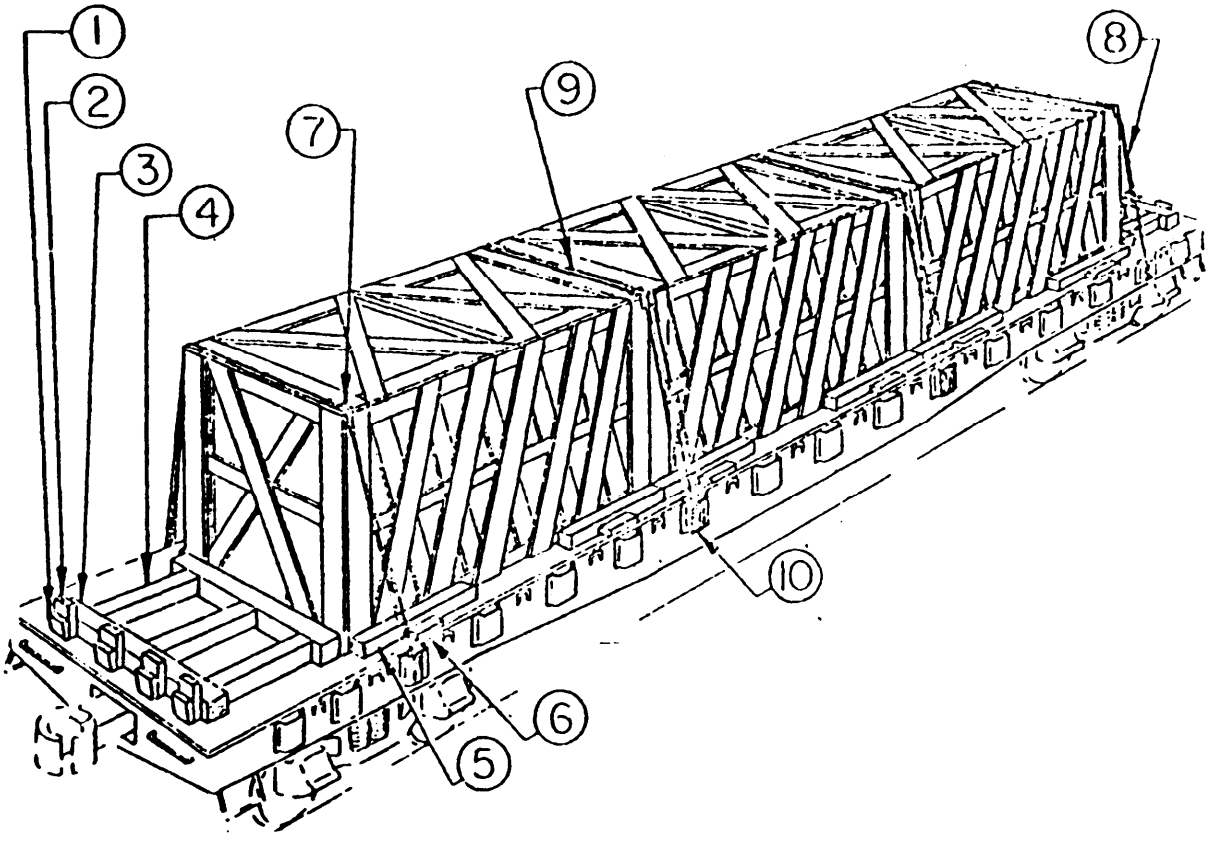


ITEM	REQ.	DESCRIPTION
1	8	Lumber wedge (To suit)
2	8	Lumber blocks stakes (To suit)
3	4	Lumber blocks 6" x 6" (To suit)
4	6	Lumber blocks 6" x 6" (To suit)
5	12	Lumber blocks 4" x 4" x 3'
6	12	Lumber blocks 2" x 4" x 14" (Center of Item No. 5)
7	12	Crate corner plates
8	24	4 single strands US steel, Grade C, #8, 2000 lb. test wire (3 loops at stake pocket)
9	18	Staples 1-1/2" x 1" gap
10 (a)	As reqd	Flexible metal sheeting (Stake pocket lining for Item No. 9)

NOTES: (a) Flexible metal sheeting (0.042 inch thick) cut to size shall be placed in stake pockets, i.e., securing point or securing device for metal wire tie-downs at points of contact. Upon machine tightening metal wire, sheeting will contour to a protective housing for the metal wire tie-down.

(b) Crates on flatcar containing shelter shall be butted.

FIGURE 5. Shelter, crated.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:17Z
Check the source to verify that this is the currentversion before use.

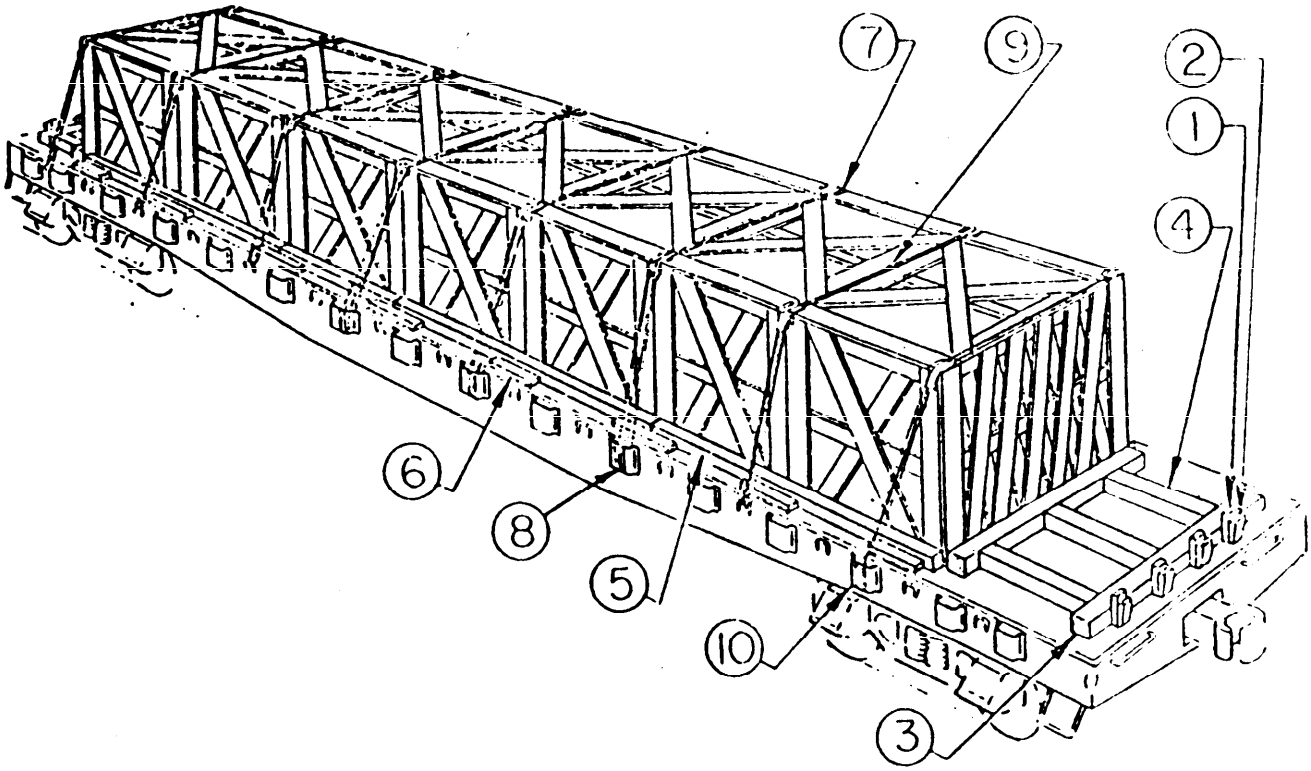


ITEM	REQ.	DESCRIPTION
1	8	Lumber wedge (To suit)
2	8	Lumber blocks stakes (To suit)
3	4	Lumber blocks 6" x 6" (To suit)
4	6	Lumber blocks 6" x 6" (To suit)
5	As reqd	Lumber blocks 6" x 6" (On edge x 12' or to suit)
6	16	Lumber blocks 2" x 4" (To suit)
7	28	Crate corner plates
8	42	3 single strands US steel, Grade C, #8, 2000 lb test wire (3 loops at stake pocket)
9	42	Staples 1-1/2" x 1" gap
10 (a)	As reqd	Flexible metal sheeting (Stake pocket lining for Item No. 9)

NOTES: (a) Flexible metal sheeting (0.042 inch thick) cut to size shall be placed in stake pockets, i.e., securing point or securing device for metal wire tie-downs at points of contact. Upon machine tightening metal wire, sheeting will contour to a protective housing for the metal wire tie-down.

(b) Crates on flatcar containing shelter shall be butted.

FIGURE 6. Shelter, crated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

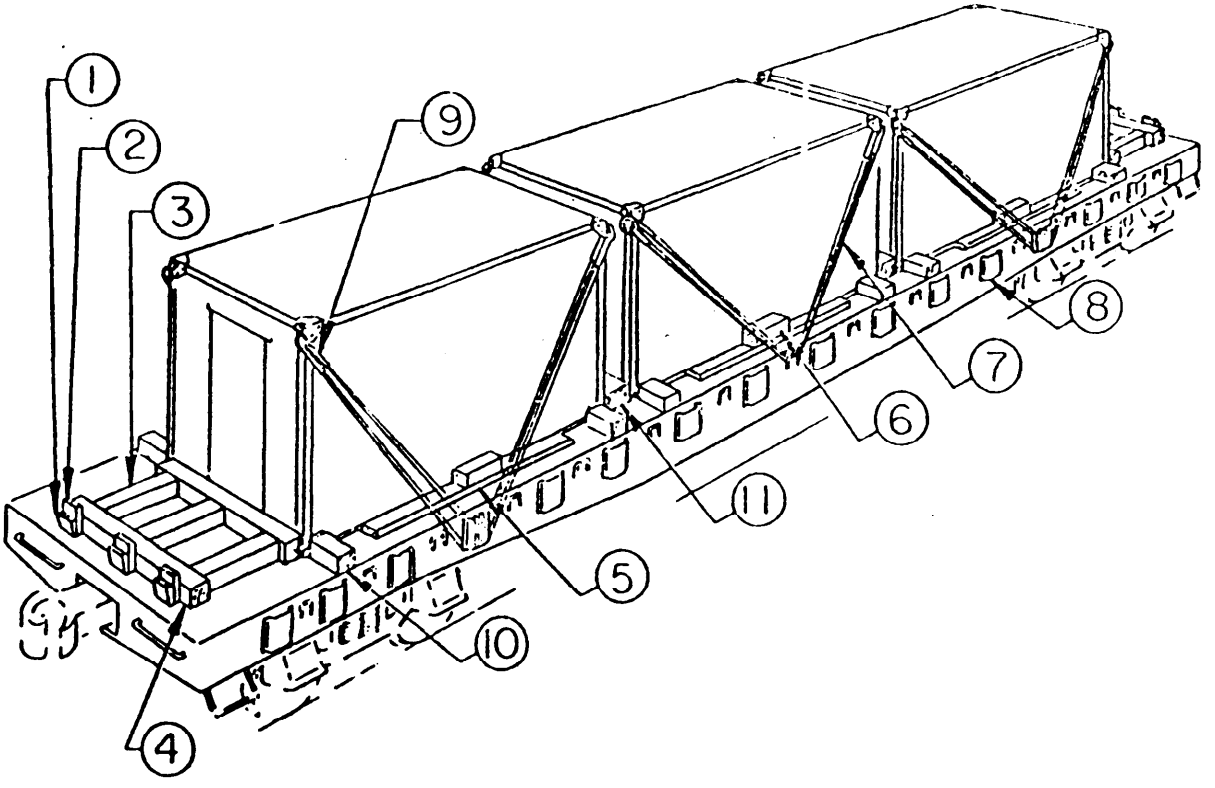


ITEM	REQ	DESCRIPTION
1	6	Lumber wedge (To suit)
2	6	Lumber blocks stakes (To suit)
3	6	Lumber blocks 6" x 6" (To suit)
4	4	Lumber blocks 6" x 6" (To suit)
5	6	Lumber blocks 2" x 6" x 10' (To suit)
6	6	Lumber block 4" x 4" x 14'
7	24	2 single strand US steel, Grade C, #8, 2000 lb. test wire (3 loops at stake pockets)
8 (a)	As reqd	Flexible metal sheeting (Stake pocket lining for Item No. 7)
9	As reqd	Sleeving plastic
10	12	Lumber blocks 6" x 6" x 16"
11	2	Lumber blocks 6" x 8" (To suit) (Flat between shelters)

NOTE: (a) Flexible metal sheeting (0.042 inch thick) cut to size shall be placed in stake pockets, i.e., securing point or securing device for metal wire tie-downs at points of contact. Upon machine tightening metal wire, sheeting will coutour to a protective housing for the metal wire tie-down.

FIGURE 7. Shelter, uncrated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

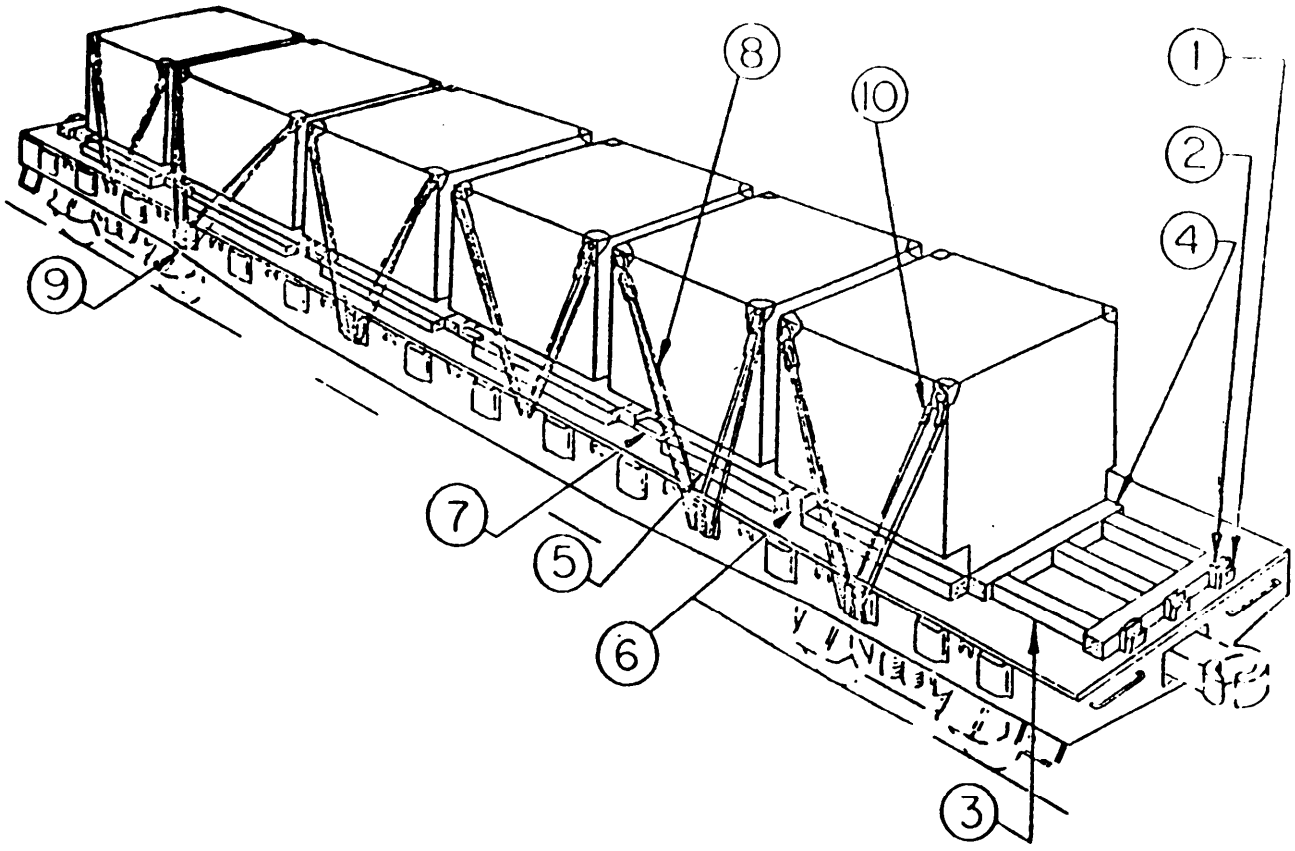

ITEM	REQ.	DESCRIPTION
1	6	Lumber wedge (To suit)
2	6	Lumber blocks stakes (To suit)
3	6	Lumber blocks 6" x 6" (To suit)
4	4	Lumber blocks 6" x 6" (To suit)
5	12	Lumber blocks 4" x 4" x 38" (Side block)
6	10	Lumber blocks 4" x 4" x 64" (Between shelter)
7	10	Lumber blocks 2" x 4" (To suit) (Corner of shelters)
8	48	2 single strands US steel, Grade C, #8, 2000 lb. test wire (3 loops at stake pocket)
9	As reqd	Flexible metal sheeting (For Item No. 8)
10	As reqd	Sleeving plastic (For No. 8 tie-down wire under Item No. 8)

NOTES: (a) Flexible metal sheeting (0.042 inch thick) cut to size shall be placed in stake pockets, i.e., securing point or securing device for metal wire tie-downs at points of contact. Upon machine tightening metal wire, sheeting will contour to a protective housing for the metal wire tie-down.

(b) Load six to eight shelters per flatcar.

FIGURE 8. Shelter, uncrated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

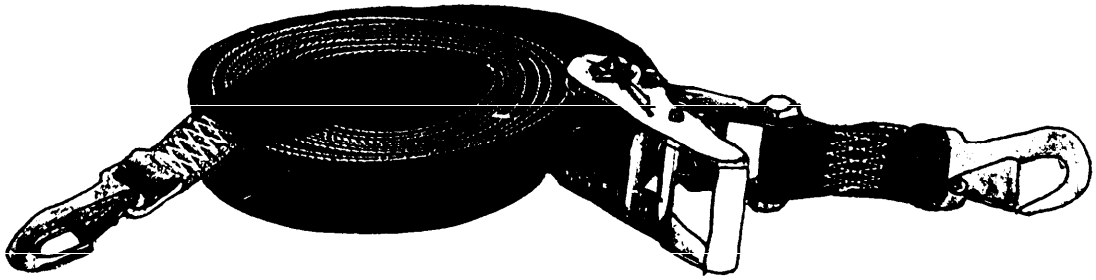


FIGURE 9. Tie-Down, Cargo, Aircraft, CGU-1/B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 4966 Alexandria, VA

POSTAGE WILL BE PAID BY

Commander
U.S. Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-MMD-P
Fort Monmouth, NJ 07703-9990

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE. HISA-FM 149-85

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:17Z
Check the source to verify that this is the current version before use.