MIL-S-55329(EL)
20 November 1970

MILITARY SPECIFICATION
SEMI-TRAILER,VAN, ELECTRONIC EQUIPMENT

V-189( )/MSC-25

1. SCOPE

1.1 Scope.- This specification covers the van facility portion of the Operations Center, Communications AN/MSC-25( ) which is a mobile van assemblage providing telephone and telegraph communications for planning, engineering, and control of an area type communications system.

1.2 Description.- Semi-Trailer,Van,Electronic Equipment V-189( )/MSC-25 (hereinafter referred to as the van facility) is a mobile air or ground vehicular transportable van facility which includes the standard ordnance vehicle; Semi-Trailer, Van, Electronic M348A2C (hereinafter referred to as the basic van). The basic van is described in Military Standard MS500029 and the ATAC Drawings listed in 2.1. The van facility includes modifications to the basic van; and van facility items such as lighting, air conditioning, heating, ventilation, wiring, and brackets for the operational equipment of the Operations Center, Communications AN/MSC-25( ) (hereinafter referred to as the van assemblage).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-636	Box,Fiberboard.
T-T-871	Twine,Cotton,Wrapping.

FSC-5805

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	Preservation,Methods of.
MIL-C-3885	Cable Assemblies and Cord Assemblies (For use in Electronics and Associated Electrical Equipment).
MIL-W-6858	Welding,Resistance; Aluminum, Magnesium,Non-Hardening Steels or Alloys,Nickel Alloys,Heat-Resisting Alloys, and Titanium Alloys; Spot and Seam.
MIL-T-7928	Terminals,Lug and Splice, Crimp Style.
MIL-M-13231	Marking of Electronic Items.
MIL-F-14072	Finishes for Ground Signal Equipment.
MIL-H-15424	Hand Tool,Packaging of.
MIL-E-17555	Electronic,Electrical Equipment, Accessories & Repair Parts: Packaging & Packing of.
MIL-W-45205	Welding,Gas,Metal-arc & Gas, Tungsten-arc,Aluminum Alloys, Readily Weldable,for Structures, Excluding Armor.

STANDARDS

MILITARY

MIL-STD-22	Welded Joint Design.
MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-252	Wired Equipment,Classification of Visual and Mechanical Defects.
MIL-STD-281	Automobiles,Trucks,Truck-Tractors Trailers & Trailer Dollies: Preservation & Packaging of.
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment.
MIL-STD-1235	Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

MS500029	Semi-Trailer,Van: Electronic 26 Foot,Military Design, 2 Wheel, 6 Ton M348A2C.
MS53036-1	King Pin (Basic Van).

DRAWINGS

ELECTRONICS COMMAND

DL-SC-B-353255	Semi-Trailer,Van,Electronic Equipment V-189()/MSC-25.
SM-D-378627	Signal Schematic Diagram.
SM-C-378988	Electrical Wiring Diagram.
SM-J-379080	Power Schematic Diagram.
SC-D-595542	Power Wiring Diagram .

ARMY TANK AND AUTOMOTIVE COMMAND (ATAC)

K10882355	Body Assembly (Basic Van).
A873629	M348A2C Vehicle(Basic Van).
BII-873629	M348A2C Vehicle (Basic Van).
K10882358	Body Structure (Basic Van).
K10891320	Frame (Basic Van).
K8389773-1	Installation (Basic Van).

(Copies of specifications, standards, drawings and publication required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer. Both the title and number or symbol should be stipulated when requesting copies).

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASSOCIATION OF AMERICAN RAILROADS
Rules Governing Loading of Commodities on Open Top Cars.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

(Applications for copies should be addressed to the Association of American Railroads, 59 East Van Buren Street, Chicago 5,Illinois).

3. REQUIREMENTS

3.1 Preproduction sample.- Unless otherwise specified in the invitation for bids and contract, the contractor shall furnish one preproduction sample of the van facility for approval. Hereinafter, this contractor is the only contractor to which reference is made.

3.2 Construction.- The van facility shall be constructed in accordance with the drawings as listed on DL-SC-B-353255 (See 4.6).

3.2.1 Basic van.- Unless otherwise specified the basic van; Semi-Trailer, Van, Electronic M348A2C shall be government furnished. The basic van is described on the MS Standards and ATAC Drawings of 2.1.

3.3 Electrical installation.-

3.3.1 Power system wiring and components.- Installation and wiring of power wires and components (including cable assemblies, receptacles, switches, meters, circuit breakers, neon lamps, fluorescent lamps, incandescent lamps, lighting fixtures, distribution assembly system and wiring components constituting a three wire electrical power distribution system) shall be installed and wired in accordance with the drawings unless otherwise stated. The completed in-place power distribution system shall meet the following requirements:

3.3.1.1 Continuity of conductors.- There shall be point-to-point circuit continuity on all power-line circuits and the resistance of the continuous circuit shall not exceed 3 ohms when tested in accordance with 4.7.1 and 4.7.1.1.

3.3.1.2 Dielectric breakdown voltage.- The dielectric strength of insulation of all power wires, cables, and components shall withstand a potential of 600 volts DC applied continuously for not less than 30 seconds when tested in accordance with 4.7.1 and 4.7.1.2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

3.3.1.3 Insulation resistance.- The resistance of insulation between any two of three circuit conductors and also between each of the two ungrounded power-line conductors and van facility ground terminal shall not be less than 100 megohms when tested in accordance with 4.7.1 and 4.7.1.3.

3.3.2 Power distribution and operational functions.- Main power branch distribution and circuit switching functions thereof shall meet the operational requirements as denoted by the power system schematic plate, when tested in accordance with 4.7.2.

3.3.3 Signal (audio) system wiring and components.- Installation and wiring of signal wires, cables and wiring components shall be in accordance with the drawings unless otherwise stated. The completed in-place signal system installation shall meet the following requirements:

3.3.3.1 Continuity and circuit resistance.- There shall be circuit continuity between both end terminations of all signal-line conductors and the resistance of the continuous circuit shall not exceed 5 ohms when tested in accordance with 4.7.3.1.

3.3.3.2 Dielectric breakdown voltage.- The dielectric strength of insulation of all signal wires, cables and components, shall withstand a potential of 500 volts DC applied continuously for not less than 5 seconds when tested in accordance with 4.7.3.2.

3.3.3.3 Insulation resistance.- The resistance of insulation between each signal-line conductor and all other signal-line conductors connected to ground shall not be less than 100 megohms when tested in accordance with 4.7.3.3.

3.3.4 Cable assemblies, power and audio frequency.- All power and audio frequency cable and cord assemblies shall be fabricated in accordance with the drawings unless otherwise stated and shall meet the requirements and tests of MIL-C-3885.(See 4.4).

3.3.5 Suppression of electromagnetic interference.- The motors in the ventilating equipment and heaters used in the van facility shall meet the emanation limits of MIL-STD-461 for tactical equipment, if other than those items defined by the drawings. (See 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

3.4 Systems operational tests.- With all operational equipments of the AN/MSC-25() van assemblage installed, the operational requirements of all power and audio frequency cable assemblies, switches, connectors, jacks, and patch panels, shall be met when tested in accordance with 4.8.

3.5 Truck Transportability.- The van facility, weighted in accordance with the following note, shall be capable of withstanding the test of 4.9 without sustaining any damage such as buckling, cracking, delamination, or any other permanent deformation or dislodgement of any item in or on the van facility. NOTE: The van facility shall be weighted to simulate the van assemblage by using live and dummy loads (See 6.2b).

3.6 Railroad transportability.- The van facility weighted as mentioned in 3.5 shall be capable of withstanding the test of 4.10 without sustaining any damage or dislodgement such as mentioned in 3.5.

3.7 Watertightness.- The van facility shall be capable of withstanding the test of 4.11 without leakage of water into the van facility via any modification, or part, made or installed by the contractor. Such leakage shall constitute failure to pass the test. Any other leakage of water into the van facility shall be prevented, or stopped as soon as detected, by means of temporary sealing to be removed after the test.

3.8 Fording.- The van facility shall be capable of withstanding the test of 4.12 without leakage of water into the van facility via any modification, or part, made or installed by the contractor. Such leakage shall constitute failure to pass the test. Any other leakage of water into the van facility shall be prevented, or stopped as soon as detected, by means of temporary sealing to be removed after the test.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the currentversion before use.

3.9 Mounting inserts.- All mounting inserts shall be installed without the use of auxiliary adhesives and when installed, each insert shall be capable of withstanding the test of 4.13 without dislodgement, rotation, or permanent distortion of the insert head or threads and without permanent distortion of the van facility mounting surface. Before and after the test, the insert head shall be properly seated and tight against its bearing surface. Insert threads shall be free of paint and any unspecified matter such as dirt, grease, etc.

3.10 Cleaning.- After fabrication and after assembly, all items of the van facility shall be free of any dirt, smudges, oil, grease, drippings, splatter and any material unspecified for the particular part or assembly or in unsightly excess as in accordance with an acceptable good commercial practice. Cleaning processes shall have no deleterious effect. Corrosive cleaning materials and fluxes shall be removed completely before parts are assembled. (See 4.16).

3.11 Finish.- The van facility shall be finished in accordance with MIL-F-14072 and the drawings. (See 4.4).

3.12 Marking.-

3.12.1 General.- Marking shall conform to MIL-M-13231 and to the drawings. (See 4.4 and 4.16).

3.12.2 Nameplate.- Each van facility shall be provided with an identification nameplate in accordance with the drawings. This nameplate shall include the proper assigned nomenclature (see 6.5). Each such nameplate identifying a van facility shall bear a sequential serial number, starting with number 1.

3.12.3 Aircraft loading data plates.- Aircraft loading data plates for the van assemblage AN/MSC-25 and the van facility V-189()/MCS-25 shall be fabricated and installed on the van facility. The data to be imprinted on these plates, including the center-of-gravity shall be determined by the contractor, using the preproduction sample and live or dummy loads. The van facility shall have the data plates of the van assemblage, the van facility and the existing data plate of the basic van fastened in a stack using the existing screws of the data plate of the basic van. The data plate of the van facility shall be outer-most.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

3.12.4 Interior and exterior marking.- All interior and exterior markings shall be as defined on the drawings.

3.13 Riveting.- Riveted joints shall be tight, the joined parts shall be undamaged, and the rivet heads shall be properly seated and tight against their bearing surfaces. (See 4.16).

3.14 Seal,water.- All exterior rivets, screws, through-bolts, and fasteners shall be dipped in sealer prior to installation. The sealer shall be a one-part sealant, Silicone Construction Sealant SE-1204, as made by General Electric Corp., or equal. (See 4.11 and 4.12).

3.15 Securing of parts.- Brackets, lugs, flanges, inserts, bolts, and other mounting arrangements shall retain components of the van facility securely so that loosening, wear of mounting arrangements, or permanent separation of parts or components will not occur when the van facility is subjected to the specified transportability tests. (See 4.9,4.10, and 4.16).

3.15.1 Screws, threaded devices, and related parts.- Screws, threaded devices and related parts shall be as defined by the drawings. (See 4.6 and 4.16).

3.16 Soldering.-

3.16.1 Solder and flux.- Solder and flux shall be as defined on the drawings. (See 4.6).

3.16.2 Acid or acid salts.- No acid or acid salts shall be used in preparation for or during soldering; however, exception is permitted for preliminary tinning of electrical connections and for tinning of electrical connections and for tinning or soldering of mechanical joints not used to complete electrical circuits, but in no case shall acid or acid salts be used where they can come in contact with insulation material. Where acid or acid salts are used, as permitted above, they shall be completely neutralized and removed immediately after use.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:16Z
Check the source to verify that this is the currentversion before use.

3.16.3 Process.- There shall be no sharp points or rough surfaces resulting from insufficient heating. The solder shall feather out to a thin edge, indicating proper flowing and wetting actions, and shall not be crystallized, over-heated, or under heated. The minimum necessary amount of flux and solder shall be used for electrical connections. Any means employed to remove an unavoidable excess of flux shall not incur the risk of loose particles of flux, brush bristles, or other foreign material remaining in the equipment; flux being spread over a larger area; or damage to the equipment. Insulation material that has been subjected to heating during the soldering operation shall be undamaged and parts fastened thereto shall not have become loosened.

3.17 Tropicalization of material.- Canvas, webbing,wood,cork, etc. shall be cleaned in accordance with 3.10 and treated to be resistant to moisture and fungi as specified on the drawings and as follows:

3.17.1 Treating materials.- Treating materials containing mercury-bearing fungicide shall not be used. The contractor shall determine that the treating material is compatible with the material or surface to be treated. Selection of treating materials shall be such that any increase in flammability of treated material be held to the practical minimum.

3.17.2 Toxicity.- Treating materials shall cause no skin irritation or other injury to personnel handling the treated material during fabrication, transportation, operation, or maintenance of the equipment, or during use of the finished items when used for the purpose intended.

3.17.3 Flexibility.- Treatment shall not affect the flexibility of treated materials, to the extent that the equipment may fail to meet specified requirements when subjected to specified service conditions.

3.17.4 Statement of treatment.- The contractor shall submit for approval, to the contracting officer, a statement describing in detail the materials to be treated and the treating materials and processes that he proposes to use. (See 6.2d).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

3.18 Welding.- Welded joints shall be as defined by the drawings and shall be such that grinding of the finished weld will be unnecessary except where grinding is specified on the drawings. Welded joints not defined by the drawings shall conform to MIL-STD-22. Inert gas metal-arc (MIG) welding conforming to MIL-W-45205 Class B using helium and/or argon shall be used for arc welding of aluminum alloys and stainless steel. Spot, stitch, and seam welding shall conform to MIL-W-6858 Class B. Surfaces to be welded shall be cleaned in accordance with any good commercial practice which leaves the surfaces free of paint, scale, grease, and other foreign materials. Preheating or other suitable technique shall be employed where distortion would otherwise result from welding. Welds shall have thorough penetration, good fusion, and freedom from scabs, blisters, abnormal pock marks, cracks, voids, slag inclusions, and other harmful defects. Welded assemblies shall be cleaned to remove oxidation, scale, and excess flux. Any acid used in cleaning shall be completely neutralized and removed. (See 4.4, 4.6 and 4.16).

3.19 Wiring and cabling.- Wiring and cabling shall be in accordance with the drawings and shall be neat and sturdy (See 4.6).

3.19.1 Slack.- Wires and cables shall be as short as practical except that sufficient slack shall be provided:

a. To prevent undue stress on cable forms, wires, and connections.

b. To permit removal from rack of operational equipments having wiring or cables to connectors at back of equipment so that cable may be connected or disconnected.

c. To facilitate field repair of broken or cut wires.

d. To prevent chafing or breaking or wires due to repeated flexing of hinged parts.

3.19.2 Protection.- Wires and cables shall be so placed and protected as to avoid contact with rough or irregular surfaces or metal edges. Wires shall not be bent sharply where they enter insulation material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

3.19.3 Splicing.- Wires in a continuous run between two terminals shall not be spliced during the wiring operation unless so indicated by a drawing other than schematic diagrams.

3.19.4 Crimping of solderless terminal lugs.- Crimping of solderless terminal lugs shall be so accomplished that the connections will meet the resistance (voltage drop) and tensile strength requirements and tests of Specification MIL-T-7928. (See 4.14).

3.19.5 Identification of wiring.- Wiring shall be identified by color-coding and wire pair marking, as indicated on the drawings. (See 4.6).

3.20 Interchangeability.- Like units, assemblies, sub-assemblies, and replaceable parts shall be physically and functionally interchangeable without modification of such items or of the equipment. Individual items shall not be hand-picked for fit or performance. Reliance shall not be placed on any unspecified dimension, rating, characteristic, etc. (See 4.15).

3.21 Workmanship.- The equipment shall be manufactured and assembled in accordance with the applicable portions of the following paragraphs: (See 4.16)

3.2 Construction
3.3 Electrical installation
3.9 Mounting inserts
3.10 Cleaning
3.11 Finish
3.12 Marking
3.13 Riveting
3.14 Seal,water
3.15 Securing of parts
3.16 Soldering
3.17 Tropicalization
3.18 Welding
3.19 Wiring and cabling
3.20 Interchangeability

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified the contractor may utilize his own facilities, including test meters and instruments, or those of any commercial laboratory acceptable to the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection.- Inspection shall be classified as follows:

a. Preproduction inspection (does not include preparation for delivery). (See 4.3)

b. Inspection covered by subsidiary documents. (See 4.4)

c. Quality conformance inspection.

(1) Quality conformance inspection of equipment before preparation for delivery. (See 4.5)

(2) Quality conformance inspection of preparation for delivery. (See 4.17)

4.3 Preproduction inspection.- This inspection shall be performed by the contractor on the preproduction sample unless otherwise specified in the contract. (See 3.1) It shall consist of the inspection specified in the subsidiary documents covering the items listed in 4.4 and the inspection specified for Group A, Group B, and Group C (except EVR) (see Inspection Tables I,II,and III, respectively). Preproduction inspection shall be performed in the following order, unless otherwise specified:

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

a. Mounting inserts
b. Electrical installation (Pwr.,Distrib.,& Sig.)
c. System operation
d. Truck Transportability
e. Railroad transportability
f. Watertightness
g. Fording

The last tests performed shall be a repeat of the Electrical installation tests and System test. Remaining preproduction tests specified for Groups A,B and C inspections but not included in the above list shall be performed in any order satisfactory to the contracting officer.

4.4 Inspection covered by subsidiary documents.- The following shall be inspected under the applicable subsidiary documents as part of preproduction inspection and inspection of equipment before preparation for delivery:

Item	Where required
Cable assemblies	3.3.4
Suppression,EMI	3.3.5
Finish	3.11
Marking	3.12
Welding	3.18

4.5 Quality conformance inspection of equipment before preparation for delivery.- The contractor shall perform the inspection specified in 4.4 and 4.5.1 through 4.5.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition, the government - at its discretion- may perform all or any part of the specified inspection to verify the contractor's compliance with specified requirements (See 6.6) Test equipment for government verification inspection shall be made available by the contractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

4.5.1 Group A inspection.- Each unit of equipment shall be inspected for conformance to all the inspection and test requirements of Table I of this specification. Equipment conforming to the above requirements shall be verified by the contractor, utilizing the procedures for the multilevel continuous sampling plan (CSP-M) of MIL-STD-1235, unless otherwise specified.

Table I - Group A Inspection

Inspection	Rqr Para	Insp Para	AOQL % Def Major	AOQL % Def Minor
Visual and Mechanical	3.21	4.16	1.5 (AQL 1.0%)	5.0 (AQL 4.0%)
Electrical				
Power wiring				
Continuity	3.3.1.1	4.7.1.1		
Dielectric strength	3.3.1.2	4.7.1.2		
Insulation resistance	3.3.1.3	4.7.1.3		
Power distribution	3.3.2	4.7.2	1.5 (AQL 1.0%)** for the entire group of power and signal wiring	
Signal wiring				
Continuity & circuit resistance	3.3.3.1	4.7.3.1		
Dielectric strength	3.3.3.2	4.7.3.2		
Insulation resistance	3.3.3.3	4.7.3.3		

** All defects are major

NOTE: The order of inspection of Group A with respect to Groups B and C shall conform to the order specified in 4.3.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

4.5.1.1 Group A verification sampling plan.- The Group A Verification Sampling plans for the AOQL's listed in Table I of this specification shall be selected from Tables VIII, IX and X of MIL-STD-1235 which are for f=½. The number of units in the Production Interval shall be the entire production quantity unless otherwise specified in the contract.

4.5.2 Group B inspection.- This inspection, including sampling, shall conform to Table II and to the procedures for multi-level continuous sampling plan (CSP-M) of Standard MIL-STD-1235, unless otherwise specified. Group B inspection shall be performed on units of production that have passed Group A inspection, except for Mounting Insert and Interchangeability Inspections which are performed prior. The government reserves the right to require complete retest of any sample which is reworked after failing Group B inspection.

Table II - Group B Inspection

Inspection	Rqr Para	Insp Para	AOQL % Def (see 4.5.2.1)
Mounting inserts	3.9	4.13.2	5.0(AQL 4.0%)
Interchangeability	3.20	4.15	5.0(AQL 4.0%)
Watertightness	3.7	4.11	3.0(AQL 2.5%)
Fording	3.8	4.12	3.0(AQL 2.5%)

Note: The order of inspection of Group B with respect to Groups A and C shall conform to the order specified in 4.3. The order of inspection within Group B shall be as in Table II.

4.5.2.1 Group B sampling plans.- The Group B sampling plans for the AOQL's listed in Table II of this specification shall be selected from Tables VIII,IX and X of MIL-STD-1235 which are for f=½. The number of units in the Production Interval shall be the entire production quantity unless otherwise specified in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

4.5.3 Group C inspection.- This inspection shall be as listed in Table III.

Table III - Group C Inspection

Inspection	Rqr Para	Insp Para
Solderless-terminal-lug connection	3.19.4	4.14
Construction verification	3.2	4.6
Mounting inserts	3.9	4.13.1
System operation	3.4	4.8
Truck Transportability	3.5	4.9
Railroad transportability	3.6	4.10

NOTE: The order of inspection of Group C with respect to Groups A and B shall conform to the order specified in 4.3. The order of inspection within Group C for all inspections listed shall be as listed in Table III.

4.5.3.1 Sampling for inspection of construction evaluation.- The Equipment Verification Review, in accordance with paragraph 4.6 shall be performed once on each part and assembly, randomly selected, and on their installation into one of first 10 van facilities produced. This inspection shall not be performed on the preproduction unit.

4.5.3.2 Sampling for inspection of solderless-terminal-lug connections.- Five specimens of each combination of wire and terminal produced each week shall be prepared for inspection. A specimen is a 1 foot length of wire on which a terminal lug has been applied, using the same tools and procedures used in crimping the terminal lugs in production.

4.5.3.3 Sampling for other inspections.- For inspection tests listed below, one unit shall be selected at random from the first 10 units or fraction thereof which have been produced, unless otherwise specified in the contract. Selection of the unit will be made by the government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

a. Mounting inserts

b. System operation

c. Truck Transportability

d. Railroad Transportability

4.5.3.4 Noncompliance.- The contractor shall immediately report in writing each Group C failure occurrence, including details of the failure and characteristics affected. The contractor shall immediately investigate the cause of failure and further report the results of investigation and details of the proposed corrective action on (i) the process and materials, as applicable, and, (ii) all units or product which were manufactured under the same conditions and which the government considers subject to the same failure. Reports shall be forwarded to the responsible technical activity designated in the contract through the Quality Assurance Representative. After corrective action has been taken, additional sample units shall be subjected to Group C inspection (all inspections, or the inspections which the sample failed; at the option of the government) and Groups A and B inspection may be reinstituted; final acceptance and shipment will be withheld until the Group C reinspection results have shown that the corrective action was effective.

4.5.4 Reinspection of conforming Group B and Group C sample units.- Unless otherwise specified, sample units which have been subjected to and pass Group B or Group C inspection, or both, may be accepted on contract, provided that they are resubjected to and pass Group A inspection after repair of all visible damage (See 6.4).

4.6 Construction verification.- The contractor shall perform an Equipment Verification Review (EVR), consisting of a complete technical audit of the equipment on order against the drawings (see 3.2) cited in the Technical Data Package (as supplemented by all approved engineering changes). EVR shall consist of the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

a. An audit to establish that "as-built" van facilities, including individual parts, their use in subassemblies and assemblies (components), and their final installation into the basic van forming the van facility, are in accordance with the end product drawings.

b. An audit to establish that "as-built" van facilities, including parts, components and their installation, meet the acceptance requirements specified in the Technical Data Package for each van part, component, and van facility. The audit shall record all acceptance test methods used together with resulting verification test data.

c. Preparation of EVR report(s) containing the following information:

(1) Identification of parts, components, van facilities and details proving compliance with a and b above.

(2) Discrepancies noted.

(3) Corrective action taken.

d. Two (2) copies of the EVR report shall be submitted no later than 15 days prior to the submission of the first production unit or lot to the government technical organization cited in the contract. The results of the EVR shall be subject to verification by authorized government personnel at the time the first unit or production lot is offered for acceptance. Government verification will be to the depth and extent necessary to demonstrate that the "as-built" hardware is in accordance with the cited drawings. Copies of the EVR reports shall be made available to government personnel during the verification. The contractor shall provide the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

(1) Segregation of parts, components of van facilities, to permit reviewing government personnel access for detailed inspection. The contractor shall also provide personnel to disassemble any parts of the van facility necessary to permit government review of the van facility, its components and their installation, and to reassemble parts after inspection.

(2) Have as required, responsible personnel from each functional department available for discussions in their respective areas.

(3) Adequate administrative support for the EVR.

4.7 Electrical installation tests.- The tests of 4.7.1 thru 4.7.3.3 shall be performed on each van facility. Before applying power to the van facility, an electrical ground at the power entrance box shall be made. Power to be supplied shall be 115 volts AC, 60 cycles, single phase.

4.7.1 Power system and components installation tests.- Prior to conducting power wiring and components tests of 4.7.1.1, 4.7.1.2, and 4.7.1.3, the following shall be accomplished. (Refer to Power Schematic Diagram Drawing SM-J-379080). NOTE: Tests of 4.7.1.1, 4.7.1.2, and 4.7.1.3, shall be performed prior to installation of relay K1.

a. Remove or disconnect the following electrical loads:

(1) All fluorescent, incandescent, and neon (power indicators, teletypes, and power distributions) lamps.

(2) All fluorescent lamp starters.

(3) Blower and Heaters

(4) Teletypes TT-76 and TT-4A,Telegraph Terminal TH-5, and Intercom

(5) 24 volt DC battery at forward compartment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

b. Disconnect both conductors from the voltmeter and frequency meter terminals. Position or isolate disconnected leads so as not to short to each other or to van facility ground.

4.7.1.1 Continuity of conductors.- Continuity resistance which meets the requirements of 3.3.1.1 shall be performed on each power circuit in accordance with the following paragraphs. A calibrated low resistance reading ohmmeter or equivalent shall be used in performing the test.

a. Place the following controls in the ON position.

(1) CURB ODD fluorescent light switch

(2) CURB EVEN fluorescent light switch

(3) ROAD ODD fluorescent light switch

(4) ROAD EVEN fluorescent light switch

(5) SPOTLIGHTS incandescent light switch

(6) NIGHT LIGHT fluorescent light switch

(7) Forward compartment fluorescent light switch

(8) VESTIBULE fluorescent light switch

(9) Blower switch

(10) TT-76 TH-5 switch

(11) TT-4A TH-5 switch

(12) Main circuit breaker

(13) All branch circuit breakers

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

b. Place BLACKOUT/BYPASS switch to the BYPASS position; and DOME TRACTOR BAT/DOME INT BAT switch to the DOME INT BAT position.

c. Connect jumper cables between the wires that would normally connect to contacts A and 1 of relay K1; and contacts B and 1 of the same relay.

d. Measure continuity resistance from pin 1 of power connector IN located at the power entrance box to the following: brass (hot) contacts of outside power receptacle J3, Heater-1 thru Heater -5 power receptacles J16 thru J20, Convenience power receptacles J9 thru J15 Blower power receptacle J8, Teletypes power receptacles J5 and J6, and Intercom power receptacle J7; black wire termination at each fluorescent lamp DS6 thru DS23 and DS34 thru DS37; black wire termination at each incandescent lamp DS24 thru DS33; and pin 1 of power OUT connector J2 at power entrance box.

e. Place all circuit controls listed under step a above in the OFF position, except main circuit breaker.

f. Repeat step d above substituting pin 2 for pin 1; silver (neutral) contacts for brass (hot) contacts; and white wire termination for black wire termination.

g. Place main circuit breaker in the OFF position.

h. Measure continuity resistance from pin 4 (ground) of power IN connector to the following: all ground terminals located at the power entrance box, power distribution box, and raceway; green (ground) contacts of outside power receptacle J3, Heater-1 thru Heater-5 power receptacles J16 thru J20, Convenience power receptacles J9 thru J15, Blower power receptacle J8, Teletypes power receptacles J5 and J6, and Intercom power receptacle J7; pin D of front and rear Tractor Connectors; and pin 4 of power OUT connector J2.

i. Measure continuity resistance from the conductor that normally connects to contact 2, side A of relay K1 to the black wire termination at the internal 24 volt battery location.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

j. Measure continuity resistance from the neutral bus bar to the white wire termination at the internal 24 volt battery location.

k. Measure continuity resistance from the conductor that normally connects to contact 2, side B of relay K1 to the black wire terminations of dome incandescent lamps DS1 thru DS3.

l. Place DOME TRACTOR BAT/DOME INT BAT switch to the DOME TRACTOR BAT position.

m. Measure continuity resistance from pin K of front TRACTOR CONNECTOR to pin K of rear TRACTOR CONNECTOR and to black wire terminations of dome incandescent lamps DS1 thru DS3.

n. Resistance measurements made in steps d,f,h,i,j,k, and m above shall meet the requirements of 3.3.1.1.

4.7.1.2 Dielectric breakdown voltage.- Dielectric strength tests which meets the requirements of 3.3.1.2 shall be performed on each power circuit in accordance with the following paragraphs. A non-destructive DC dielectric tester shall be used in performing the test.
NOTE: Take preventive measures that will preclude personnel from coming into contact with conductors under test during performance of ALL dielectric and insulation resistance tests. Discharge each conductor to ground following each test, to eliminate danger of shock.

a. Place all circuit controls listed under 4.7.1.1a in the ON position, except CONV EXT circuit breaker CB8 and AIR COND circuit breaker CB9.

b. Place BLACKOUT/BYPASS switch to the BYPASS position and lock vestibule, rear, and front door securely.

c. Test between pins 1 and 4 of power connector IN. Adjust tester for a value of not less than 500 volts DC output and maintain this potential for 30 seconds. The requirements of 3.3.1.2 shall be met.

d. Repeat step c above with tester connected first across pins 1 and 2, and then across pins 2 and 4.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:16Z
Check the source to verify that this is the current version before use.

4.7.1.3 Insulation resistance.- Insulation resistance which meets the requirements of 3.3.1.3 shall be made on each power circuit in accordance with the following paragraphs. A megohmmeter or equivalent shall be used in performing the test.

a. Repeat steps 4.7.1.2a and b above.

b. Test between pins 1 and 4 of power connector IN. The output test voltage shall not be less than 100 volts DC nor more than 500 volts DC. Maintain this potential until the indicating meter has ceased fluctuating and indicates a steady or increasing insulation resistance. (See Note under 4.7.1.2) The requirements of 3.3.1.3 shall be met.

c. Repeat step c above with tester connected first across pins 1 and 2, and then across pins 2 and 4.

4.7.2 Power distributional and operational function tests.- Power distributional and operational function tests which meets the requirements of 3.3.2 shall be performed on each power circuit in accordance with the following paragraphs: (Refer to Power Schematic Diagram Drawing SM-J-379080).

4.7.2.1 Test preparation.-

a. Replace or reconnect all electrical loads and line voltmeter and frequency meter removed or disconnected by 4.7.1a and b.

b. Connect relay K1 in accordance with Wiring Diagram and Power Wiring Diagram Drawings SM-C-378988 and SC-D-595542 respectively.

c. Place all circuit breakers and switches in the OFF position.

d. Place BLACKOUT/BYPASS switch to the BYPASS position; and DOME TRACTOR BAT/DOME INT BAT switch to the OFF position.

e. Place a 115 volt AC test lamp with grounding plug into all convenience, teletype, intercom, and heater receptacles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

f. Open outer exhaust port cover of blower.

g. Insert AC line plug of blower into designated receptacle.

4.7.2.2 Test of line voltmeter and indicator lamp.-

a. Apply 115 volts AC (nominal), 60 cycles, single phase power to van facility at power connector IN. Vestibule and forward compartment power indicator neon lamp shall light and van facility voltmeter at power distribution panel shall indicate power to the van facility.

b. Measure specific line voltage by connecting a calibrated AC voltmeter (0-150 volt scale) between pin 1 and pin 2 of power connector OUT.

c. Read voltage indicated on van facility voltmeter. The voltage read shall read within ±2% of the voltage measured by step b above.

d. Place main circuit breaker in the ON position.

4.7.2.3 Test of circuit breakers and switches.-

Circuits #1 and #2.- (LIGHTS INT and LIGHTS VEST circuit breakers CB1 and CB2)

a. Place LIGHTS INT circuit breaker CB1 in the ON position. Neon lamp above CB1 shall light.

b. Place CURB ODD switch in the ON position. Alternate curbside fluorescent lamps shall light.

c. Place CURB EVEN switch in the ON position. The remaining curbside fluorescent lamps shall light.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

d. Place ROAD ODD switch in the ON position. Alternate roadside fluorescent lamps shall light.

e. Place ROAD EVEN switch in the ON position. The remaining roadside fluorescent lamps shall light.

f. Place SPOTLIGHTS switch in the ON position. All incandescent spotlights shall light.

g. Place NIGHT LIGHT switch in the ON position. NIGHT LIGHT fluorescent lamp shall light.

h. Place circuit breaker CB1 in the OFF position. All lamps mentioned in steps a thru g above shall go out.

i. Replace circuit breaker CB1 in the ON position to restore lights.

j. Place LIGHTS VEST circuit breaker CB2 in the ON position. Neon lamp above CB2 shall light.

k. Place FORWARD COMP switch in the ON position. All fluorescent lamps in the forward compartment shall light.

l. Place VESTIBULE switch in the ON position. Vestibule fluorescent lamp shall light.

m. Place circuit breaker CB2 in the OFF position. All lamps mentioned in steps j thru l above shall go out.

n. Replace circuit breaker CB2 in the ON position to restore lights.

o. With all van facility doors open, place BLACKOUT/ BYPASS switch in the BLACKOUT position. All fluorescent and incandescent lamps mentioned above shall go out.

p. Close vestibule door. Fluorescent and incandescent lamps mentioned in steps b thru g above shall light.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

q. Open vestibule door. Fluorescent and incandescent lamps shall go out.

r. Close rear door. Fluorescent and incandescent lamps mentioned in steps b thru g and l shall light.

s. Open rear door. Fluorescent and incandescent lamps shall go out.

t. Close forward compartment door. Fluorescent lamps in the forward compartment shall light.

u. Close all van facility doors to restore lights.

v. Place CURB ODD switch in the OFF position. Alternate curbside fluorescent lamps shall go out.

w. Place CURB EVEN switch in the OFF position. The remaining curbside fluorescent lamps shall go out.

x. Place ROAD ODD switch in the OFF position. Alternate roadside fluorescent lamps shall go out.

y. Place ROAD EVEN switch in the OFF position. The remaining roadside fluorescent lamps shall go out.

z. Place SPOTLIGHTS switch in the OFF position. All incandescent spotlight shall go out.

aa. Place NIGHT LIGHT switch in the OFF position. NIGHT LIGHT fluorescent lamp shall go out.

ab. Place VESTIBULE switch in the OFF position. VESTIBULE fluorescent lamp shall go out.

ac. Place FORWARD COMP switch in the OFF position. Forward compartment fluorescent lamps shall go out.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

ad. Restore fluorescent lights by placing CURB ODD, CURB EVEN, ROAD ODD, ROAD EVEN, and VESTIBULE switches in the ON position, and the BLACKOUT/BYPASS switch in the BYPASS position.

Circuit #3.- (TTY Circuit Breaker CB3)

a. Place TTY circuit breaker CB3 in the ON position. Neon lamp above CB3 shall light. Frequency meter shall indicate approximately 60 hertz.

b. Place TT-76 TH-5 switch in the ON position. TT-76 TH-5 neon lamp and test lamp in receptacle J5 shall light.

c. Place TT-4A TH-5 switch in the ON position. TT-4A TH-5 neon lamp and test lamp in receptacle J6 shall light.

d. Place circuit breaker CB3 in the OFF position. All lamps mentioned in steps a thru c above shall go out. Frequency meter should not indicate frequency readings.

Circuit #4.- (Intercom LS-147 circuit breaker CB4)

a. Place LS-147 circuit breaker CB4 in the ON position. Neon lamp above CB4 and test lamp in Intercom receptacle J7 shall light.

b. Place circuit breaker CB4 in the OFF position. All lamps mentioned in step a above shall go out.

Circuit #5.- (Blower circuit breaker CB5)

a. Place BLOWER circuit breaker CB5 in the ON position. Neon lamp above CB5 shall light.

b. Place blower switch in the ON position. Blower shall operate and exhaust air from the van facility.

c. Place circuit breaker CB5 in the OFF position. Neon lamp above CB5 shall go out and blower shall cease to operate.

Circuit #6.- (CONV CURB circuit breaker CB6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

a. Place CONV CURB circuit breaker CB6 in the ON position. Neon lamp above CB6 and test lamp in each curbside receptacle J9 thru J11 shall light.

b. Place circuit breaker CB6 in the OFF position. All lamps mentioned in step a above shall go out.

Circuit #7.- (CONV ROAD circuit breaker CB7)

a. Place CONV ROAD circuit breaker CB7 in the ON position. Neon lamp above CB7 and test lamp in each roadside receptacle J12 thru J15 shall light.

b. Place circuit breaker CB7 in the OFF position. All lamps mentioned in step a above shall go out.

Circuit #8.- (CONV EXT circuit breaker CB8)

a. Place CONV EXT circuit breaker CB8 in the ON position. Neon lamp above CB8 and test lamp in external receptacle at power entrance box shall light.

b. Depress buzzer switch located at power entrance box. Buzzer shall operate.

c. Place circuit breaker CB8 in the OFF position. All lamps mentioned in step a above shall go out.

d. Depress buzzer switch. Buzzer shall not operate.

Circuit #9.- (Air cond circuit breaker CB9)

a. Open the air conditioner intake vent (front door) and outlet vent (exterior curbside) before operating air conditioner.

b. Place air conditioner circuit breaker CB9 in the ON position. Neon lamp above CB9 shall operate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

c. Place temperature control switch to a high cooling temperature.

d. Place air conditioner rotary switch to the VENTILATING position. Air conditioner fan shall operate.

e. Place air conditioner rotary switch to the COOLING position. Air conditioner fan and compressor shall operate. Cool air should be felt at the air conditioner distribution ducts.

f. Place circuit breaker CB9 in the OFF position. Neon lamp above CB9 shall go out and air conditioner shall cease to operate.

Circuit #10.- (HEATER 1 circuit breaker CB10)

a. Place Heater 1 circuit breaker CB10 in the ON position. Neon lamp above CB10 and test lamp in heater 1 receptacle J16 shall light.

b. Place circuit breaker CB10 in the OFF position. All lamps mentioned in step a above shall go out.

Circuit #11.- (HEATER 2 circuit breaker CB11)

a. Place HEATER 2 circuit breaker CB11 in the ON position. Neon lamp above CB11 and test lamp in heater 2 receptacle J17 shall light.

b. Place circuit breaker CB11 in the OFF position. All lamps mentioned in step a above shall go out.

Circuit #12.- (HEATER 3 circuit breaker CB12)

a. Place HEATER 3 circuit breaker CB12 in the ON position. Neon lamp above CB12 and test lamp in heater 3 receptacle J18 shall light.

b. Place circuit breaker CB12 in the OFF position. All lamps mentioned in step a above shall go out.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:16Z
Check the source to verify that this is the current version before use.

Circuit #13.- (HEATER 4 circuit breaker CB13)

a. Place HEATER 4 circuit breaker CB13 in the ON position. Neon lamp above CB13 and test lamp in heater 4 receptacle J19 shall light.

b. Place circuit breaker CB13 in the OFF position. All lamps mentioned in step a above shall go out.

Circuit #14.- (HEATER 5 circuit breaker CB14)

a. Place HEATER 5 circuit breaker CB14 in the ON position. Neon lamp above CB14 and test lamp in heater 5 receptacle J20 shall light.

b. Place circuit breaker CB14 in the OFF position. All lamps mentioned in step a above shall go out.

Circuit #15.- (MAIN circuit breaker)

a. Place all circuit breakers and switches in the ON position. All neon, fluorescent, incandescent (with exception of dome lights), and test lamps shall light. Air conditioner and blower shall operate.

b. Place main circuit breaker in the OFF position. All lamps mentioned in step a above shall go out. Air conditioner and blower shall cease to operate.

c. Restore lights by placing MAIN and LIGHTS INT circuit breakers in the ON position and all other circuit breakers in the OFF position.

Circuit #16.- (Test of relay K1 and dome lights)

a. Connect a 24 volt DC source to the black and white wire terminations at the battery location. Connect positive side of source to the black wire and negative side to the white wire.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

b. Place DOME TRACTOR BAT/DOME INT BAT switch to the DOME INT BAT position.

c. Place main circuit breaker in the OFF position. Relay K1 shall de-energize. All lamps previously on shall go out. Dome incandescent lamps DS1 thru DS3 shall light.

d. Place DOME TRACTOR BAT/DOME INT BAT switch to the OFF position. All dome lamps shall go out.

e. Restore dome lights by placing DOME TRACTOR BAT/DOME INT BAT switch to the DOME INT BAT position.

f. Place main circuit breaker in the ON position. Relay K1 shall energize. All dome lamps shall go out. Fluorescent and incandescent lamps shall light.

g. Connect a 24 volt DC source to pins K and D of the front TRACTOR CONNECTOR. Connect positive side of source to pin K and negative side to pin D.

h. Place DOME TRACTOR BAT/DOME INT BAT switch to the DOME TRACTOR BAT position. Dome lamps shall light.

4.7.3 Signal system wiring and components installation tests.- (Refer to signal schematic Diagram Drawing SM-D-378627).

4.7.3.1 Continuity of conductors.- Continuity resistance which meets the requirements of 3.3.3.1 shall be performed on each signal-line circuit in accordance with the following paragraphs. A low resistance continuity tester or equivalent shall be used. (An automatic tester may be used, subject to government approval).

a. Connect tester between between contact 1A of signal connector J4 and binding post 1A located at signal entrance box. Circuit continuity shall exist and meet the requirements of 3.3.3.1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the currentversion before use.

b. Repeat step a above for each remaining contact 1B thru 26B of signal connector J4 to each remaining binding posts (1B thru 26B) respectively.

c. Connect tester between binding post 1A and pin E of position 5 connector J32 located at the front curbside signal duct. Circuit continuity shall exist and meet the requirements of 3.3.3.1.

d. Insert opened plug into jack #1 of SWITCHBOARD SB-22 LINE OUT at patch panel.

e. Repeat tester connections of step c above. No continuity shall exist.

f. Remove opened plug from patch panel and insert into jack #1 of SWITCHBOARD SB-22 LINE IN.

g. Repeat connections of step c above. No continuity shall exist.

h. Repeat steps c thru g above for each remaining SB-22 LINE binding posts 1B thru 12B to the corresponding pin of position 5 connector J32 each time inserting opened plug into jack correlating with the circuit being test.

i. Connect tester between pin A of position 5 connector and pin A of position 4 connector located at the front roadside signal duct. Circuit continuity shall exist and meet the requirements of 3.3.3.1.

j. Repeat step i above for each remaining pin of position 5 connector to the corresponding pin of position 4 connector.

k. Connect tester between TT-76 binding post 13A and the corresponding red wire termination at TH-5/TG #1 location. Circuit continuity shall exist and meet the requirements of 3.3.3.1.

1. Repeat step K above for each remaining TT-76 and TT-4A binding posts 13B thru 17B to the corresponding wire termination at TH-5/TG #1 and #2 location.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

m. Insert an opened plug into MAP 1 jack located at curbside signal duct.

n. Connect tester between MAP 1 binding post 18A and tip of opened plug. Circuit continuity shall exist and meet the requirements of 3.3.3.1.

o. Repeat step n above for binding post 18 B and sleeve of opened plug.

p. Insert another opened plug into MAP 1 OUT jack at patch panel.

q. Repeat tester connection of step n above and then of step o above. No circuit continuity shall exist for either connections.

r. Remove opened plug from MAP 1 OUT jack and insert into MAP 1 IN jack. Repeat step q above.

s. Repeat steps m thru r above substituting MAP 2 for MAP 1, binding post 19A for binding post 18A, and binding post 19B for binding post 18B.

t. Connect tester between SPARE binding post 20A and the corresponding red wire termination at the curbside signal duct. Circuit continuity shall exist and meet the requirements of 3.3.3.1.

u. Insert an opened plug into SPARE OUT jack at patch panel.

v. Repeat tester connections of step t above. No circuit continuity shall exist.

w. Remove opened plug from patch panel and insert into SPARE IN jack.

x. Repeat tester connections of step t above. No circuit continuity shall exist.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

y. Repeat steps t thru x above substituting SPARE binding post 20B for SPARE binding post 20A and green wire termination for red wire termination.

z. Insert an opened plug into PHONE position 1 jack.

aa. Connect tester between PHONE 1 binding post 21A and tip of opened plug at PHONE position 1 jack. Circuit continuity shall exist and meet the requirements of 3.3.3.1.

ab. Repeat step aa above for PHONE 1 binding post 21B and sleeve of opened plug.

ac. Insert another opened phone plug into jack #21 of PHONE LINE OUT at patch panel.

ad. Repeat tester connection of step aa above and then of step ab above. No circuit continuity shall exist for either connection.

ae. Remove opened plug from PHONE LINE OUT jack and insert into jack #1 of PHONE POS IN at patch panel.

af. Repeat tester connection of step aa above and then of step ab above. No circuit continuity shall exist for either connection:

ag. Repeat steps z thru af above for each remaining PHONE binding post 22A thru 25B to the corresponding PHONE position jacks each time inserting opened plug into jack correlating with the circuit being tested.

ah. Insert five opened plugs into each INTERCOM position jacks 1-5.

ai. Connect tester between INTERCOM binding post 26A and tip of each opened plug of step ah above. Circuit continuity shall exist and meet the requirements of 3.3.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

aj. Repeat step ai above for INTERCOM binding post 26B and sleeve of each opened plug.

ak. Short across SPARE POS 1 binding posts A and B at signal entrance box.

al. Connect tester between the spare binding post located at roadside signal duct. Circuit continuity shall exist and meet the requirements of 3.3.3.1.

am. Remove short of step ak above.

an. Repeat tester connection of step al above. No circuit continuity shall exist.

ao. Connect tester between ANT TRANS binding post at signal entrance box and ANT TRANS binding post at roadside signal duct. Circuit continuity shall exist and meet the requirements of 3.3.3.1.

ap. Repeat step ao above for ANT REC binding post, FIL POWER BLACK TERMINAL, and FIL POWER RED TERMINAL at signal entrance box to ANT REC binding post, FIL POWER BLACK TERMINAL, and FIL POWER RED TERMINAL at roadside signal duct respectively.

aq. Insert three opened plugs into each parallel MULT jack at patch panel.

ar. Connect tester between the tips of each opened plug. Circuit continuity shall exist and meet the requirements of 3.3.3.1.

as. Repeat step ar above for the sleeves of each plug.

at. Connect tester between tip of each opened plug and all sleeves. No circuit continuity shall exist.

au. Insert three opened plugs into each SERIES MULT jack at patch panel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

av. Circuit continuity shall exist when the tester is connected across the following contacts of the opened plugs at the series MULT jacks. The requirements of 3.3.3.1 shall be met.

(1) Tip of plug #1 to sleeve of plug #3

(2) Sleeve of plug #1 to tip of plug #2

(3) Sleeve of plug #2 to tip of plug #3

No circuit continuity shall exist between the following contacts:

(1) Tip of plug #1 to tip of plug #2 and #3

(2) Sleeve of plug #1 to sleeve of plug #2 and #3

(3) Tip of plug #1 to sleeve of plug #2

(4) Sleeve of plug #1 to tip of plug #3

aw. Remove plug #3 of SERIES MULT jack. Circuit continuity shall exist when the tester is connected across the following contacts. The requirements of 3.3.3.1 shall be met.

(1) Tip of plug #1 to sleeve of plug #2

(2) Sleeve of plug #1 to tip of plug #2

Remove plug #2. Circuit continuity shall exist between tip and sleeve of plug #1.

4.7.3.2 Dielectric breakdown voltage.- Dielectric strength tests which meets the requirements of 3.3.3.2 shall be performed on each signal circuit in accordance with the following paragraphs. A non-destructive dielectric test instrument and suitable test jigs shall be used in performing the test. (An automatic tester may be used, subject to government approval).

a. Remove all opened plugs from the patch panel.

b. Using appropriate test jigs or test fixtures, connect all binding posts and FIL POWER contacts at the signal entrance box to van facility ground terminal.

c. Remove ground connection from binding post 1A. Connect tester between van facility ground terminal and binding post 1A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

d. Adjust tester to 500 volts DC output and maintain this potential for a continuous period of not less than 5 seconds. The requirements of 3.3.3.2 shall be met. Re-establish ground connection to the binding post or contact under test.

e. Repeat step c and d above for each of the remaining binding posts and contacts; each time ungrounding the binding post or contact under test and reconnecting to van facility ground following completion of test.

4.7.3.3 Insulation resistance.- Insulation resistance which meets the requirements of 3.3.3.3 shall be performed on each signal circuit in accordance with the following paragraphs. A megohmmeter tester or equivalent shall be used in performing the test. (An automatic tester may be used subject to government approval).

a. Repeat steps 4.7.3.2 a thru e, except 4.7.3.2d, which shall be replaced by step b below.

b. Adjust tester to a value of not less than 100 nor more than 500 volts DC output. Maintain this potential until the indicating meter has ceased fluctuating and indicates a steady or increasing insulation resistance. The requirements of 3.3.3.3 shall be met. Re-establish ground connection to the binding post or contact under test.

4.8 System test.- Install all operational equipments in their respective locations and connect power and signal cable assemblies to their designated positions. Refer to Signal Schematic Diagram, drawing SM-D-378627 for cable connections and operations of all equipments. (See 3.4).

a. At signal entrance box, make the following field wire connections: Binding Posts 1A to 13A, 1B to 13B, 2A to 14A, 2B to 14B, 3A to 15A, 3B to 15B, 4A to 16A, 4B to 16B, 5A to 17A, and 5B to 17B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

b. On the SB-22()/PT switchboard insert the plug of line pack #1 to jack of line pack #5; and plug of line pack #4 to jack of line pack #3.

c. Arrange teletypewriters TT-76()/GGC and TT-4()/TG to Half Duplex operation.

d. Turn on all operational equipments.

e. Using the keyboard of the TT-4()/TG transmit a message utilizing all letters. The message shall be repeated twice. A printed and perforated tape of the same messages shall be receive at the reperforator of the TT-76()/GGC.

f. Retransmit the printed and perforated tape at the transmitter-distributor of the TT-76()/GGC. The messages shall be received at the TT-4()/TG page copy.

g. On the SB-22()/PT remove the plug of the line pack #1 from jack of line pack #5. Insert plug of line pack #2 to jack of line pack #5.

h. Using the keyboard of the TT-76()/GGC transmit the message of step e above twice. The messages shall be received at the TT-4()/TG page copy.

i. Connect a Telephone Set TA-312()/PT to MAP 1 position.

j. At patch panel patch between in MAP 1 and SWITCHBOARD SB-22 LINE IN #6.

k. At the SB-22()/PT connect the operator's telephone set connector to the operator's telephone set receptacle on the operator's pack. Operate the visual and audible alarm switch to VIS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

l. Operate the hand ringing generator on the TA-312()/PT. The line signal on the line pack of the SB-22()/PT should operate to white and the light on the operator's pack should light.

m. Insert the plug of the operator's cord into the jack on the line pack. The line signal should operate to black and the light on the operator's pack should go out.

n. Operate the switch in the cord of the operator's telephone set to the first position and establish two-way communications between the telephone sets.

o. Repeat steps i through n above substituting MAP 1 position, in MAP 1, and SWITCHBOARD SB-22 LINE IN #6 respectively with the following:

(1) MAP 2 position, IN MAP 2, SWITCHBOARD SB-22 LINE IN #7.

(2) PHONE 1 position, PHONE POS IN 1, SWITCHBOARD SB-22 LINE IN #8.

(3) PHONE 2 position, PHONE POS IN 2, SWITCHBOARD SB-22 LINE IN #9.

(4) PHONE 3 position, PHONE POS in 3, SWITCHBOARD SB-22 LINE IN #10.

(5) PHONE 4 position, PHONE POS in 4, SWITCHBOARD SB-22 LINE IN #11.

(6) PHONE 5 position, PHONE POS in 5, SWITCHBOARD SB-22 LINE IN #12.

p. Connect a phone set to binding posts 26A and 26B at the signal entrance box.

q. Connect phone sets to each INTERCOM jacks.

r. Establish communications on all phones listed under steps p and q above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

4.9 Truck transportability test.- The van facility, loaded to simulate the van assemblage using live and dummy loads (See 6.1), shall be attached to a prime mover, military truck tractor, M52, M221, or M275, or equal and transported over a specially prepared course described in 4.9.1 for 20 laps at 5 miles per hour. A lap is defined as traversing the course in one direction. The van facility shall meet the requirements of 3.5 after completion of the test. Tires of the van facility and truck shall be inflated to the cross-country driving pressure, 60% to 70% of highway pressure marked on the basic van, for the basic van and on the dashboard data plate of the truck, respectively.

4.9.1 Truck transportability test course.- The course for the truck transportability test shall have twelve (12) 4-inch by 8-inch timbers placed on 25 feet centers on the 8-inch face with the 4-inch face fully above ground. The long top edges shall have 1 x 1-inch chamfers. The timbers shall be placed perpendicular to the direction of travel. The timbers shall be at least 16 feet long and the anchors shall be only near the ends of each timber. Each timber shall be anchored down securely by any adequate means. The ground on which the timbers are placed shall be hard and level.

4.10 Railroad transportability test.- This test shall be performed on a level stretch of track in the manner described in this paragraph. The test flatcar and the loading of the van facility (without the prime mover truck) on the flatcar shall be in accordance with 4.10.1a or b below and shall conform to Figures 67 or 202 of Section 6 of "Association of American Railroads Rules Governing the Loading of Department of Defense Materiel on Open Top Cars"; Figure 67 refers in part to Section 1 General Rules of the same manual. The test flatcar less the van facility shall weigh 45,000 to 55,000 pounds. The two empty flatcars shall each weigh 45,000 to 55,000 pounds. The gondola car including its load shall weigh 165,000 pounds and shall meet the provisions of the test as specified in 4.10.2. The loaded gondola car traveling at 9 miles per hour (or equivalent energy conditions acceptable to the government) shall be impacted against the stationary loaded testcar coupled to the two empty flatcars, all with brakes off. The lashing and blocking holding the van facility in place shall be tight at the start of each run. If the blocking is torn loose or the lashing is broken during the impact, the run shall be repeated. After each impact, the van facility shall meet the requirements of 3.6. With the van facility positioned longitudinally on the test flatcar, four impacts shall be performed, two toward each end of the van facility.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:16Z
Check the source to verify that this is the currentversion before use.

4.10.1 Test flatcar.-

a. A.A.R. Section 6 Figure 67.- If this figure, referred to in 4.10, is used for fastening of the van facility on the test flat car and the items "S" of the figure cannot be installed as specified by the figure, two ½ inch thick bent plates shall be substituted for the bars and installed on the kingpin of the basic van and van facility. Each plate shall have a keyhole shaped hole, one end being of a diameter to permit passage of the plate over the collar portion of the kingpin and the other end being of a diameter to fit the neck of the kingpin. Each plate shall have two 1½ inch diameter holes for two sets of eight strands of No.8 gage wire of item "S". The bend in each plate shall be such that the portion of the plate near the kingpin will be approximately horizontal and the other half of the plate will be directed approximately toward the side edge of the flatcar. The flatcar used shall have floor planking which is in good condition.

b. A.A.R. Section 6 Figure 202.- If this figure, referred to in 4.10, is used for fastening of the van facility on a car which includes a built-in stanchion ("piggy-back car") for attachment of the kingpin basic van and van facility and the car has no device for attachment of the rear axle of the van facility and basic van to the car, no blocking or tiedown shall be added for tiedown of the axle or wheels.


4.10.2 Loaded gondola car.- The load in the gondola car shall be one of the following:

a. A coarse size of either coal, crushed stone, gravel, crushed concrete, or metal scrap (other than sheet metal, metal shavings or other springy forms of metal).

b. Chunk, slab, block, or plate form of the preceding acceptable materials, constrained to prevent shifting during impact.

4.11 Watertightness test.- The exposed surfaces of the power and signal entrance boxes and adjacent area of the van facility rear wall shall be sprayed with water from 6 nozzles; model G29SQ (GG29SQ) as made by Spraying Systems Company, Bellwood, Illinois, or equal; arranged as in Figure 1. This region shall be sprayed for 20 minutes.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

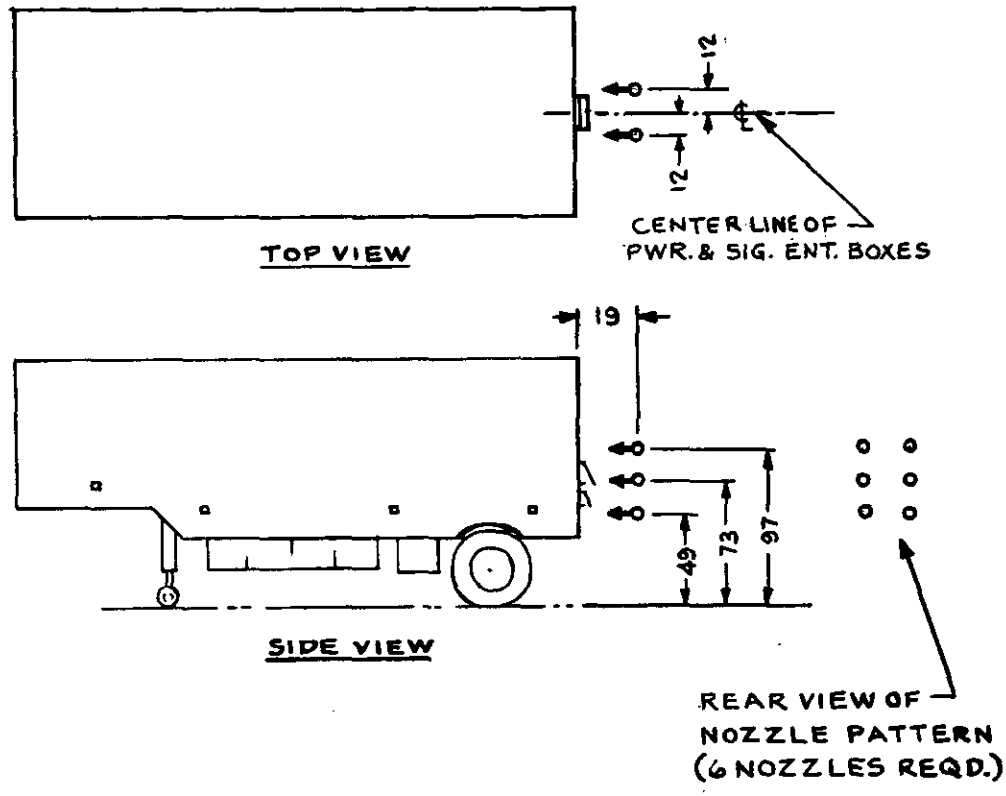

LEGEND

o Indicates tip of nozzle directed at van.

◄o Indicates direction of spray.

NOTES

1. Centerline of each nozzle shall be perpendicular to van rear wall.
2. Gages shall be permanently installed in piping as close as possible to nozzles.
3. Dimensions shown are in inches.

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:16Z
Check the source to verify that this is the current version before use.

Throughout this test, the water pressure in the pipes shall be 40 psig adjacent to each nozzle. (Note: The inside covers of the entrance boxes shall be removed prior to the test to permit observation of any leakage). After the spraying, holes shall be drilled at points to be specified by the government at the time of testing to determine if water has leaked into the wall panels; after this determination, the holes shall be sealed with rivets and sealer. Upon completion of this test, the van facility shall meet the requirements of 3.7.

4.12 Fording test.- The van facility shall be immersed in water to a depth of 60 inches (measured from the bottom of the tires). The van facility shall be restrained from floating by external tiedowns using the tiedown threaded holes in the sides of the basic van. After the fording, holes shall be drilled at points to be indicated by the government at the time of testing to determine if water has leaked into the wall panels. After this determination, the holes shall be sealed with rivets and sealer. Upon completion of this test, the van facility shall meet the requirements of 3.8.

4.13 Mounting insert tests.-

4.13.1 Preproduction and Group C insert test.- Four of each size insert shall be randomly selected for test. Each selected insert shall be tested with an axial load followed by a torque load in accordance with Table IV. After test, the requirements of 3.9 shall be met. Failure of any insert shall be cause for rejection of the sample van facility. This test shall be conducted prior to installation of brackets, racks, etc.

4.13.2 Production Group B insert test.- Five of each size insert (if the total quantity of any size is less than five, all of that size shall be tested) shall be randomly selected for test in each sample van facility. Each selected insert shall be tested in accordance with Table IV. After test, the requirements of 3.9 shall be met. Failure of any insert shall be cause for rejection of the sample van facility. This test shall be conducted prior to installation of brackets, racks, etc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

Table IV - Mounting Inserts Loads

Insert size	Group C and Preproduction Test Axial(lbs)	Torque(in-lbs)	Group B Production Test (Axial(lbs)	Torque(in-lbs)
3/8-16	2000	150	1000	150
5/16-18	2000	100	1000	100
1/4-20	1300	60	650	60
#10-32	600	23	300	23

4.14 Testing of solderless terminal-lug connections.- Connections made with solderless terminal-lugs shall be tested for conformance to 3.19.4.

4.15 Inspection for interchangeability.- The dimensions listed below shall be gaged or measured to determine compliance with the physical interchangeability requirements of 3.20. When a dimension is not within specified or design limits, it shall be considered a defect.

a. Size and mounting dimensions of brackets.

b. Size and mounting dimensions of racks and cabinets.

4.16 Visual and mechanical inspection.- The van facility shall be examined for the defects listed in Standard MIL-STD-252, the requirements of 3.21 and Table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

Table V - Classification of Visual and Mechanical Defects

Classification	Defects
Major	1. Mounting plates missing or mislocated. 2. Aircraft loading data plate, instructions or nameplates omitted, incomplete, incorrect or illegible. 3. Welds - cracked or porous. 4. Parts,brackets, equipment,bolts, or screws loose or missing. 5. Drawers,slides,doors,etc,inoperative. 6. Power receptacles,switches,jacks, wire ducts or other electrical components loose,improperly located or inoperative. 7. Locking or holding devices missing or inoperative. 8. Lock washer or lock nut missing. 9. Burrs and sharp edges in wire duct not removed. 10. Gaps between sections of wire duct exceed 1/16". 11. Sealer improperly applied (holes, separations or lack of adhesion).
Minor	1. Drawers,slides,door,not easily operable. 2. Fastening devices difficult to operate. 3. Finish - abrasions, scratches, or uncleanliness. 4. Screws,or rivets loose. 5. Burrs and sharp edges on brackets not removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

4.17 Quality conformance inspection of preparation for delivery.- Preparation for delivery shall be inspected in accordance with Specification MIL-P-116 to determine conformance to the requirements of section 5 below.

4.18 Rough handling test (preparation for delivery).- When rough handling test in accordance with Specification MIL-P-116 is required by the contract (see 6.2), the following functional tests shall be conducted to determine freedom from operational malfunction caused by the rough handling:

Paragraph 4.7	Power and Signal Wiring
Paragraph 4.16	Visual and Mechanical

5. PREPARATION FOR DELIVERY

5.1 Preservation and Packaging.- Preservation and packaging shall be level A or C as specified (See 6.2)

5.1.1 Level A.

5.1.1.1 Cleaning.- Each Semi-Trailer, Van,Electronic Equipment V-189( )/MSC-25; shall be cleaned in accordance with cleaning process C-1 of MIL-P-116.

5.1.1.2 Drying.- Each van facility shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservation application.- The application of preservation compounds shall be in accordance with the criteria and guide lines of MIL-P-116. Preservative shall not be applied to surfaces exempted in the criteria from the need for preservative.

5.1.1.4 Unit packaging.- Unit packaging shall be in accordance with the methods prescribed in MIL-P-116 as specified herein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the currentversion before use.

5.1.1.4.1 Technical literature.- Each technical literature shall be individually packaged in accordance with Method 1C-1 of MIL-P-116.

5.1.1.4.2 Running spares and accessories.- Running spares and accessories shall be individually packaged in accordance with MIL-E-17555.

5.1.1.4.2.1 Hand tools.- Hand tools shall be packaged in accordance with the applicable requirements of MIL-H-15424.

5.1.1.4.2.2 Wire and cable not assigned on reels.- Wind each wire, cord and cable into a coil of the smallest proportionate dimensions and tie in three places with cotton twine conforming to T-T-871.

5.1.1.4.2.3 Cabinet and drawer stowage.- Within the van facility, stow the specified items within the designated compartments of the cabinets or drawers to the maximum capacity. Secure the drawers and cabinets by fasteners or locks provided.

5.1.1.4.2.4 Wire and cables on assigned reels.- Wind and secure wire and cables on assigned reels.

5.1.1.4.2.5 Overflow items.- After cabinets and drawers have been filled, the remaining items shall be stowed in boxes as follows: Group like items together and place within a fiberboard box conforming to PPP-B-636 domestic class. Box closure shall be in accordance with the appendix of the box specification.

5.1.1.4.2.6 Major components mounted.- Within the van facility components assigned a permanent position shall be carefully mounted in place. Secure all fastenings, shockmounts, bolts, nuts, screws, and straps of all major components and accessories mounted on the walls, benches, shelves, and floor. Secure all covers.

5.1.1.4.2.7 Floor stowage.- All equipment and accessories not specifically assigned a location in the van shall be stowed and secured on the floor of the van facility.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

5.1.2 Level C.- Each van facility shall be preserved and packaged in a manner that will afford adequate protection against physical and environmental damage during shipment, handling, and limited in-transit storage.

5.2 Packing.- Packing shall be level A,B, or C as specified. (See 6.2).

5.2.1 Level A.- Each van facility; preserved and packaged as specified in 5.1 thru 5.1.1.4.2.7 shall be packed in accordance with MIL-STD-281.

5.2.2 Level B.- Each van facility shall be packed in accordance with 5.2.1.

5.2.3 Level C.- Each van facility, packaged as specified in 5.1 shall be packed in accordance with MIL-STD-281.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.-The Semi-Trailer,Van,Electronic Equipment V-189()/MSC-25 is the van facility portion of the van assemblage, Operations Center,Communications AN/MSC-25(). The van facility is used to house the operational equipments including:

a. 1 ea Intercom LS-147()/FI

b. 1 ea Switchboard,Telephone SB-22()/PT

c. 2 ea Terminal,Telegraph TH-5/TG

d. 7 ea Telephone Set TA-312/PT

e. 1 ea Teletypewriter TT-4()/TG

f. 1 ea Reperforator-Transmitter,Teletypewriter TT-76()/GGC

g. 2 ea Security Equipment KW-7/TSEC (Optional)

forming the Operations Center,Communications. (See 1.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number, and date of this specification and any amendment thereto.

b. Preproduction and Group C inspection of the van facility requires use of government furnished live loads (switchboard, teletypewriters, telephone sets, and telegraph terminal components) unless otherwise specified in the bid request and contract.

c. A list of government furnished equipments required as part of the V-189()/MSC-25 on order.

d. A list of equipments to be government loaned for testing purposes.

e. Levels of preservation, packaging and packing. (See Section 5).

f. When rough handling and functional test are required.

g. Submission of the statement of treatment referenced in 3.17.4, as soon as possible after award of contract. This statement should be submitted to the Contracting Officer.

6.3 Definitions.-

6.3.1 Inspection.- Inspection is the examination or testing, or both, of supplies to determine compliance with applicable requirements. Sampling is an element of inspection.

6.3.2 Examination.- Examination consists of simple, generally non-destructive determinations of compliance, without use of special testing equipment.

6.3.3 Testing.- Testing consists of determinations of compliance, using technical means.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:16Z
Check the source to verify that this is the current version before use.

6.4 Group C inspection.- Approval to ship may be withheld, at the discretion of the government, pending the decision from the Contracting Officer on the adequacy of corrective action (see 4.5.3.4).

6.5 Nomenclature.- The parenthesis in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: V-189X/MSC-25. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

6.6 Verification inspection.- Verification by the government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

Custodian:
Army - EL

Preparing Activity:
Army - EL

Project No. 5805-A173

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-S-55329(EL), SEMI-TRAILER, VAN, ELECTRONIC EQUIPMENT V-189( )/MSC-25

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:16Z
Check the source to verify that this is the current version before use.