MILITARY STANDARD


MIL-STD-1323-357
(NAVY)
29 NOVEMBER 1989


UNIT LOAD
FOR UNDERWAY REPLENISHMENT
COVER, PLENUM CELL,
MK 18 MOD 0

UNIT LOAD DATA

NUMBER OF CELLS PER UNIT LOAD.....12
GROSS WEIGHT OF ONE CELL.....288 LBS
WEIGHT OF WOOD DUNNAGE.....92 LBS
WEIGHT OF STEEL STRAPPING.....4 LBS
WEIGHT OF PALLET.....90 LBS
GROSS WEIGHT OF UNIT LOAD.....3,642 LBS Δ
CUBE.....35.9 CU FT
DO NOT STACK MORE THAN 5 UNIT LOADS HIGH

Δ DO NOT USE FOR SHIPPING WEIGHT

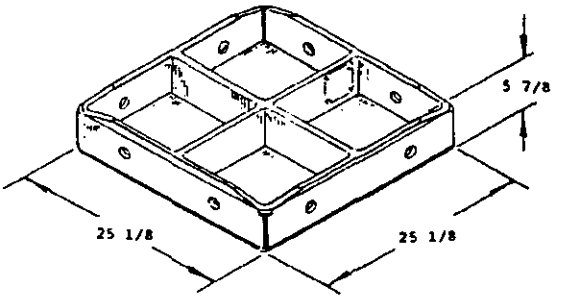

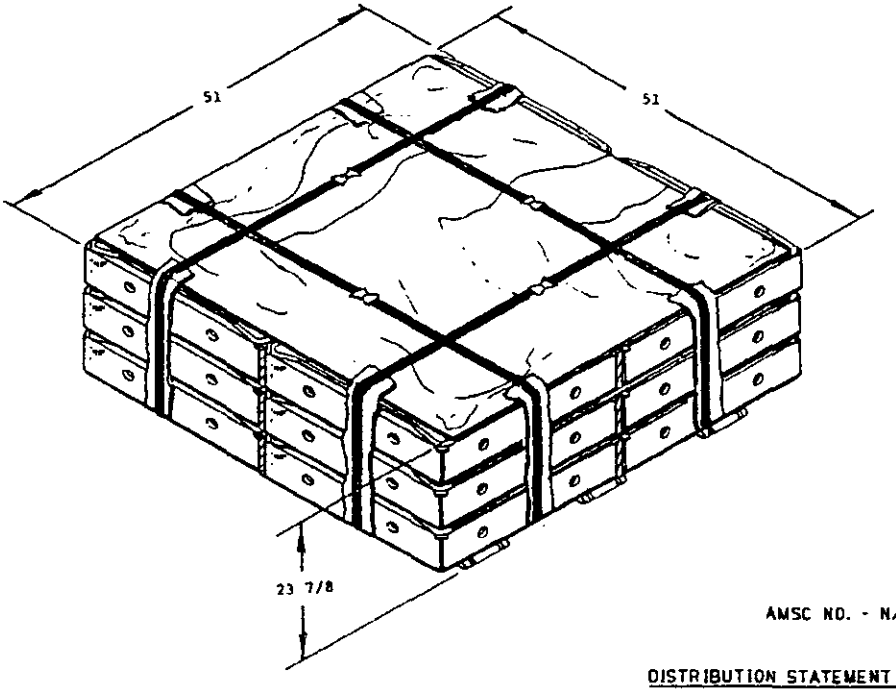

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

SIGNATURE TDA, WPNSTA EARLE 11-29-89 DATE

SIGNATURE NAVSEASYSCOM BY DIRECTION 11/29/89 DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR 11/29/89 DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

A. THREAD STRAPPING (ITEM 2) BETWEEN THE DECK WIRES OF PALLET (ITEM 1) AS SHOWN IN DETAIL A.

B. POSITION PLYWOOD (ITEM 4) ON CENTER OF PALLET.

C. PLACE TWO (2) SEPARATORS (ITEM 5) WITH NOTCHES FACING EACH OTHER IN A PLUS CONFIGURATION AT THE CENTER OF THE PLYWOOD. SEE DETAIL B.

D. PLACE FOUR (4) PLENUM CELL COVERS (OPEN END UP) ONE AT EACH CORNER OF THE PLYWOOD (ITEM 4).


E. PLACE PLYWOOD (ITEM 4) OVER CELLS AND SEPARATORS.

F. REPEAT STEPS C THRU E FOR SECOND AND THIRD LAYERS.

G. POSITION STRAPPING (ITEM 2) OVER THE UNIT LOAD. TENSION AND DOUBLE NOTCH SEAL USING (ITEM 6).

H. POSITION STRAPPING (ITEM 3) UNDER THE PALLET DECK AND OVER THE UNIT LOAD. TENSION AND DOUBLE NOTCH SEAL (ITEM 6).

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323.

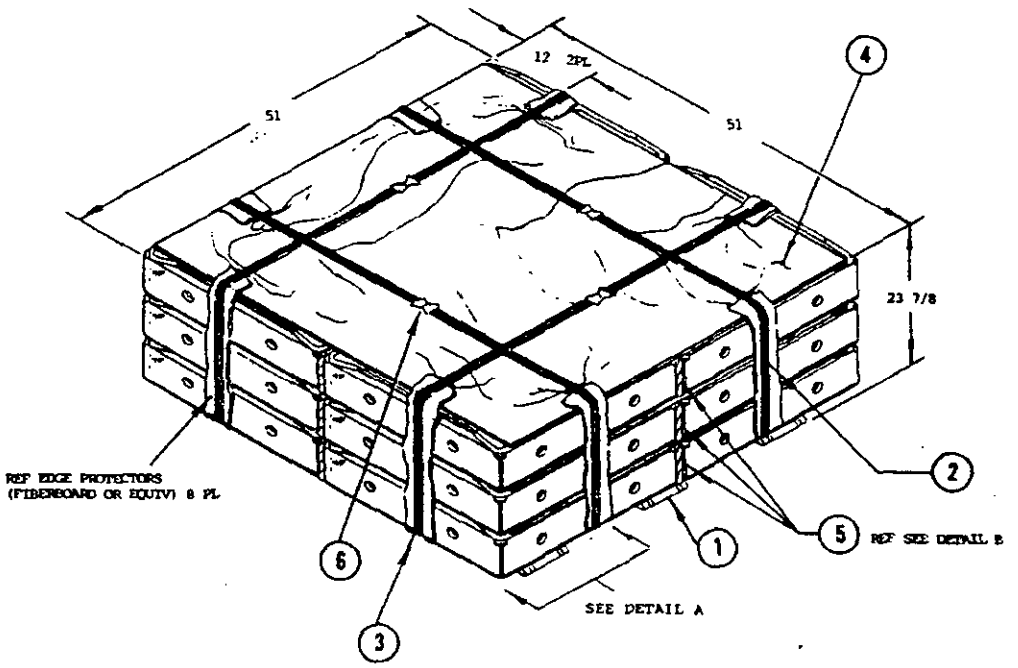

DEPALLETIZING PROCEDURE

A. CUT AND REMOVE STRAPPING.

B. REMOVE PLYWOOD AND SEPARATORS.


C. REMOVE PLENUM CELLS.

NOTE: UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1323 (NAVY).


REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	6	SEAL	STEEL	3/4 X .035
6	5	SEPARATOR, WOOD	SEE DETAIL B	1 X 6 X 51
4	4	PLYWOOD		3/8 X 48 X 51
2	3	STRAPPING, LATERAL	STEEL	3/4 X .035 X 13 FT
2	2	STRAPPING, LONGITUDINAL	STEEL	3/4 X .035 X 13 FT
1	1	PALLET MK 3 MOD 0	564200	40 X 48 X 4 3/4

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.

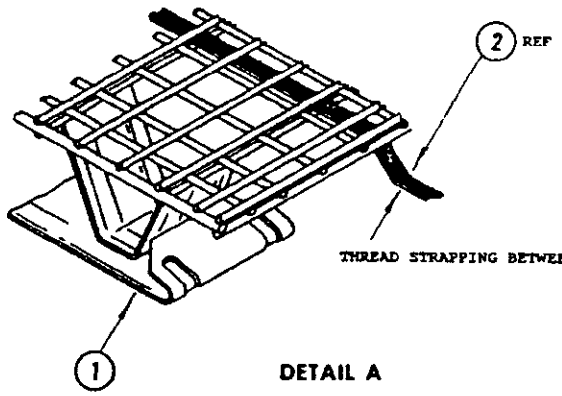

DETAIL A

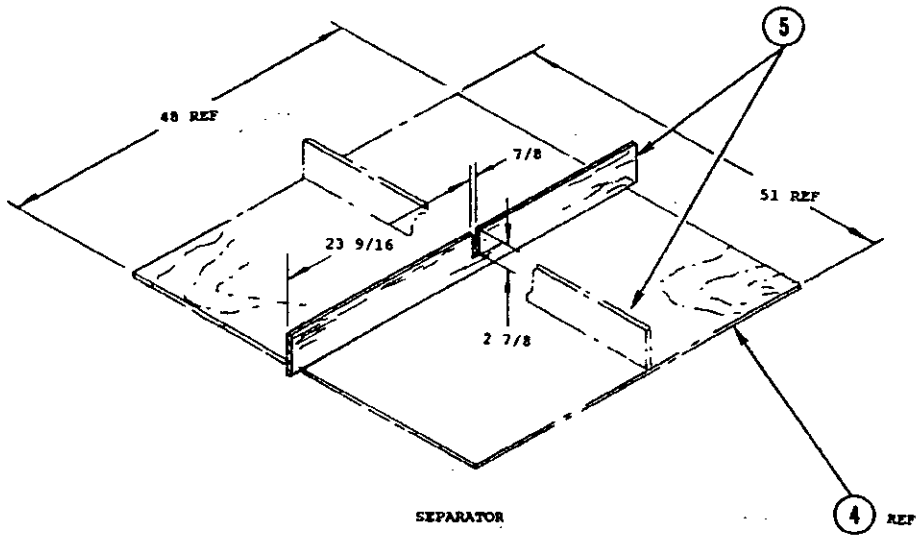

DETAIL B

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.