MILITARY STANDARD

MIL-STD-1323-127 A
(NAVY)
23 DECEMBER 1993

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
BOMB, GENERAL PURPOSE: 2000 LB MK 84 MODS 2, 4, AND 7
IN UNIT LOAD ADAPTER, MK 79 MOD 0
(DWG 2642646)

SUPERSEDING MIL-STD-1323-127 (NAVY)
8 JUNE 1989

UNIT LOAD DATA

NO. OF BOMBS/UNIT LOAD _____ 2

GROSS WEIGHT OF ONE BOMB _____ 1919 LBS.

WEIGHT OF ADAPTER _____ 248 LBS.

WEIGHT OF STEEL STRAPPING _____ 20 LBS.

GROSS WEIGHT OF UNIT LOAD _____ 4106 LBS. △

CUBE _____ 52.8 CU. FT.


△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN 6 UNIT LOADS HIGH IN STORAGE

FOR HAZARD CLASSIFICATION, SEE SW020-AC-SAF-010/020/030

CAUTION

DO NOT USE THIS UNIT LOAD FOR THERMALLY PROTECTED BOMBS. USE MIL-STD-1323-253.

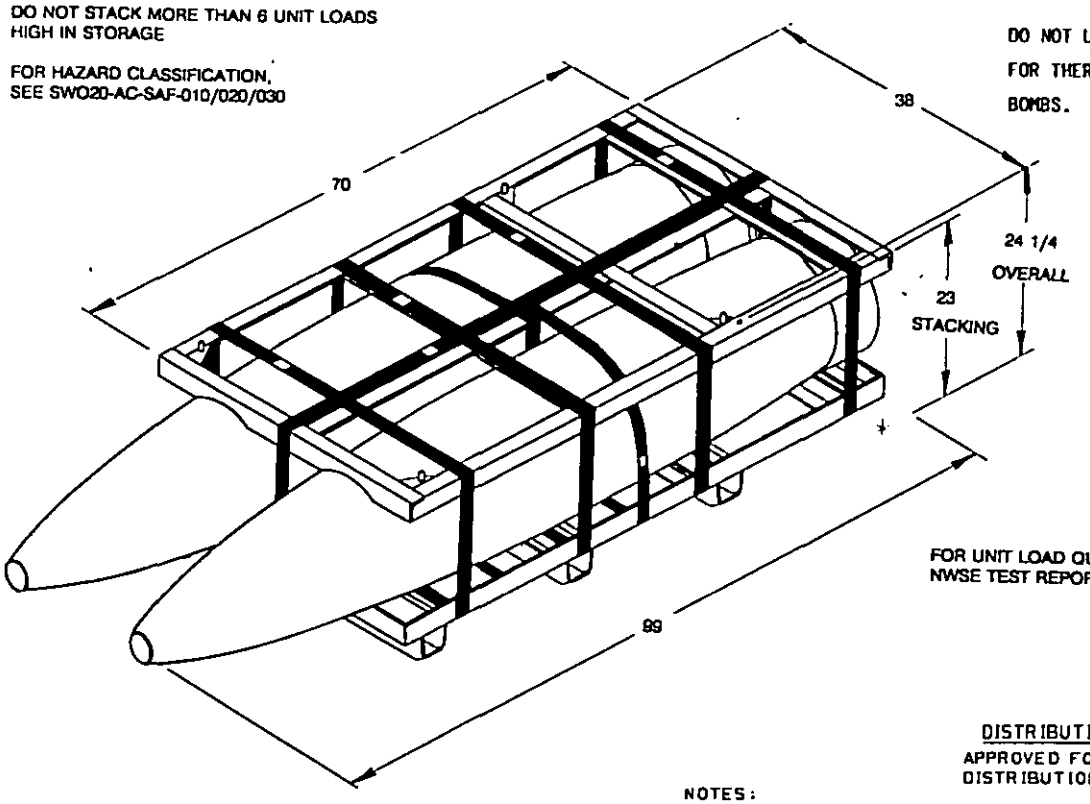

FOR UNIT LOAD QUALIFICATION SEE NWSE TEST REPORTS #93042 AND #93068.

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	
A	ELIMINATED BOMB STRAPPING AND ADDED PARTIAL UNIT LOAD	12/23/93	ER	

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

SIGNATURE TDA, WPNSTA EARLE DATE 6-5-89

SIGNATURE NAVAIRSYSCOM BY DIRECTION DATE 6/6/89

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR S.R. Ponn 6/5/89 DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.

PALLETIZING DETAILS


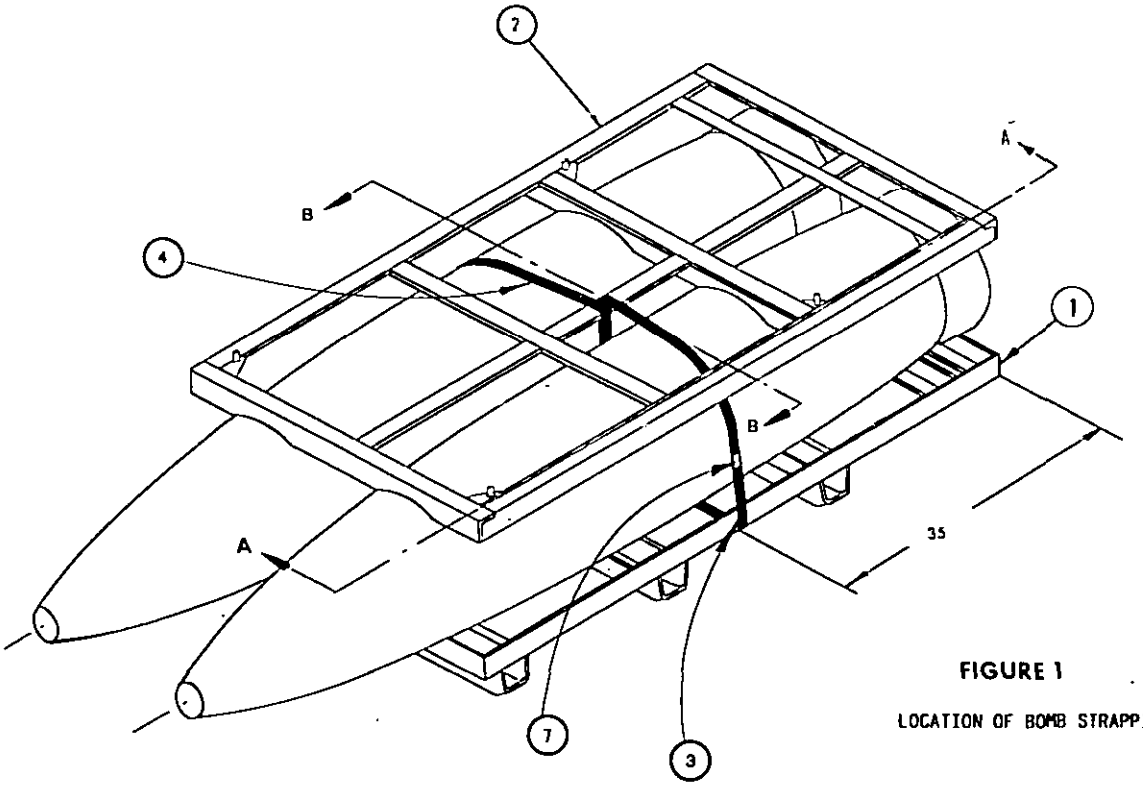



FIGURE 1

LOCATION OF BOMB STRAPPING.

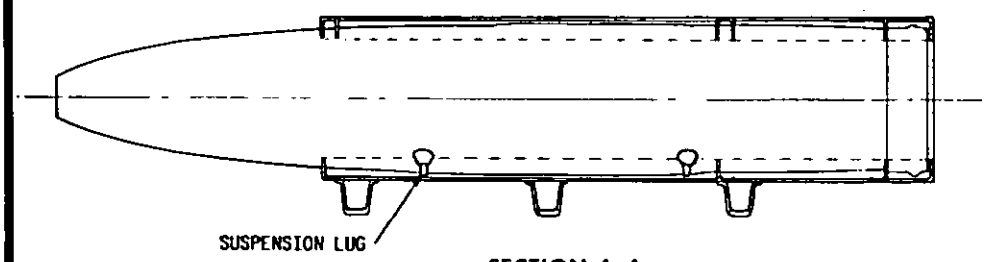


SECTION A-A

ITEMS 3 AND 4, BOMB STRAPPING.
OMITTED FOR CLARITY.

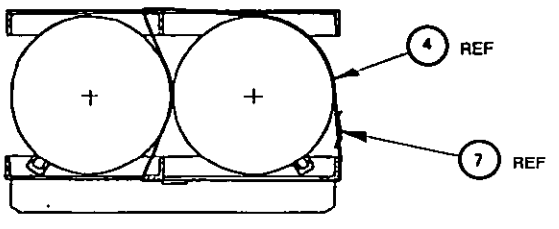

ITEM 3, LEFT BOMB STRAPPING,
OMITTED FOR CLARITY.

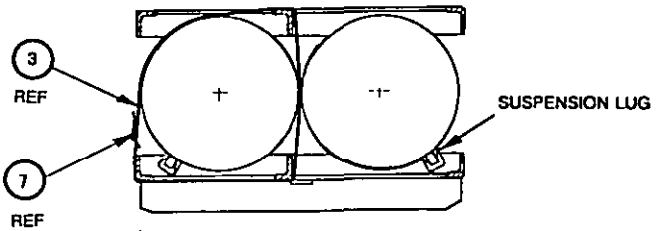

ITEM 4, RIGHT BOMB STRAPPING,
OMITTED FOR CLARITY.

SECTION B-B

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(A) THREAD LONGITUDINAL STRAPPING, ITEM 6, THROUGH SLOTS IN BOTTOM FRAME, ITEM 1.

(B) BE SURE THAT LONGITUDINAL AXES OF SUSPENSION LUGS ARE PERPENDICULAR TO LONGITUDINAL AXES OF BOMBS. POSITION TWO BOMBS IN BOTTOM FRAME WITH THEIR SUSPENSION LUGS OUTBOARD IN FIVE O'CLOCK AND SEVEN O'CLOCK POSITION AND THEIR AFT ENDS SNUG AGAINST AFT RIM OF FRAME, AS SHOWN IN SECTIONS A-A AND B-B. ALTERNATE REPALLETIZATION ONLY: LUGS MAY BE LOCATED AT ONE O'CLOCK TO TWO O'CLOCK OR TEN O'CLOCK TO ELEVEN O'CLOCK.

(C) POSITION THE TOP FRAME, ITEM 2, OVER THE BOMBS WITH THE AFT RIM OF THE FRAME SNUG AGAINST THE AFT END OF THE BOMBS.

(D) THREAD BOMB STRAPPING, ITEMS 3 AND 4, UNDER BOTTOM FRAME, ITEM 1, AROUND LONGITUDINAL STIFFENER OF BOTTOM AND TOP FRAMES, AS SHOWN IN FIGURE 1 AND SECTION B-B.

(E) POSITION LATERAL STRAPPING, ITEM 5, UNDER BOTTOM FRAME AND AROUND THE UNIT LOAD, WITHIN DIMENSION SHOWN IN FIGURE 2. TENSION AND DOUBLE NOTCH SEAL, ITEM 7.

(F) POSITION THE BOMB STRAPPING, ITEMS 3 AND 4 OVER THE BOMB WITHIN DIMENSION SHOWN IN FIGURE 1. TENSION AND DOUBLE NOTCH SEAL, ITEM 7.

(G) POSITION LONGITUDINAL STRAPPING, ITEM 6, OVER THE TOP FRAME WITHIN DIMENSION SHOWN IN FIGURE 2. TENSION AND DOUBLE NOTCH SEAL, ITEM 7.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

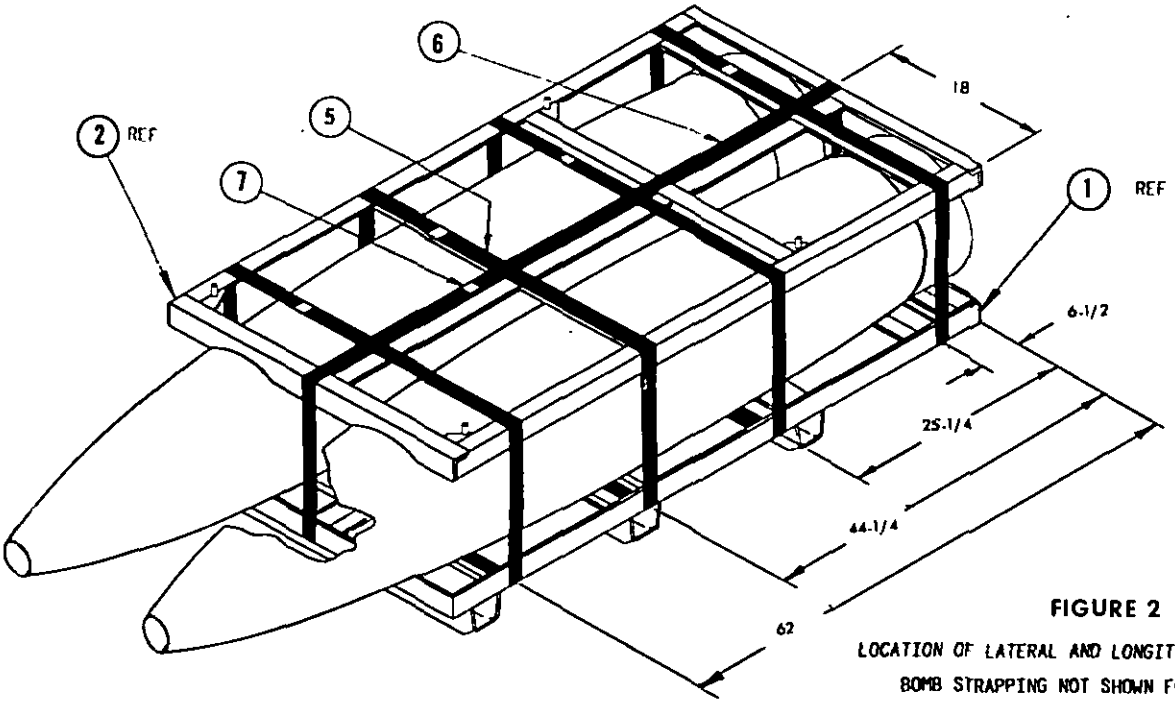


FIGURE 2

LOCATION OF LATERAL AND LONGITUDINAL STRAPPING. BOMB STRAPPING NOT SHOWN FOR CLARITY.

DEPALLETIZING PROCEDURES

(A) CUT AND REMOVE STRAPPING.

(B) REMOVE TOP FRAME.

(C) REMOVE BOMBS.

*UNLESS OTHERWISE SPECIFIED, MATERIAL SHALL BE IN ACCORDANCE WITH THE GENERAL DOCUMENT, MIL-STD-1323.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
7	7	SEAL	STEEL*	1-1/4
1	6	LONGITUDINAL STRAPPING	STEEL*	1-1/4 X .035 X 16 FT
4	5	LATERAL STRAPPING	STEEL*	1-1/4 X .035 X 10 FT 6
1	4	RIGHT BOMB STRAPPING	STEEL*	1-1/4 X .035 X 8 FT
1	3	LEFT BOMB STRAPPING	STEEL*	1-1/4 X .035 X 8 FT
1	2	TOP FRAME	10001-2642648	
1	1	BOTTOM FRAME	10001-2642647	

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.

PARTIAL UNIT LOAD (ONE BOMB ONLY)

PALLETIZING PROCEDURE

(A) FABRICATE TWO WOOD FRAME ASSEMBLIES AS SHOWN IN DETAIL C.

(B) THREAD LONGITUDINAL STRAPPING, ITEM 6, THROUGH SLOT ON BOTTOM FRAME, ITEM 1.

(C) POSITION BOMB ON RIGHT HAND SIDE ONLY OF BOTTOM FRAME (LOOKING AT THE FRAMES FROM THE REAR) WITH THE AFT END OF THE BOMB SNUG AGAINST THE AFT RIM OF THE FRAME AS SHOWN IN DETAIL D. SUSPENSION LUGS SHALL BE IN THE FIVE O'CLOCK POSITION AS SHOWN IN SECTION B-B ON PAGE 2.

(D) POSITION WOOD FRAME ASSEMBLIES ON BOTTOM FRAME IN THE POSITIONS SHOWN IN DETAIL D.

(E) POSITION RIGHT BOMB STRAPPING, ITEM 4, AROUND BOMB AND BOTTOM FRAME IN THE POSITION SHOWN IN DETAIL D. TENSION AND SECURE STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 7.

(F) POSITION TOP FRAME, ITEM 2, OVER BOMB AND WOOD FRAME ASSEMBLIES WITH THE AFT RIM OF THE FRAME SNUG AGAINST THE AFT END OF THE BOMB AND SITTING SNUGLY OVER THE WOOD FRAME ASSEMBLIES.

(G) POSITION ONLY TWO LATERAL STRAPS, ITEM 5, AROUND THE UNIT LOAD AT LOCATIONS AS SHOWN. TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 7.

(H) POSITION LONGITUDINAL STRAPPING, ITEM 6, OVER THE UNIT LOAD AS SHOWN. TENSION AND SECURE STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 7.

(J) POSITION SHORT LATERAL STRAPPING, ITEM 8, AROUND UNIT LOAD AT LOCATIONS SHOWN. TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 7.

(K) SECURE LATERAL STRAPPING, ITEM 5, TO WOOD FRAME ASSEMBLIES WITH TWO STAPLES, ITEM 9, PER STRAPPING AS SHOWN.

DEPALLETIZING PROCEDURE

(A) CUT AND REMOVE ALL STRAPPING.

(B) REMOVE TOP FRAME AND WOOD FRAME ASSEMBLIES.


(C) REMOVE BOMB.

WARNING


1. PARTIAL UNIT LOAD CAN ONLY UNDERGO TRANSFER-AT-SEA BY CONNECTED REPLENISHMENT (CONREP).
2. DO NOT STACK ON TOP OF PARTIAL UNIT LOAD.

APPROXIMATE GROSS WEIGHT OF
PARTIAL UNIT LOAD . . . . . 2,308 LBS △

△ DO NOT USE FOR SHIPPING WEIGHT.

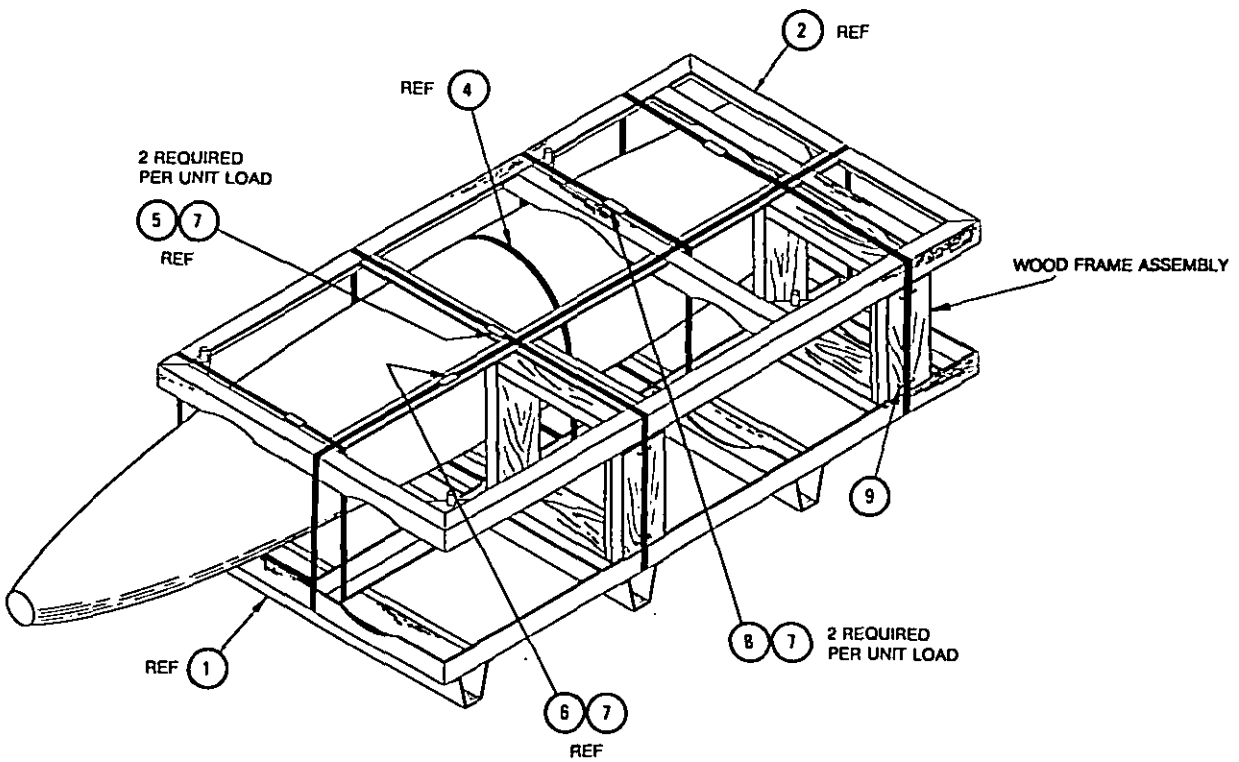


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.

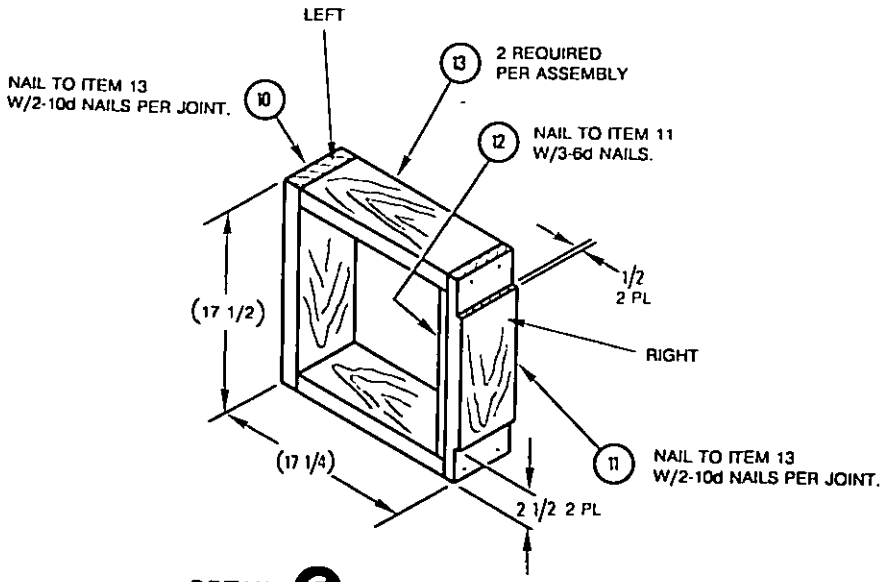

DETAIL C

WOOD FRAME ASSEMBLY
(2 REQUIRED)

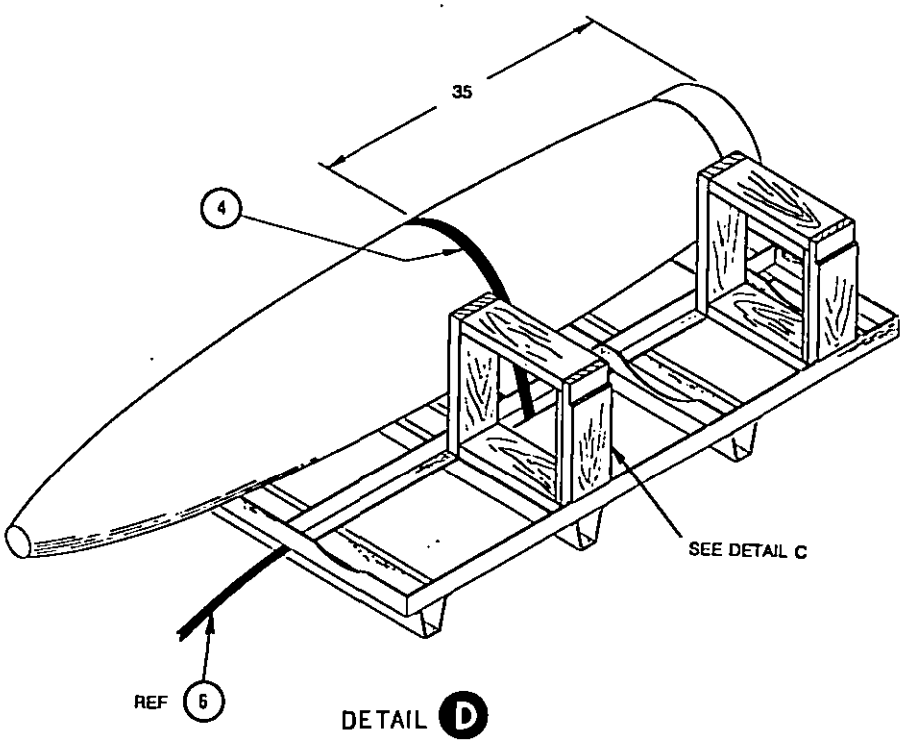

DETAIL D

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL MATERIAL USED TO CREATE UNIT LOAD SHALL BE IN ACCORDANCE WITH THE GENERAL DOCUMENT, MIL-STD-1323 (NAVY).

REQ	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	13	HORIZONTAL, DETAIL C	WOOD	2 X 6 X 14 3/4
2	12	VERTICAL, DETAIL C	WOOD	1 X 6 X 14 1/2
2	11	RIGHT VERTICAL, DETAIL C	WOOD	2 X 6 X 17 1/2
2	10	LEFT VERTICAL, DETAIL C	WOOD	2 X 6 X 17 1/2
4	9	STAPLES	STEEL	1 1/4" SIZE
2	8	LATERAL STRAPPING, SHORT	STEEL	1 1/4 X .035 X 8 FT

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:36Z
Check the source to verify that this is the current version before use.