MILITARY STANDARD

MIL-STD-1323-253A

(NAVY)

23 DECEMBER 1993

SUPERSEDING
MIL-STD-1323-253
2 JUNE 1989

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
BOMB, GENERAL PURPOSE: 2,000 LB MK 84 MODS 3,5, AND 6 (THERMALLY PROTECTED) IN UNIT LOAD ADAPTER, MK 79 MOD 0 WITH SADDLES (2642646)

UNIT LOAD DATA

NUMBER OF BOMBS PER UNIT LOAD 2

GROSS WEIGHT OF ONE BOMB . . . . . 1,920 LBS

WEIGHT OF ADAPTER WITH SADDLES . . . . . 259 LBS

WEIGHT OF STEEL STRAPPING (APPROX.) . . . . . 19 LBS

GROSS WEIGHT OF UNIT LOAD . . . . . 4,118 LBS ♦

CUBE . . . . . 53.6 CU FT

♦ DO NOT USE FOR SHIPPING WEIGHT


DO NOT STACK MORE THAN 6 UNIT LOADS HIGH IN STORAGE.

FOR HAZARD CLASSIFICATION SEE SW020-AC-SAF-010/020/030.

FOR UNIT LOAD QUALIFICATION SEE NWSE TEST REPORTS 93042 & 93068

WARNING

DO NOT USE THIS UNIT LOAD FOR BOMBS WHICH ARE NOT THERMALLY PROTECTED. USE MIL-STD-1323-127.

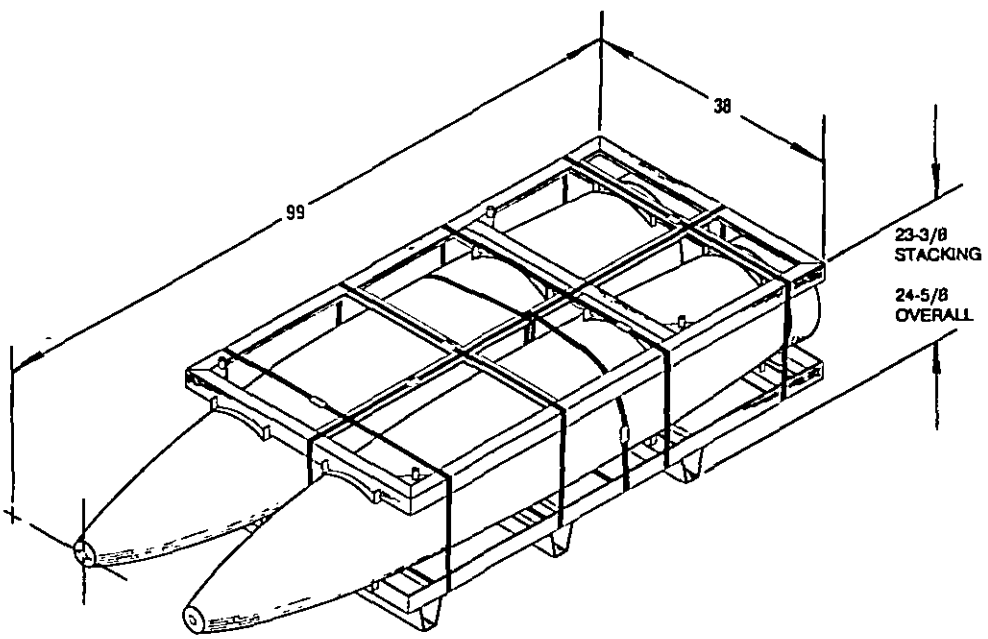

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

REV LTR	REVISION DESCRIPTION	DATE	APPROVAL TDA	APPROVAL SYSCOM
A	ELIMINATE BOMB STRAPPING AND INCLUDE PARTIAL UNIT LOAD.	12/23/93		

NOTES:
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

S/ERNIE RINALDI — 5-31-89
SIGNATURE — DATE
TDA, WPNSTA EARLE

S/L.R. CARINGI — 6-2-89
SIGNATURE — DATE
NAVAIRSYSCOM BY DIRECTION

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR — S/S.R. PETOIA — 5-31-89 DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57:7
Check the source to verify that this is the currentversion before use.

PALLETIZING PROCEDURE:

(A) THREAD LONGITUDINAL STRAPPING, ITEM 6, THROUGH SLOTS IN BOTTOM FRAME, ITEM 4, AS SHOWN IN DETAIL A.
(B) HAMMER FORWARD SADDLES, ITEM 1, IN PLACE AT THE FORWARD END OF THE BOTTOM FRAME, ITEM 4, AS SHOWN IN DETAIL A.
(C) HAMMER CENTER SADDLES, ITEM 2, IN PLACE AT THE CENTER OF THE BOTTOM FRAME, ITEM 4, AS SHOWN IN DETAIL A.
(D) HAMMER AFT SADDLES, ITEM 3, IN PLACE AT THE AFT END OF THE BOTTOM FRAME, ITEM 4, AS SHOWN IN DETAIL A.
(E) REPEAT STEPS (B), (C), AND (D) FOR TOP FRAME, ITEM 5.
(F) POSITION TWO BOMBS ON THE BOTTOM FRAME WITH THE AFT ENDS OF THE BOMBS SNUG AGAINST THE AFT RIM OF THE BOTTOM FRAME. THE SUSPENSION LUGS OF THE RIGHT HAND BOMB SHALL BE IN THE 5 O'CLOCK POSITION (LOOKING AT THE FRAME FROM THE REAR), AND THE SUSPENSION LUGS OF THE LEFT HAND BOMB SHALL BE IN THE 7 O'CLOCK POSITION AS SHOWN IN SECTIONS C-C AND D-D.
ALTERNATE: FOR REPALLETIZATION ONLY, LUGS MAY BE LOCATED AT 1 TO 2 O'CLOCK FOR THE RIGHT HAND BOMB AND 10 TO 11 O'CLOCK FOR THE LEFT HAND BOMB.
(G) POSITION TOP FRAME, ITEM 5, OVER BOMBS WITH THE AFT RIM OF THE FRAME SNUG AGAINST THE AFT ENDS OF THE BOMBS.
(H) POSITION LATERAL STRAPPING, ITEM 7, AROUND UNIT LOAD IN LOCATIONS SHOWN IN DETAIL E. TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 10.
(J) THREAD LEFT BOMB STRAPPING, ITEM 9, AROUND BOMB AND FRAMES IN LOCATION SHOWN IN DETAIL B AND SECTION D-D. TENSION AND SECURE STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 10.
(K) THREAD RIGHT BOMB STRAPPING, ITEM 8, AROUND BOMB AND FRAMES IN LOCATION SHOWN IN DETAIL B AND SECTION D-D. TENSION AND SECURE STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 10.
(L) POSITION LONGITUDINAL STRAPPING OVER UNIT LOAD AS SHOWN IN DETAIL E. TENSION AND SECURE STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 10.

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

DEPALLETIZING PROCEDURE:

1. CUT AND REMOVE ALL STRAPPING.
2. REMOVE TOP FRAME.
3. REMOVE BOMBS.

NOTES:


1. UNLESS OTHERWISE SPECIFIED, MATERIAL SHALL BE IN ACCORDANCE WITH THE GENERAL DOCUMENT, MIL-STD-1323 (NAVY).

REQ	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
7	10	STRAP SEAL	STEEL	1¼" SIZE
1	9	LEFT BOMB STRAPPING	STEEL	1¼ X .035 X 8 FT
1	8	RIGHT BOMB STRAPPING	STEEL	1¼ X .035 X 8 FT
4	7	LATERAL STRAPPING	STEEL	1¼ X .035 X 11 FT
1	6	LONGITUDINAL STRAPPING	STEEL	1¼ X .035 X 16 FT
1	5	TOP FRAME	10001-2642648	
1	4	BOTTOM FRAME	10001-2642647	
4	3	SADDLE, AFT	30003 805AS100-3	
4	2	SADDLE, CENTER	30003 805AS100-2	
4	1	SADDLE, FORWARD	30003 805AS100-1	


LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:57Z
Check the source to verify that this is the current version before use.

PALLETIZING DETAILS

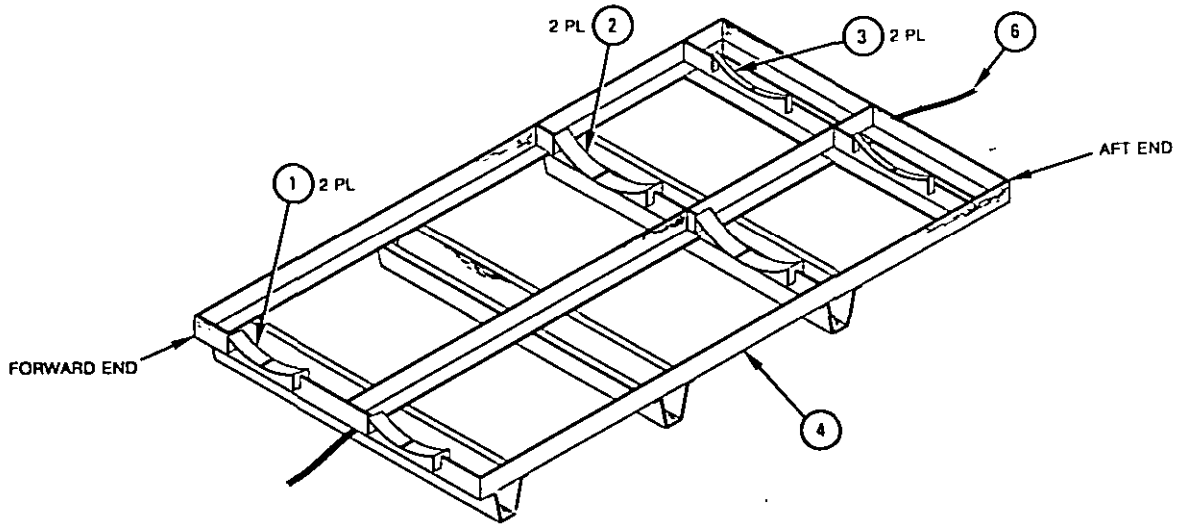

DETAIL A

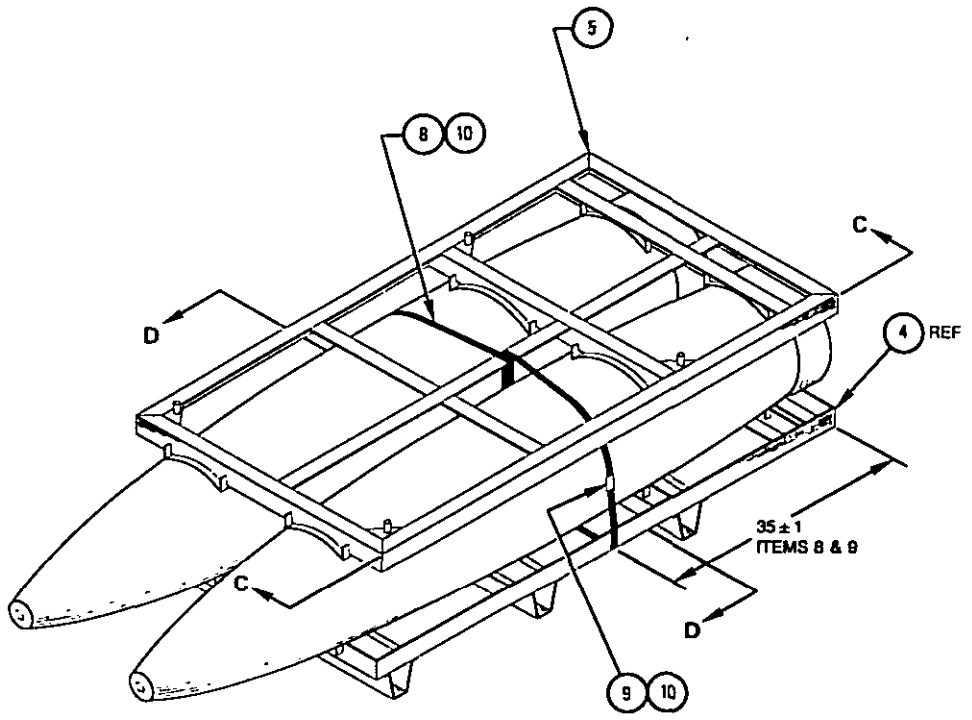


DETAIL B


LOCATION OF BOMB STRAPPING

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:57Z
Check the source to verify that this is the current version before use.

PALLETIZING DETAILS

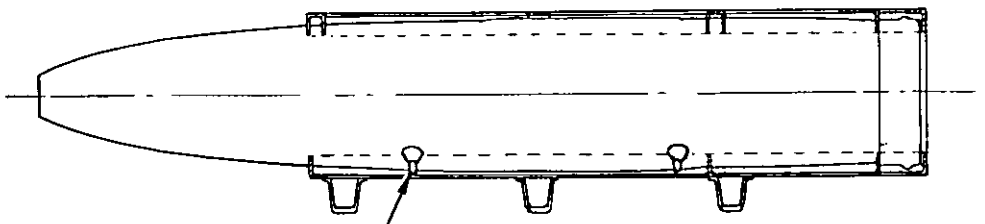


SECTION C-C
STRAPPING OMITTED FOR CLARITY

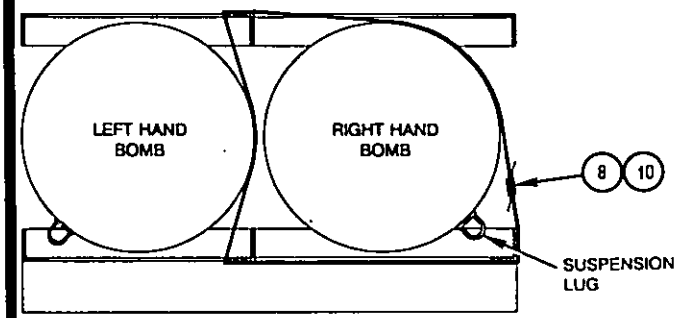


SECTION D-D
RIGHT BOMB STRAPPING

LEFT BOMB STRAPPING, ITEM 9, NOT SHOWN FOR CLARITY

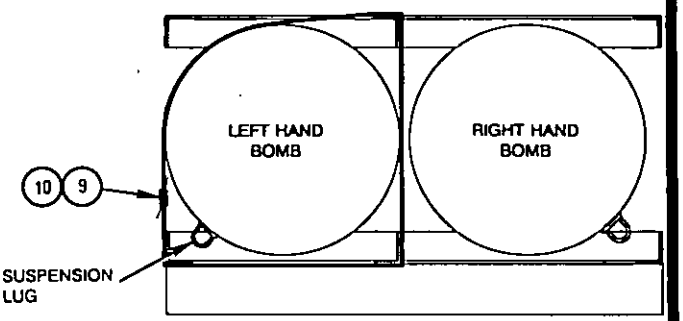

SECTION D-D
LEFT BOMB STRAPPING

RIGHT BOMB STRAPPING, ITEM 8, NOT SHOWN FOR CLARITY

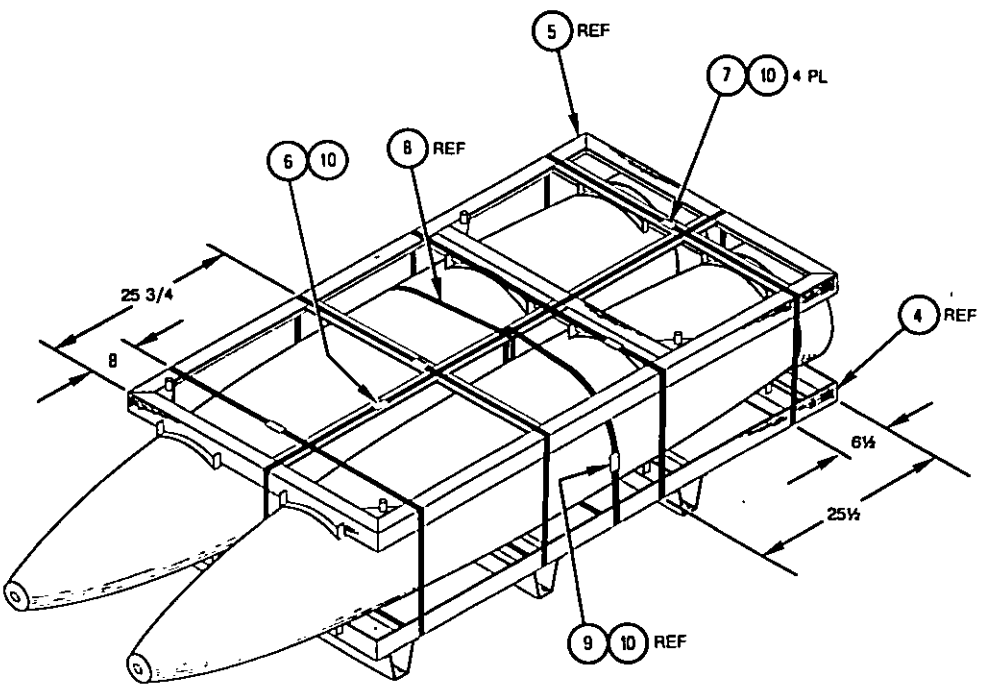

DETAIL E

LOCATION OF LATERAL AND LONGITUDINAL STRAPPING

Source: https://assist.dla.mil -- Downloaded: 2026-10-23 23:37Z
Check the source to verify that this is the current version before use.

PARTIAL UNIT LOAD
(ONE BOMB ONLY)

WARNING

1. PARTIAL UNIT LOADS CAN ONLY UNDERGO TRANSFER-AT-SEA BY CONNECTED REPLENISHMENT (CONREP).
2. DO NOT STACK ON TOP OF PARTIAL UNIT LOAD.

PALLETIZING PROCEDURE

(A) FABRICATE TWO WOOD FRAME ASSEMBLIES AS SHOWN IN DETAIL F.

(B) THREAD LONGITUDINAL STRAP, ITEM 6, THROUGH SLOT ON BOTTOM FRAME, ITEM 4, AS SHOWN IN DETAIL G.

(C) HAMMER SADDLES, ITEMS 1, 2, AND 3, INTO THEIR RESPECTIVE POSITIONS ON RIGHT HAND SIDE ONLY (LOOKING AT FRAMES FROM THE REAR) OF TOP AND BOTTOM FRAMES, ITEMS 4 AND 5. SEE DETAIL A ON PAGE 3.

(D) POSITION BOMB ONTO SADDLES WITH AFT END OF BOMB SNUG AGAINST AFT RIM OF THE FRAME AS SHOWN IN DETAIL G. SUSPENSION LUGS OF BOMB SHALL BE IN THE FIVE O'CLOCK POSITION AS SHOWN IN SECTION D-D ON PAGE 4.

(E) POSITION TWO WOOD FRAME ASSEMBLIES ON BOTTOM FRAME IN APPROXIMATE POSITIONS SHOWN IN DETAIL G.

(F) POSITION BOMB STRAP, ITEM 16, AROUND BOMB AND BOTTOM FRAME IN POSITION SHOWN IN DETAIL G. TENSION AND SECURE STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 10.

(G) POSITION TOP FRAME, ITEM 5, OVER BOMB AND WOOD FRAME ASSEMBLIES WITH ITS AFT RIM SNUG AGAINST THE AFT END OF THE BOMB. BE SURE THAT THE FRAME SITS SNUGLY OVER THE WOOD FRAME ASSEMBLIES.

(H) POSITION ENDS OF LONGITUDINAL STRAPPING, ITEM 6, OVER UNIT LOAD AS SHOWN. TENSION AND SECURE STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 10.

(J) POSITION TWO SHORT LATERAL STRAPS, ITEM 11, AROUND UNIT LOAD IN APPROXIMATE LOCATIONS SHOWN BELOW. TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 10.

(K) POSITION TWO LATERAL STRAPS, ITEM 7, AROUND UNIT LOAD IN APPROXIMATE LOCATIONS SHOWN BELOW. TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 10.


(L) SECURE LATERAL STRAPS, ITEM 7, TO WOOD FRAME ASSEMBLIES WITH TWO STAPLES, ITEM 12, PER STRAP AS SHOWN BELOW.

DE-PALLETIZING PROCEDURE

(A) CUT AND REMOVE ALL STRAPPING.

(B) REMOVE TOP FRAME AND WOOD FRAME ASSEMBLIES.

(C) REMOVE BOMB.

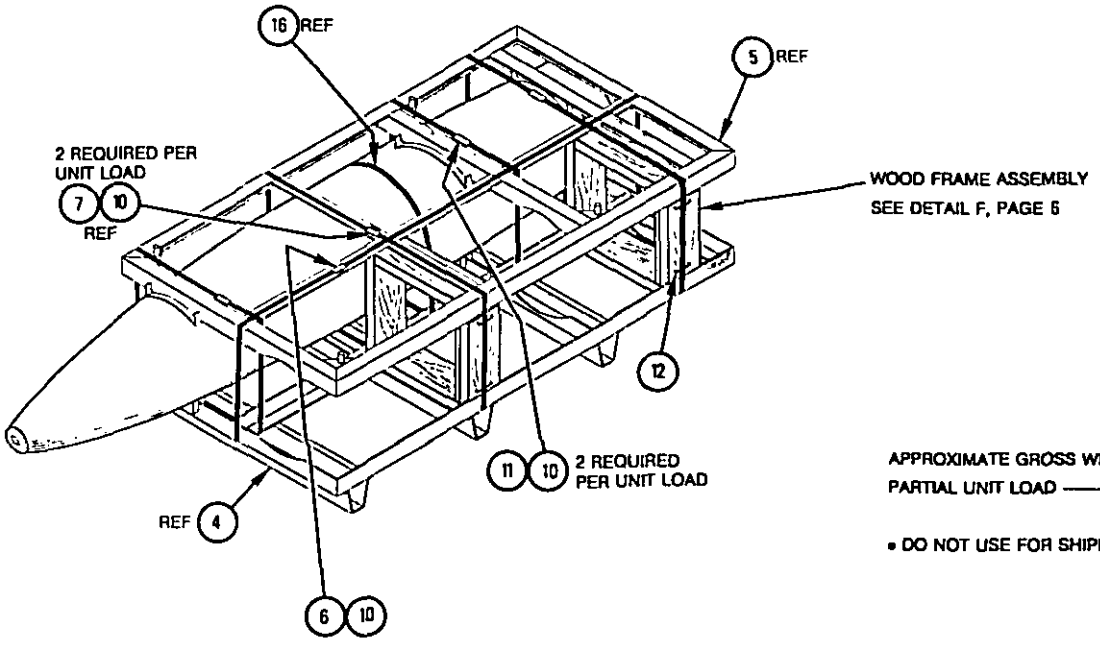


APPROXIMATE GROSS WEIGHT OF PARTIAL UNIT LOAD ——————— 2,243 LBS •

• DO NOT USE FOR SHIPPING WEIGHT.

REQ	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
1	16	BOMB STRAP	STEEL	1¼ X .035 X 8 FT
4	15	HORIZONTAL, DETAIL F	WOOD	2 X 6 X 14 3/4
2	14	VERTICAL, DETAIL F	WOOD	1 X 6 X 14½
4	13	VERTICAL, DETAIL F	WOOD	2 X 6 X 17½
4	12	STAPLES	STEEL	1¼" SIZE
2	11	LATERAL STRAPPING, SHORT	STEEL	1¼ X .035 X 8 FT

LIST OF MATERIALS


Source: https://assist.dla.mil -- Downloaded: 2026-01-23T23:57Z
Check the source to verify that this is the current version before use.

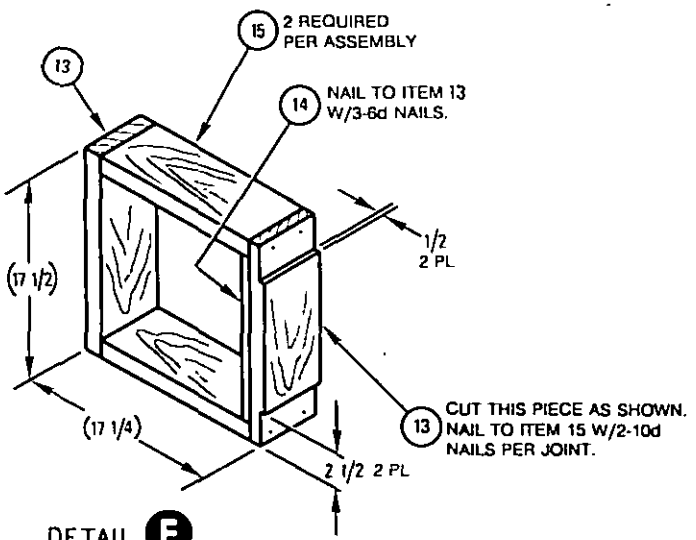

DETAIL F

WOOD FRAME ASSEMBLY

2 REQUIRED

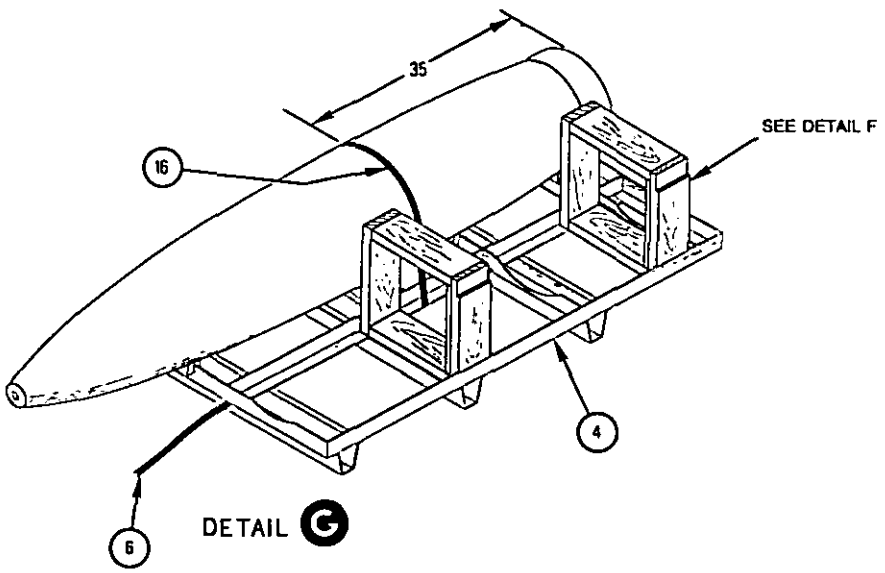

DETAIL G

REVIEW ACTIVITY:
NAVY AS,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:57Z
Check the source to verify that this is the current version before use.

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 8140-0110)