MIL-C-45888(PA)
30 May 1975
SUPERSEDING
See Section 6

MILITARY SPECIFICATION

CONNECTOR PLUG, THERMAL RELEASING

1. SCOPE

1.1 This specification covers requirements, quality assurance provisions, and the preparation for delivery criteria for one type of connector entitled Connector Plug, Thermal Releasing which is used in the Lance warhead section.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-1169(MU)	- Packing, Packaging and Marking for Shipment of Inert Ammunition Components.

DRAWINGS

PICATINNY ARSENAL

8879605	- Connector Plug, Thermal Releasing.
EL-8879605	- Equipment List.

PUBLICATIONS

QAI-PA-1	- Quality Assurance Instructions for Reporting Data on Nuclear Weapons.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 1190

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material complies with the specifications listed on the applicable drawing.

3.2 Assembly. The connector shall comply with all requirements specified on the drawing (dwg) 8879605, with all requirements specified herein, and with the requirements of all applicable specifications to the extent specified on the drawing and herein.

3.3 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.2).

3.4 Serialization. The contractor shall assign serial numbers as required by drawings. The contractor may select any number which complies with the drawing requirement. These numbers shall not be duplicated.

3.5 Mating assembly. The connector shall be capable of being completely mated and unmated with its proper receptacle without the use of tools. This capability shall be verified as specified in 4.4.1.

3.6 Continuity.

3.6.1 Continuity prior to thermal separation. Each electrical circuit (see Table I) in the thermal releasing connector shall have continuity with a resistance of less than 10 milliohms when the thermal release connector plug is mated to a connector receptacle. Testing shall be as specified in 4.4.2.

3.6.2 Continuity after thermal separation. Each electrical circuit in the thermal releasing connector shall show discontinuity (as indicated by a resistance of more than 100,000 ohms) when thermally separated from a mated connector receptacle. Testing shall be as specified in 4.4.2.

Table I

Continuity

From	To	Test Code Number (see 3.9)	From	To	Test Code Number (see 3.9)
A	A	060001	P	P	060015
B	B	060002	R	R	060016
C	C	060003	S	S	060017
D	D	060004	T	T	060018
E	E	060005	U	U	060019
F	F	060006	V	V	060020
G	G	060007	W	W	060021
H	H	060008	X	X	060022
J	J	060009	Y	Y	060023
K	K	060010	Z	Z	060024
L	L	060011	a	a	060025
M	M	060012	b	b	060026
N	N	060013	c	c	060027
O	O	060014			

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

3.7 Insulation resistance. The insulation resistance of any circuit listed in Table II shall not be less than 50 megohms when subjected to a potential of 500 ± 50 volts direct current (vdc) when tested as specified in 4.4.3.

Table II

Insulation Resistance

From	To	From	To
A	All other pins and shell	P	All other pins and shell
B		R	
C		S	
D		T	
E		U	
F		V	
G		W	
H		X	
J		Y	
K		Z	
L		a	
M		b	
N		c	
O			

3.8 Environmental testing (see 4.4).

3.8.1 Operational vibration. The connector assembly shall be subjected to the vibration levels specified in boost and/or sustainer phases, after being stabilized at -65°F or 165°F as applicable (see 6.4). The tests shall be conducted as specified in 4.4.4.1. After the test, the connector shall comply with the requirements of 3.6 and 3.7. After the test, the threaded ring shall be removed and the connector shall show no evidence of physical damage.

3.8.1.1 Boost phase. The connector shall be subjected for 10 seconds along the longitudinal and transverse axes to a random vibration motion having the following properties: power spectral density (psd) or 0.06 gravity units squared per cycles per second (g2/Hz) between the frequencies of 100 and 1000 Hz, 8.50 overall root means square gravity units (grms) minimum. The applied random vibration spectrum shall have a tolerance level of ± 1.5 decibels (dB) between the frequencies of 50 and 1000 Hz and a tolerance level of ± 3.0 dB between the frequencies of 1000 and 2000 Hz. Attenuation outside the flat portion of the psd vs frequency spectrum shall be 12 dB/octave. The test shall be conducted as specified in 4.4.4.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

3.8.1.2 Sustainer phase. The connector assembly shall be subjected for 2 minutes along the longitudinal and transverse axes to a random vibration motion having the following properties: psd of 0.02 g2/Hz between the frequencies of 100 and 1000 Hz, 4.90 (grms) minimum. The applied random vibration shall have a tolerance level of ± 1.5 dB between the frequencies of 1000 and 2000 Hz. Attenuation outside the flat portion of the psd vs frequency spectrum shall be 12dB/octave. The test shall be conducted as specified in 4.4.4.1.2.

3.8.3 Low temperature. The connector assembly shall show no evidence of physical (see 6.5) or electrical damage when subjected to a temperature of -65 ± 5°F as specified in 4.4.4.2. The connector shall meet the requirements of 3.6 and 3.7, after exposure to this temperature.

3.8.4 High temperature. The connector assembly shall show no evidence of physical (see 6.5) or electrical damage when subjected to a temperature of 165 ± 5°F as specified in 4.4.4.3. The connector shall meet the requirements of 3.6 and 3.7, after exposure to this temperature.

3.8.5 Temperature shock. Following the temperature shock test as specified in 4.4.4.4, the connector assembly shall comply with the requirements of 3.6 and 3.7.

3.8.6 Mechanical shock. The connector shall be subjected to a half sine shock pulse of 25 gravity units (g's) ± 2.5 g's three times in each direction of both a transverse and the longitudinal axis (12 shock total), after being stabilized at -65°F or 165°F as applicable (see 6.4). The duration of each shock shall last for 11 milliseconds (ms) ± 2 ms as measured between points which are 10 percent of the peak level. The time to peak shall be 3 ms ± 1 ms. The connector shall be tested as specified in 4.4.4.5. Upon completion of this test, the connector shall comply with the requirements of 3.6 and 3.7. The threaded ring shall be removed and the connector shall show no evidence of physical damage (see 6.5).

3.8.7 Transportation vibration. The connector shall be subjected along the longitudinal axis and the transverse axis to the vibration levels for the lengths of times shown in Table III at each of the specified temperatures. After completion of the vibration tests, the connector shall comply to the requirements of 3.6 and 3.7. The threaded ring shall be removed and the connector shall show no evidence of physical damage (see 6.5). The connector shall be tested as specified in 4.4.4.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

Table III

Frequency (Hz)	Time Per Sweep (minutes)	Time (Minutes) Temperature (°F) -65°F	+165°F	Double Amplitude (da) or g level
10-50-10	2.0	16	16	0.04 inch da
50-115-50	2.5	10	10	5.0 g
115-500-115	2.0	10	10	10.0 g
	Total	36	36	

3.8.8 Separation temperature. The connector shall electrically separate from a mated receptacle when it has reached a temperature of 356 ± 20°F. Separation shall be determined when electrical discontinuity is observed. Time to separation shall be 10 minutes (max). Testing shall be as specified in 4.4.4.7.

Separation Temperature	Test Code No. (see 3.9)
Temperature reading	014001

3.9 Coded serialization requirements (see 6.1.2). The contractor shall supply feedback data on punch cards for any item for which coding is required in section 3. The feedback data shall be in accordance with QAI-PA-1. Serial numbers required on these items shall be obtained by means of a letter addressed to: Commanding Officer, Picatinny Arsenal, Dover, New Jersey 07801, ATTENTION: SARPA-QA-T-M. The letter of request shall include:

a. Exact nomenclature of the item as specified on the applicable drawing.
b. Name of the contractor.
c. Contract number or procurement request order number.
d. Number of serial codes required (unused code numbers shall be returned).

3.10 Workmanship.

3.10.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

3.10.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

3.10.3 Burrs. Parts shall be free from burrs.

3.10.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

3.10.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

3.10.6 Electrical. Cable assemblies and wires shall be dressed in such a manner as to prevent pinching or chafing of the wire insulation. Ends of wires shall be free from burrs, sharp edges, or points. All parts shall be free from flux, chips, dirt, grease, rust or foreign material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.

4.2.1 Quantity to be submitted. When the contract requires first article inspection, the contractor shall submit 10 complete assemblies (see dwg 8879605) for first article testing to the testing facility designated in the invitation for bids or request for proposal.

4.2.2 Inspection and testing to be performed. The first article inspection sample shall be subjected to the inspections and tests specified in Table IV. Tests shall be conducted in order specified in Table IV.

Table IV
First article inspection and tests

Inspection or Test	Dest	Non-Dest
1. Classification of characteristics (see 4.3.2.1)		X
2. Mating assembly (see 3.5)		X
3. Continuity (see 3.6)		X
4. Insulation resistance (see 3.7)		X
5. Temperature shock (see 3.8.5)	X	
6. Mechanical shock (-65°F) (see 3.8.6)	X	
7. Mechanical shock (165°F) (see 3.8.6)	X	
8. Transportation vibration (-65°F) (see 3.8.7)	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

Table IV (Cont.)

Inspection or Test	Dest	Non-Dest
9. Transportation vibration (165°F) (see 3.8.7)	X	
10. Operational vibration (see -65°F) (see 3.8.1)	X	
11. Operational vibration (see 165°F) (see 3.8.1)	X	
12. Seperation temperature (see 3.8.8)		X
13. Low temperature (see 3.8.3)		X
14. High temperature (see 3.8.3)		X

4.2.3 Inspection equipment. The inspection and testing specified in 4.2.2 shall be accomplished by using the gages and test equipment specified in 4.3.4.1.

4.2.4 Rejection. If any item fails to comply with any of the applicable requirements, the first article sample shall be rejected.

4.3 Quality conformance inspection.

4.3.1 Lot formation. The formation of an inspection lot and related functions shall be in accordance with Section 5, MIL-STD-105. A lot shall consist of parts and assemblies produced by one manufacturer in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision.

4.3.1.1 Inspection lot. An inspection lot shall be the quantity of parts, subassemblies, or assemblies from the same lot, which are submitted to inspection for Government acceptance.

4.3.2 Product inspection examination. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor characteristic table (see Table V and Table VI), and inspected for all characteristics in the applicable classification. Any characteristics in the sample found to be defective shall reject the inspection lot. Sequence for the inspection of characteristics in each classification need not be followed as long as all characteristic inspections are performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

Table V
Major Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-72	all	140-141	124	256-259	177	541-549	230
73	72	142	125	260-262	178	550-559	231
74	73	143-144	126	263-265	179	560-569	232
75	74	145	127	266-268	180	570-579	233
76	75	146-147	128	269-271	181	580-590	234
77	76	148-149	129	272-275	182	591-601	235
78	77	150	130	276-278	183	602-613	236
79	78	151-152	131	279-282	184	614-625	237
80	79	153-154	132	283-285	185	626-637	238
81-82	80	155-156	133	286-289	186	638-649	239
83	81	157	134	290-293	187	650-662	240
84	82	158-159	135	294-296	188	663-676	241
85	83	160-161	136	297-300	189	677-690	242
86	84	162-163	137	301-304	190	691-704	243
87	85	164-165	138	305-308	191	705-719	244
88-89	86	166-167	139	309-312	192	720-735	245
90	87	168	140	313-316	193	736-751	246
91	88	169-170	141	317-320	194	752-768	247
92	89	171-172	142	321-324	195	769-785	248
93	90	173-174	143	325-329	196	786-804	249
94-95	91	175-176	144	330-333	197	805-823	250
96	92	177-178	145	334-338	198	824-842	251
97	93	179-180	146	339-342	199	843-863	252
98	94	181-182	147	343-347	200	864-884	253
99-100	95	183-184	148	348-352	201	885-907	254
101	96	185-187	149	353-356	202	908-930	255
102	97	188-189	150	357-361	203	931-955	256
103	98	190-191	151	362-366	204	956-981	257
104-105	99	192-193	152	367-372	205	982-1008	258
106	100	194-195	153	373-377	206	1009-1036	259
107	101	196-197	154	378-382	207	1037-1066	260
108-109	102	198-200	155	383-388	208	1067-1098	261
110	103	201-202	156	389-393	209	1099-1131	262
111	104	203-204	157	394-399	210	1132-1166	263
112-113	105	205-207	158	400-405	211	1167-1204	264
114	106	208-209	159	406-411	212	1205-1243	265
115	107	210-212	160	412-417	213	1244-1285	266
116-117	108	213-214	161	418-424	214	1286-1330	267
118	109	215-217	162	425-430	215	1331-1378	268
119	110	218-219	163	431-437	216	1379-1429	269
120-121	111	220-222	164	438-443	217	1430-1483	270
122	112	223-224	165	444-450	218	1484-1542	271
123-124	113	225-227	166	451-457	219	1543-1605	272
125	114	228-230	167	458-465	220	1606-1673	273
126-127	115	231-232	168	466-472	221	1674-1747	274
128	116	233-235	169	473-480	222	1748-1827	275
129-130	117	236-238	170	481-488	223	1828-1914	276
131	118	239-241	171	489-496	224	1915-2010	277
132-133	119	242-243	172	497-504	225	2011-2115	278
134	120	244-246	173	505-513	226	2116-2232	279
135-136	121	247-249	174	514-521	227	2233-2361	280
137	122	250-252	175	522-530	228	over 2361	298
138-139	123	253-255	176	531-540	229		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

Table VI
Minor Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-16	all	28-29	23	52-56	31	132-156	39
17	16	30-31	24	57-62	32	157-191	40
18	17	32-34	25	63-69	33	192-244	41
19-20	18	35-36	26	70-76	34	245-334	42
21	19	37-40	27	77-86	35	335-519	43
22-23	20	41-43	28	87-97	36	520-1120	44
24-25	21	44-47	29	98-112	37	over 1120	45
26-27	22	48-51	30	113-131	38		

4.3.2.1 Classification of characteristics (see 3.2). Critical, major and minor characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

4.3.2.1.1 Connector (see dwg 8879605).

Categories	Characteristis	Method of Inspection
Critical:	None defined.	
Major:		
	101. Incorrect overall length	Gage
	102. Incorrect outside diameter	Gage
	103. Evidence of recorded dimension as shown in View A between shell insert assembly and spacer not recorded	Visual
	104. Inspection holes (3) missing	Visual
	105. Incorrect keyway orientation	Gage
	106. Objective evidence that delrin material for a lot of connectors is from the same batch of delrin material (see 6.2)	Visual
	107. Unsymmetrical assembly of delrin ring tabs in groove	Visual
	108. Inability to observe internal gap using three inspection holes	Visual
	109. Objective evidence that springs (24) conform to applicable drawing (see 6.2)	Visual
	110. Delrin ring tabs broken or missing	Visual
Minor:		
	201. Evidence of poor workmanship (see 3.10)	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

4.3.2.1.2 Preparation for delivery (see 5).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Preservation, packing, and packaging not in accordance with MIL-STD-1169	Visual
	102. Marking not in accordance with MIL-STD-1169	Visual
Minor:		
	201. Evidence of poor workmanship (see 3.10)	Visual

4.3.3 Testing. All tests shall be performed. Tests shall be performed in the order specified below:

Test	Test Classification
a. Mating (see 3.5)	Major
b. Continuity (see 3.6)	Major
c. Insulation resistance (see 3.7)	Major
d. Seperation temperature (see 3.8.8)	Major

None of these tests are considered destructive and samples so tested may be returned to the lot.

4.3.3.1 Mating, continuity, and insulation resistance. Each connector shall be tested in accordance with 4.4.1, 4.4.2 and 4.4.3. If any item fails to comply with 3.5, 3.6 and 3.7, the item shall be rejected and removed from the lot.

4.3.3.2 Separation temperature. A random sample of three connectors from each inspection lot of twenty-five or portion thereof shall be selected. If any of the connectors fails to comply with the requirements specified in 3.8.8, the lot shall be rejected.

4.3.4 Acceptance inspection equipment.

4.3.4.1 Major characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions, and calibration instructions specified on the Equipment Lists (EL) (see EL-8879605). When either of the conditions listed below exist, the contractor shall design required equipment or specify suitable commercial equipment and obtain approval prior to use on the contract.

a. Any deviation from equipment or procedures

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

specified on the EL is desired (see 6.3).

b. The code "CD" is listed in the "Part or Identifying Number" column on the EL (see 6.1.2).

4.3.4.2 Minor characteristics and tests. Acceptance inspection equipment for minor characteristics is not specified on ELs. The acceptance inspection equipment, operating instructions and calibration instructions used by the contractor for minor classification inspection shall be approved by the Government representative authorized by the procuring agency.

4.4 Test methods. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

4.4.1 Mating assembly. The connector shall mate to connectors equivalent to the terminations they are to be used on so that an audible click is evident, and that visual observation of the locking pins is confirmed, when proper coupling is accomplished.

4.4.2 Continuity. The resistance between the pins listed in 3.6 shall be measured with a government approved electrical resistance tester. The resistance shall not exceed the value specified in 3.6. The current applied shall be limited to 100 milliamperes (ma) maximum.

4.4.3 Insulation resistance. Insulation resistance shall be measured by means of government approved instrument capable of measuring megohms. Any circuit exhibiting an insulation resistance less than 50 megohms shall be accepted if the observed value increases to 50 megohms minimum after the specified voltage has been applied for 60 seconds miaimum. The current applied shall be limited to 5 ma maximum. Requirements shall be as specified in 3.7.

4.4.4 Environmental testing (see 3.8).

4.4.4.1 Operation vibration.

4.4.4.1.1 Boost phase. The connector shall be rigidly mounted to an approved fixture capable of being readily positioned along the longitudinal the transverse axes. The fixture shall be mounted on a suitable vibration producing apparatus and vibrated as specified in 3.8.1.1.

4.4.4.1.2 Sustainer phase. The connector shall be rigidly mounted to an approved fixture capable of being readily positioned along the longitudinal and transverse axes. The fixture shall be mounted on a suitable vibration producing apparatus and vibrated as specified in 3.8.1.2.

4.4.4.2 Low temperature (-65°F). The connector shall be placed in a low temperature chamber and the temperature shall be lowered to and maintained at -65°F ± 5°F for a minimum of four hours or until the connector is stabilized (see 6.4). While still at this temperature, the connector shall meet the requirements of 3.6 and 3.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

4.4.4.3 High temperature (+165°F). The connector shall be placed in a high temperature chamber and the temperature shall be raised to and maintained at 165°F + 5°F for a min of four hours or until the connector is stabilized (see 6.4). While still at this temperature, the connector shall meet the requirements of 3.6 and 3.7.

4.4.4.4 Temperature shock. The thermal releasing connector mated to a suitable connector receptable shall be placed in an approved temperature chamber at -65 + 5°F and maintained for 2 hours minimum. The connector shall then be removed from the low temperature chamber within 5 minutes placed in a chamber with an internal temperature of +165 + 5°F and maintained for 2 hours minimum. Within 5 minutes the connector shall be returned to -65 + 5°F in the low temperature chamber. This sequence constitutes one cycle. Twelve cycles shall be executed. At the end of the twelve cycles, the connector shall be returned to ambient temperature and after stabilization (see 6.4) the connector shall be visually examined for physical damage (see 6.5) and tested in accordance with 3.8.5.

4.4.4.5 Mechanical shock. The connector shall be mounted on a suitable fixture and shocked at the levels and conditions specified in 3.8.6. After undergoing the test, the connector shall meet the post test requirements of 3.8.6.

4.4.4.6 Transportation vibration. The connector shall be mounted securely to a suitable fixture and vibrated at the levels specified in Table III. After undergoing the transportation vibration, the connector shall meet the post test requirements of 3.8.7.

4.4.4.7 Separation temperature. The thermal releasing connector separation temperature shall be measured by monitoring the connector temperature and connector contacts continuity simultaneously versus time on an analog recorder (see Figure 1). Recording time shall start at the time after insertion of the connector into the chamber when the chamber has recovered to within 5°F of the set temperatures. The thermal releasing connector shall be mated to a suitable connector receptacle and a thermocouple shall be securely attached to the outside diameter of the coupling ring opposite the Delrin ring. The connector device (when mated to the receptacle) shall be monitored for continuity by connecting all connector contacts in parallel and passing 100 milliamperes dc maximum at 28 volts dc open circuit maximum through the connector device and recording the voltage across the contacts. The connector device shall be mounted on a fixture and inserted into a circulatory air oven operating at 420°F + 5°F through a minimum clearance port hole. The temperature when electrical discontinuity has occurred shall be recorded to determine compliance with 3.8.8 (see Figure 1). After completion of test, each circuit in the connector device shall be checked for discontinuity as specified in 3.6.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The connector shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169(MU).

5.1.2 Level C. The connector shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169(MU).

5.2 Packing.

5.2.1 Levels A and C. The connector shall be packed in accordance with the applicable instructions contained in MIL-STD-1169(MU).

5.3 Marking. Marking shall be in accordance with MIL-STD-1169(MU).

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

6.1.1 Procurement requirements.

a. Title, number, and date of this specification.
b. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.1.2 Contract data requirements (see 4.3.4.1). Data specified in 3.9 will be delivered as identified on a numbered DD Form 1664 when required on a DD Form 1423 incorporated in the contract.

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

6.3 Acceptance inspection equipment (see 4.3.4.1). The contractor shall obtain approval from the Commander, Picatinny Arsenal, Dover, New Jersey 07801, ATTN: SARPA-QA-T.

6.4 Temperature stabilization. The temperature is considered stabilized when the greatest peaks (both highest and lowest) continually observed over 5 minutes min. do not exceed the nominal temperature plug tolerances specified.

6.5 Physical damage. Physical damage shall include bent or loose pins, split or cracked insulation, cracks in body, unsymmetrical assembly of delrin tabs in the groove, and any delrin tabs broken or missing.

6.6 Supersession data. This specification supersedes the requirements of Purchase Description PA-PD-2063A dated 18 May 1972.

Custodian:
Picatinny Arsenal, Dover, New Jersey 07801

Preparing activity:
Army - PA

Project No. 1190-A097

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

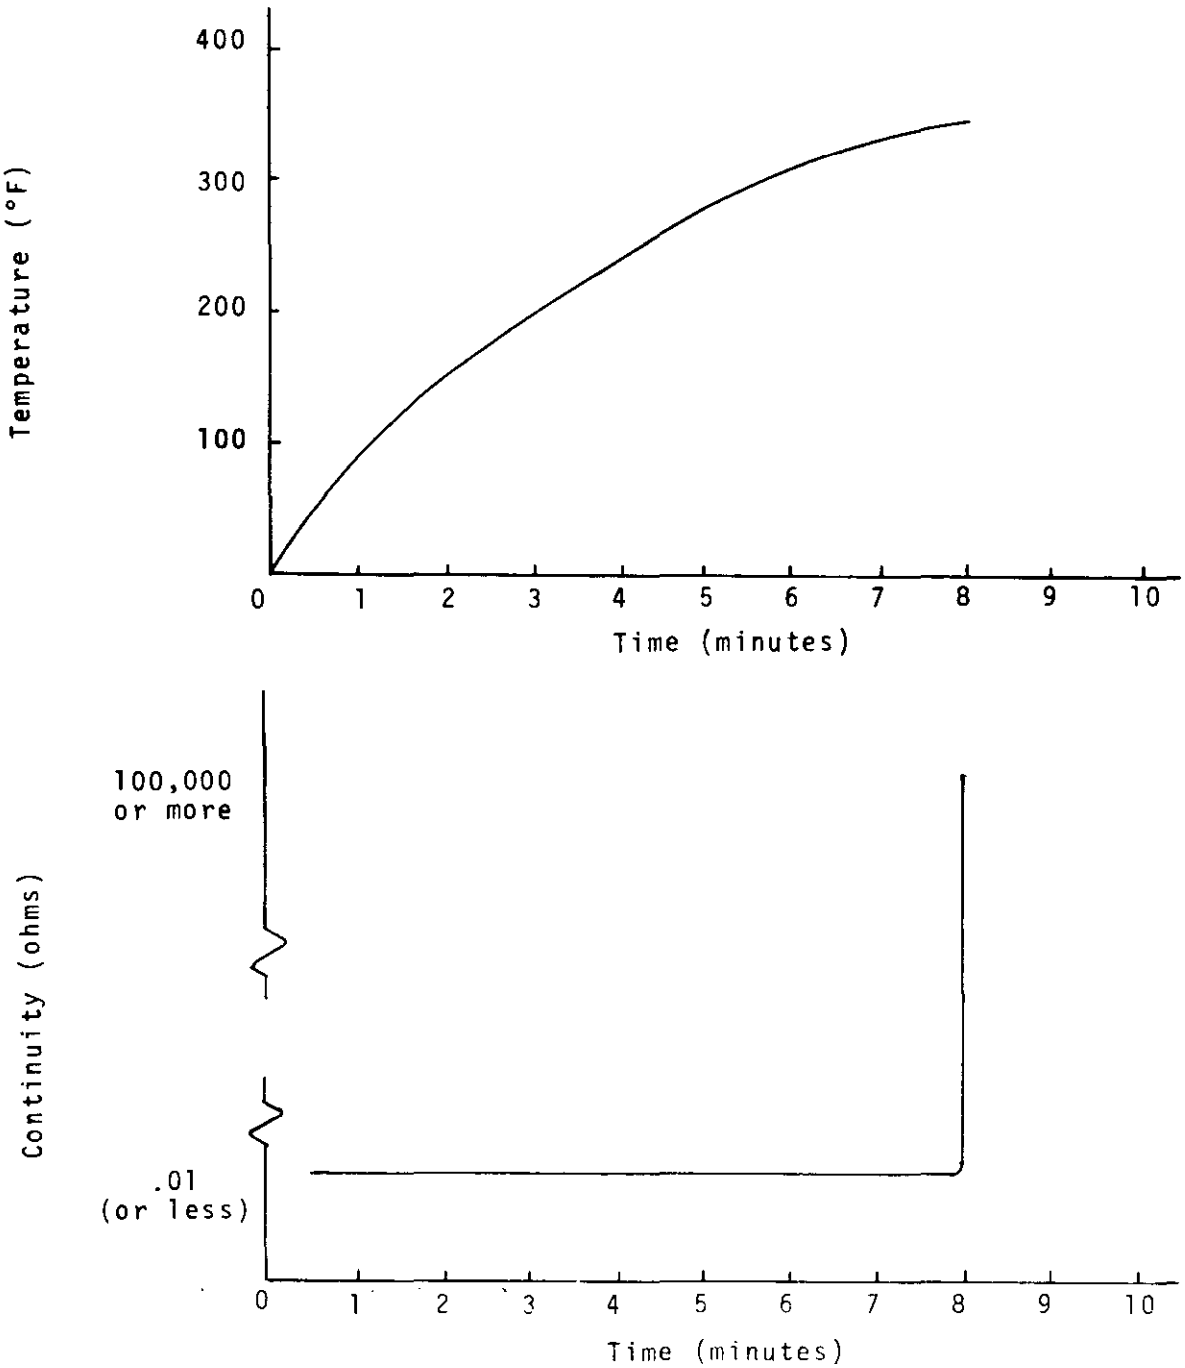


Figure 1 Example of Recording

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. *DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product* are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
Picatinny Arsenal
ATTN: SARPA-QA-N-Q
Dover, New jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:06Z
Check the source to verify that this is the current version before use.