MIL-D-19151A(OS)

10 April 1972
Superseding
MIL-D-19151(NOrd)
25 November 1955

MILITARY SPECIFICATION

DETONATOR MARK 57 MODS 1 AND 2

(This specification has been approved by the Naval Ordnance Systems Command, Department of the Navy.)

1. SCOPE

1.1 This specification governs the manufacture, assembly, loading and preparation for delivery of Detonators Mark 57 Mods 1 and 2 and the methods of inspection and tests upon which acceptance shall be based.

2. APPLICABLE DOCUMENTS

2.1 The following specifications, drawings and publications of the issue in effect on date of invitation for bids, form a part of this specification.

SPECIFICATIONS

MILITARY

MIL-P-387	Pentaerythrite Tetranitrate (PETN)
MIL-L-3055	Lead Azide
MIL-L-46225	Lead Azide, RD-1333

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes

FSC 1356

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:19Z
Check the source to verify that this is the current version before use.

MIL-STD-129	Marking for Shipment and storage
MIL-STD-331	Fuze and Fuze Components; Environmental and Performance Tests for

DRAWINGS

NAVAL ORDNANCE SYSTEMS COMMAND

LD 295534	Detonator Mark 57 Mod 1
LD 275959	Detonator Container Mark 6 Mod 0 (Inner)
LD 275960	Detonator Container Mark 8 Mod 0 (Outer)
PL 2506506	Guided Drop Test Fixture
PL 2506508	Jolt and Vibration Test Fixture
PL 2508060	Detonator Mark 57 Mod 2
1250473	Energy Test Circuit for Mark 57 Mod 1 and 2 Detonator

PUBLICATIONS

INSTRUCTIONS

DEPARTMENT OF DEFENSE

DOD Instruction 4145.26M	DOD Contractor Safety Manual for Ammunition Explosives and Related Dangerous Materials

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:19Z
Check the source to verify that this is the current version before use.

2.2 Other publications. - The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

CODE OF FEDERAL REGULATIONS

CFR Parts 1 to 199	Title 49 - Transportation

(The Code of Federal Regulations are available from the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

3. REQUIREMENTS

3.1 General.

3.1.1 Construction. - Material, parts and assemblies shall be manufactured in accordance with this specification (and LD 295534 for Detonator Mk 57 Mod 1 and PL 2508060 for Detonator Mk 57 Mod 2) and all drawings and specifications listed thereon. Inspection shall be in accordance with 4.1.1.

3.1.2 Preproduction sample. - A preproduction sample of 50 detonators shall be manufactured using the methods and procedures proposed for production. The sample shall be tested as specified in Section 4 for the purpose of determining that the contractor, prior to starting production, is capable of producing items that comply with the design and technical requirements of the contract. Provision of samples shall be in accordance with 4.2.1.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:19Z
Check the source to verify that this is the current version before use.

3.1.3 Conflicting requirements. - Conflicting requirements arising between this specification and any specifications, publications, drawings, or inspection requirements listed herein shall be referred in writing to the procuring agency or appointed agent for interpretation, clarification, and resolution.

3.2 Performance requirements and product characteristics. - The detonator shall meet the following performance requirements and product characteristics:

3.2.1 Explosive materials.

3.2.1.1 Lead azide. - The lead azide shall conform to the requirements of specification MIL-L-3055 for the Mod 1 and MIL-L-46225 for the Mod 2. The moisture content of the lead azide at the time of loading shall not exceed 0.30 percent as determined by the procedure of 4.5.1.

3.2.1.2 PETN. - The PETN shall conform to the requirements of specification MIL-P-387, Class 2. The volatiles and moisture content of the PETN at the time of loading shall not exceed 0.30 percent when tested as specified in 4.5.2.

3.2.2 Plug assembly insulation. - The insulation resistance between the contact pins and between the shorted contact pins and the eyelet of the plug assembly shall be greater than 50 megohms under an applied potential of 500 volts d.c. Testing procedure shall be in accordance with 4.5.3.

3.2.3 Bridge wire assembly. - The bridge wire shall be attached both electrically and mechanically in a sound manner. The resistance of the bridge wire measured between the contact pins shall be between 4.0 ohms and 8.0 ohms after soldering. Testing procedure shall be in accordance with 4.5.4 when process inspection is required.

Source: https://assist.dla.mil -- Downloaded: 20261O-18T12:19Z
Check the source to verify that this is the current version before use.

3.2.3.1 Soldering of bridge wire assembly (M-110).

3.2.3.1.1 Application. - Solder shall be applied only to bright clean surfaces. Fluxing and heating shall be such as to avoid flux inclusions. Operations shall be conducted to avoid insecure or pasty joints caused by vibration of joint while the solder is setting.

3.2.3.1.2 Cleaning. - After removal of all flux and neutralization as described on Drawing 1409497, which is part of LD 295534, or on Drawing 2508064, which is part of PL 2508060, as applicable, the bridge wire assembly is immersed in running water. The water shall be clear tap water at a temperature of 45 ± 5°C. The washing period shall be as specified on the applicable drawing. During the washing period the water shall be completely replaced at least every 15 minutes. The washing container and rate of water flow shall be such that excessive abrasion of the assembly is voided.

3.2.4 Flash charge assembly (M-111).

3.2.4.1 Charge holder. - The charge holder shall be pressed into place on the bridge wire assembly. Care shall be exercised that neither the bridge wire nor other parts of the assembly are injured in this operation. The charge holder shall fit securely on the eyelet of the bridge wire assembly.

3.2.4.2 Loading of flash charge. - The technique of wet loading the flash charge shall be such as to avoid damage to the bridge wire or other parts. The flash charge shall be applied over a dry bridge surface by means of a small wire loop or wood stick of such size as to allow the flash charge to extend approximately .025 inch above the bridge surface. To apply the charge over the bridge, the wire loop or wood stick shall be dipped in the properly moistened flash charge mixture (see Dwg. 959568) and the

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:19Z
Check the source to verify that this is the current version before use.

required amount of flash charge picked up and transferred to the assembly by touching the drop of mixture to the bridge wire. The wire loop or wood stick shall be lifted away from the surface in such a manner as to prevent spreading or smearing of the charge. The flash charge assembly shall be dried as specified on the applicable drawing (see Dwg. 1664934 or 2508063) prior to loading of the ignition charge. The flash charge assembly shall be processed and handled in such a manner as to preclude the presence of moisture on the charge prior to the addition of the ignition load.

3.2.5 Detonator Mark 57 Mods 1 and 2 Assembly.

3.2.5.1 Detonator circuit resistance. - The resistance of the finished detonator shall be between 4.0 and 8.0 ohms. Acceptance and testing shall be in accordance with 4.5.4.

3.2.5.2 Insulation. - The insulation resistance between the shorted contact pins and the cup of each assembly shall be greater than 50 megohms under an applied potential of 500 volts d-c. The insulation resistance as ascertained by using the procedure of 4.5.5 shall be applicable.

3.2.5.3 Sealing of detonator. - The detonator shall be hermetically sealed after insertion of the ignition assembly into the cup assembly by the application of a solder seal between the outer flange of the eyelet and the inside wall of the cup. The detonator seal shall be tested as described on Drawing 1261834, which is a part of LD 295534 (Mk 57 Mod 1) or use paragraph 4.5.6 for Mk 57 Mod 2.

3.2.5.4 Functioning. - The detonator shall function when subjected to the discharge of a 3.75 mfd condenser charged to 40 volts. Acceptance and testing shall be in accordance with 4.5.7.

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:19Z
Check the source to verify that this is the currentversion before use.

3.2.5.5 Output. - The functioning and output tests shall be performed concurrently to reduce sampling requirements.

3.2.5.5.1 Steel indentation test. - The explosion of the Mark 57 Detonator shall produce an indentation in the steel block having an average depth equal to or greater than 0.023 inches for the Mod 1 and 0.030 inch for the Mod 2. No individual indentation value for the test sample shall be less than 0.021 inch for the Mod 1 and 0.028 inch for the Mod 2. Testing and acceptance shall be in accordance with paragraph 4.5.8.1; acceptance of the lot shall be in accordance with paragraph 4.3.2.

3.2.5.6 Jolt test. - The detonator shall withstand the jolt test described in MIL-STD-331, Test 101, and subsequently be safe to handle and dispose of. See paragraph 4.5.9.

3.2.5.7 Forty foot drop test. - The detonator shall be subjected to the forty foot guided drop test as specified in 4.5.10 without exploding, firing, burning or becoming unsafe to handle or dispose of.

3.2.5.8 Transportation vibration test. - The detonator shall be subjected to the transportation vibration test of 4.5.11 and thereafter shall meet the requirements of 3.2.5.1, 3.2.5.2, 3.2.5.3, 3.2.5.4 and 3.2.5.5.

3.3 Workmanship. - The detonator and shipping container, including all parts and accessories, shall be constructed and finished in a manner to assure compliance with all requirements of this specification. Particular attention shall be paid to neatness and thoroughness of assemblage, and freedom of parts from foreign materials, burrs, and sharp edges. The workmanship exhibited in the

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:19Z
Check the source to verify that this is the current version before use.

preproduction samples will be evaluated to determine acceptability. The approved standards of workmanship will thereby become a minimum production requirement for all units offered for acceptance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection procedure. - Inspection shall be in accordance with Table I. This inspection does not relieve the contractor of responsibility for meeting all drawing and specification requirements.

4.2 Sampling.

4.2.1 Preproduction sampling. - A representative sample of 50 detonators shall be manufactured using the methods and procedures proposed for the production material. Further production of the item by the contractor prior to the approval of the contracting activity or completion of the tests on the preproduction sample shall be at the contractor's risk.

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:19Z
Check the source to verify that this is the currentversion before use.

4.2.2 Quality conformance sampling. - Unless otherwise specified, and when applicable, the sampling plans and procedures used in the determination of the acceptability of products shall be in accordance with the provisions set forth in MIL-STD-105.

4.3 Classification of tests. - The inspection and testing of the detonators shall be classified as follows:

4.3.1 Preproduction tests. - Preproduction tests are those tests performed on the sample selected as specified in 4.2.1 to verify that the requirements of the contract, drawings, and this specification are met prior to start of production. The preproduction tests are detailed in Figures 1 and 2. Failure of the preproduction sample to pass these tests shall cause rejection of the sample.

4.3.2 Quality conformance tests. - These tests are to be performed by the contractor on the detonators being submitted for acceptance. Quality conformance tests are outlined in Figures 3 and 4. Acceptance and rejection shall be in accordance with MIL-STD-105 and the stated AQL unless otherwise required by special sampling procedure.

4.4 Quality conformance facilities, test equipment and conditions. - The following facilities, test equipment and conditions are required to perform the tests of 4.5.

4.4.1 Test equipment and facilities. - The contractor shall furnish and maintain all necessary test

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:19Z
Check the source to verify that this is the currentversion before use.

equipment facilities and personnel for performing the pre-production and quality conformance tests of Figures I and II. The test equipment shall be adequate in quantity and when definite requirements are not specified, the equipment shall be of sufficient accuracy and quality to permit performance of the required tests.

4.4.2 Test conditions. - Unless otherwise specified, the following test conditions are required for the tests of 4.5.

a.	Temperature:	Room ambient 65°F to 95°F
b.	Altitude:	Normal ground
c.	Humidity:	Room ambient to 95 percent relative, maximum

4.5 Test procedures.

4.5.1 Moisture content test for lead azide (M101). - Conduct at least one test for each lot of loaded detonators and such additional tests warranted by variations in the process and materials. Collect an approximate two gram sample in a tared, stoppered container at the site of and immediately prior to consolidating the charge in the detonator. Weigh the container; open and expose the sample for drying at 50 ± 2 degrees C and at least 28 inches (Hg) vacuum until constant weight is reached. Cool the container in a desiccator; stopper and weigh. All weighings shall be accurate to ± 0.5 milligram. The presence of moisture in excess of 0.30 percent shall cause suspension of the charge loading until permanent corrective measures have been completed. Detonators which have been loaded with the defective charges shall be rejected.

4.5.2 Volatiles and moisture content test for PETN (M102). - Conduct at least one test for each lot of loaded detonators and such additional tests warranted by variations in the process and materials. Test procedure shall be in

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:19Z
Check the source to verify that this is the current version before use.

accordance with that given in 4.5.1 above. The presence of volatiles and moisture in excess of 0.30 percent shall cause suspension of the charge loading until permanent corrective measures have been completed. Detonators which have been loaded with the defective charges shall be rejected.

4.5.3 Plug assembly insulation test (M103). - The insulation resistance between the contact pins and between the shorted contact pins and the eyelet shall be determined by applying a potential of 500 volts d-c using the contact pins as terminals. The voltage shall be applied for at least one second. The test temperature and relative humidity shall be 65 - 79°F and 80 percent, respectively. To facilitate production, ambient conditions may exceed the prescribed limits for acceptance, but rejection of material shall be based on tests conducted as described. Assemblies which have an insulation resistance less than 50 megohms shall be classed as defective.

4.5.4 Detonator circuit electrical resistance test (M104). - The resistance of the bridge wire of the completed detonator assembly shall be tested by a suitable circuit which subjects the detonator to a current of less than 5 milliamperes. Measurements shall be made to an accuracy of ± 0.1 ohm. Detonators having a resistance less than 4.0 ohms or greater than 8.0 ohms shall be classed as defectives.

4.5.5 Detonator insulation test (M105). - Apply a potential of 500 volts d-c using the shorted contact pins and the detonator cup as terminals. The voltage shall be applied for a period of at least one second. The test temperature and relative humidity shall be 65 - 79°F and 80 percent max., respectively. To facilitate production, ambient conditions may exceed the prescribed limits for acceptance but rejection of the detonators shall be based on tests conducted as prescribed. Detonators which have insulation resistance less than 50 megohms shall be classed as defectives.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:19Z
Check the source to verify that this is the current version before use.

4.5.6 Detonator sealing test (M106). - Each detonator shall be coated with "Leak Tec" (see 6.2.3) and exposed to a maximum absolute pressure of 4.0 inches of Hg under a bell jar or other suitable chamber through which the detonator may be observed. The detonator shall be placed in the chamber such that the entire soldered joint may readily be observed when the required vacuum has been obtained. The detonators shall be observed for at least 15 seconds at the required vacuum. Leakage is indicated by the formation of foam.

4.5.7 Detonator functioning test (M107). - Samples shall be selected and tested from each lot in accordance with the Single Sampling Plan, Inspection Level II, AQL 0.25 percent defective as given in MIL-STD-105. The circuit shown on Drawing 1250473 shall be used for the functioning test. All leads shall be capable of carrying peak current without heating and shall be kept as short as possible. A detonator which fails to explode on the first condenser discharge shall be classed as defective.

4.5.8 Output test.

4.5.8.1 Steel indentation test (M108). - The Detonators Mark 57 Mods 1 and 2 shall be assembled as shown on Figure 5. The lead wires shall be connected to an electric circuit (see Drawing 1250473) which discharges a 3.75 mfd condenser charged to 40 volts. The output of the detonator shall be determined as indicated in 4.5.8.1.1.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:19Z
Check the source to verify that this is the current version before use.

4.5.8.1.1 Indentation depth measurement procedure. - After firing the detonator, remove the Steel Block (Drawing No. 1419828) for depth of indentation measurements. Before measurements, remove any foreign material, such as deposits, from the indentation. Measurement of the depth of indentation shall be made with dial indicator capable of measuring 0.0001 inch units. The point of the dial indicator probe shall have a 30° ± 1° included angle and the end of the point shall have a radius of 0.025 ± 0.002 inch. Zero the indicator with the point of the probe in the deepest part of the indentation and take the readings at four points near the cut face edges of the steel block. These points shall be approximately 0.125 inch in from the center of each of the four cut face edges of the indented surface. The average of these four readings shall be recorded as the indentation depth of the individual steel block.

4.5.9 Jolt test (Safety (C1)). - A sample of detonators Mk 57 Mod 1 or 2 shall be selected at random from the lot under investigation and rigidly mounted in the Jolt Fixture, PL 2506508, which shall be attached tightly to the jolt machine. No detonator shall explode, burn, or become unsafe to handle or dispose of as a result of the Jolt Test of MIL-STD-331, Test 101.

4.5.10 Forty foot guided drop test (Safety (C2)). - The detonator shall be mounted in the Guided Drop Fixture shown in PL 2506506. The test fixture containing the detonator shall be fastened to the carrier of the drop test apparatus. The drop test apparatus, which is comprised of three basic components as follows, shall be used for this test:

a. A rigidly supported, truncated cone shaped, hardened, steel anvil having a minimum 6.0 inch diameter flat top striking surface, a minimum 36 inch diameter base and a minimum height of 21 inches fixed to and supported by a circular concrete pad having a minimum diameter of 36 inches and a minimum thickness of 60 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:19Z
Check the source to verify that this is the current version before use.

b. A carrier to which the test fixture containing the detonator is fixed. The striking surface of the carrier shall be a hardened steel disc 6.0 inches in diameter by a minimum thickness of 3.0 inches. Separate carriers may be required for mounting test fixtures in vertical, horizontal and 45 degree positions, depending upon requirements for the particular explosive loaded device under test or the design of the test fixture.

c. A vertical guide which shall serve to guide the carrier in its drop to impact the anvil. The design of the guide surfaces shall be such that a negligible amount of friction between the carrier and guide is developed in order to simulate "free fall" as nearly as possible.

4.5.10.1 One-third of the sample shall be dropped in the vertical orientation with leads up, one-third shall be dropped in the horizontal orientation, and one-third shall be dropped in the 45° orientation with leads up. No detonator shall explode, burn, or become unsafe to handle or dispose of as a result of the 40 foot guided drop test.

4.5.11 Transportation vibration test (Safety (C3); Function (M109)). - The detonator, when assembled to the Vibration Test Fixture, LD 2506508, and tested in accordance with the requirements of Test 104 of MIL-STD-331, Test Procedure II, will not explode, burn, or become unsafe to handle or dispose of.

4.6 Acceptance criteria. - Detonator assemblies, or parts which fail to meet any of the performance requirements or product characteristics of this specification shall be classed as defective and rejection of the sample or lot represented shall be in accordance with the sampling plan specified.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:19Z
Check the source to verify that this is the current version before use.

5.1.1 Level A.

5.1.1.1 Unit packaging. - Detonators should be packaged in accordance with NAVORDSYSCOM LD 275959.

5.1.2 Level B. - (Not applicable)

5.1.3 Level C. - (Not applicable)

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior containers. - Detonators, packaged as specified in 5.1.1.1, shall be packed in accordance with NAVORDSYSCOM LD 275960.

5.2.2 Level B. - (Not applicable)

5.2.3 Level C. - (Not applicable)

5.3 Marking.

5.3.1 Special marking. - Precautionary and explosive markings shall be in accordance with Code of Federal Regulations, Title 49, CFR Parts 1 to 199.

5.4 Normal markings. - In addition to any special markings required by the contract or order, unit packages, intermediate packages, and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Ordering data. - Procurement documents should specify the following:

a. Title, number, revision letter and date of this specification.

b. Exceptions to this specification, applicable drawings or other referenced documents.

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:19Z
Check the source to verify that this is the current version before use.

c. Desired completeness and availability test data, including data cards in accordance with DD Form 1664 #D1-E-2001.

d. Type and degree of contractor quality assurance system required.

e. Whether or not the test samples required are included in the number of detonators ordered.

6.2 Definitions. - The following definitions are applicable to this specification:

6.2.1 Leak testing solution. - Leak Tec No. 577-V, American Gas and Chemical Co., Inc., Dept. R&D, 120 East End Avenue, N.Y., N.Y.

6.3 Explosives safety precautions. - Explosives safety precautions shall be in accordance with DOD Instruction 4145.26M, DOD Contractors Safety Manual for Ammunition, Explosives and Related Dangerous Materials.

Preparing Activity:
NAVY - OS
(Proj. No. 1356-N011)

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:19Z
Check the source to verify that this is the currentversion before use.

TABLE I

CLASSIFICATION OF CHARACTERISTICS

NOTES:

A. This CC covers only those design requirements which affect safety, performance, life, coordination and interchangeability.

B. Conformance with the requirements of this CC does not relieve the contractor of the responsibility for meeting all applicable specification and drawing requirements.

C. Sampling and acceptance procedures shall be in accordance with MIL-STD-105, unless otherwise specified in the specification.

D. AQL values, when shown in the heading of a group of CC's shall apply collectively to the group as a whole.

E. Characteristics with the numbers followed by the suffix "(V)" shall be inspected by one of the following procedures, as applicable:

(1) A special sampling plan called out in a referenced paragraph of this specification.
(2) A special sampling plan or procedure of a specification referenced on the applicable drawing.
(3) The contractor must have his procedure for inspection of the characteristic examined and approved as satisfactory by a Government representative. This procedure is only used when (1) or (2), above, does not apply.

F. Characteristics with numbers preceded by an asterisk (*) shall be verified prior to assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:19Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF CHARACTERISTICS
FOR
DETONATOR MARK 57 MOD 1

REQUIREMENTS	REFERENCE DRAWING OR PARAGRAPH NO.
CRITICAL (100% Inspection unless otherwise specified)	
C1(V)	4.5.9
C2(V)	4.5.10
C3(V)	4.5.11
MAJOR (1.0% AQL unless otherwise specified)	
*M101(V)	4.5.1 & 1664935
*M102	4.5.2
*M103 (100% inspection;reject defectives)	4.5.3
M104 (100% inspection;reject defectives)	4.5.4 & 1261834
M105 (100% inspection;reject defectives)	4.5.5 & 1261834
M106 (100% inspection;reject defectives)	4.5.6 & 1261834
M107 (0.25% AQL)	4.5.7
M108(V) (0.25% AQL)	4.5.8.1
M109(V)	4.5.11
*M110	3.2.3.1
*M111(V)	3.2.4
*M101	959567
*M102	959567
*M103	959567
*M101	959570
*M102	959570
*M103	959570
*M104(V)	959570
*M105(V)	959570
*M106(V)	959570

Source: https://assist.dla.mil -- Downloaded: 20260-18T12:19Z
Check the source to verify that this is the current version before use.

Continued

REQUIREMENTS	REFERENCE DRAWING OR PARAGRAPH NO.
MAJOR (1.0% AQL unless otherwise specified)	
*M101	1261834
*M102	1261834
*M103	1261834
*M106	1261834
*M107	1261834
*M101(V)	1409497
*M102(V)	1409497
*M101	1409500
*M102	1409500
*M101(V)	1664933
*M102	1664933
*M101(V)	1664934
*M102(V)	1664934
*M103(V)	1664934
*M102(V)	1664935
*M103(V)	1664935
*M101(V)	1261796
*M102(V)	1261796
*M103(V)	1261796
*M104(V)	1261796
*M105(V)	1261796
*M106(V)	1261796
*M107(V)	1261796

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:19Z
Check the source to verify that this is the current version before use.

Continued

CLASSIFICATION OF CHARACTERISTICS
FOR
DETONATOR MARK 57 MOD 2

REQUIREMENTS	REFERENCE DRAWING OR PARAGRAPH NO.
CRITICAL (100% Inspection unless otherwise specified)	
C1(V)	4.5.9
C2(V)	4.5.10
C3(V)	4.5.11
MAJOR (1.0% AQL unless otherwise specified)	
*M101(V)	4.5.1 & 2508062
*M102	4.5.2
*M103 (100% Inspection;reject defectives)	4.5.3
*M104 (100% Inspection;reject defectives)	4.5.4 & 2508060
*M105 (100% Inspection;reject defectives)	4.5.5 & 2508060
M106 (100% Inspection;reject defectives)	4.5.6
M107 (0.25% AQL)	4.5.7
M108(V) (0.25% AQL)	4.5.8.1
M109(V)	4.5.11
*M110	3.2.3.1
*M111	3.2.4
*M101(V)	2506415
*M102(V)	2506415
*M103(V)	2506415
*M104(V)	2506415
*M105(V)	2506415
*M106(V)	2506415
*M107(V)	2506415

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:19Z
Check the source to verify that this is the current version before use.

Continued

REQUIREMENTS	REFERENCE DRAWING OR PARAGRAPH NO.
MAJOR (1.0% AQL unless otherwise specified)	
*M101	2508060
*M102	2508060
*M103	2508060
*M106(V)	2508060
*M101(V)	2508061
M102	2508061
*M102(V)	2508062
*M103(V)	2508062
*M104(V)	2508062
*M101(V)	2508063
*M102(V)	2508063
*M103(V)	2508063
*M101(V)	2508064
*M102(V)	2508064
M103(V)	2508064
*M104(V)	2508064

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:19Z
Check the source to verify that this is the current version before use.

PREPRODUCTION TESTS CONDUCTED BY THE CONTRACTOR

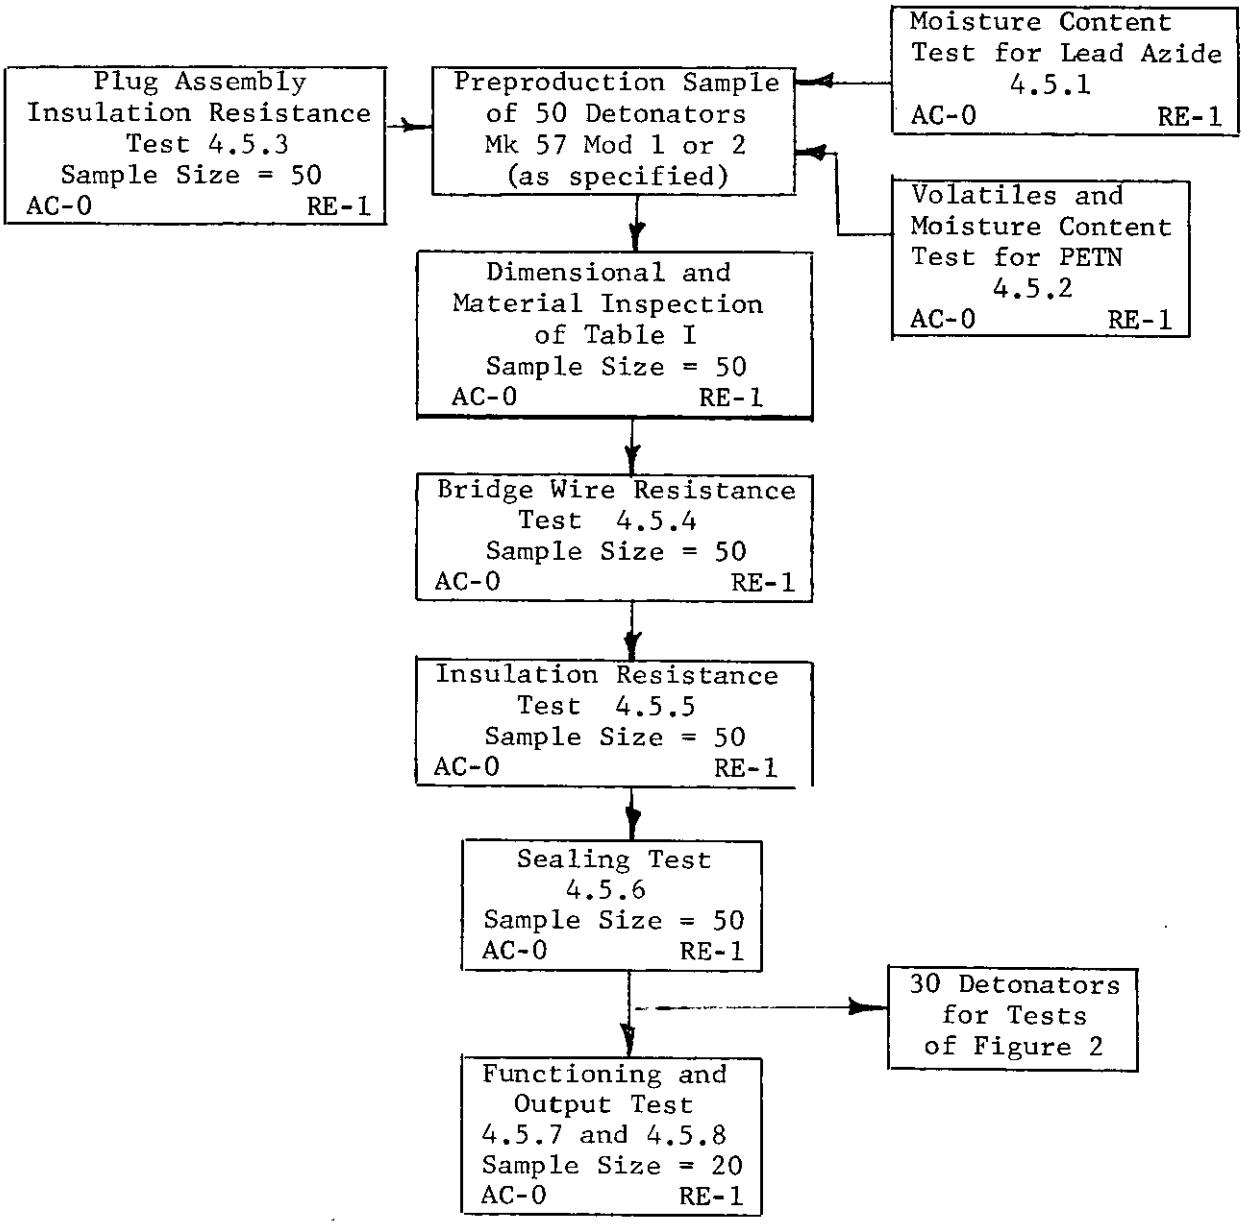


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 20261O-18T12:19Z
Check the source to verify that this is the current version before use.

PREPRODUCTION TESTS CONDUCTED BY A TESTING ACTIVITY DESIGNATED BY THE PROCURING AGENCY

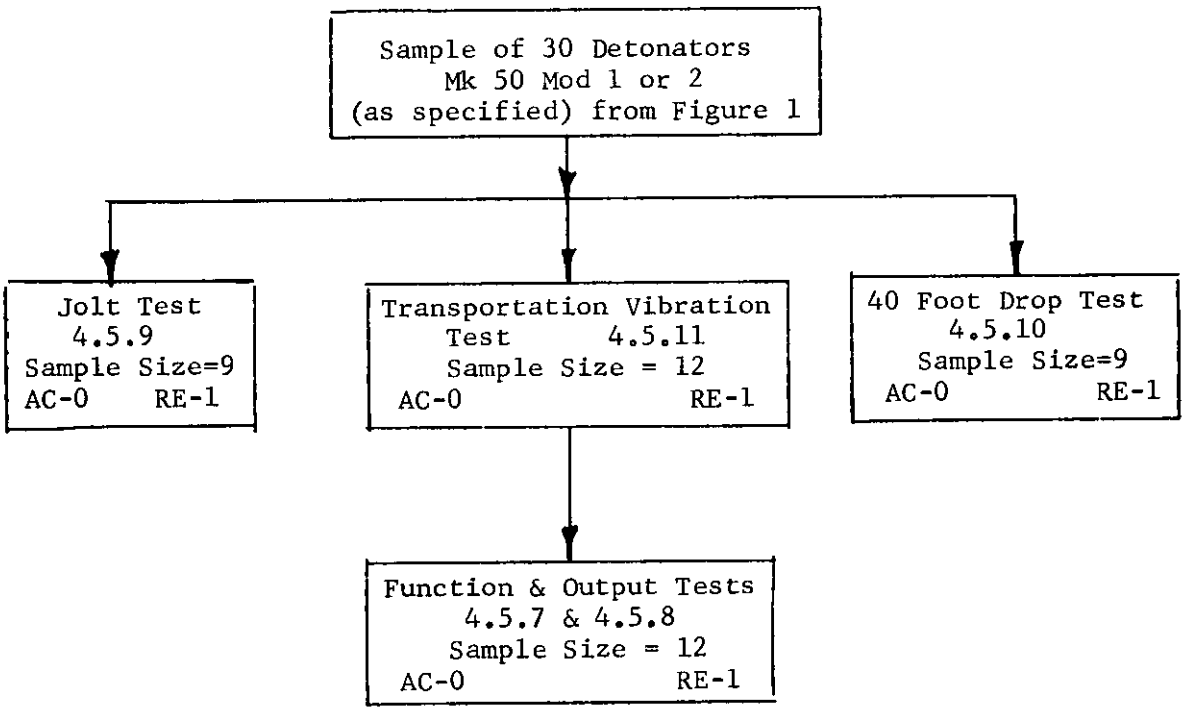


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:19Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE TEST CONDUCTED BY CONTRACTOR

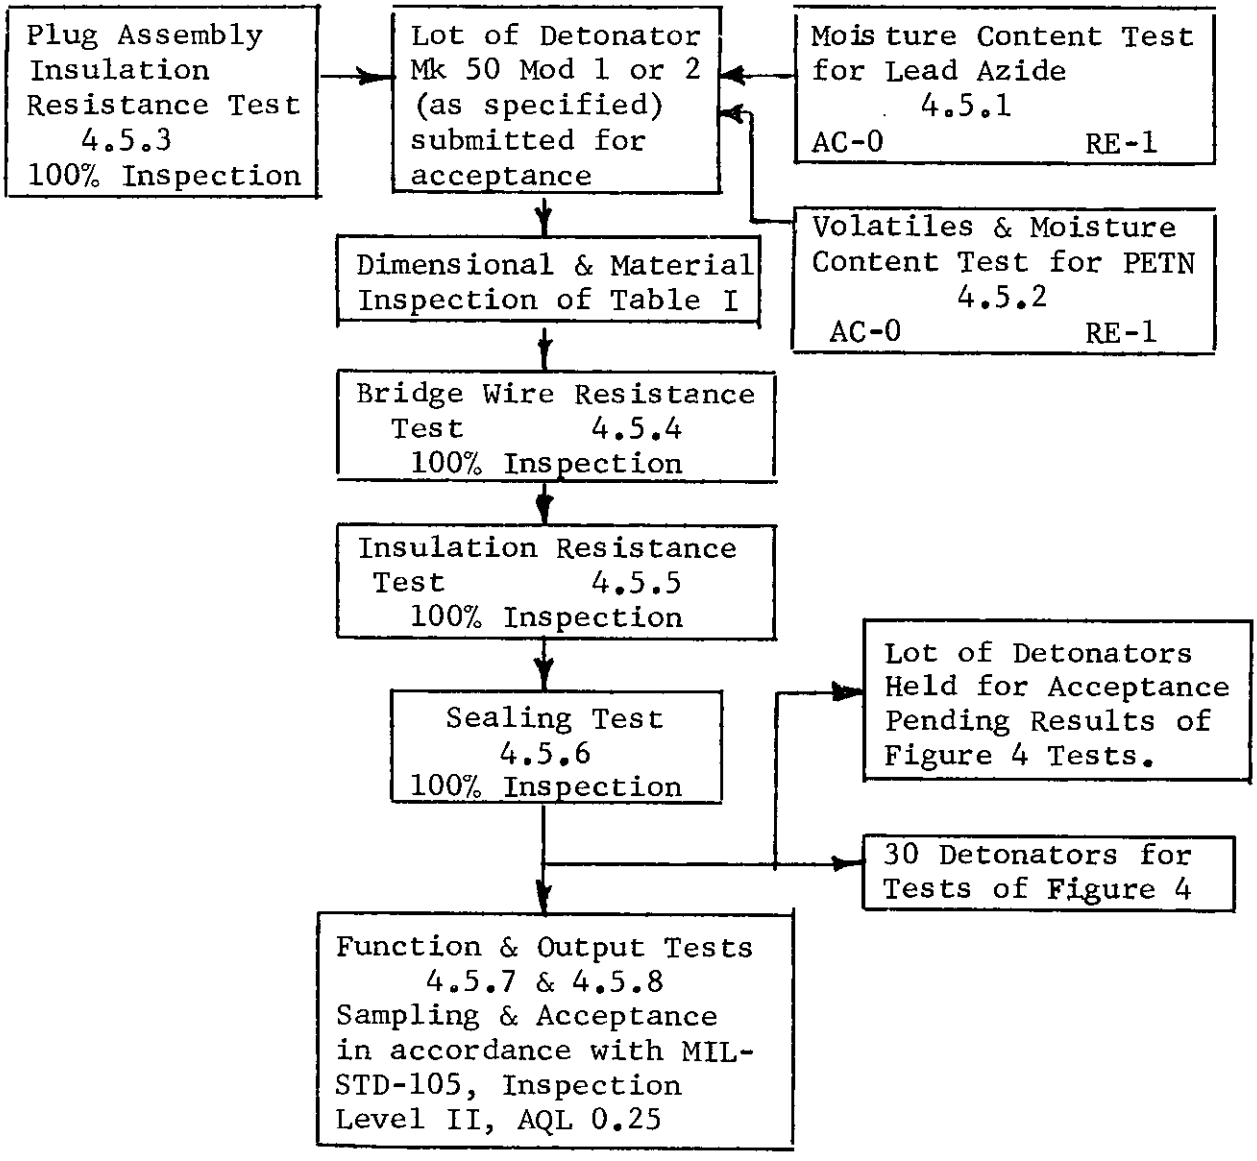


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 20261O-18T12:19Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE TESTS CONDUCTED BY A TESTING ACTIVITY DESIGNATED BY THE PROCURING AGENCY


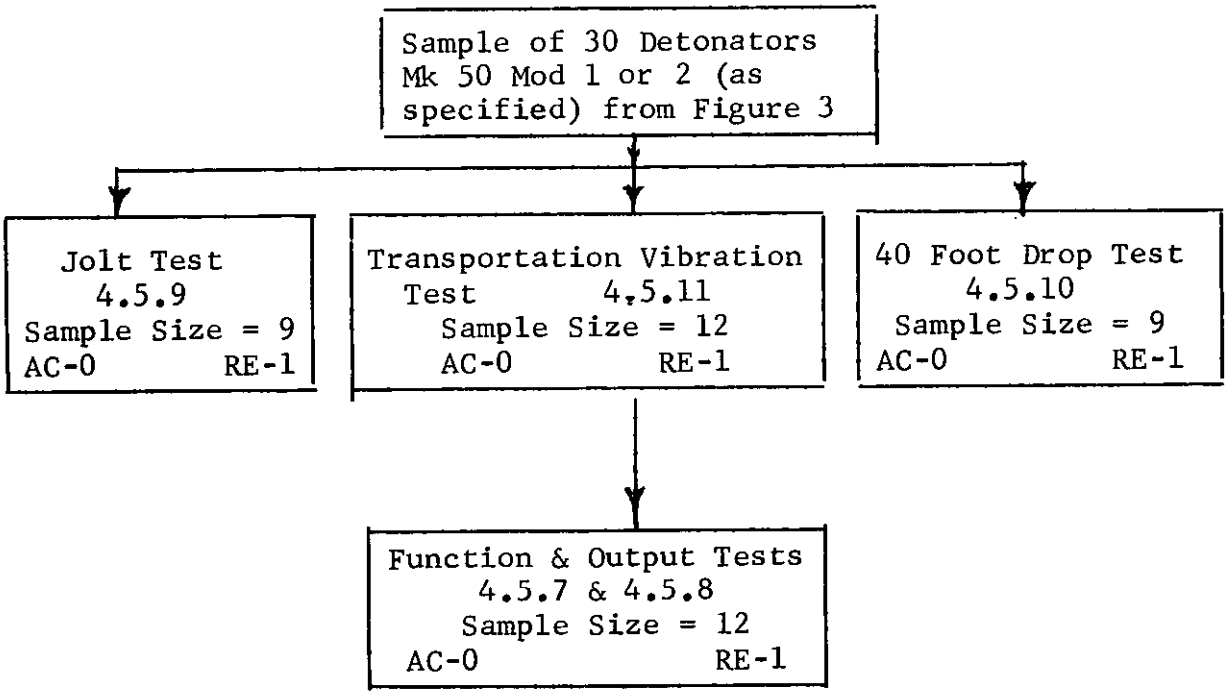


FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:19Z
Check the source to verify that this is the current version before use.

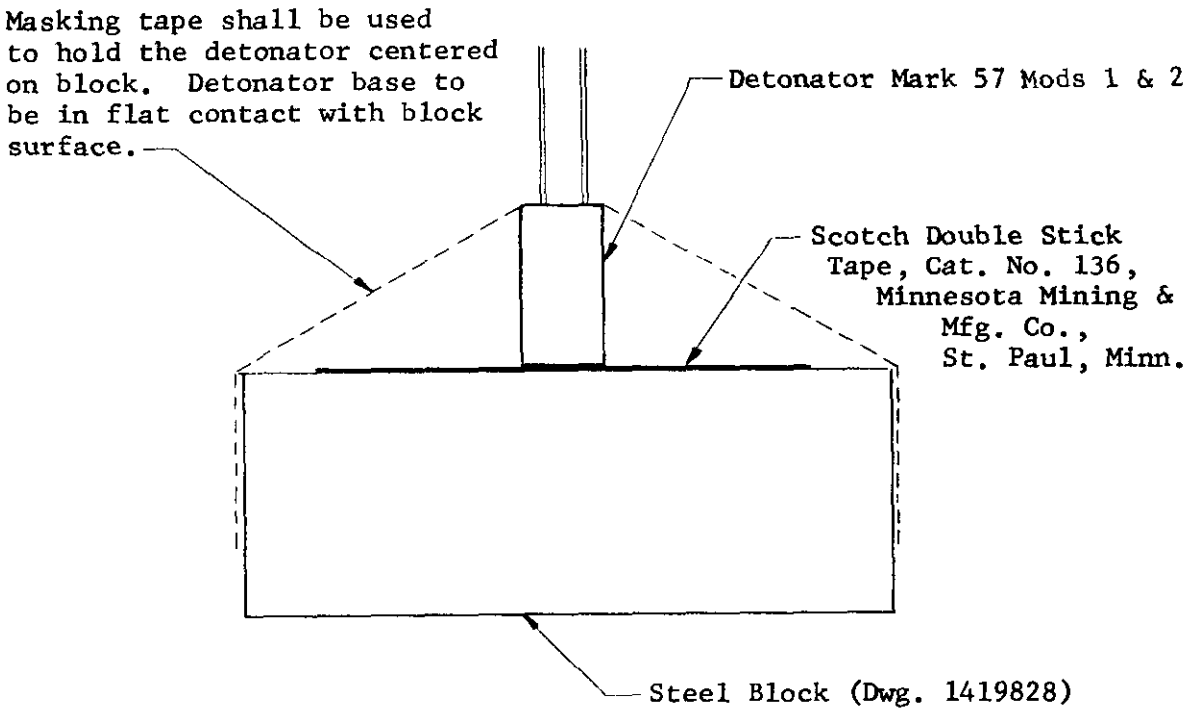

STEEL INDENTATION ASSEMBLY
FOR
DETONATOR MARK 57 MOD 1 or 2

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:19Z
Check the source to verify that this is the current version before use

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-D-19151A (OS) Detonator Mark 57 Mods 1 and 2

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 20261O-18T12:19Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding Officer
Naval Ordnance Station (QA3)
Indian Head, MD 20640

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:19Z
Check the source to verify that this is the current version before use.