INCH-POUND
MIL-DTL-0053133A(ME)
24 July 1995
USED IN LIEU OF
MIL-G-53133
30 August 1993

DETAIL SPECIFICATION

GENERATOR SETS, SKID MOUNTED, TACTICAL, QUIET,

DIESEL ENGINE DRIVEN, ALTERNATING CURRENT

5 THROUGH 60 KILOWATTS

GENERAL SPECIFICATION FOR

This specification is approved for interim use by the USA Communications-Electronics Command, Logistics Research Center, Department of the Army in lieu of the coordinated issue of MIL-DTL-53133.

1. SCOPE

1.1 Scope. This specification covers the general requirements for generator sets (hereinafter referred to as "set" or "sets"), skid mounted, tactical, quiet, alternating current, diesel engine driven, 5 through 60 kilowatts.

1.2 Classification. The sets shall be tactical and of the following modes and sizes:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Communications-Electronics Command, ATTN: AMSEL-LC-ED-BD, 10115 Gridley Rd, Ste 228, Fort Belvoir, VA 22060-5849 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6115
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

MODE:
I - 50/60 Hz
II - 400 Hz
III - 60 Hz

SIZE:
5 - 5 kW, MODE II and III
10 - 10 kW, MODE II and III
15 - 15 kW, MODE I and II (12.5 kW at 50 Hz)
30 - 30 kW, MODE I and II (25 kW at 50 Hz)
60 - 60 kW, MODE I and II (50 kW at 50 Hz)

1.3 Set rating. The set shall be rated 0.8 power factor (pf), lagging, and shall be re-connectable for the following voltages:

- 5/10 kW, 60 Hz and 400 Hz

  a. 120-volt, single phase, 2 wire

  b. 120/240-volt, single phase, 3 wire

  c. 120/208-volt, 3-phase, 4 wire

- 15/30/60 kW, 50/60 Hz and 400 Hz

  a. 120/208-volt, 3-phase, 4 wire

  b. 240/416-volt, 3-phase, 4 wire

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are needed to meet the requirements specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

(DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

VV-F-800	-	Fuel Oil; Diesel.

MILITARY

MIL-L-2104	-	Lubricating Oil, Internal Combustion Engine, Tactical Service.
MIL-T-5624	-	Turbine Fuels, Aviation, Grades JP-4 and JP-5.
MIL-G-10924	-	Grease, Automotive and Artillery.
MIL-A-11755	-	Antifreeze, Arctic-type.
MIL-A-46153	-	Antifreeze, Ethylene Glycol, Inhibited, Heavy Duty, Single Package.
MIL-F-46162	-	Fuel, Diesel, Referee Grade.
MIL-L-46167	-	Lubricating Oil, Internal Combustion Engine, Arctic.
MIL-A-53009	-	Additive, Antifreeze Extender, Liquid Cooling Systems.
MIL-T-83133	-	Turbine Fuel, Aviation, Kerosene Type, Grade JP-8.

(See Supplement 1 for list of associated specification sheets).

STANDARDS

MILITARY

MIL-STD-209	-	Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.
MIL-STD-461	-	Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference.
MIL-STD-705	-	Generator Sets, Engine-Driven, Methods of Tests and Instructions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

HANDBOOKS

MILITARY

MIL-HDBK-705 - Generator Sets, Electrical, Measurements and Instrumentation.

(Unless otherwise indicated, copies of federal and military specifications and standards are available form the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ASQC Z 1.4- Sampling Procedures and Tables for Inspections by Attributes.

(Application for copies should be addressed to: AMERCN NATL STANDS INST, 1430 BROADWAY, NEW YORK NY 10018.)

DETAILED TEST PLAN FOR FIRST ARTICLE PREPRODUCTION TEST (FAPT) OF TACTICAL QUIET GENERATOR SETS, Nuclear Effects Directorate, US Army White Sands Missile Range, dated December 1989.

(Requests for this document must be referred to: US Army Communications-Electronics Command Product Integrity and Production Engineering South, ATTN: AMSEL-LC-ED-BG, 10115 Gridley Rd, Ste 228, Fort Belvoir, VA 22060-5849.)

US Army Nuclear and Chemical Agency Memorandum, dated 17 April 1987, Subject: NUCLEAR SURVIVABILITY CRITERIA FOR THE COMMERCIAL GENERATOR SET AND ASSEMBLAGES.

(Requests for this document must be referred to: US Army Nuclear and Chemical Agency, ATTN: MONA-NU, 7500 Backlick Road, Building 5073, Springfield, VA 22150-3198.)

2.2 Non-Government publications. The following document form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

documents not listed in the issue of the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

MG1 - Motors and Generators.

(Application for copies should be addressed to the National Electrical Manufacturers Association, 2101 L Street, N.W., Washington D.C. 20037.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Specification sheet requirements for individual set size, and mode. The individual set requirements shall be as specified herein and in accordance with the applicable specification sheets (see 6.2). In the event of any conflict between the requirements of this specification and the specifications sheets, the latter shall govern.

3.1.1 Drawings. The drawings forming a part of this specification as listed in the applicable specification sheets, are end product drawings. No deviation from the prescribed drawing requirements is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to ensure correct fit, assembly, and operation of the set. Any data (e.g. shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or the designated representative.

3.1.2 Size and weight. Set size and operational weight (see 6.4.15) shall be as specified in the applicable specification sheets.

3.1.3 Reliability. Set reliability shall be as specified in the applicable specification sheets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

3.2 First article (preproduction model). When specified (see 6.2), one generator with excitation system and five complete assembled sets of each size and mode shall be furnished for examination and testing within the time frame specified (see 6.2) to prove prior to starting production that the contractor is capable of producing sets that comply with the requirements of this specification. Examination and tests shall be as specified in section 4; and, unless otherwise specified (see 6.2), all examination and tests shall be conducted by the contractor subject to surveillance and approval by the Government.

3.3 First article (production model). When specified (see 6.2) five or more sets per size, per mode, shall be furnished for inspection as specified in section 4.

3.4 Materials. Materials shall be in accordance with the drawings listed in the applicable specification sheets.

3.5 Design. (See 3.1).

3.5.1 Engine. The engine, including all systems and components, shall comply with applicable Environmental Protection Agency (EPA) regulations and meet the requirements as specified herein.

3.5.1.1 Oil temperature. Oil temperature in the oil sump shall stabilize between 100 and 265 °F under all operating conditions specified herein.

3.5.2 Cranking system. The cranking system shall be 24 volts direct current (DC), negative ground. The set shall not be damaged (see 6.4.3) in the event polarity of the battery cables is reversed.

3.5.3 Batteries. Batteries shall be furnished with electrolyte, in all first article sets. When specified (see 6.2), batteries with shall be furnished with all production sets. The batteries shall have sufficient capacity to permit fulfillment of the following requirement under all conditions between 120 and -25 °F ambient temperatures:

After two consecutive cranking cycles, each compromising 15 seconds of continuous cranking, on an inactive set (engine shut-off solenoid deenergized), followed by a 5-second rest period.

3.5.4 Starting aid. Ether tanks shall be furnished in the first article sets. Production sets shall be furnished without ether tanks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

3.5.5 Governing system. The governing system shall provide the frequency performance as specified in the applicable specification sheets. Any loss of input signal to the governing system shall not cause the set to operate at more than 115 percent of the rated speed.

3.5.6 Generator and excitation system. The generator and excitation system (exciter, voltage regulator, and other accessories necessary to control the output voltage) shall meet the requirements as specified herein and on the applicable specification sheets.

3.5.7 Generator. No damage (see 6.4.3) shall result from running the set at its low idle speed (see 6.4.19) setting for a period of one hour with the excitation system energized and the generator set temperature stabilized in an ambient of 49 °C (120 °F). Phase sequence shall be ABC and L1 to L2 and L3. The generator shall be in electrical and mechanical balance at all speeds up to 125 percent rated speed. The generator shall withstand operation at 125 percent rated speed to be 2250 rpm for 60 Hz and 2500 rpm for 400 Hz.

3.5.8 Temperature rise. Allowable temperature rise of generator coils, windings and mechanical parts, when the generator and auxiliary items are installed in the set, shall not exceed the following:

Coils, windings and connections:

-105 C° (189 F°) (measured by rise in resistance method)

Generator bearings:

-50 C° (90 F°)

Poles, cores, and other mechanical devices:

-Same as for the parts in contact with insulation in which the parts are in contact.

3.5.9 Insulation resistance. Insulation resistance of generator windings shall not be less than 1 megohm in an ambient temperature of 25 °C (77 °F).

3.5.10 Dielectric strength. Generator windings shall withstand the following 60 Hz voltages applied for 1 minute:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

a. Generator field and exciter windings - 10 times ceiling voltage, but neither less than 1,500 nor more than 3,500 volts (applied between windings and ground)

b. Windings energized by the 24-volt dc control, cranking and battery charging systems - 500 volts (applied between windings and ground)

c. Generator stator windings - 1,832 volts between phase windings and 1,480 volts between phase windings and ground

d. All others - twice rated voltage plus 1,000 volts (applied between winding and ground and between windings where applicable).

3.5.11 Short circuit. The generator, voltage regulator and excitation system operating as a unit shall withstand two consecutive single-phase line-to-line, single-phase line-to-neutral, and symmetrical 3-phase short-circuits at 5-minute intervals at generator output terminals when operating at rated load (see 6.4.6) and frequency without reduction in dielectric strength to a point where it does not meet the requirements in 3.5.10. The sustained short-circuit current shall not be less than 300 percent of rated output current. 3-phase short circuits shall be for 10 seconds and single phase short circuits shall be for 5 seconds.

3.5.12 Winding resistance. The resistance of each generator winding shall be as specified on the applicable drawings. All resistance values shall be corrected to a temperature of 25 °C (77 °F).

3.5.13 Saturation curves. The curves listed herein shall be plotted with the generator armature terminal volts on the vertical axis versus the exciter field current on the horizontal axis:

a. Open circuit saturation curve
b. Synchronous impedance curve (short circuit saturation curve)
c. Zero power factor saturation curve
d. Rated load current saturation curve

The exciter field current shall be as specified in the specification sheets.

3.5.14 Phase balance (voltage). The maximum difference in the 3 line-to-neutral voltages shall not be more than 1 percent of rated line-to-neutral voltage. The maximum difference between

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

the voltages of the 120-volt windings of any one phase shall not be more than 1 volt.

3.5.15 Transient reactance, rated voltage. For sets 15 kW and above, the direct axis transient reactance shall not be more than 18 percent for the 3-phase 60 Hz operation of the mode I sets and shall not be more than 16 percent for the 3-phase 400 Hz operation of the mode II sets. For sets 5 and 10 kW, the direct axis transient reactance shall not be more 25 percent for the 120-volt single phase connection and shall not be more than 18 percent for the 3-phase connection.

3.5.16 Negative sequence impedance. For sets 15 kW and above, the generator negative sequence impedance shall not be more than 18 percent for the 60 Hz rating of the mode I sets and shall not be more than 15 percent for the mode II sets. For sets 5 and 10 kW, the generator negative sequence impedance shall not be more than 18 percent with the set connected in the 120/208-volt 3-phase connection.

3.5.17 Flexural vibrations and critical speeds. The sets shall be free from dangerous flexural vibration (see 6.4.4) and dangerous torsional critical speeds (see 6.4.7) between the minimum low idle speed and 115 percent of rated speed.

3.5.18 Overspeed. The 15, 30, and 60 kW sets shall operate at 115 percent of rated speed for 5 minutes without damage (see 6.4.3). Rated speed of the sets shall be that required for the sets to produce rated frequency. The 5 and 10 kW sets shall operate at wide open throttle for 5 minutes.

3.5.19 Instruments, controls, and other devices. Instruments, controls, and devices shall meet all requirements herein when mounted in the set with the set operating under all conditions, including storage, as specified herein.

3.5.19.1 DC control power. All DC control devices shall be suitable for operation at 20 to 32 volts. DC voltage transients resulting from operation of the AC circuit interrupter or any other set mounted device shall not exceed 150 volts measured across any DC component. Total operating DC current at any one time for all devices shall not exceed 5 amps when the set is operating. When the set master switch is in the "off" position, no current drain shall be imposed on the batteries, except the following:

a. Panel Lights, when associated switch is in the "on" position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

b. Malfunction Indicator Lamps, which require manual reset.

3.5.20 Protective system. The set shall be equipped with the protective devices specified herein and the applicable specification sheets. In addition to functions specified herein, activation of these devices shall cause the appropriate lamp to illuminate on the malfunction indicator panel.

3.5.20.1 Overspeed device. This device shall activate at 2,200 ±40 rpm and shut down the engine. This device is not required on the 5 and 10 kW sets.

3.5.20.2 High temperature device. This device shall activate at 107 ±3 °C (225 ±5 °F) - except 104 ±2 °C (220 ±3.5 °F) for 15 kW sets - and shut down the engine before damage.

3.5.20.3 Low oil pressure device. The low oil pressure protective device shall activate at 15 ±3 pounds per square inch (psi) and shut down the engine.

3.5.20.4 Low fuel level device. This device shall activate when the fuel level falls to a point at which operation of the set at rated load is four minutes or more and shut down the set.

3.5.20.5 Overvoltage device. This device shall activate in not more than 1.25 seconds after the voltage in a 120-volt generator coil winding has risen to and remained at any value greater than 153 ±3 volts for not less than 200 milliseconds and shut down the set.

3.5.20.6 Undervoltage device. This device shall be connected across the same generator coil winding as the over-voltage protective device. When the voltage drops below 48 volts this device shall activate instantaneously. In addition, the device shall activate in 6 ±2 seconds after the voltage has fallen to and remained at not more than 99 ±4 volts. The device shall open the set circuit interrupter upon activation. This device is not required on 5 and 10 kW sets.

3.5.20.7 Short-circuit device. This device shall activate within 50 milliseconds in the event set output current in any phase exceeds 425 ±25 percent for all voltage connections. The device shall open the set circuit interrupter upon activation.

3.5.20.8 Overload device. This device shall not activate when current in all three phases is less than 110 percent of rated value. It shall activate within 8 ±2 minutes for 130 percent of rated current in any phase. At currents between 110 percent and 350 percent, the device shall operate on an inverse time

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

principle with the time to trip reduced in proportion to the increase in current. The device shall open the set circuit interrupter upon activation.

3.5.20.9 Reverse power device. This device shall activate if power flow into the set exceeds 20 ±3 percent of rated value. This device is not required on 5 and 10 kW sets. The device shall open the set circuit interrupter upon activation.

3.5.21 Instrument accuracy. The maximum error (see 6.4.12) range of each metering system shall be as follows:

a. **5 and 10 kW**

INSTRUMENT	Maximum Allowable Error Range
Voltmeter	
115-125 volt range	± 9 V
200-250 volt range	± 9 V
Ammeter (AC)	
25 percent Load Current	15-35 percent Rated Current
50 percent Load Current	40-60 percent Rated Current
75 percent Load Current	65-85 percent Rated Current
100 percent Load Current	90-110 percent Rated Current
Frequency meter	
Mode I, 55-65 Hz range	± 1.5 Hz
Mode II, 380-420 Hz range	± 6 Hz

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

b. **15, 30 and 60 kW**

INSTRUMENT	Maximum Allowable Error Range
Voltmeter	
115-125 volt range	± 5 V
200-250 volt range	± 10 V
Ammeter (AC)	
25 percent Load Current	17-33 percent Rated Current
50 percent Load Current	42-58 percent Rated Current
75 percent Load Current	67-83 percent Rated Current
100 percent Load Current	92-108 percent Rated Current
Frequency meter	
Mode I, 55-65 Hz range	± 0.6 Hz
Mode I, 48-52 Hz range	± 0.6 Hz
Mode II, 380-420 Hz range	± 4 Hz
Kilowattmeter	
25 percent Load	12-38 percent Load
50 percent Load	37-63 percent Load
75 percent Load	62-88 percent Load
100 percent Load	87-113 percent Load

3.5.22 Malfunction indicator. The malfunction indicator system shall cause the appropriate indicating lamp to energize under activation of the protective device (see 3.5.20).

3.5.23 Lifting and tiedown provisions. Lifting and tiedown provisions shall be provided in accordance with MIL-STD-209. The set, with fuel tank 1/4 full to full, shall remain within 15 degrees from level when lifted.

3.5.24 Interchangeability. All mode sets of one size shall use the same engine, governing system, skid base, housing, frame, AC and DC wiring harnesses, AC and DC schematic diagrams, mounts, batteries, battery charging system, fuel system, air filter, oil filter, fuel filter, muffler, and as many other common components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

3.6 Transportability. The sets shall not be damaged by rough handling (see 6.4.3.2) which could be encountered during rail, truck, trailer, aircraft, or helicopter transportation (see 6.4.8, 6.4.9, and 6.4.10).

3.7 Performance. The set performance shall be as specified herein and in the applicable specification sheets.

3.7.1 Starting, operating and stopping.

3.7.1.1 Starting. The set shall start (see 6.4.1) within 5 minutes under the following conditions:

a. Any individual or combination of the environmental conditions specified in 3.9.

b. With the base of the set in planes from level up to 15 degrees from level.

c. With fuels, lubricants, and coolants as specified herein.

3.7.1.2 Operating. Immediately after starting and with a maximum warm-up period of 5 minutes, the set shall operate without damage (see 6.4.3) or failure (see 6.4.11) under the following conditions:

a. Conditions specified in 3.7.1.1.

b. All loads, continuous and intermittent, up to and including rated load as specified herein and in the applicable specification sheets.

C. Servicing and maintenance shall be in accordance with Appendix A, Maintenance Schedule.

3.7.1.3 Stopping. The set shall stop (see 6.4.2) within 30 seconds or within the time interval specified herein after activation of any device intended to stop the set.

3.7.2 Parallel operation. The requirement for parallel operation is as specified in the applicable specification sheet (see 3.1).

3.7.3 Maximum power. The minimum acceptable maximum power shall be 110 percent of rated load under all operating conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

3.7.4 Fuels. The sets, while operating on referee grade fuels conforming to MIL-F-46162; DF-1, DF-2, or DF-A diesel fuel conforming to VV-F-800; JP-5 turbine fuel conforming to MIL-T-5624; or JP-8 turbine fuel conforming to MIL-T-83133 shall meet all requirements herein. The sets, while operating on JP-4 turbine fuel conforming to MIL-T-5624 (with a cetane rating of 30 to 35) shall meet all requirements herein, except rated load may be reduced 15 percent and a maximum of 300 hours of operation on JP-4 per 3,000 hours of set operation shall be required. Operation on JP-4 shall only be required at temperatures -18 to 38 °C (0 to 100 °F) and at altitudes up to 914 meter (m) (3,000 feet).

3.7.5 Lubricants. The engine shall operate on lubricating oil conforming to MIL-L-2104 when temperatures are above -26 °C (-15 °F). The engine shall operate on lubricating oil conforming to MIL-L-46167 when temperatures are at or below 4 °C (40 °F). Grease shall conform to MIL-G-10924.

3.7.6 Coolant. The set shall operate with the following coolants:

a. MIL-A-11755 antifreeze from -32 to 49 °C (-25 to 120 °F) ambient.

b. Water with MIL-A-46153 inhibited antifreeze from -32 to 49 °C (-25 to 120 °F) ambient.

c. Water with MIL-A-53009 additive from 4 to 49 °C (40 to 120 °F) ambient.

3.8 Audio noise. Audio noise sound-pressure levels (SPL) emanating from the set shall not exceed 70 dBA at 7 m (22.9 feet) from the perimeter of the set with all doors closed, when measured at 1.2 m (3.9 feet) above the ground. In addition, audio noise emanating from the set shall not exceed 85 dBA at the operator's station, defined to be 0.7 m (2.3 feet) from the control panel, while the control panel door(s) are open. These requirements apply under all operating conditions specified herein with the set operating at all loads from the no-load to rated load.

3.9 Environmental requirements.

3.9.1 Starting and operating. The set shall start and operate under each and any combination of the following operating conditions:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

a. All possible relative humidities, with ambient temperatures ranging from -32 to 49 °C (-25 to 120 °F) at sea level; and from -32 to 35 °C at 1,219 m (-25 to 95 °F at 4,000 feet). The high temperature requirement remains at 35 °C (95 °F) at altitudes above 1,219 m (4,000 feet).

b. Altitudes up to and including 2,438 m (8,000 feet). Rated load may be reduced by 3.5 percent for each 305 m (1,000 feet) above 1,219 m (4,000 feet) (e.g., at 8,000 feet rated load may be reduced by 14 percent).

c. With 127 millimeters (mm) (5 inches) of rain per hour impinging on the set at angles from the vertical up to 45 degrees.

d. With 355 British thermal units (BTUs) per square foot per hour of solar radiation.

e. With sand and dust particle concentration of up to 1,400 milligrams per cubic meter (mg/m³). Particle sizes shall range from less than 74 micrometers in diameter to 1,000 micrometers with the bulk of the particles ranging in size from 74 to 350 micrometers.

f. With a steady windspeed of 22 meters per second (m/s) (73 feet per second [ft/s]) and gusts up to 29 m/s (95 ft/s) at a height of 3 m (10 feet) above ground level.

g. With accumulations of ice glaze, freezing rain and hoarfrost of up to 13 mm (0.5 inch) and up to a specific gravity of 0.9.

h. In a salt fog or sea spray environment.

3.9.2 Storage. The set without packaging shall not be damaged (see 6.4.3.1) by exposure to:

a. Storage at -51 to 71 °C (-60 to 160 °F).
b. Salt fog environment.
c. All possible relative humidities.

3.10 High altitude electromagnetic pulse (HAEMP). All sets operating as a single unit and 15 through 60 kW sets while operating in parallel (see 3.7.2) shall withstand the HAEMP nuclear environment as specified in the US Army Nuclear and Chemical Agency Memorandum, dated 17 April 1987. The set shall meet the operational requirements specified herein within 5 minutes after being subjected to the specified HAEMP nuclear

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

environment. The recovery may not include the replacement of piece parts or components.

3.11 Electromagnetic interference. The electromagnetic interference emission and susceptibility characteristics of the set shall not exceed the UM04 limits of class C2 equipment of MIL-STD-461, Part 9.

3.12 Treatment and painting. Treatment and painting shall be in accordance with the drawings listed in the applicable specification sheets. When specified (see 6.2), a camouflage pattern shall be applied to the set.

3.13 Maintainability. The maintenance ratio (see 6.4.16) shall not exceed 0.05.

3.14 Endurance. The set endurance requirements are as specified in the applicable specification sheet.

3.15 Workmanship. Workmanship shall be of a quality to assure delivery of sets that are free from defects (see 6.4.17) resulting from defective material and incorrect manufacturing or assembly practices.

3.16 Government-furnished property. Each set will be mounted in the Government-furnished power unit/power plant configurations listed below (see 6.2).

Size	Nomenclature
5 kW	AN/MJQ-35
10 kW	AN/MJQ-37
15 kW	PU-801
15 kW	PU-802
30 kW	PU-803
60 kW	PU-805

4. VERIFICATION

4.1 Classification of inspection. Inspection shall be classified as follows:

a. First article preproduction inspection (see 4.3).
b. First article production inspection (see 4.4).
c. Conformance inspection (see 4.5).
d. Inspection comparison (see 4.9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

4.2 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in applicable test method document or applicable paragraphs in the specification.

4.2.1 Fuel, lubrications, and coolant for inspection. DF-2 diesel fuel conforming to VV-F-800 shall be used for all tests unless otherwise specified herein. DF-1 (VV-F-800) shall be used for all testing with ambient temperatures between -32 to -18 °C (-26 and 0 °F). Lubricating oil shall be as follows:

LUBRICATING OIL SPECIFICATION	GRADE	DAILY LOW AMBIENT TEMPERATURE (°C/°F)
MIL-L-2104	OE/HDO-15/40	-18 to 49 °C (0 to 120 °F)
MIL-L-2104	OE/HDO-10	-26 to 4 °C (-15 to 40 °F)
MIL-L-2104	OE/HDO-30	-9 to 49 °C (15 to 120 °F)
MIL-L-2104	OE/HDO-40	-4 to 49 °C (25 to 120 °F)
MIL-L-46167	OEA	-32 to 4 °C (-25 to 40 °F)

Coolant shall conform to either MIL-A-11755, water with MIL-A-46153 inhibited antifreeze, or water with MIL-A-53009 additive for all testing conducted at temperatures from 4 to 49 °C (40 to 120 °F). Below 4 °C (40 °F), either MIL-A-11755 or water with MIL-A-46153 inhibited antifreeze shall be used for testing.

4.3 First article preproduction inspection. The preproduction generators, with excitation system, and sets shall be examined and tested as specified herein to determine compliance with this specification and the applicable specification sheets (see 3.1).

4.3.1 Examination of components and subassemblies. Examination of components and subassemblies shall be made prior to assembly of the generator or set. Evidence that any components or

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

subassemblies do not comply with the requirements of this specification shall be cause for rejection of that component or subassembly.

4.3.1.1 Examination of generator, excitation system, and sets. Examination of the generator with excitation system and the three sets shall be made without disassembly. Evidence that the generator, excitation system, or sets do not comply with the drawings shall be cause for rejection of the generator, excitation system, or sets.

4.3.2 Preproduction tests. Two preproduction sets shall be subjected to the applicable tests marked "X" under column 1 of table I except for the reliability test. Three preproduction sets shall be subjected only to reliability test of table I. All generators shall be subjected to the generator only tests marked "X" in column 1 of table I. The generator with excitation system shall be subjected to the generator with excitation system tests marked "X" under column 1 of table I. In addition to any test specified as part of the preproduction tests, the Government reserves that right to conduct any and all preproduction tests and failures of such additional tests shall have the same effect as failures of those tests specified as preproduction tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE I. Test schedule.

1	2	3	4	5	6	7
First Article		Quality Control				
PPT SEE 4.4	PTSE E 4.5	IND I SEE 4.6.1	SAMP SEE 4.6.2	TEST	TEST METHOD (MIL-STD-705) AND TEST PARAGRAPH (SEE NOTE 1)	BASIC REQUIREMENT PARAGRAPH
				GENERATOR ONLY:		
X		X		High Potential	TM 302.1 (Isolate diodes)	3.5.10
X		X		Insulation Resistance	TM 301.1 (Isolate diodes)	3.5.9
X		X		Winding Resistance	TM 401.1	3.5.12
				GENERATOR WITH EXCITATION SYSTEM:		
X	X			Direct-axis Transient Reactance	TM 425.1	3.5.15
X			X	Generator Power Input	TM 415.1 (Sample at rated load only)	3.1
X	X			Negative Sequence Reactance and Impedance	TM 422.1	3.5.16
X	X			Open Circuit Saturation Curve	TM 410.1 (See Note 2)	3.5.13
X	X			Overspeed (Generator only)	TM 505.3	3.5.18
X		X		Rated Load Current Saturation Curve	TM 413.1 (See Note 2; One point at rated voltage only for individual tests)	3.5.13
X			X	Short Circuit (Mechanical strength)	TM 625.1 (Apply single phase short circuits at each line-to-line and each line-to-neutral connection. Also apply symmetrical 3 phase short circuits at the output terminals. Single phase short circuits are for 5 seconds, 3 phase short circuits are for 10 seconds. Power input to the voltage regulator to sustain the required short circuits may be obtained from a separate source.)	3.5.11
X	X			Synchronous Impedance Curve (Short-circuit	TM 411.1 (See Note 2)	3.5.13

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE I. Test schedule. - Continued

1	2	3	4	5	6	7
First Article		Quality Control		TEST	TEST METHOD (MIL-STD-705) AND TEST PARAGRAPH (SEE NOTE 1)	BASIC REQUIREMENT PARAGRAPH
PPT SEE 4.4	PTSE E 4.5	IND I SEE 4.6.1	SAMP SEE 4.6.2			
				Saturation Curve)		
X	X			Zero Power Factor Saturation Curve	TM 412.1 (See Note 2)	3.5.13
				GENERATOR SET:		
X	X		X	Noise level	4.8.2.1	3.8
X		X		Circuit Interrupter (Overload Current)	TM 512.2	3.5.20.8
X		X		Circuit Interrupter (Overvoltage and Undervoltage)	TM 512.3	3.5.20.5, 3.5.20.6
X		X		Circuit Interrupter (Short Circuit)	TM 512.1 (Use oscillograph for preproduction qualification model sets only)	3.5.20.7
X		X		DC Control	TM 655.1 (Perform at minimum and maximum settings of the battery charging voltage adjustment control.)	3.5.19.1
			X	Sample Endurance	TM 690.1, 4.8.2.7	3.1
X		X		Frequency Adjustment Range	TM 511.2 (At no-load and rated load; See Note 3)	3.1
X		X		Frequency & Voltage Regulation, Stability and Transient Response (Short Term)	TM 608.1 (See Note 2 and 4)	3.1
X	X			Frequency & Voltage Stability (Long Term)	TM 608.2 (See Note 3)	3.1
X	X		X	High Temperature at 49 °C (120 °F)	TM 710.1 at 49 °C (120 °F) (Take temperature rise measurements on the stator windings and exciter field under the following conditions: (See Note 5) All single and 3 phase	3.1, 3.9.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE I. Test schedule. - Continued

1	2	3	4	5	6	7
First Article		Quality Control		TEST	TEST METHOD (MIL-STD-705) AND TEST PARAGRAPH (SEE NOTE 1)	BASIC REQUIREMENT PARAGRAPH
PPT SEE 4.4	PTSE E 4.5	IND I SEE 4.6.1	SAMP SEE 4.6.2			
					connections at the maximum and minimum voltage adjustment range specified on the applicable specification sheets. (Also perform TM 619.1 and 619.2 at rated frequency and 3 phase volt-connections.)	
X		X		High Temperature Protective Device	TM 515.2	3.5.20.2
X	X			Humidity	TM 711.1, 4.8.2.20	3.9
X		X		Indicating Instrument (Electrical)	TM 513.1 (At all rated voltage connections.)	3.5.21
X				Lifting and Tiedown	TM 740.4	3.5.23
X		X		Low Fuel Protective Device	TM 515.5 (See Note 6)	3.5.20.4
X		X		Low Oil Pressure Protective Device	TM 515.1	3.5.20.3
X		X		Malfunction Indicator Exam	4.8.2.11	3.5.22
X	X			Maximum Power	TM 640.1	3.7.3, 3.7.4
		X		Maximum Power	TM 640.4	3.7.3, 3.7.4
X		X		Overspeed (Set)	TM 505.1 (At 115 percent rated speed for 5 minutes)	3.5.18
X		X		Overspeed Protective Device	TM 505.2	3.5.20.1
X		X		Parallel Operation	TM 630.1, 4.8.2.2 (See Note 3)	3.1, 3.7.2
X		X		Phase Balance (Voltage)	TM 508.1 (To be measured at load terminals. Also, measure voltages for each winding using separate excitation. On individual production sets measure line-to-line and line-to-neutral at	3.5.14

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE I. Test schedule. - Continued

1	2	3	4	5	6	7
First Article		Quality Control		TEST	TEST METHOD (MIL-STD-705) AND TEST PARAGRAPH (SEE NOTE 1)	BASIC REQUIREMENT PARAGRAPH
PPT SEE 4.4	PTSE E 4.5	IND I SEE 4.6.1	SAMP SEE 4.6.2			
					load terminals only)	
X		X		Phase Sequence (Rotation)	TM 507.1	3.5.7
X	X			Railroad Impact	TM 740.5, 4.8.2.3	3.6
X	X			Reliability	TM 695.1, 4.8.2.18.1	3.1
X	X		X	Reverse Battery Polarity	TM 516.5	3.5.3
X		X		Reverse Power Protective Device	TM 516.2 (15 kW size and above only)	3.5.20.9
X		X		Start and Stop	TM 503.1	3.7.1, 3.9
X	X			Voltage Dip and Rise for Rated Load	TM 619.2 (See Note 4)	3.1
X	X		X	Voltage Dip for Low Power Factor Load	TM 619.1 (See Note 4)	3.1
X	X		X	Voltage Modulation	TM 602.1 (At all rated voltage connections.)	3.1
X	X			Voltage Unbalance with Unbalanced Load	TM 620.2	3.1
X	X		X	Voltage Waveform (Oscillographic, Harmonic Analysis)	TM 601.1 and 601.4 (See Note 2; At all rated voltage connections and the following loading conditions: a. No-load b. Rated kW at 0.8 pf lagging c. Rated kW at 1.0 pf)	3.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. Tests shall be conducted with the 240/416-volt connection for sets 15 kW and larger, unless otherwise indicated. For Mode I sets, tests shall be conducted at 60 Hz only unless otherwise indicated. Tests shall be conducted with the 120/208-volt connection for sets 10 kW and smaller, unless otherwise indicated. The Government reserves the right to reject the set for not meeting any requirement of this specification even through not performing a test directly related to the specific requirement.

2. For Mode I sets, test shall be conducted at 50 and 60 Hz at all voltage connections.

3. For Mode I sets, test shall be conducted at 50 and 60 Hz.

4. Test to be conducted at all voltage connections for 5 and 10 kW size sets.

5. For sample tests, only make the runs which gave highest stator and excitor field temperature rises during the first article inspection.

6. For the low fuel protective device test, the requirements of fuel system shall be verified as applicable.

7. Also view waveform with an oscilloscope having a bandwidth of DC to 1.5 MHz and a usable viewing screen of 8 by 10 cm. The oscilloscope gain shall be adjusted such that one cycle of voltage covers approximately the entire viewing screen. For sample tests, only TM 601.4 need to be used for the voltage waveform test.

4.3.3 Inspection failure. Failure of a first article set to meet any requirement specified herein during and as a result of the examination and tests specified in 4.4 shall be cause for rejection of the first article sets.

4.4 First article production inspection. Two production sets shall be subjected to the applicable tests marked "X" under column 2 of table I except for the reliability test. Three production sets shall be subjected only to reliability test of table I. All generators shall be subjected to the generator only tests marked "X" in column 2 of table I. The generator with excitation system shall be subjected to the generator with excitation system tests marked "X" under column 2 of table I. In addition to any test specified as part of the first article production inspections, the Government reserves that right to

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

conduct any and all other test contained in this specification as part of the first article production inspection and failure of such addition tests shall have the same effect as failure of those tests specified as first article production inspections.

4.4.1 Inspection failure. Failure of a production set to meet any requirement specified herein during and as a result of the examination and tests specified in 4.4 shall be cause for rejection of the production sets and shall be cause for refusal by the Government to continue acceptance of production sets until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on sets previously accepted and produced under the contract. Any deficiencies found as a result of the production inspection will be considered prima facie evidence that all sets accepted prior to the completion of production inspection are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.5 Conformance inspection.

4.5.1 Individual set inspection. Each production set shall be examined and tested (see 4.6.1.1), without disassembly, for conformance to this specification and the drawings (see 3.1). Noncompliance with the drawings shall be cause for rejection.

4.5.1.1 Tests. Each set shall be subjected to the tests marked "X" under column 3 of table I. For generator only tests, the tests shall be conducted prior to assembly into the set. Failure of any test shall be cause for rejection.

4.5.2 Sample inspection. Sampling shall be in accordance with ANSI/ASQC Z1.4 after all sets comprising a lot have passed the inspection specified in 4.5.1. Unless otherwise specified (see 6.2), lot sizes shall consist of not more than 50 sets except that the first lot shall contain not less than 25 sets. For a lot size of 50 or less, a minimum sample size of 2 shall be used. A lot shall be accepted when zero defects are found and rejected when one or more defects are found. No adjustment or substitution of components shall be made on the sets selected for sample inspection.

4.5.2.1 Tests. Sets selected in accordance with 4.5.2 shall be subjected to the tests marked "X" under column 4 of table I in the order listed with the exception that the sample endurance test shall be conducted on 50 percent of the samples from each lot or on 2 samples per lot whichever is greater. When this 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

percent results in fraction of sets, the next highest number representing complete sets shall be used. A sample set which fails to meet a requirement during any test shall be considered a defective set. Failure of any sample set to meet any requirement herein shall be cause for rejection of the lot. Rejection shall be the cause for Government to refuse further acceptance of production sets until Government-approved correction of deficiencies has been implemented. The Government may choose that the rejected lot, after correction of deficiencies, undergo any or all of the table I, column 4 tests, prior to acceptance of the lot or acceptance of further production sets. Correction of deficiencies and retesting of rejected sets or lots shall be accomplished by the contractor under Government supervision at no cost to the Government.

4.6 Test schedules. The test schedules shall be as shown in table I. Nonconformance to the applicable requirement paragraph shown in column 7 shall constitute failure of the test and shall be cause for rejection of the generator, the generator with excitation system, or the set, as applicable. The Government reserves the right to reject the equipment for not meeting any requirement herein, even though not performing a test directly related to the specific requirement. The requirements in section 3 shall apply to all tests performed as a part of another test. If maintenance shutdown, as permitted in Appendix A, Maintenance Schedule, would be due to occur, because of hours accrued during previous testing, after the beginning of any test, the shutdown shall be postponed until completion of the test or until completion of 100 hours of operation, whichever is lesser.

4.6.1 Table I. Unless otherwise specified (see 6.2), the test schedule shall be as shown in table I.

4.6.2 Table II. When changes to components or materials specified on the drawings are proposed (see 6.3) by the contractor, the contracting officer shall determine which, if any, additional tests listed in table II shall be conducted by the contractor to determine set compliance with the requirements specified herein. All quality assurance provisions of section 4 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE II. Additional test schedule.

1	2	3
TEST	TEST METHOD (MIL-STD-705) And TEST PARAGRAPH (SEE NOTE)	BASIC REQUIREMENT PARAGRAPH
	GENERATOR SET:	
Altitude Operation	Before and after REM test. TM 720.1 at 1219 m, 35 °C; and 2438 m, 35 °C (4,000 ft, 95 °F; and 8,000 ft, 95 °F)	3.7.4, 3.9
Drop (Ends)	TM 740.3, 4.7.2.4	3.6
Electromagnetic Interference	4.7.2.5 (At all rated voltage connections at the following load conditions: a. No load b. Rated kW load at 1.0 pf c. Rated kW load at 0.8 pf lagging	3.11
Extreme Cold Storage	TM 731.1, 4.7.2.16	3.9.2
Fuel Consumption	TM 670.1 (At 25, 50, 75, and 100 percent rated load)	3.1
HAEMP	4.7.2.8	3.10
Ice Glaze and Wind	4.7.2.15	3.9.1
Inclined Operation	TM 660.1 (Perform at maximum fuel levels. Perform at full and add positions on the oil dipstick)	3.7.1.1
JP-4 and JP-5 Fuel	4.7.2.12	3.7.4
Maintainability Demonstration	4.7.2.22	3.13
Motor Starting	4.7.2.6	3.1
Rain	4.7.2.17	3.9.1
Reliability, Endurance, Maintainability	4.7.2.18.2	3.1, 3.13
Road	4.7.2.9	3.6
Salt Fog	4.7.2.10	3.9.1
Sand and Dust	4.7.2.14	3.9.1
Size and Weight	4.7.2.25	3.1
Solar Radiation	4.7.2.23	3.9.1.d
Starting and Operating (Moderate Cold Battery Start)	TM 701.2 at -32 °C (-25 °F)	3.9.1
Voltage and Frequency Drift	4.7.2.13	3.1
Hot Storage Test	TM 732.1, 4.7.19	3.9.2
Torsiographing	TM 504.2 (At no load and rated load. Also perform search for dangerous flexural vibration and dangerous torsional critical speeds between low idle speed and 115 percent of rated speed.)	3.5.17

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

NOTE: Tests shall be conducted with the 240/416-volt connection for sets 15 kW and larger, unless otherwise indicated. For Mode I sets, tests shall be conducted at 60 Hz only unless otherwise indicated. Tests shall be conducted with the 120/208-volt connection for sets 10 kW and smaller, unless otherwise indicated.

4.7 Test procedures. Tests shall be conducted in accordance with MIL-STD-705, MIL-HDBK-705, and as specified herein. Test instruments shall be of the laboratory type and shall have been calibrated within 30 days of the start of testing and at six months periods thereafter. Instruments used in calibration should be at least five times the accuracy of the instrument being calibrated. Direct-reading instruments shall have at least 0.5 percent accuracy and shall be connected to indicate the most accurate portion of their range. On DC instruments, the readings shall not be made on the lower 15 percent of the scale. On AC instruments, the readings shall not be made on the lower one-third of the scale. Oscillograph galvanometer frequency response shall be flat (±5 percent) from DC to not less than 3,000 Hz. The voltage and frequency recording-type meters, other than oscillographs, shall have the following specifications:

a. Rise time for the frequency to be 250 ms.

b. Rise time for the voltage to be 60 ms.

c. Input to be up to 500 volts RMS.

d. Output to be ±5 volts DC maximum.

e. The signal input(s) and output(s) shall be ungrounded.

In addition, if an analog signal is digitized for the purpose of automation, the sampling frequency shall be at least 25 percent higher than twice the highest frequency component of the analog signal; (i.e. The sampling frequency for voltage waveforms acquired using the above oscillograph is 7.5 kHz; 3.75 MHz for the oscilloscope aforementioned 3.34.9.) The sampling frequency for any waveforms acquired using the above voltage and frequency recording-type meter shall be at least 100 Hz. The data shall be saved on 3½-inch or 5¼-inch floppy disks and in ASCII text file. Exhaust smoke testing shall be in accordance with the method specified in 4.7.2.21. Exhaust smoke conditions shall be measured during all altitude testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

4.7.1 Government performed tests. The maintainability demonstration, road, and HAEMP tests will be accomplished by the Government at Government expense at a Government installation (see 6.2).

4.7.2 Tests.

4.7.2.1 Audio noise test. Instrumentation and procedures for the audio noise test shall conform to Appendix B, TM 100.1. Measure audio noise sound pressure level at no-load and rated load. The microphone(s) shall be located at 7 m (22.9 feet) from the perimeter of the set and 1.2 m above the ground. Measure audio noise sound pressure levels at 0.7 m from the control panel, at a height equal to the control panel, with the set on the ground, and with the control panel door(s) open.

4.7.2.2 Parallel operation test. For first article preproduction model testing (column 1 of table I), two sets of each size and mode shall be tested in accordance with method 630.1 of MIL-STD-705. For individual set verification testing (column 3 of table I), each production set shall be tested in parallel with the first set of same production lot sets (see 6.2). Each set selected as the test set shall be tested with the next test set selected from the next lot. The set selected as the paralleling master set (test set) per lot, shall not be the quality control sample set(s) of that same lot. Testing shall be in accordance with method 630.1 of MIL-STD-705 with the following changes:

a. Control panel instrumentation on the sets shall be used.
b. Load connections shall be no-load, half-load, and rated load.
c. Where 1 hour of operation is referenced, substitute 15 minutes of operation.

4.7.2.3 Railroad impact test. Test shall be performed in accordance with TM 740.5 of MIL-STD-705, with the following conditions:

a. Two sets shall be used.
b. The two sets shall be mounted in opposite direction to each other.
c. The sets shall be mounted in accordance with set rail tiedown procedures.
d. The sets shall not require any type of packaging for the test.

4.7.2.4 Drop test. The drop test shall be performed in accordance with TM 740.3 of MIL-STD-705 at a height of 9 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

4.7.2.5 Electromagnetic interference test. The electromagnetic interference test shall be performed in accordance with Appendix B, Test Method 101.1.

4.7.2.6 Motor starting test. The motor starting test shall be performed by use of a motor rated NEMA Code F, in accordance with MG-1. The motor shall be loaded with a flywheel or equivalent having an inertia equal to that of the motor rotor. Satisfactory starting is defined as acceleration of the motor to rated speed without tripping any generator set protective devices.

4.7.2.7 Sample endurance test. Sample sets shall be operated for 50 hrs per set, in accordance with MIL-STD-705, TM 690.1. The disassembly portion contained in TM 690.1 is not required. The number of operating hours at each load shall be proportional to the hours specified in the TM 690.1 cyclic load schedule. JP-8 fuel per MIL-T-83133 shall be used for this test. The sets shall be fueled utilizing the auxiliary fuel system on the set. The set fuel tank shall be inspected for leaks during the test. The sample sets shall complete the test with zero defects. Defects are defined in 6.4.17.

4.7.2.8 HAEMP tests and analyses. This test shall be conducted in accordance with the Detailed Test Plan for First Article Preproduction Test (FAPT) of Tactical Quiet (TQ) Generator Sets and Towed Assemblages, Nuclear Effects Directorate, U.S. Army Test and Evaluation Command, dated December 1989.

4.7.2.9 Road test. Each configuration as defined in 6.4.9 on the Government-furnished property listed in 3.16, shall be tested in accordance with Appendix B, TM 106.1 Road Test.

4.7.2.10 Salt fog test. The salt fog test shall be performed in accordance with Appendix B, TM 104.1 Salt Fog Test. Two sets shall be subjected to two 48-hour cycles as follows:

24 hours - salt fog exposure
24 hours - standard ambient (drying)

Salt concentration shall be a 5 ±1 percent solution. The sets shall be tested in their normal operating mode. TM 608.1 of MIL-STD-705 shall be performed within 4 hours before the start of the salt fog cycling. After performing TM 608.1, but prior to the start of the salt fog cycling, isolate the exciter field and measure their insulation resistances in accordance with TM 301.1 of MIL-STD-705, except that the values need not be corrected for temperature. After completion of the salt fog cycling, but prior to the post-cycling TM 608.1 test, measure the insulation resistance of all circuits initially measured in accordance with

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TM 301.1, except that the set shall not be operated prior to this test and measured values shall not be corrected for temperature. Upon completion of the post-cycling TM 301.1 test, reconnect all circuits and perform TM 608.1 within 4 hours after removal of the set from the test chamber. The set shall be examined for corrosion or other physical damage (see 6.4.3) resulting from this test.

4.7.2.11 Malfunction indicator exam. Indicator operation shall be noted throughout all testing.

4.7.2.12 JP-4 and JP-5 fuel test. The fuel test shall be performed using JP-4 fuel as follows:

a. Perform a high temperature test at 38 °C (100 °F) in accordance with TM-710.1 of MIL-STD-705, except that Section 710.1.3.2 shall be modified as follows: Perform only paragraphs a and g (608.1 only).

b. Perform a moderate cold test at 18 °C (0 °F) in accordance with TM 701.2 of MIL-STD-705, except that Section 701.2.3.2k shall be modified as follows: Perform 608.1 only.

C. Operate each test set for a total of 300 hours in accordance with TM 690.1 of MIL-STD-705.

The above procedures shall be repeated using JP-5 except high temperature test shall be performed at 49 °C (120 °F). Acceptance criteria for the 300-hour operation run shall be zero relevant or critical failures. JP-4 shall conform to MIL-T-5624 with a cetane rating of 30-35, and JP-5 shall conform to MIL-T-5624.

4.7.2.13 Voltage and frequency drift test. Follow the same procedure in TM 608.2 of MIL-STD-705, except that the set is initially stabilized at an ambient temperature which differs by 33 C° (60 F°) from the final stabilization temperature and the test is conducted for 8 hours. This test may be accomplished as the environmental chamber is being warmed from a cold temperature test. Temperature change shall be less than 5.5 C° per hour (10 F° per hour).

4.7.2.14 Sand and dust test. The sand and dust test shall be conducted in accordance with Appendix B, TM 103.1 Sand And Dust test with the following conditions:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

a. Perform TM 608.1 of MIL-STD-705.

b. Test shall be performed at prevailing ambient temperatures and relative humidities.

c. Air velocity shall be maintained at a minimum of 32.2 km/h (20 mph).

d. Sand concentration shall be 1.4 g/m^3.

e. The test shall consist of four 90-minute intervals. The set shall be oriented with each side exposed to the blowing sand for one 90-minute interval. The set shall be operated at no load for a minimum of 10 minutes during the last half of each 90-minute interval.

f. Following completion of the four 90-minute intervals, TM 608.1 of MIL-STD-705 shall be performed.

4.7.2.15 Ice glaze and wind test. The set shall be subjected to the combined action of wind and ice as follows:

a. Perform TM 608.1 of MIL-STD-705.

b. With the ambient temperature between -23 and 0 °C (-10 and 32 °F), and with a steady windspeed of at least 22.25 m/s (73 ft/s), deliver a uniform rainspray on the non operating set until 12.7 mm (0.5 inch) of ice glaze has accumulated on the top of the set.

c. After accumulation of 12.7 mm (0.5 inch) on the top of the set, the set shall be started and operated at no load for a minimum of 1 hour.

d. After 1 hour of operation at no load, TM 608.1 of MIL-STD-705 shall be performed.

4.7.2.16 Extreme cold storage test. The test shall be conducted in accordance with TM 731.1 of MIL-STD-705 except at an extreme cold temperature of -51 °C (-60 °F) instead of -62 °C (-80 °F).

4.7.2.17 Rain test. Conduct test in accordance with Appendix B, TM 102.1, at 5 inches of rain per hour.

4.7.2.18 Reliability, endurance, maintainability test. The reliability test shall be conducted on 3 sets per mode, in accordance with MIL-STD-705, TM 695.1. The disassembly portion

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

contained in TM 695.1 is not required. The number of operating hours at each load shall be proportional to the hours specified in the TM 695.1 cyclic load schedule. The sets shall be fueled utilizing the auxiliary fuel system on the set. The set fuel tank shall be inspected for leaks during the test.

4.7.2.18.1 Reliability test. The reliability test shall be conducted using table III. The reliability failure criteria shall be in accordance with table III. All failures shall be in accordance with 6.4.11. JP-8 fuel per MIL-T-83133 shall be used for this test. One critical failure (see 6.4.11.d) shall constitute a failure of the reliability test.

TABLE III. Reliability test schedule.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE IV. Reliability, endurance, and maintainability test schedule.

Set Size	Mode	Relevant Failures Allowed	Test Hrs per Set	Total Reliability Hours
5 kW	60 Hz	17	3145	9440
5 kW	400 Hz	17	3016	9047
10 kW	60 Hz	12	3179	9538
10 kW	400 Hz	16	3132	9396
15 kW	50/60 Hz	13	3051	9153
15 kW	400 Hz	22	3023	9068
30 kW	50/60 Hz	12	3179	9538
30 kW	400 Hz	14	3081	9243
60 kW	50/60 Hz	15	3129	9386
60 kW	400 Hz	21	3107	9320

4.7.2.19 Hot storage test. Perform in accordance with MIL-STD-705, test method 732.1 at 71 °C (160 °F).

4.7.2.20 Humidity test. The humidity test shall consist of 5 consecutive 48-hour cycles as specified in MIL-STD-705, test method 711.1.

4.7.2.21 Exhaust smoke. Exhaust smoke conditions for diesel engines during performance and altitude testing shall be measured by the use of a Robert Bosch EFAW 65 sampling pump and analyzed on a EFAW 68 analyzing instrument at room temperature (65 to 80 °F). The smoke sampling tube shall be located in the exhaust pipe, positioned midway of and parallel to the pipe walls and between 12 and 60 inches of the exhaust manifold. Tubing between the sampling pump and exhaust probe shall not exceed 24 inches in length and shall have an inside diameter of not more than 1/4 inch. At that location, the exhaust pipe inside area shall not be larger than 125 percent of the exhaust manifold outlet area. Alternate smoke analyzers may be utilized provided comparative data is obtained during initial portion of the test program, and the engine manufacturer and contracting officer mutually establish an official table indicating comparative readings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

4.7.2.22 Maintainability demonstration. The maintainability demonstration shall consist of performance of all scheduled maintenance (PMCS and 250/300 hour servicing) per Appendix B. Arctic mittens and MOPP IV gear shall be used. Any item of service which can not be performed with arctic mittens or MOPP IV gear shall constitute a failure. Item 12, tighten hardware and replace insulation (noise) shall be excluded.

4.7.2.23 Solar radiation test. The solar radiation test shall be in accordance with Appendix B, TM 105.1.

4.7.2.24 Referee grade diesel test. The referee grade diesel fuel test shall be conducted on 2, mode III generator sets. Each set shall be operated for 500 hours, using diesel fuel conforming to MIL-F-46162. The test shall be performed in accordance with TM 695.1 of MIL-STD-705.

4.7.2.25 Size and weight. The overall size shall be determined with all of the set doors in the closed position, using standard measuring equipment. The set shall be weighed to determine the operational weight (see 6.4.15), using a calibrated scale. For information only, a dry weight defined as no fluids except battery electrolyte, shall be determined.

4.8 Inspection comparison. The Government may select sets at any time during the contract production period and subject these sets to any examination and test specified herein, necessary to determine that the selected sets meet all requirements of this specification. The inspection will be performed by the Government at a site selected by the Government. Sets will be selected at random from those which have been accepted by the Government and will not include the previously inspected preproduction model and production sets. Acceptance of an inspection comparison set shall not exclude the remaining sets from the quality conformance inspection and acceptance provisions specified in section 4. In addition to any test specified as part of the inspection comparison, the Government reserves the right to conduct any and all other tests contained in this specification as part of the inspection comparison and failure of such additional tests shall have the same effect as failure of those tests specified as inspection comparison.

4.8.1 Inspection failure. Failure of an inspection comparison set to meet any requirement specified herein, during and as a result of the examination and tests specified in 4.8, shall be cause for refusal by the Government to continue acceptance of production sets until evidence has been provided by the contractor that corrective action has been taken to eliminate the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on sets previously accepted and produced under the contract. Any deficiencies found as a result of the inspection comparison will be considered prima facie evidence that all sets accepted prior to completion of the inspection comparison are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.

6.1 Intended use. The sets are intended to supply power for multipurpose use in military applications.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.

b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.2 and 2.2).

c. Associated specification sheets, number and date (see 3.1).

d. Time frame required for submission of first article preproduction model (see 3.2).

e. When the Government will conduct any or all of the preproduction model examination and tests. When the Government will conduct some but not all of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

preproduction examination and tests. The contracting officer should specify which examination and tests, will be conducted by the Government and which examination and tests shall be conducted by the contractor (see 3.2).

f. When initial production inspection is required and number of sets to be furnished, when applicable (see 3.3).

g. Whether batteries are to be furnished with production sets (see 3.5.3).

h. Which paint color code is to be used for camouflage pattern (standard, desert, winter/snow) (see 3.12).

i. Government-furnished property (see 3.16).

j. Size of lots for production sets (see 4.6.2).

k. Delivery and test schedule of Government performed tests (see 4.7.1).

l. How production paralleling sets are to be retained and maintained during life of the contract (see 4.8.2.2) and how sets are to be refurbished and delivered at the end of the contract.

m. Whether failure reports are required for reliability testing.

o. Packaging requirements (see 5.1).

p. TM 100.1 - Audio Noise

(1) Audio noise sound-pressure levels other than as specified herein.
(2) Load condition other than as specified herein.

q. TM 101.1 - Electromagnetic Interference

(1) Conduct emissions other than as specified in Figure 9.1 of MIL-STD-461.
(2) Radiated emissions other than as specified in Figure 9.2 of MIL-STD-461.
(3) Short-term voltage and frequency stability.

r. TM 102.1 - Rain

(1) Wind speeds and angles of water drops impinge on the set other than as specified herein.
(2) Frequency

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

(a) Maximum allowable short-term stability bandwidth or deviation in percent of rated frequency.
(b) Maximum allowable recovery time.
(c) Maximum allowable overshoot and undershoot.
(d) Frequency(ies) at which this method is to be performed.
(e) Maximum allowable regulation.

(3) Voltage

(a) Maximum allowable short-term stability bandwidth or deviation in percent of rated voltage.
(b) Maximum allowable recovery time.
(c) Maximum allowable overshoot and undershoot.
(d) Voltage connection(s) at which this method is to be performed.
(e) Maximum allowable regulation.

s. TM 103.1 - Sand and Dust

(1) Air velocity other than as specified herein.
(2) Sand concentration and composition other than as specified herein.

(3) Frequency

(a) Maximum allowable short-term stability bandwidth or deviation in percent of rated frequency.
(b) Maximum allowable recovery time.
(c) Maximum allowable overshoot and undershoot.
(d) Frequency(ies) at which this method is to be performed.
(e) Maximum allowable regulation.

(4) Voltage

(a) Maximum allowable short-term stability bandwidth or deviation in percent of rated voltage.
(b) Maximum allowable recovery time.
(c) Maximum allowable overshoot and undershoot.
(d) Voltage connection(s) at which this method is to be performed.
(e) Maximum allowable regulation.

t. TM 104.1 - Salt Fog

(1) Frequency

(a) Maximum allowable short-term stability bandwidth or deviation in percent of rated frequency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

(b) Maximum allowable recovery time.
(c) Maximum allowable overshoot and undershoot.
(d) Frequency(ies) at which this method is to be performed.
(e) Maximum allowable regulation.

(2) Voltage

(a) Maximum allowable short-term stability bandwidth or deviation in percent of rated voltage.
(b) Maximum allowable recovery time.
(c) Maximum allowable overshoot and undershoot.
(d) Voltage connection(s) at which this method is to be performed.
(c) Maximum allowable regulation.

(d) Salt concentration other than as specified herein.

u. TM 105.1 - Solar Radiation

(1) Frequency

(a) Maximum allowable short-term stability bandwidth or deviation in percent of rated frequency.
(b) Maximum allowable recovery time.
(c) Maximum allowable overshoot and undershoot.
(d) Frequency(ies) at which this method is to be performed.
(e) Maximum allowable regulation.

(2) Voltage

(a) Maximum allowable short-term stability bandwidth or deviation in percent of rated voltage.
(b) Maximum allowable recovery time.
(c) Maximum allowable overshoot and undershoot.
(d) Voltage connection(s) at which this method is to be performed.
(e) Maximum allowable regulation.

(3) Solar radiation other than as specified herein.

v. TM 106.1 - Road Transportability

(1) The quantity of equipment to be tested.
(2) Speeds and distances other than as specified herein.
(3) The failure definition for damage.

(4) Frequency

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

(a) Maximum allowable short-term stability bandwidth or deviation in percent of rated frequency.
(b) Maximum allowable recovery time.
(c) Maximum allowable overshoot and undershoot.
(d) Frequency(ies) at which this method is to be performed.
(e) Maximum allowable regulation.

(5) Voltage

(a) Maximum allowable short-term stability bandwidth or deviation in percent of rated voltage.
(b) Maximum allowable recovery time.
(c) Maximum allowable overshoot and undershoot.
(d) Voltage connection(s) at which this method is to be performed.
(e) Maximum allowable regulation.

(6) Road courses other than as specified herein.

w. TM 107.1 - Railroad Impact

(1) The quantity of equipment to be tested.
(2) The equipment orientation and method of tiedown if other than that specified by the Association of American Railroads.
(3) The location and orientation of shock recording or strain sensing devices if required.
(4) Speeds other than as specified herein.
(5) The failure definition for damage.

(6) Frequency

(a) Maximum allowable short-term stability bandwidth or deviation in percent of rated frequency.
(b) Maximum allowable recovery time.
(c) Maximum allowable overshoot and undershoot.
(d) Frequency(ies) at which this method is to be performed.
(e) Maximum allowable regulation.

(7) Voltage

(a) Maximum allowable short-term stability bandwidth or deviation in percent of rated voltage.
(b) Maximum allowable recovery time.
(c) Maximum allowable overshoot and undershoot, if applicable.
(d) Voltage connection(s) at which this method is to be performed.
(e) Maximum allowable regulation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

6.3 Configuration management. The generator sets controlled by this specification are under the configuration management authority of the DoD Project Manager for Mobile Electric Power. All engineering change proposals (ECPs), request for waivers (RFWs), and request for deviations (RFDs) must be processed in accordance with DLAR 4120.7, AR700-101, AFR 400-50, NAVMATINST 4120.100A, MC011310.8C, Joint Operating Procedures Management and Standardization of Mobile Electric Power Generating Sources.

6.4 Definitions.

6.4.1 Start. A set is considered to have started when it is operating at rated voltage and speed without the further use of starting aids.

6.4.2 Stop. A set is considered to have stopped when all rotating members are at zero rpm, with the exception of a turbo charger if used.

6.4.3 Damage. Damage is defined as any failure (see 6.4.11), temperature or humidity related (see 6.4.3.1), rough handling damage (see 6.4.3.2) or degradation in life. The blowing (opening) of a replaceable fuse is not considered damage, provided it is performing its intended function.

6.4.3.1 Temperature and humidity damage. Temperature and humidity damage is defined as conditions causing malfunction of any component or part, corrosion, breakage, deformation, or reduction of insulation resistance below 50,000 ohms.

6.4.3.2 Rough handling damage. Rough handling damage is defined as any condition resulting in malfunctioning of the set, liquid leakage, deformation, loosening, breakage, or change of fit of any component or part.

6.4.4 Dangerous flexural vibration. Dangerous flexural vibration is defined as a vibration which occurs at a speed at which maximum stress in the shaft from flexural vibration exceeds 9,000 psi.

6.4.5 Stable (engine) operating conditions. Stable (engine) operating conditions are the conditions specified for short-term, steady-state performance.

6.4.6 Rated load. Rated load is rated kilowatt at rated power factor, rated frequency and rated voltage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

6.4.7 Dangerous torsional critical speed. Dangerous torsional critical speed is defined as the speed at which maximum vibrating stress in the shaft from torsional vibration exceed 5,000 psi.

6.4.8 Railroad transportation. Railroad transportation shall be interpreted to mean impact speeds up to and including 12.88 km/h (8 MPH) under test conditions specified in 4.7.2.3.

6.4.9 Truck or trailer transportation. Truck or trailer transportation is defined as the conditions encountered during four cycles of a road test, each cycle consisting of the following, with the set mounted on an Army truck or trailer:

ROAD CONDITION	DISTANCE km (Mi)	SPEED km/h (MPH)
Paved Highway	161 (100)	up to 80.5 (50)
Level Cross-country	161 (100)	up to 32.2 (20)
Hilly Cross-country	80.5 (50)	up to 32.2 (20)
Belgian Block	9.7 (6)	up to 32.2 (20)

6.4.10 Aircraft and helicopter transportation. Aircraft and helicopter transportation shall be interpreted to mean a 22.86 cm (9 inch) end drop under test conditions specified in MIL-STD-705, method 740.3.

6.4.11 Failure. A failure is defined as the inability of an item to perform within specified limits. The contracting officer will classify failures into the categories described below. The following definitions are applicable for section 3 requirements and the specification sheets.

a. Relevant failure. Any failure of an item which prevents the set from starting, stopping, meeting the power output requirements, meeting audio noise requirements, any failure which renders any device of the protection system (see 3.5.20) inoperative, or any failure which causes a critical or catastrophic hazard to personnel or equipment. Relevant failure shall be used to calculate the MTBF requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

b. Nonrelevant failure. Any failure of an item which is not used to compute reliability. Examples of nonrelevant failures are as follows:

- Secondary failures caused by failures in the powered equipment or other occurrences in the set environment when integral set protection is not provided against such equipment failures of occurrence, e.g., explosion or fire

- Failures due to characteristic of the load, e.g., waveform distortion caused by saturated inductors

- Failures resulting from operating items beyond requirement

- A failure of an item which does not prevent the set from meeting the power output requirements specified herein, e.g., a panel light burns out

- Failures due to operator error where procedures are documented in technical manuals, instruction plates mounted on the set, or both, e.g., use of improper lubricant

- Failures due to design deficiencies when subsequent testing demonstrates that the design deficiency has been corrected may be assessed and rescored as nonrelevant if the Government determines testing has proved the design deficiency has been corrected

c. Pattern failure. The occurrence of two or more failures of the same part in the same failure mode constitutes a pattern failure. A pattern failure, whether scored relevant or nonrelevant, may be a cause for rejection of the sets.

d. Critical failure. A critical failure is defined as a relevant failure requiring removal of the engine, cylinder head, oil pan, gear cover, or ac generator to repair.

6.4.12 Accuracy/error. Accuracy is a ratio which defines the limit of error expressed as a percentage of full scale value. Error is the difference between the indication and the true value of the quantity measured. It is the quantity which, when algebraically subtracted from the indication, gives the true value. A positive error denotes that the indication of the meter is greater than the true value.

6.4.13 Inspection/test. Inspection/test is the examination and testing of supplies or services including, when appropriate, raw materials, components, and intermediate assemblies to determine conformance with contract requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

6.4.14 First article set. First article sets are defined as preproduction or production models.

6.4.15 Operational weight. The operational weight is the total weight of the set including fuel, lubricating oil, electrolyte, and coolant at full capacities. The weight also includes ground rods and attaching hardware, paralleling cables where applicable, and auxiliary fuel line.

6.4.16 Maintenance ratio. The maintenance ratio is defined as the total maintenance manhours per total operating hours for all scheduled and unscheduled maintenance (excluding preventive maintenance checks and services by the operator) of the set. Maintenance manhours include any and all manhours expended for scheduled and unscheduled manhours (excluding preventive maintenance checks and services by the operator) before, during and after operation, including time expended for inspection, diagnosis, and adjustments of the set and repair of failed components and assemblies.

6.4.17 Defect. A defect is any nonconformance of the set with either the specification or drawings specified in the applicable specification sheets.

6.4.18 Packaging defect. A packaging defect is defined as a noncompliance with any of the packaging instructions contained on drawings in the applicable specification sheets.

6.4.19 Low idle speed. The low idle speed is defined as the slowest speed attainable by the frequency adjust control.

6.5 Inspection report. The contractor shall furnish, within the time interval specified (see 6.2), inspection reports in accordance with MIL-STD-831 for preproduction inspection and production inspection. The inspection reports shall also include the following:

a. All test data obtained from applicable tests.

b. Description of malfunction, damages, failures, and adjustments (other than adjustments permitted by this specification) which occur during inspection.

c. Causes and analysis of malfunction, damages, or failures, and reasons for adjustments.

d. Corrective actions taken or required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

6.6 Subject term (key word) listing.

Noise
Nuclear
Mobile

6.7 Government-furnished property. The contracting officer should arrange to furnish the Government-furnished property listed in 3.16.

6.8 First article. When a first article inspection is required, the item(s) should be a preproduction model and initial production model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 6115-A614

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

APPENDIX A

MAINTENANCE SCHEDULE.

A.1. SCOPE

A.1.1 Scope. The appendix is a mandatory part of the specification. The information contained herein is intended for compliance only.

A.2 APPLICABLE DOCUMENTS. This section is not applicable to the appendix.

A.3. MAINTENANCE SCHEDULE.

#	Interval (hours)	Set Size (kW)	Item to be Inspected	Procedures Check for and have repair or adjust as necessary
1	Daily	5-60	Housing	Check doors, panels, hinges, and latches for damaged, loose or corroded items. Inspect air intake and exhaust grills for debris
2	Daily	5-60	Identification plates	Check to ensure identification plates are secure.
3	Daily	5-60	Skid Base	Inspect skid base for cracks or corrosion
4	Daily	5-60	Acoustical Materials	Ensure that acoustical materials are securely in place and free of damage.
5	Daily	5-60	Engine Assembly	Check for loose, damaged or missing hardware.
6	Daily	5-60	Fuel System	Inspect fuel system for leaks, damaged, loose or missing parts.
7	Daily	5-60	Fuel Filter / Water Separator	Inspect fuel filter / water separator for leaks, proper mounting, cracks damage, or missing parts.
	250 300	5-10 15-60		Replace fuel water separator element.
8	Daily	30-60	Ether Start System	Check for deteriorated, loose or missing parts.
9	Daily	5-60	Lubrication System	Inspect lubrication system for leaks, damaged, loose or missing parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

Maintenance Schedule. - Continued.

#	Interval (hours)	Set Size (kW)	Item to be Inspected	Procedures Check for and have repair or adjust as necessary
				Check engine oil level. Check engine oil for contamination.
10	Daily	5-60	Radiator	Check radiator for leaks, damage or missing parts.
	1500			Drain coolant and flush radiator. Add proper coolant.
11	Daily	5-60	Hoses	Check hoses for leaks or cracks.
12	Daily	30-60	Cooling Fan	Check fan for damage or looseness. Check for unusual noise being emitted from fan area.
13	Daily	5-60	Fan Belt	Inspect belts for cracks, fraying and looseness.
	1500			Replace fan drive belt(s)
14	Daily	5-60	Over-flow bottle	Check over-flow bottle for leaks or missing parts
15	Daily	5-60	Exhaust System	Check muffler for leaks and exhaust system for corrosion, damaged, or missing parts
16	Daily	5-60	Air Cleaner Assembly	Inspect air cleaner assembly and piping for loose or damaged connections Check restriction indicator for clogged element.
17	Daily	5-60	Batteries	Check electrolyte level.
	250 300	5-10 15-60		Test batteries for charge state. Replace if charge state is low.
18	Daily	5-60	Battery cables	Inspect cables and connectors for corrosion, loose, damaged or missing parts
19	Daily	15-60	Output Box Assembly	Check for loose or damaged wiring or cables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

Maintenance Schedule. - Continued.

#	Interval (hours)	Set Size (kW)	Item to be Inspected	Procedures Check for and have repair or adjust as necessary
20	Daily	5-60	Indicators and Controls	Check all indicators and controls for damaged or missing parts. Ensure all indicators are operating properly.
21	Daily	5-60	Control Box Harness	Check for loose or damaged wiring.
22	Daily	15-60	Parallel Cable	If required for generator set operation, inspect parallel cable for damage.
23	Daily	5-60	Ground Rod Cable and Connection	Inspect ground rod and cable for loose connections, break, damage and corrosion.
24	250 300	5-10 15-60	Engine Lube Oil	Drain lube oil and add proper lube oil.
25	250 300	5-10 15-60	Engine Lube Filter	Remove and replace engine lube oil filter.
26	300	15-60	Governor Linkage	Clean and lubricate governor actuator linkage rod ends.
27	1,000 1,500 3,000	5 10 15-60	Engine Fuel Injectors	Replace engine fuel injectors.
28	3,000	15-60	Engine Valve Tappets	Adjust engine valve tappets.
29	250 300	5-10 15-60	Air Filter	Replace air filter element.
30	300	30-60	Crankcase Breather	Replace crankcase breather.
31	250 300	5-10 15-60	Hardware and Sound Insulation	Tighten hardware and check placement of insulation. Replace insulation as required.
32	1,500	5-60	Interior of set	Clean radiator, exterior surface, and engine compartment.
33	1,500	5-60	Magnetic Pick-up	Remove, clean, and reinstall magnetic pick-up.
34	1,500	15-60	Governor	Replace governor actuator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

Maintenance Schedule. - Continued.

#	Interval (hours)	Set Size (kW)	Item to be Inspected	Procedures Check for and have repair or adjust as necessary
			Actuator	
35	3,000	5-10	Governor Systems	Examine all interior and exterior components and renew as necessary.
36	3,000	5-10	Muffler	Check for leaks, restriction, accumulation of carbon and replace as necessary.
37	3,000	15-60	Fuel Injection Pump	Replace fuel injection pump.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

APPENDIX B

GENERAL REQUIREMENTS

B.1 SCOPE

B.1.1 Scope. This appendix is a mandatory part of the specification. The information contained herein is intended for guidance only. This document clarifies the test methods to be used for testing the generator set.

B.2 APPLICABLE DOCUMENTS

B.2.1 Government documents.

B.2.2 Standards and handbooks. The following standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-462 - Measurement of Electromagnetic Interference Characteristics.
MIL-STD-882 - System Safety Program Requirements.
MIL-STD-1472- Human Engineering Design Criteria for Military Systems.

B.2.3 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ISO 10012-1 - Quality Assurance For Measuring Equipment, Part I, Meterorlogical Confirmation System for Measuring Equipment.
NCSL Z 540-1 - General Requirements for Calibration Laboratories, Measuring and Test Equipment.

(Application for copies should be addressed to: AMERCN NATL STANDS INST, 1430 BROADWAY, NEW YORK NY 10018.)

B.3 GENERAL REQUIREMENTS

B.3.1 Test conditions. Unless otherwise specified herein, measurements and tests shall be made at the following conditions:

a. Standard ambient. Ambient measurements and checks (e.g., pre- and post-test) are conducted at room ambient conditions as follows:

Temperature:	25 ±10 °C (77 ±18 °F)
Relative humidity:	Uncontrolled room ambient
Atmospheric pressure:	Site pressure

b. Controlled ambient. When the ambient conditions must be closely controlled, the following shall be maintained:

Temperature:	23 ±2 °C (73 ±3.6 °F)
Relative humidity:	50 percent ±5 percent
Atmospheric pressure:	86.45 to 103.05 kPa (655 to 775 mmHg) (25.5 to 30.5 inHg)

B.3.1.1 Tolerance for test conditions. Unless otherwise specified, tolerances for test conditions shall be as follows:

a. Temperature. The test item shall be totally surrounded by an envelope of air (except at necessary support points). The temperature of the test section measurement system and the temperature gradient throughout this envelope, which is measured close to the test item, shall be within ±2 °C (±3.6 °F) of the test temperature and shall not exceed 1 °C per meter or a maximum of 2.2 °C total (equipment nonoperating).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

b. Pressure. ±5% (±200 Pa).

c. Humidity. Relative humidity at the chamber control sensor shall be ±5 percent RH of the measured value.

d. Time. Elapsed time shall be measured with an accuracy of ±1 percent.

e. Air velocity. Air velocity shall be within 10 percent of the specified value.

B.3.1.2 Accuracy of test instrumentation calibration. The accuracy of instruments and test equipment used to control or monitor the test parameters shall be verified prior to and following each test and then calibrated in predetermined intervals and shall meet the requirements of ISO 10012-1 and ANSI/NCSL Z 540-1 to the satisfaction of the procuring activity. All instruments and test equipment used in conducting the tests specified herein shall:

a. Be calibrated to laboratory standards whose calibration is traceable to the National Standards via primary standards.

b. Have an accuracy of at least one-third the tolerance for the variable to be measured. In the event of conflict between this accuracy and a requirement for accuracy in any one of the test methods of this appendix, the latter shall govern.

B.3.2 General test performance guidance.

B.3.2.1 Pretest performance record. Before testing, the test item should be operated at standard ambient conditions to obtain and record data determining compliance with the requirements document(s) and for comparison with data obtained before, during, and after the environmental test(s). The identification and environmental test history of the specific test item(s) should be documented for failure analysis purposes. The pre-test record shall include (as applicable):

a. The functional parameters to be monitored during and after the test if not specified herein. This shall include acceptable functional limited (with permissible degradation) when operation of the test item is required.

b. Additional evaluation criteria.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

B.3.2.2 Installation of test item in test facility. Unless otherwise specified, the test item shall be installed in the test facility in a manner that will simulate service usage, with connections made and instrumentation attached as necessary.

a. Plugs, covers, and inspection plates not used in operation, but used in servicing, shall remain in place.

b. Electrical connections normally used in service but not in test shall be provided with electrical connectors having dummy cables with protected terminations. Such mechanical connections shall also be protected.

c. For tests where temperature values are controlled, the test chamber shall be at standard ambient conditions when the test item is installed or as specified in the individual methods.

d. The test item shall be operated according to the applicable technical order or technical manual, when available, to determine that no malfunction or damage has resulted from faulty installation or handling. The requirement to operate the test item after its installation in the test facility applies only when the item is required to operate during the test.

e. Test items shall be positioned at least 15 cm (6 inches) from each other or from walls, floors, ceilings, etc. to allow for adequate circulation.

f. If the item to be tested consists of several separate units, these units may be tested separately provided the functional aspects are maintained as defined herein.

B.3.2.3 Interrupted tests. Unless otherwise specified in the individual methods, the following procedures shall be followed when a test is interrupted. Any deviation from this guidance shall be explained in the test report.

B.3.2.3.1 In-tolerance interruptions. Interruptions during which the prescribed test tolerances are not exceeded shall be considered as part of the total test duration. (No allowance is necessary if exposure to the proper test levels was maintained.)

B.3.2.3.2 Methods 103.1, 105.1 (See figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

a. Undertest. If test tolerances have been exceeded resulting in an undertest condition, the test may be resumed from the point at which tolerances were exceeded following reestablishment of prescribed conditions (except as noted in the individual methods), and extended to ensure that the prescribed test cycle is extended as in the undertest condition, if an item failure occurs during the achieved.

b. Overtest. If an overtest condition occurs, the preferable course of action is to stop the test and start over with a new test item. However, if any damage is a direct result of the overtest conditions and will not affect other test item characteristics, or if the item can be repaired, the test may be resumed and extended as in the undertest condition. If an item failure occurs during the remainder of the test, the test results shall be considered invalid.

B.3.2.3.3 Methods 104.1. Each of these methods contains guidance for handling out-of-tolerance-test interruptions. Any such interruption must be carefully analyzed. If the decision is made to continue testing from the point interruption, to restart the last successfully completed test cycle, or to restart the entire test with the same test item, and a failure occurs, it is essential to consider the possible effect of the interruption or of the extended length of the test.

B.3.2.4 Post-test data. At the completion of each environmental test, the test item shall be inspected as specified herein, and the results shall be compared with the pretest data obtained in accordance with B.3.2.1. Post-test data shall include:

a. Complete identification of all test equipment and accessories.

b. The actual test sequence (program) used.

c. Deviation from the planned test program.

d. The room ambient test conditions recorded periodically during the test period.

f. A signature and data block for certification of the test data by the test engineer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

g. Other data as specified in the individual methods or as specified herein.

B.3.2.5 Failure criteria. Failure of the test item to meet any one of the following conditions shall constitute a test item failure.

a. Deviation of monitored functional parameter levels beyond acceptable limits established in B.3.2.1 and specified herein.

NOTE: Certain types of equipment (e.g., propellants and electrically driven devices) are often expected to demonstrate lesser performance at an environmental extreme, particularly low temperature. A failure would occur only if degradation is more than permissible.

b. Nonfulfillment of safety requirements or the development of safety hazards.

c. Nonfulfillment of specific test item requirements.

d. Changes to the test item which could prevent the equipment from meeting its intended service life or maintenance requirements. (For example: Corroded oil drain plug cannot be removed with specified tools.)

e. Deviation from established environmental requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TEST METHOD 100.1
AUDIO NOISE TEST

100.1.1 General. The generator set must satisfy audio noise requirements.

100.1.2 Apparatus. Instrumentation for measuring load conditions and noise shall be as described and illustrated in MIL-HDBK-705.

100.1.3 Procedure.

100.1.3.1 Preparation for test. The test site shall be a uniform flat grass surface, free of ice, snow, or vegetation over 0.15 meter (5.9 inches) tall; it shall be free of reflecting surfaces such as buildings, trees, hillsides, or load bank(s) within a 50 meter (164 ft) radius. The generator set or power unit/plant shall be positioned in the center of the test site. An anechoic or hemi-anechoic chamber may be substituted for outdoor measurements. Audio Noise Sound Pressure Level (SPL) readings shall be taken with the set(s) not operating (ambient), at no-load and rated load. The ambient noise level must be at least 10 dB below the sets for a valid test

100.1.3.2 Steady-State noise. Start and operate the set and allow it to stabilize at rated load, rated voltage and rated frequency. Stabilization shall be considered to have occurred after the set is operated at rated load, rated voltage and rated frequency for 10 minutes. The generator set shall be operated at rated load, 75 percent, 50 percent, 25 percent and no load. Measurements shall be taken at each load condition. The dB(A) SPL shall be determined by positioning microphones at an elevation above the ground and distance away from the perimeter of the generator set or power unit/plant as specified in herein. The sensing element of the microphones shall be positioned parallel to the ground. The microphone(s) shall be placed or moved in 30-degree increments around the item with the 0-degree location being the center of the operator's control panel.

100.1.3.3 Hearing protection assessment. The control panel door (if applicable) shall be opened and secured. Position the microphone at the distance from the operator's panel specified herein. The height of the microphone will be equal to the vertical center of the control panel. The generator set shall be operated at rated load, 75 percent, 50 percent, 25 percent and no

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

load. Noise level measurements shall be taken at each load condition.

100.1.3.4 Data required. The following data will be included on the test data sheets for each test condition:

a. Ambient temperature, °C (°F).

b. Wind speed, km/hr (mph).

c. Barometric pressure, milimeters mercury (mmhg).

d. Relative humidity, %.

e. Ambient noise levels versus octave band center frequency (dB and dB(A))

f. A tabulation of the audio noise SPL versus octave band center frequency for rated load and no load operation for each measurement (dB).

g. A tabulation of the SPL at each measurement (dB(A)).

h. A measurement of the SPL at the operator's station (dB(A)).

100.1.3.5 Results. Compare the operator's control panel noise level with the 85 dB(A) criteria for personnel hearing protection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TEST METHOD 101.1
ELECTROMAGNETIC INTERFERENCE TEST

101.1.1 General. The generator set must satisfy the electromagnetic interference requirements.

101.1.2 Apparatus. Instrumentation for measuring load conditions shall be as described and illustrated in MIL-HDBK-705. Measurement instrumentation shall include electromagnetic interference meter, current probes, head set and intermediate frequency (IF) monitoring device, test antennas, and signal source as described and illustrated in MIL-STD-462. In addition, a 50-foot load cable, resistive/reactive load bank having sufficient capacity to load the Mobile Electric Power Generating Sources (MEPGS) to rated capacity at both unity and 0.8 power factor, and a recording voltage and frequency meter in accordance with MIL-HDBK-705 shall be needed.

101.1.3 Procedure.

101.1.3.1 Procedure 1. (Conducted emission - 0.015 to 50MHz, power leads).

101.1.3.1.1 Test setup. The test setup shall be as shown in figure CE02 of MIL-STD-462.

101.1.3.1.2 Test. With the 50-foot cable connected to MEPGS output and energized during the no load test, determine the broadband conducted emissions (0.015 - 50 MHz) on each conductor at the end of the cable at no-load, rated kW load at 1.0 pf, and rated kW load at 0.8 pf at all voltage and frequency connections.

101.1.3.2 Procedure 2. (Radiated emission, 14 kHz to 1 GHz, electric field).

101.1.3.2.1 Test setup.

a. The basic test setups shall be as shown in figures RE02-1 and RE02-2 of MIL-STD-462. Test sample antenna terminals if any shall be connected to shield dummy loads.

(1) Nonportable equipments. Equipment which is permanently connected either physically or electrically to a vehicle, system or installation shall be tested in accordance with the setup shown in figure RE02-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

(2) Portable equipments. Portable equipment including manpack operable equipments and test equipment shall be tested in accordance with the setup shown in figure RE02-2.

(3) Equipment falling into both of the categories indicated in 101.1.3.2.1a(1) and 101.1.3.2.1a(2) shall be tested both ways.

b. Probe the test sample as indicated in Section 4 of MIL-STD-462 to locate the points of maximum radiation from the test sample.

c. Select and position the test antennas as indicated in Section 4 at a test distance indicated in table VIII (MIL-STD-461). In the frequency range of 0.030 to 12.4 GHz, position linearly polarized antennas so as to make both vertical and horizontal measurements.

d. Bond counterpoise of 41-inch rod antenna using bonding straps.

101.1.3.2.2 Test. With the 50-foot cable connected to the MEPGS output and energized during the no-load test, determine the radiated emissions (14 kHz - 1 GHz) at no-load, rated kW load at 1.0 pf, and rated kW load at 0.8 pf at all voltage and frequency connections. For each antenna, scan the applicable frequency range of this test with the EMI meter and take measurements as required.

NOTE: Errors due to reflections within the shielded enclosure can be reduced by use of absorptive materials lining the walls or by portable panels of such materials placed around the test setup.

101.1.3.3 Procedure 3. (Radiated susceptibility, 2 MHz to 10 GHz, electric field).

101.1.3.3.1 Test setup.

a. The test setup shall be as required by the general testing requirements of MIL-STD-462 for placement of antennas.

b. Test signals shall be selected in accordance with the rules of 101.1.3.3.3 below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

c. Fields shall be generated, as required, with the antenna specified in table I (MIL-STD-462). Care shall be taken so that the test equipment is not affected by the test signals.

d. The specified field strength shall be established prior to the actual testing by placing a field measuring antenna at the same distance and in the same relative location as where the test sample will be placed and adjusting the signal level applied to the transmitting antenna until the required field intensity is indicated. The voltage or power at the input terminals of the transmitting antenna, required to establish the specified field shall be monitored and recorded. When performing this calibration in a shielded enclosure, the measurement antenna shall be placed in either the exact location that the test sample will occupy or shall be in a position which simulates exactly the geometry of the test sample location as regards distances to reflective surfaces. (This calibration may be used for all subsequent testing provided that the data was taken in a reflective free area or the exact same shielded enclosure test sample location is used).

e. When a large test sample is to be immersed in a field, the transmitting antenna shall be placed at a distance sufficient to allow the entire test sample to fall within the 3 dB bandwidth of the transmitted field. If this is not feasible because of difficulty in generating the required field at the greater distance or because of the nature of the antenna radiation characteristics, the sample may be tested in segments, each segment being equal in dimension to the 6 dB bandwidth of the antenna radiation characteristic. For a whip transmitting antenna the horizontal segments shall have length no greater than given by the following equation:

$$L = 2 x [Rd - (d-2)^2]^{1/2}$$

Where R is the test distance and d is the test sample width measured along a line forming a right angle with the face of the test sample which is directed toward the transmitting antenna.

101.1.3.3.2 Test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

a. Determine those frequencies at which the test sample is susceptible. At these frequencies, determine the threshold of susceptibility. Record all pertinent data.

b. With the 50-foot cable connected to the set and energized during the no load test, subject the set to electric fields to 10 V/m (2-400 MHz) and 5 V/m (400 MHz to 10 GHz) while operating at no-load, rated kW load at 1.0 pf, and rated kW load at 0.8 pf and at all voltage and frequency connections.

c. The set output voltage shall be monitored throughout the test with the recording voltage and frequency meter operating at 6 inches per hour until voltage or frequency variations as a function of field strength or frequency are noted. Upon observing such variation, the chart speed shall be increased to 6 inches per minute and the frequency spectrum in question shall be rescanned for acceptance/rejection analysis.

101.1.3.3.3 Susceptibility signal modulation rules. Test signals shall be modulated according to the following rules.

a. Test samples with audio channels/receivers.

(1) AM Receivers: Modulate 50 percent 1000 Hz tone.

(2) FM Receivers: When monitoring signal to noise ratio modulate with 1000 Hz signal using 10 kHz deviation. When monitoring receiver quieting, use no modulation.

(3) SSB Receivers: Use no modulation.

(4) Other Equipments: Same as for AM receivers.

b. Test samples with video channels other than receivers. Modulate 90 to 100 percent with pulse of duration 2/BW and repetition rate equal to BW/1000 where BW is the video bandwidth.

c. Digital equipment. Use pulse modulation with pulse duration and repetition rates equal to that used in the equipment.

d. Non-tuned equipments. Amplitude modulate 50 percent with 1000 Hz tone.

101.1.3.4 Results.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

a. For procedure 1, compare the test results with the limit of figure 9.1 of MIL-STD-461. Conduct emissions exceeding the limit of figure 9.1 of MIL-STD-461 shall be cause for rejection.

b. For procedure 2, compare the test results with the limit of figure 9.2 of MIL-STD-461. Radiated emissions exceeding the limit of figure 9.2 of MIL-STD-461 shall be cause for rejection.

c. For procedure 3, compare the short-term stability of the test results with the short-term stability of the requirement for both voltage and frequency. Failure of the output voltage or frequency to remain within the 30-second short-term stability bandwidth (which is established prior to the application of the various electrical fields) when subjected to the specified electrical fields shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TEST METHOD 102.1
RAIN TEST

102.1.1 General. Since most generator sets are expected to be operated outdoors, without shelter of any kind, this test is performed to assure proper operation during a heavy rain storm.

102.1.2 Apparatus. Instrumentation for measuring load conditions and rain shall be as described and illustrated in MIL-HDBK-705. In addition, a test area capable of providing the required rainfall and wind conditions shall be provided.

102.1.3 Procedure.

102.1.3.1 Preparation for test.

a. Perform test method 608.1 of MIL-STD-705 within 4 hours before the start of the rain test.

b. Place the generator set in the rain environmental location with external connections made to simulate field installation conditions as closely as possible.

c. Connect the load instrumentation in accordance with the applicable figure of MIL-HDBK-705, method 205.1, 205.1.10 for the voltage connection and frequency specified herein.

d. The test area shall be at normal ambient temperature (68 to 86 °F or 20 to 30 °C) at the beginning of the test and no further regulation of temperature is required.

102.1.3.2 Test.

a. A simulated rainfall of 8 ±1 inches per hour or as otherwise specified herein, shall be produced by water spray nozzles of such design that the water is emitted in the form of small droplets, rather than a fine mist. The temperature of the water shall be above 40 °F (4.44 °C). The spray nozzles shall be located so that the water drops impinge on the set at angles between 15 degrees and 45 degrees from the vertical. The water shall be dispersed as uniformly as possible over the entire area by means of a wind source producing wind velocities up and including 40 mph (18 m/s). The wind velocity shall be measured at the position of the set prior to placement of the set in the facility.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

b. Open the set control panel doors, if provided. Subject the set to the water spray for 3 consecutive hours. Each side of the set shall be exposed to simulated blowing rain for 30 minutes beginning with the control panel end of the set. At the beginning of the last hour of the test, and with the simulated blowing rain on the control panel end of the set, perform TM 608.1 of MIL-STD-705. Continue operating the set during the simulated blowing rain until completion of TM 608.1 or completion of the third hours, whichever conditioner is the longer of the two.

c. Immediately after exposure to the simulated blowing rain and at the rain test site, examine the set for evidence of water penetration and damage. After completion of the examination of the set, start the set and perform TM 608.1.

102.1.4 Results. The data sheet shall indicate the length of test, quantity and incident angle of the water, wind velocity, any malfunction, water penetration, and water damage (see figure 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TEST METHOD 103.1
SAND AND DUST TEST

103.1.1 General. Since most generator sets are expected to be operated outdoors, without shelter of any kind, this test is performed to assure proper operation in an airborne sand and dust environment.

103.1.2 Apparatus.

103.1.2.1 Test facility.

a. The required apparatus consists of a chamber or cabinet, together with necessary air conditioning and circulation equipment with its auxiliary control instrumentation, sand storage and moving equipment, and sand concentration measuring equipment, capable of maintaining and continuously monitoring the required conditions throughout an envelope of air surrounding the test item(s). (See B.1.1.) Figures 3 and 4 are schematic diagrams of typical facilities for this test.

b. A data collection system, separate from the chamber controllers, shall be employed to measure test space conditions. Readout charts shall be readable to within at least 0.6 °C (1 °F).

c. Dehumidification, heating, and cooling of chamber test volume air for control of test conditions shall be achieved by methods that do not alter the chemical composition of the air, sand, or water vapor within the chamber test volume air.

d. Test facility design considerations.

(1) The vibratory or screw type sand feeder shall be controlled to emit the sand at the specified concentrations. The feeder shall be located in such a manner as to ensure that the sand is uniformly in suspension in the air stream when it strikes the test item, to simulate the same effects as in the field.

NOTE: Uniform sand distribution is usually easier to obtain when the sand-air mixture is directed downward, as in figure 3.

(2) Because of the extremely abrasive characteristics of blowing sand at high velocity, it is not recommended that the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

sand be recirculated through the fan or air conditioning equipment. Instead, it should be separated from the air downstream from the test chamber in a sand separator, collected in a separate receiver, and reintroduced into the sand tank or hopper. The fan should recirculate only the sand-free conditioning air.

NOTE: The sand collected in the separator may be reused for other tests if, after analysis, it still conforms to 103.1.2.2d of this method.

103.1.2.2 Controls.

a. Test parameters. Unless otherwise specified herein, temperature and relative humidity measurements made during testing shall be continuous if measurements are in analog form, or at intervals of one every 15 minutes or less if measurements are in digital form. All instrumentation used with the test chamber shall be capable of meeting the accuracies, tolerances, etc., of B.1.1 and B.1.2. Any significant change of the test item temperature or chamber conditions shall result in the test item being reestablished at the required environmental conditions before continuation.

b. Relative humidity. Relative humidity in the test section shall be less than 30 percent throughout the conduct of the test.

c. Test variables. The test variables (temperature, air velocity, and dust concentration) shall be continuously monitored during the test. Humidity shall be verified just before or during each test.

d. Sand composition Unless otherwise specified, the sand suggested to be used in the large particle test is silica sand and (at least 95 percent by weight SiO_2). The amount 1.0 percent ±0.5 percent of the sand shall be retained by a 20-mesh screen (850 mm), 1.7 percent ±0.5 percent by a 30 mesh screen (590 mm), 14.8 percent ±1 percent by a 40 mesh screen (420 mm), 37.0 percent ±1 percent by a 50 mesh screen (297 mm), 28.6 percent ±1 percent by a 70 mesh screen (210 mm), 12.7 percent ±1 percent by a 100 mesh screen (149 mm), and 5.2 percent ±1 percent shall pass a 100 mesh screen. The sand shall be of subangular structure with a mean Krumbein number (roundness factor) equal to 0.2 and a hardness factor of 7 mohs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

e. Sand concentration The sand concentrations shall be 1.4 grams per cubic meter.

f. Air velocity. An air velocity shall be maintained at a minimum of 20 mph.

103.1.2.3 Test interruption. (See B.2.3).

a. Undertest interruption. The abrasion, penetration, and collection of dust are cumulative effects that are not affected by interruption. The test item shall be reestablished at the prescribed temperature and the test continued from the point of interruption.

b. Overtest interruption. Any interruption that results in more extreme exposure of the test item than required herein should be followed by a complete physical examination and operational check (where possible) before continuation of testing. If a problem is encountered, the test should be reinitiated with a new test item.

103.1.3 Criteria. The failure of a test item to meet the requirements specified herein must be analyzed, and related information must be considered, such as:

a. Degradation allowed in operating characteristics while at the extreme conditions.

b. Necessity for use of special operating procedures or special kits during extreme conditions.

c. The test item shall be considered to have failed the large-particle test when:

(1) Abrasion of the test item exceeds the amount described herein.

(2) The test item does not perform safely or operate adequately as described herein.

NOTE: The test plan shall contain procedures for determining the test item's degradation due to abrasion. These procedures shall describe parameters (such as amount of wear or loss of

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

weight) or observable attributes (such as change of shape) which, if not within specified limits, are indications that the test item has failed because of abrasion effects. The permissible tolerances of the parameters and attributes shall be provided.

103.1.4 Procedure.

103.1.4.1 Preparation for test. Conduct the pretest checkout as follows:

Step 1. Position the test item in the test chamber as near the center of the test sections as practicable. The test item shall have a minimum clearance of 15 cm (6 inches) from any wall of the test chamber and from any other test item (if more than one item is being tested). Orient the test item so as to expose the most critical or vulnerable parts to the sand or dust stream.

NOTE: The orientation of the test item may be changed during the test if required by the test plan.

Step 2. Prepare the test item in its operational configuration in accordance with B.2.2.

Step 3. Stabilize the test item at standard ambient conditions (see B.1a).

Step 4. Conduct a complete visual examination of the test item with special attention to sealed areas and minute of openings

Step 5. Document the results.

Step 6. Conduct an operational checkout in accordance with the approved test plan. Perform TM 608.1 of MIL-STD-705 within 4 hours before the start of the sand and dust test.

Step 7. Record results for compliance with B.2.1.

Step 8. If the test item operates satisfactorily, proceed to step 1 of the test procedure. If not, resolve the problem and restart at step 1 of pretest checkout.

103.1.4.2 Test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

Step 1. Adjust the chamber temperature to the high operating temperature of the test item and maintain until temperature stabilization of the test item is achieved.

Step 2. Adjust the air velocity to that required by the test plan.

Step 3. Adjust the sand feeder to obtain the sand concentration specified in the test plan, depending upon the application of the test item.

Step 4. Maintain the conditions of steps 1 through 3 for the duration specified in the test plan.

Step 5. If operation of the test item during the test is required, perform an operational test of the item during the last hour of the test and document the results. If not, proceed to step 6.

Step 6. Turn off all chamber controls and allow the test item to return to standard ambient conditions. Remove accumulated sand from the test unit by brushing, wiping, or shaking, taking care to avoid introduction of additional sand into the test unit.

Step 7. Conduct an operational checkout of the test item in accordance with the approved test plan. Within 4 hours after the completion of the test, perform TM 608.1 of MIL-STD-705.

Step 8. Document the results.

Step 9. Visually inspect the test item looking for abrasion and clogging effects and any evidence of sand penetration.

Step 10. Compare these data with the pretest data.

103.1.4.3 Data to be recorded.

a. Test item identification (manufacture, serial numbers, etc.).

b. Previous test methods to which the specified test item has been subjected.

c. Orientation and any change in orientation during test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

d. Results of each performance check (pretest, during test, and post-test).

e. Values of the test variables for each section of the test.

f. Results of each visual inspection.

g. Duration of each section of test.

103.1.5 Results. The results will be reviewed and compared to the criteria (see 103.1.3) for compliance. Inability to meet the voltage and frequency specified herein will constitute failure of the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TEST METHOD 104.1
SALT FOG TEST

104.1.1 General. This test is performed to determine the resistance of generator set to the effects of an aqueous salt atmosphere.

104.1.2 Apparatus.

104.1.2.1 Test facility. The apparatus used in performing the salt fog test in this method shall include:

a. A test chamber with:

(1) Supporting racks designed and constructed so that they will not affect the characteristics of the salt fog mist. All parts of the test chamber and the supporting racks that come into contact with the test item shall be constructed of material or will be buffered with material that will not cause electrolytic corrosion. Condensation shall not be allowed to drip on the test item. No liquid that comes in contact with either the exposure chamber or the test item shall return to the salt solution reservoir. The exposure chamber shall be properly vented to prevent pressure buildup.

(2) The capability to maintain temperatures in the exposure zone at 35 °C (95 °F). Satisfactory methods for controlling the temperature accurately are by housing the apparatus in a properly controlled constant-temperature room, by thoroughly insulating the apparatus and preheating the air to the proper temperature before the atomization, or by jacketing the apparatus and controlling the temperature of the water or the air used in the jacket. The use of immersion heaters within the chamber exposure area for the purpose of maintaining the temperature within the exposure zone is prohibited.

b. A salt solution reservoir made of material that is nonreactive with the salt solution, e.g., glass, hard rubber, or plastic.

c. A means for injecting the salt solution into the test chamber. Caution must be exercised to prevent clogging of the nozzles from salt buildup. Atomizers used shall be of such

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

design and construction as to produce a finely divided, wet, dense fog. Atomizing nozzles and the piping system shall be made of material that is nonreactive to the salt solution. Suitable atomization has been obtained in chambers having a volume of less than 0.34 m^3 (12 ft^3) under the following conditions:

(1) Nozzle pressure as low as practical to produce fog at the required rate.

(2) Orifices between 0.5 and 0.76 mm (0.02 and 0.03 inches) in diameter.

(3) Atomization of approximately 2.8 liters of salt solution per 0.28 m^3 (10 ft^3) of chamber volume per 24 hours. When chambers with a volume considerably in excess of 0.34 m^3 (12 ft^3), are used the conditions specified may require modification.

NOTE: A filter fabricated of noncorrosive materials similar to that shown in figure 4 shall be provided in the supply line and immersed in the salt solution reservoir as illustrated in figure 5.

d. Salt fog collection receptacles placed so that a clean receptacle at any point in the exposure zone will collect from 0.5 to 3 milliliters of solution per hour for each 80 square centimeters of horizontal collecting area (10 cm diameter) in an average test of at least 16 hours. A minimum of 2 receptacles shall be used, one placed nearest to any nozzle and one farthest from all nozzles. Receptacles shall be placed so that they are not shielded by the test item and will collect no drops of solution from the test item or other sources.

104.1.2.2 Controls.

a. Before injection into the test section, the salt solution shall be heated to within ±6 °C (±10 °F) of the test section temperature at the time of injection.

b. All water used during the salt fog tests shall be from steam or distilled, demineralized, or deionized water, and have a pH between 6.5 and 7.5 at 25 °C, or have a resistivity of not less than 250,000 ohms/cm at 25°C.

c. Test section air circulation: Air velocity in test chambers shall be minimal (essentially zero).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

104.1.2.3 Test interruptions. (See B.2.3)

a. Undertest interruptions. If an unscheduled test interruption occurs that causes the test conditions to exceed allowable tolerances toward standard ambient conditions, the test item should be given a complete visual examination, and a technical evaluation should be made of the impact of the interruption on the test results. The test must be restarted at the point of interruption and the test item restabilized at the test conditions.

b. Overtest interruptions. If an unscheduled test interruption occurs that causes the test conditions to exceed allowable tolerances away from standard ambient conditions, the test conditions should be stabilized to within tolerances and held at that level until a complete visual examination and technical evaluation can be made to determine the impact of the interruption on test results. If the visual examination or technical evaluation results in a conclusion that the test interruption did not adversely affect the final test results, or if the effects of the interruption can be nullified with confidence, pre-interruption conditions should be reestablished and the test continued from the point where the test tolerances were exceeded.

104.1.3 Criteria. In addition to the failure criteria of B.2.5, the following must be considered. Any corrosion must be analyzed for its immediate or potential effect on the proper functioning of the test item. Satisfactory operation following this test is not the sole criterion for pass/fail.

104.1.4 Procedure

104.1.4.1 Preparation for test

104.1.4.1.1 Preparation of salt solution. The salt used for this test shall be sodium chloride containing (on a dry basis) not more than 0.1 percent sodium iodide and not more than 0.5 percent total impurities. Unless otherwise specified, a 5 ±1 percent solution shall be prepared by dissolving 5 parts by weight of salt in 95 parts by weight of water. The solution shall be adjusted to, and maintained at, a specific gravity (figure 7) by using the measured temperature and density of the salt solution. Sodium tetraborate (borax) may be added to the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

salt solution as a pH stabilization agent in a ratio not to exceed 0.7g sodium tetraborate to 75 liters of salt solution. The pH of the salt solution, as collected as fallout in the exposure chamber, shall be maintained between 6.5 and 7.2 with the solution temperature at +35 °C (+95 °F). Only diluted chemically pure hydrochloric acid or chemically pure sodium hydroxide shall be used to adjust the pH. The pH measurement shall be made electrometically or colorimetrically.

104.1.4.1.2 Chamber operation verification. Unless the chamber has been used within five days, immediately before the test, and with the exposure chamber empty, adjust all test parameters to those required for the test. Maintain these conditions for one 24-hour period. Continuously monitor all test parameters to verify that the test chamber is operating properly.

104.1.4.1.3 Pretest standard ambient checkout. All items require a pretest checkout at room ambient conditions to provide baseline data. Conduct the checkout as follows:

Step 1. Prepare the test item in its required configuration in accordance with B.2.2.

Step 2. Record the room ambient conditions.

Step 3. Conduct a complete visual examination of the test item with attention to:

a. High-stress areas.

b. Areas where dissimilar metals are in contact.

c. Electrical and electronic components - especially those having closely spaced, unpainted, or exposed circuitry.

d. Metallic surfaces.

e. Enclosed volumes where condensation has occurred or may occur.

f. Components or surfaces provided with coatings or surface treatments for corrosion protection.

g. Cathodic protection systems; mechanical systems subject to malfunction if clogged or coated with salt deposits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

h. Electrical and thermal insulators.

NOTE: Partial or complete disassembly of the test item should be considered if a complete visual examination is required. Care must be taken not to damage any protective coatings, etc.

Step 4. Document the results. (Use photographs, if necessary.)

Step 5. Conduct an operational checkout in accordance with the approved test plan. Perform TM 608.1 of MIL-STD-705 within 4 hours before the start of the test.

Step 6. Record the results for compliance with B.2.1.

Step 7. If the test item meets General Requirements, the approved test plan, or other applicable documents, proceed to step 1 of the test procedure below. If not, resolve any problems and restart the pretest standard ambient checkout at the most reasonable step above.

104.1.4.1.4 Preparation of the test item.

a. The test item shall be given a minimum of handling, particularly on the significant surfaces, and will be prepared for test immediately before exposure. Unless otherwise specified, test items shall be free of contamination such as oil, grease, or dirt, which could cause a water break. The cleaning methods shall not include the use of corrosive solvents, solvents which deposit either corrosive or protective films, or abrasive other than a paste of pure magnesium oxide.

b. Arrange the test item configurations as specified in the test plan.

c. Insert the test item into the test chamber (see B.2.2).

104.1.4.2 Test

Step 1. Adjust the test chamber temperature to 35 °C (95 °F) and condition the test item for at least two hours before introducing the salt fog.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

Step 2. Continuously atomize a salt solution of a composition as given in 104.1.4.1.1 into the test chamber for a period of 48 hours or as specified in the test plan. (Cycling periods of 24 hours each (wet and dry) may be required instead of constant wetting for 48 hours or longer.) During the entire exposure period, the salt fog fallout rate and pH of the fallout solution shall be measured at least at 24-hour intervals. (More frequent intervals are recommended. If fallout quantity requirements are not met, that interval must be repeated.) Fallout shall be between 0.5 and 3 ml/80cm^2/hr.

Step 3. Store the test item in a standard ambient atmosphere for 48 hours, or as specified in the equipment specification, for drying.

Step 4. At the end of the drying period, unless otherwise specified, the test item shall be operated and the results documented for comparison with the pretest data. Within 4 hours after the completion of the test, perform TM 608.1 of MIL-STD-705.

Step 5. The test item shall be visually inspected in accordance with the guidelines given in 104.1.4.1.3. If necessary to aid in examination, a gentle wash in running water not warmer than 38 °C (100 °F) may be used.

104.1.4.3 Data to be recorded

a. Test item identification (manufacturer, serial number, etc.).

b. Previous test methods to which the test item was subjected.

c. Results of each visual examination and performance checkout performed on the test item.

d. Areas of the test item visually and functionally examined and an explanation of their inclusion.

e. Areas of the test item not visually and functionally examined and an explanation of their exclusion.

f. Test chamber operational information (interruptions, time schedule. etc.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

g. Test variables:

(1) Salt solution pH.

(2) salt solution fallout rate (ml/cm^2/hr).

(3) Resistance of initial water and type of water.

h. Preliminary failure analysis.

104.1.5 Results. The results will be reviewed and compared to the criteria (see 104.1.3) for compliance. Inability to meet the voltage and frequency specified herein will constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

METHOD 105.1
SOLAR RADIATION TEST

105.1.1 General. The generator sets must be capable of withstanding the effect of solar loading without physical damage or compromises in operational ability.

105.1.2 Apparatus.

105.1.2.1 Test facility.

a. The required facility consists of a chamber or cabinet, auxiliary instrumentation, and a solar lamp bank. This apparatus must be capable of maintaining and monitoring required conditions of temperature, airflow, and irradiation.

b. The possible cooling effects of airflow over the test specimens must be considered. An airflow of as little as 1 m/s can cause a reduction in temperature rise of over 20 percent. It is essential, therefore, to control and measure the rate of airflow, which should be as low as possible consistent with achieving satisfactory control of temperature. Adjustments of the temperature within the enclosure and control of chamber gradients by suitable heating and cooling of the walls of the enclosure eliminate the need for high air velocities. The air velocity shall be maintained between 0.25 and 1.5 m/s (50 to 300 ft/min).

c. The volume of the test chamber shall be a minimum of 10 times that of the envelope volume of the test item.

d. The solar radiation source area shall be such that the length and width of the test item shall be no more than one-half the same dimensions of the lamp bank and may be composed of either radiant heat-producing lamps or lamps that simulate the solar spectrum.

e. The irradiance shall have a maximum intensity of 1120 W/m^2 (±10 percent), and the radiation on the test item shall be uniform to within ±10 percent of the desired value, with the spectral distribution given in table V. Where thermal effects only are to be assessed, deviation from this spectral distribution is permitted, but the irradiance must be adjusted to give an equivalent heating effect. In order to calculate this adjustment, it is necessary to know:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

(1) The spectral reflectance or transmittance of the irradiated surfaces, and

(2) The spectral energy distribution of the particular lamps being used (and also the effect of any associated reflectors or glasses). The radiation shall be directed onto the test item and shall irradiate the entire surface of the test item facing the solar radiation source. The value of 1120 W/m^2 shall include any radiation reflected from the test chamber walls and received by the test item, but it should not include long-wave infrared radiation emitted by the chamber walls. The radiation-measuring device shall be calibrated in the wavelength range of the test source radiation.

TABLE V. Spectral energy distribution and permitted tolerance.

CHARACTERISTIC	SPECTRAL REGION			
	ULTRAVIOLET		VISIBLE	INFRARED
Bandwidth	0.28 to 0.32 mm	0.32 to 0.40 mm	0.40 to 0.78 mm	0.78 to 3.00 mm
Irradiance	5 W/m^2	63 W/m^2	517 to 604 W/m^2	492 W/m^2
Tolerance	±35%	±25%	±10%	±20%

NOTE: The amount of radiation wavelength shorter than 0.30 mm reaching the Earth's surface is insignificant.

f. The radiation source shall be located at least 76 cm (30 inches) away from any other surface of the test item.

g. Light source.

(1) Tests conducted for degradation and deterioration of materials due to actinic effects, as well as heat buildup within the test items, must satisfy the full spectrum of table I and may use one of the following acceptable radiation sources:

(a) Xenon arc or mercury xenon arc (used singularly) with suitable reflector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

(b) Combination of high pressure sodium vapor and improved mercury vapor with suitable reflectors.

(c) High-intensity multivapor, mercury vapor (with suitable reflectors), and incandescent spot lamp.

(d) Carbon arc lamp with suitable reflectors.

NOTE: Other combinations of the lamps listed above and in 105.1.2.1g(2) below may be used if it is proven that the combination produces the spectrum of table V.

(2) Tests in which it is not sought to reproduce the sun's spectrum may use the appropriate lamps from

(a) Mercury vapor lamps (internal reflector type only).

(b) Combination of incandescent spot lamps and tubular-type mercury vapor lamps with external reflectors.

(c) Combination of incandescent spot lamps and mercury vapor lamps with internal reflectors.

(d) Metal halide.

(e) Mercury xenon arc lamps with suitable reflectors.

(f) Multivapor (clear or coated bulb) with suitable reflectors.

(g) Tungsten filament lamps.

This list is not intended to exclude new lamps made available by advanced technology.

105.1.2.2 Controls.

a. Temperature. The chamber air temperature shall be within ±2 °C (±3.6 °F) of the test temperature and shall not exceed 1 °C per meter or a maximum of 2.2 °C total (equipment nonoperating) and measured (with adequate shielding from radiated heat) at a point or points in a horizontal plane 0 to 50 mm below the prescribed irradiation plane, at half the distance between the test item and the wall of the chamber or at 1m from the test

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

item, whichever is smaller. This is one way to ensure reasonable control of the envelope of air surrounding the test item.

b. Surface contamination. Dust and other surface contamination may significantly change the absorption characteristics of irradiated surfaces. Unless otherwise required, specimens should be clean when they are tested.

c. Instrumentation.

ITEM	TOLERANCE
Pyranometer or pyrheliometer	Total irradiation (direct and scattered) to +47 W/m² (+14 Btu/ft /h)
Spectroradiometer or filtered pyranometer	+5% of reading

NOTE: Values may be assumed to represent plus or minus two standard deviations; thus, the stated tolerances should not be exceeded in more than 1 measurement out of 20. Solar radiation intensity shall be measured with a pyranometer or pyrheliometer. Spectral distribution of irradiance as a function of wavelength shall be measured with a spectral radiometer or filtered pyranometer.

d. Calibration of chamber. Because of the variety of permissible lamps and chamber designs, it is particularly important that the chamber be calibrated to assure that the proper levels of radiant infrared energy are impacting the test area when heat alone is of concern and that the proper intensity and spectral distribution of solar radiation are impacting the test area when actinic effects are of concern. Over the area covered by the test item, the radiation intensity must be within +10 percent. As the lamps age, their spectral output changes. A check on spectral distribution, intensity, and uniformity shall be performed at intervals not exceeding 500 hours of operation to ensure that the facilities continue to meet established specifications. This value is based on the manufacturer's guarantee for minimum bulb life.

105.1.2.3 Test interruptions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

a. Undertest interruptions.

(1) The test rationale is based on the total cumulative effect of the solar environment. Any undertest interruption should be followed by restabilization at the specified conditioning and continuation of the test from the point of the interruption.

(2) If an interruption occurs after 18 hours 20 minutes of the last cycle, the test shall be considered complete. (At least 92 percent of the test would have been completed, and the probability of a failure is low during the remaining reduced levels of temperature and solar radiation.)

b. Overtest interruption. Any overtest conditions must be followed by a thorough examination and checkout of the test item to verify the effect of the overtest. Since any failure following continuation of testing will be difficult to defend as unrelated to the overtest, a new test item should be used.

105.1.3 Criteria.

a. The set shall not be damaged (see below) or show degradation in operational performance by the effects of solar radiation with up to 355 British Thermal Units (BTUs) per square foot per hour of solar radiation.

b. The damage is defined as:

(1) Change in strength, stress, or loss of structural integrity due to differential expansion and contraction of dissimilar materials.

(2) Jamming or loosening of moving parts or linkages.

(3) Loss of seal or gasket integrity.

(4) Deteriorated electronic or electrical components or wiring.

(5) Blistering, fading, cracking, or peeling of paints.

(6) Softening or weakening of glued parts.

105.1.4 Procedure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

105.1.4.1 Preparation for test. Before the sets are placed in the solar radiation test chamber the following preparation will be made:

a. Perform test method 608.1a, of MIL-STD-705.

b. Fill the set's fuel tank and all other liquids to rated capacity.

c. Install thermocouples at the following locations:

(1) Engine compartment.

(2) Control cubicle.

(3) Fuel tank.

(4) Top, front, rear, and side surface of housing.

(5) Ambient (in accordance with 202.1.4 of MIL-HDBK-705).

d. Conduct the checkout as follows:

Step 1. Install the test item in the chamber and stabilize it at standard ambient conditions (see B.1.1a) and in a manner that will simulate service usage, unless the storage configuration is specified. Position the test item in accordance with the following:

(a) As near the center of the test chamber as practical and so that the surface of the item is not closer than 0.3m (1 foot) to any wall or 0.76m (30-inch) to the radiation source when the source is adjusted to the closest position it will assume during the test.

(b) Oriented, within realistic limits, to expose its most vulnerable parts to the solar radiation, unless a prescribed orientation sequence is to be followed.

(c) Separated from other items that are being tested simultaneously, to ensure that there is no mutual shading or blocking of airflow.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

Step 2. Conduct a visual examination of the test item with special attention to stress areas, such as corners of molded cases.

Step 3. Document the results.

Step 4. Prepare the test item in accordance with B.2.2, with the temperature sensors necessary to determine test item response.

Step 5. Conduct an operational checkout in accordance with the approved test plan.

Step 6. Record results for compliance with B.2.4.

Step 7. If the test item operates satisfactorily, place it in its test configuration (if other than operational). If not, resolve the problem and restart at step 1. Position the test item in accordance with the following and proceed to the first test as specified ln the test plan.

(a) As near the center of the test chamber as practical. (See 105.1.2.1c and d.)

(b) Oriented, within realistic limits, to expose its most vulnerable parts to the solar radiation, unless a prescribed orientation sequence is to be followed.

(c) Separated from other items that are being tested to ensure that there is no mutual shading or blocking of airflow.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

105.1.4.2 Test.

a. Each side will singularly be exposed to four 24-hour, hot-dry test cycles described in table VI. The set will be placed in the chamber and positioned so that one vertical side and top of the set receives the greatest amount of radiation during the first 24-hour cycle so that the equal exposure to the radiation is accomplished to the entire set by the end of the test.

Step 1. Raise the chamber air temperature to the 0000-hour temperature of table VI.

Step 2. Expose the test item to continuous 24-hour cycles of controlled simulated solar radiation and dry-bulb temperature as indicated in table VI or as specified in the equipment specification. The number of cycles performed shall be whichever of the following is longer:

(a) The minimum necessary to ensure that the peak response temperature of the most critical area of the test item achieved during a cycle is within ±2 °C (±3.6 °F) of the peak response temperature achieved during the previous 24-hour cycle, or

(b) Three continuous cycles.

Increase and decrease the solar radiation intensity in a minimum of four steps up and four steps down to approximate the curve of figure 9 (table VI). The test item may or may not be operated throughout the test. When an evaluation of the heating effects is important, operation at least at peak temperature should be specified. For certain one-shot items (e.g., rockets), thermocouples affixed to critical portions of the test item should be used to determine the time and value of peak temperature. The time of operation shall coincide with peak temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE VI. Temperature/solar radiation diurnal cycles.

Time	Hot-Dry		Basic Hot		Solar Radiation (see figure 8)	
	°C	°F	°C	°F	W/m^2	$Btu/ft^2/hr$
0000	37	98	33	91	0	0
0300	34	93	32	90	0	0
0600	32	90	30	86	55	18
0900	38	101	37	99	730	231
1200	44	112	42	107	1120	355
1500	48	119	43	110	915	291
1600	49	120	43	110	730	231
1800	48	118	42	107	270	85
2100	41	105	36	97	0	0
2400	37	98	33	91	0	0
Max	49	120	43	110	1120	355
Min	32	90	30	86	0	0

Step 3. Continue cycling until the peak response temperature (measured at representative locations) achieved during a cycle is within ±2 °C (±3.6 °F) of the peak response temperature achieved during the previous 24-hour cycle, or during 7 cycles, whichever comes first.

Step 4. Conduct an operational checkout of the test item as in 105.1.4.1d, step 5.

Step 5. Adjust the chamber air temperature to standard ambient conditions and maintain until temperature stabilization of the test item has been achieved.

Step 6. Conduct a complete visual examination of the test item.

Step 7. Document the results.

Step 8. Conduct an operational checkout of the test item as in 105.1.4.1d, step 5.

Step 9. Document the results.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

Step 10. Compare these data with the pretest data.

b. After completion of the four cycles, thoroughly examine the set for physical damage.

c. Remove the set from the chamber and perform TM 608.1a, of MIL-STD-705.

105.1.5 Results. The results of the solar radiation test will be reviewed and compared to the criteria for compliance. Inability to meet the voltage and frequency criteria specified in the specification and applicable specification sheets, or evidence of physical damage as described above in 105.1.3, will constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

METHOD 106.1
ROAD TRANSPORTABILITY TEST

106.1.1 General. The generator set must be capable of withstanding the vibration and shock encountered during road transport. Skid mounted sets are transported either in the bed of wheeled vehicle cargo trucks or mounted on a cargo trailer either singly (power unit configuration) or two sets are configured as a power plant (with a load transfer switch).

106.1.2 Apparatus. Instrumentation for measuring load conditions, field voltage and current, and ambient temperature shall be as described and illustrated in MIL-HDBK-705. Recording meter(s) for recording voltage and frequency shall be required. A military cargo truck of size applicable to the generator set under test will be required for skid set testing. A military cargo trailer and compatible military truck will be required for power unit and power plant testing. Instrumentation for measuring and recording the truck speed and road mileage shall be required.

106.1.3 Procedure.

106.1.3.1 Power units and power plants.

106.1.3.1.1 Preparation for test.

a. The generator set(s) shall be serviced to verify that all fluids are at normal operating levels with the exception of the fuel. Unless otherwise stated, the fuel tank will be half full.

b. The positive securement of the generator(s) and associated equipment to the trailer shall be verified.

c. The trailer shall be inspected and serviced in accordance with its technical manual including the brake system, suspension, lighting, tire pressure and lubrication.

d. Ancillary equipment weight, as specified herein, shall be positively secured to the trailer. Care should be taken in the placement of the weight so that access to the generator sets is not restricted for inspections and operational tests.

106.1.3.1.2 Slope operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

a. The theoretical tipping angles (critical angles) should be calculated for both ends and sides of the power unit or power plant before traversing the slopes to establish a rough approximation of the maximum slopes on which the trailer can safely negotiate. In theory, the critical angle is when the center of gravity (CG) of the item is located vertically above its center of rotation (the mid-point of the tire in a single-axle trailer).

b. Side slope. The power unit or power plant shall be towed in a sine wave pattern along the horizontal length of the required side slope(s). The trailer will be towed in both directions on the slope. During the traversal of a slope, the trailer shall be stopped for inspection purposes. The power unit or plant shall be inspected for any shifting of on-board equipment, and the overflow of any fluid reservoirs. The results of the inspection shall be recorded. Power units or plants having a high vertical CG shall have their maximum side-slope ability tested with the aid of special safety precautions (i.e. a safety cable attached to the item to prevent accidental tip-over).

c. Longitudinal slope. The power unit or plant shall be towed up and down the required longitudinal slope(s). Particular attention will be given to the approach and departure of the trailer onto/from the slope. During traversal of the slope, the trailer shall be stopped for inspection purposes. The power unit or plant shall be inspected for any shifting of on-board equipment, and the overflow of any fluid reservoirs. The results of the inspection shall be recorded.

106.1.3.1.3 Road test.

a. Prior to and at the end of the last cycle of road testing, a Method 608.1, Frequency and Voltage Regulation, Stability and Transient Response Test (Short Term) of MIL-STD-705, shall be conducted. At the end of each roadability cycle of table VII, Method 608.1 test (rated load only) will be repeated to verify operability of the set(s).

b. The power unit or plant shall be exposed to four cycles of the road schedule presented in table VII. At the beginning and end of each driving period (shift or day) the generator set(s) shall be started and run at no-load until stabilized to verify operability including rated voltage, frequency, and adequate oil

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

pressure. The generator set(s), equipment and trailer shall be visually inspected several times each driving period for any evidence of structural damage, deformation or degradation that may occur during travel. The results of the inspections shall be recorded.

c. During traversal of the road courses, the trailer shall be observed for evidence of weaving, inability to successfully track behind the prime mover, interference with the prime mover, fluid reservoir overflow, or any other hazardous characteristic.

106.1.3.2 Skid-mounted sets as loose cargo.

106.1.3.2.1 Preparation for test. Service the skid-mounted set(s) as indicated in 106.1.3.1.1.a above. Unless specified herein, the skid-mounted set shall be tied down on a military cargo truck using the set lifting eyes and cargo straps.

106.1.3.2.2 Road test.

a. Prior to and at the end of the last cycle of road testing, a Method 608.1, Frequency and Voltage Regulation, Stability and Transient Response Test (Short Term), shall be conducted. At the end of each roadability cycle of table VII, Method 608.1 test (rated load only) will be repeated to verify operability of the set(s).

b. The skid-mounted set(s) shall be exposed to four cycles of the road schedule presented in table VII. At the beginning and end of each driving period (shift or day) the set(s) shall be started and run at no-load until stabilized to verify operability including rated voltage, frequency, and adequate oil pressure. The set(s) shall be visually inspected several times each driving period for any evidence of structural damage, deformation or degradation that may occur during travel. The results of the inspections shall be recorded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE VII. Road transportability test schedule.

Road Course (Aberdeen Proving Ground, Maryland)	Distance		Maximum Speed	
	mi	km	mph	km/hr
Paved highway	250	402	50	80
Level cross-country (Perryman 1)	250	402	20	32
Hilly cross-country (Churchville B)	125	201	20	32
Belgian Block	15	24	20	32
Totals	640	1029		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TEST METHOD 107.1
RAILROAD IMPACT TEST

107.1.1 General. The generator set must be capable of withstanding the vibration and shock encountered in all forms of transportation and movement. The mechanical integrity of the set is tested by means of the shock loading encountered during the railroad impact test. The test also evaluates the method of tie-down on the rail car.

107.1.2 Apparatus. Instrumentation for measuring load conditions, field voltage and current, and ambient temperature shall be as described and illustrated in MIL-HDBK-705. Recording meter(s) for recording voltage and frequency shall be required. Unless otherwise specified herein, the recording meters shall be as described and illustrated in MIL-HDBK-705, Methods 101.1 and 104.1. In addition, two railroad cars with a total standing weight of not less than 250,000 pounds, divided approximately equally between the two cars, and one standard flat railroad car (test car) all with standard draft gear couplings and conventional underframes, a means of moving the test car, an electrical or electronic device to determine the test car speed at impact, and shock measuring equipment as applicable, shall be required.

107.1.3 Procedure.

107.1.3.1 Preparation for test.

a. Unless otherwise specified, the equipment shall be mounted on the impact end of the test car in accordance with the standard loading and bracing method as shown in section 6 of the Association of American Railroads (AAR) "Rules Governing the Loading of Department of Defense Material on Open Top Cars". No exotic or unusual tiedown methods shall be used. Unless otherwise specified the longitudinal axis of the equipment shall be mounted parallel to the length of the test car.

b. Unless otherwise specified, the equipment fuel tank shall be half full of fuel. Used batteries filled with water may be installed to prevent acid damage should the set batteries fail. All liquids (except fuel) shall be at normal operating level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

c. Any load in the stationary (buffer) cars shall be secured to prevent sliding or shifting; any movement greater than two inches resulting from the test shall be justification for retest.

107.1.3.2 Test.

a. Within four hours of the test and at the test site, perform Method 608.1, Frequency and Voltage Regulation, Stability and Transient Response Test (Short Term).

b. The couplers between the stationary cars shall be compressed to remove the slack and all of the air and hand brakes shall be set.

c. Locate the test car between the stationary cars and the locomotive. A minimum of 200 feet of reasonably level track between the test car and stationary cars is required to achieve the required locomotive speeds unless an inclined ramp and tug is used. A practice test run without impacting the test car may have to be conducted to assure the required speed of impact can be achieved.

d. Position the draft gear knuckles of the stationary and test cars for coupling.

e. Install the timing device to measure the test car speed (±0.05 mph) within six feet of impact with the stationary cars.

f. Push the test car towards the stationary cars and release the test car when the desired test speed of 4 mph (+0.5, -0.0 mph) is reached as observed by using the locomotive's speedometer or other means, thus allowing the test car to freely impact the stationary cars. If an inclined ramp and tug is used, move the test car to the incline position for the desired speed and release the test car allowing it to freely impact the stationary cars.

g. Record the speed of impact.

h. Visually inspect the equipment for liquid leaks, deformation, loosening, breakage or change of fit of any component or part including the method of tiedown, tiedown anchors and fittings, and observations of blocking and lading. Record results of inspection and observations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

NOTE: If adjustment of the lading, reconditioning of the bracing or items of securement is required during the impact tests, testing will stop. A complete, new impact test shall then be required.

i. Repeat 107.1.3.2b through h at a speed of 6 mph (+0.5, -0.0 mph).

j. Repeat 107.1.3.2b through h at a speed of 8 mph (+0.5, -0.0 mph).

k. Repeat 107.1.3.2b through h at any other speeds specified herein.

l. Reverse the test car and repeat 107.1.3.2b through h at 8 mph (+0.5, -0.0 mph). No adjustment of the lading, reconditioning of the bracing or items of securement shall be made.

m. Within four hours after completion of the four impacts and final inspection, perform Method 608.1 Frequency and Voltage Regulation, Stability and Transient Response Test (Short Term) at the test site.

107.1.4 Results.

a. Compare the results at the test with the requirements specified herein.

b. Compare the result of the tests specified in 107.1.3.2a and 107.1.3.2m with the requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TEST METHOD 108.1
SAFETY AND HEALTH TEST

108.1.1 General. The generator set must not pose an unsafe or hazardous condition to personnel.

108.1.2 Apparatus. No specific equipment is required.

108.1.3 Procedure.

108.1.3.1 Preliminary safety and health assessment. A preliminary safety and health assessment will be accomplished upon receipt of the sets. This will establish the safety of the test items so that hazards to test participants can be minimized. As a minimum this preliminary assessment will include the following essentials:

a. A thorough examination will be conducted during the initial inspection and service test to identify all obvious safety problems. Based on a visual examination of the units, the Safety Checklist (table VIII) will be completed by the test director and, if available, a qualified safety engineer. At this point, based on the limited visual inspection, it is realized that only safety problems that are reasonably obvious will be determined since a more thorough evaluation of safety and health will be conducted during the remaining scope of testing. A cursory review of the safety and health warnings and other information will be made of the equipment manuals provided. This is to assure that sufficient information has been provided in these manuals related to safety and health, specifically in the area of data plates, information, warning plates (including noise hazard warnings if required), proper grounding procedures, lifting and tie-down information, electrical shock hazard warnings, and other essential safety and health information that would ordinarily appear in a manual for a generator set. Some limited safety-related tasks will be performed, if necessary, to ensure that the test items are safe for further testing.

b. During the initial inspection, an initial safety review will be made using the safety checklist contained in table VIII. The appropriate questions will be answered insofar as possible without further testing. Detailed comments and answers will be indicated for each applicable question of the safety checklists for electrical and mechanical hazards. Responses will not be limited to only the items appearing on the checklist; any other

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

safety and health hazards found will be recorded and incorporated into this subtest.

108.1.3.2 Comprehensive safety and health assessment. A comprehensive safety and health assessment will be conducted throughout the entire test program. This assessment will include:

a. Systematic observations and analysis of the test items throughout all phases of the entire test to identify and investigate any actual or potential hazards to personnel and equipment that may result from operation and maintenance. A detailed description of all safety hazards identified during operation, maintenance, and all other phases of operation will be documented.

b. To ensure that the checklist of table VIII has been completed and that all hazards have been identified, the units will be continuously monitored for hazards during all phases of testing and maintenance. It is expected that by the end of testing, all items on the safety checklist will have been answered.

c. Limitations or compromises on operating performance and maintenance because of safety considerations.

d. Examination of safety instructions and warning plates for adequacy and appropriate location.

e. Examination of operation and service manuals for adequate safety guidance concerning operation and maintenance.

f. Classification of all safety hazards in accordance with MIL-STD-882 with recommendations for appropriate corrective measures and ways to either reduce or eliminate the hazard severity and hazard probability.

108.1.4 Results.

a. List all mechanical and electrical hazards. Identify all hazards that require warning labels/placards.

b. Each NO answer reported in the checklist of table VIII and any other hazards identified will be reviewed and assessed to determine the degree of noncompliance with the criteria. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

hazard classification (including hazard severity and hazard probability) outlined in MIL-STD-882 will be used to classify all identified safety hazards into hazard level categories. The hazards will be categorized as a deficiency, shortcoming, or suggested improvement using table VIII.

c. All problems recorded that have an effect on safety will be thoroughly analyzed to determine the extent of the problems and their impact on the operators, maintainers, and other personnel associated with the sets. Noncompliance with specific elements of the criteria will be evaluated and suggested corrective actions will be proposed. Appropriate recommendations regarding methods to control, downgrade, or eliminate actual or potential hazards will be made so that the necessary changes can be incorporated before field deployment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE VIII. Safety checklist.

No.	Item	Yes	No	NA	Remarks
1	Are all external parts, surfaces, shields, and all other electrically neutral parts at ground potential at all times during normal operation?				
2	Is the ground connection for all external parts mechanically secured?				
3	Is there a suitable terminal lug or other ground connection located on the chassis or frame to provide a continuous and permanent path to ground?				
4	Are grounding rods furnished?				
5	Are output terminals or other high potentials, in excess of 70 V rms, sufficiently shielded or guarded to prevent accidental contact by personnel?				
6	Are energized components located or enclosed so that suitable protection is provided against contact with uninsulated items?				
7	Are components, conductors, and shielding appropriately located such that overheating, arching, shorting, and contact with moving parts is avoided?				
8	Are wires and cables adequately supported and terminated to prevent shock and fire hazard?				
9	Are wires and cables properly protected against rubbing at access ports by insulated bushings?				
10	Is the set provided with warning				

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE VIII. Safety checklist. - Continued.

No.	Item	Yes	No	NA	Remarks
	placards or caution plates mounted conspicuously adjacent to any condition presenting a potential hazard to personnel (such as high voltage, rotating parts, sharp corners, etc.)?				
11	Are electrical connectors designed to ensure that only the correct plug can be inserted into its receptacle and not into a wrong receptacle?				
12	Where design considerations require plugs and receptacles of similar configuration, are mating plugs and receptacle suitably coded or marked to indicate the correct mating connection?				
13	Are exposed connector pins energized after being disconnected?				
14	Are controls located away from high voltage areas?				
15	Are emergency controls placed in readily accessible positions?				
16	Is the main circuit breaker in an easily accessible location?				
17	Does a battle short switch (to bypass the safety interlocks) exist on the main control panel?				
18	Is the battle short switch designed with a readily visible indicator light to show that it is on?				
19	Are the following protective devices present with suitable indicators to safeguard against operator injury and/or equipment failure?: Low oil pressure High coolant temperature				

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE VIII. Safety checklist. - Continued.

No.	Item	Yes	No	NA	Remarks
	Overspeed Low fuel Short circuit Overload Under voltage Under frequency Reverse power Overvoltage				
20	Are DC power connections clearly marked for polarity?				
21	Does a DC circuit breaker exist that can cut off all power to the entire system?				
22	Are potential electrical hazards adequately treated in the instruction manual?				
23	Are operator means of detecting hazardous conditions adequate?				
24	Are circuit breakers and all control panel instruments and controls properly labeled?				
25	Does the convenience outlet have provisions for automatic grounding?				
26	Are adjustment screws or other commonly worked-on parts located away from unprotected high voltages?				
27	Are tools to be used near high voltages, such as the load terminal wrench, adequately insulated?				
28	Is the grounding conductor of the equipment electrically insulated from the AC power return (neutral)?				
29	Are internal controls located at safe distances from dangerous voltages?				

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE VIII. Safety checklist. - Continued.

No.	Item	Yes	No	NA	Remarks
30	Is protective guards sufficiently separated from exposed conductors to prevent shorting or arcing?				
31	Are components that sustain high operating temperatures during normal operation (such as exhaust pipes, turbochargers, radiators, etc.) sufficiently protected to prevent accidental contact by personnel?				
32	Are these components adequately identified by warning plates?				
33	Are the materials used in the engine and generator housing including noise attenuating material inherently nonflammable and nonexplosive?				
34	Do exposed gears, cams, levers, fans, belts, or other reciprocating, rotating, or moving mechanical parts have adequate safety covers?				
35	Are doors, hinged covers, panels, and any other exposed sharp projections or overhanging edges presenting a potential safety hazard rounded to prevent injury to personnel?				
36	Are fasteners and methods of securing doors and peripheral ancillary components sufficiently strong to prevent breakaway during normal use?				
37	Is the method of opening doors or covers evident from the construction of the cover? If not, is an instruction plate permanently				

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE VIII. Safety checklist. - Continued.

No.	Item	Yes	No	NA	Remarks
	attached to the outside of the cover?				
38	Is it evident when a cover is in place but not secured?				
39	Are tasks of operation and maintenance such that they do not require excessive physical strength?				
40	Can maintenance be accomplished with shielding in place?				
41	Do external or internal surfaces that expand during maintenance have sharp edges?				
42	Is the center of gravity and weight of the set distinctly marked?				
43	Are weight capacities indicated on tie-downs, lifting points, etc.?				
44	Is the set provided with sufficient caution plates to warn maintenance personnel of potential safety hazards?				
45	Is the control panel adequately illuminated for safe and efficient operation?				
46	Have fire-extinguishing methods been included in the technical publications?				
47	Are potential mechanical hazards adequately treated in the draft instruction manual?				
48	Do floor surfaces provide adequate nonslip characteristics?				
49	Are lifting rings or slings provided?				
50	Are climbing rings, handholds, rails, etc., provided where needed?				
51	Do doors and hinged covers have positive-action hold-open devices?				

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE VIII. Safety checklist. - Continued.

No.	Item	Yes	No	NA	Remarks
52	Are handles recessed rather than extended where they might be hazardous?				
53	Are doors and other openings free of hazards from improperly designed catches, hinges, supports, fasteners, and stops?				
54	Are the tasks of operation and maintenance such that they do not require excessive physical strength?				
55	hen glass is used is it glare proof and shatter proof?				
56	Does the ventilating system provide for operator safety by ducting excess heat liberated by the radiator cooling air or other hot air outlets to the exterior of the set?				
57	Are adequate precautions made to prevent exposure of operators and maintainers to exhaust gases or other toxic fumes?				
58	Is the air intake isolated or at a sufficient distance from the exhaust?				
59	Does the instruction and maintenance manual specify type of cleaning fluid and precautions to be taken when cleaning the equipment?				

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil - Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

	HAZARD PROBABILITY			
	FREQUENT	**PROBABLE**	**OCCASIONAL**	**REMO**
SPECIFIC INDIVIDUAL ITEM	Likely to occur frequently	Will occur several times in life of item	Likely to occur sometime in the life of item	Unlikely possible occur in life of a item
FLEET OR INVENTORY	Continuously experienced	Will occur frequently	Will occur several times	Unlikely can reasc be expect occur
HAZARD SEVERITY	A	B	C	D
I - CATASTROPHIC May cause death or system loss	Deficiency	Deficiency	Deficiency	Deficie
II - CRITICAL May cause severe injury occupational illness, or major system damage	Deficiency	Deficiency	Deficiency	Shortco
III - MARGINAL May cause minor injury, minor occupational illness or minor system damage	Deficiency	Shortcoming	Shortcoming	Sugges improve
IV - NEGLIGIBLE May cause less than minor injury occupational illness or system damage	Shortcoming	Suggested improvement	Acceptable	Accepta

TABLE IX. Hazard probability versus hazard severity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TEST METHOD 109.1
HUMAN FACTORS ENGINEERING TEST

109.1.1 General. The generator set must satisfy general human engineering design criteria and practices.

109.1.2 Apparatus. The following equipment shall be required: photographic and video equipment, tape measure, ruler, illumination meter (lighted displays).

109.1.3 Procedure.

109.1.3.1 Control, display, labelling. Observations will be made of all controls, displays, and labeling with respect to HFE design practices (based on paragraphs 5.1, 5.2, 5.4, and 5.5 of MIL-STD-1472). Control separation and control dimensional measurements will be taken to determine if any design problems exist. The ability of the operator to successfully operate the sets while wearing regular, arctic, and NBC gloves will be observed as well as the operator's ability to operate the set at night.

109.1.3.2 Workspace and maintenance access. Maintenance access openings and workspaces will be observed with respect to the ability of the crew to perform maintenance and to determine compatibility with anthropometric dimensions for the 5th through 95th percentile personnel while outfitted in battle dress uniform (BDU), arctic, and NBC protective ensembles.

109.1.3.3 Subjective assessment.

a. Questionnaires/interviews. Human factors questionnaires will be administered to personnel assigned to the testing program. Questionnaires will primarily pertain to operating and maintaining the equipment. A section of each questionnaire will be devoted to task performance while wearing NBC and arctic gear. Questionnaires, (table X), will be administered near the end of the test cycle to assure that all personnel are thoroughly experienced with system operations before completing the forms. Interviews will be conducted to determine the test participants opinions on the overall operation, maintenance, and performance of the generator.

b. Checklists. Checklists (table X) will be prepared by an HFE engineer on the following elements of system design:

1. HFE design - controls, displays, and markings.

2. Maintainability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

c. General HFE observations. Observations will be made throughout all testing to gain additional information on any HFE-related problems. Comments and informal interviews, in addition to HFE observations, will be documented throughout to provide subjective input to assess the TQG sets. These interviews, comments, and observations will be used to augment data from other HFE subtests supplements and will be integrated into the analysis of the TQG sets.

109.1.3.4 Anthropometric and demographic data.

a. Anthropometric data. Anthropometric measurements (standard distribution presented in table X) will be taken of test personnel who participate in daily operation, maintenance, and performance exercises.

b. Demographic data. Demographic data will be compiled of the same test participants and will include the following:

(1) Sex.

(2) Job position (for this test).

(3) Length of experience (in job position).

(4) Age.

109.1.3.5 Operator/maintainer performance tasks. The ability of the test participants to perform critical maintenance tasks while outfitted in MOPP IV and nuclear, biological, chemical (NBC) protective ensembles (arctic mittens, and NBC gloves with liners), will be determined by comparing performance times required to complete the following tasks:

a. Checking, filling, and draining engine oil.

b. Replacing engine oil filter(s).

c. Replacing air filter element.

d. Connecting load cable.

e. Replacing fuel filter(s).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

f. Checking, filling, and draining hydraulic fluid (if equipped).

g. Replacing hydraulic fluid filter(s) (if equipped).

h. Other common field maintenance actions such as filling fuel tank, radiator, battery, and adjusting belts, etc.

Excessive maintenance times or inability to perform any critical maintenance tasks will be recorded.

109.1.3.6 Manual readability. The reading grade level (RGL) of the operation and maintenance manual will be determined by conducting a readability test as referenced in TOP 1-2-609, Instructional Material Adequacy Guide and Evaluation Standard (Images), January 1981. An adequate number of text samples will be used to determine the overall grade level (OGL).

109.1.3.7 Data required. The following data will be obtained.

a. Control separation and dimensional measurements.

b. Ability of operators to operate the sets while wearing regular, arctic, and NBC gear.

c. Anthropometric and demographic data of test participants.

d. Results of interview and questionnaires administered to test personnel.

e. Results of completed checklists.

f. An assessment of controls and displays.

g. The adequacy of NET.

h. RGL of the operation and maintenance manuals.

i. Photographs and videotapes of HFE problems associated with the setup, operation, or maintenance of the generator sets.

j. Performance times of critical maintenance tasks while maintainers are outfitted in arctic and NBC ensembles.

109.1.4 Results.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

a. Qualitative results of observations, checklists and questionnaires will be summarized and presented in narrative and tabular form.

b. The degree to which the generators conform or do not conform to HFE standards and requirements will be presented. Instances of nonconformance will be supported by measurements and photographic illustrations. The causes and consequences of nonconformance will be assessed with regard to the effect on mission performance. Any degradation of the systems man-item relationship with regard to safety will be assessed and corrective action recommended. Human performance reliability will be assessed in terms of frequency and consequence of human error committed during preparation, operation, and maintenance of the generators. Subjective data analysis will include a structured interview follow-up of all unfavorable/negative comments to arrive at a description of the cause and possible corrective action.

c. The following will constitute failure of this test:

(1) Controls, displays, or labeling that do not conform to MIL-STD-1472, paragraphs 5.2, 5.4, and 5.5 in relation to appearance, spacing, size, or location.

(2) Inability to successfully operate or maintain the sets when personnel are wearing regular, NBC, or MOPP IV gear.

(3) Workspace and maintenance access openings that do not allow personnel, with anthropometric dimensions between the 5th through the 95th percentile, to perform maintenance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE X. HFE questionnaires and checklists.

How would you rate the adequacy of the following?

Rating Scale

6 Excellent
5 Very Good
4 Adequate
3 Not Quite Adequate
2 Poor
1 Extremely Poor

Human Factors Engineering - Adequacy	6	5	4	3	2	1
1. Before, during, and after operation checklist.						
2. Display panels.						
3. Space provided to service generator.						
4. Accessibility of hand controls.						
5. Illumination of instruments during night operation.						
6. Protection of operator from moving parts by guards and warning panels.						
7. Lifting provisions.						
8. Access for using test equipment.						
9. Standard tools and test equipment.						
10. Technical manuals for operations and maintenance.						
11. Based upon the previous questions, rate the OVERALL ADEQUACY of the generator.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE X. HFE questionnaires and checklists. - Continued.

How would you rate the adequacy of the following?

Rating Scale

6 Excellent
5 Very Good
4 Adequate
3 Not Quite Adequate
2 Poor
1 Extremely Poor

Human Factors Engineering - Tasks	6	5	4	3	2	1
1. Readings warnings or instruction labels.						
2. Connecting and disconnecting power cables.						
3. Operation and maintenance while wearing arctic clothing.						
4. Operation and maintenance while wearing NBC clothing.						
5. Reading and understanding the material presented in the technical manuals.						
6. Set up for operation.						
7. Operation during hours of darkness.						
8. Based upon the previous questions, rate the OVERALL EASE OF OPERATION.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE X. HFE questionnaires and checklists. - Continued.

Please rate how often the following occur?

Rating Scale

6 Almost Never
5 Very Seldom
4 Seldom
3 Often
2 Very Often
1 Almost Always

Human Factors Engineering - Intensity	1	2	3	4	5	6
1. The vibration level during operation. 2. The noise level during operation. 3. Exhaust fumes during operation.						
Human Factors Engineering - Frequency	**1**	**2**	**3**	**4**	**5**	**6**
1. Requirement for special tools and test equipment. 2. Glare on operating instruments and gauges.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE XI. HFE checklists.

Yes - Adequate No - Inadequate NA - Not Applicable

No.	Items	Yes	No	Remarks
	HFE Design - Controls, Displays, and Marking			
1	**Controls**			
a	Are all adjustments located on single panel?			
b	Are controls placed on the panel in the order they will normally be used?			
c	When controls are used in a fixed procedure, are they numbered to indicate?			
d	Are controls labeled with functional statements?			
e	Are control-position markings descriptive rather than coded or numbered?			
f	Are control scales fine enough to permit accurate setting?			
g	Except for detents or selector switches, do the controls have smooth, even resistance to movements?			
h	Are concentric knobs adequately coded to avoid confusion?			
i	Are adjustment controls easy to set and lock?			
j	Do all physical adjustment procedures provide visual, auditory, or tactical feedback?			

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE XI. HFE checklists. - Continued.

Yes - Adequate No - Inadequate NA - Not Applicable

No.	Items	Yes	No	Remarks
k	Are controls free of excessive backlash that could require needless readjustment?			
l	Are primary and emergency controls easily identifiable both visually and nonvisually?			
m	Can controls be operated by personnel wearing arctic and NBC clothing?			
n	The method used to prevent accidental activation of the control, if any does not increase the time required to operate the control to such an extent that it is unacceptable.			
2	**Displays**			
a	When this equipment is placed in ways that it will typically be used, can the display be easily read?			
b	The information presented is necessary for the decisions or actions required of the operator.			
c	The information is presented in the most immediately meaningful form, i.e., no interpretation or decoding is required.			
d	The information is displayed to the accuracy required by the decisions or actions of the operator.			
e	Are display scales limited to only that information needed to make decisions or to take some action?			
f	Information is current, that is, lag is minimized.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE XI. HFE checklists. - Continued.

Yes - Adequate No - Inadequate NA - Not Applicable

No.	Items	Yes	No	Remarks
g	Failure is clearly shown or the operator is otherwise warned.			
h	The contrast ratio and illumination of controls and/or displays are sufficient under all expected light conditions.			
i	A warning device is provided to indicate significant deviations from normal operating conditions.			
3	***Miscellaneous***			
a	Vibration and noise are kept below levels that might impair the efficiency of personnel.			
b	Visibility provides the maximum field of view possible in consonance with station, task requirement, and body conformation.			
c	Illumination of controls and displays is sufficient for the operators to carry out necessary tasks.			
d	Vibrations do not affect operator performance in reading dials and manipulating controls.			
e	No material within the operator's vision is capable of reflecting glare sufficiently to impair vision during day or night operation.			
	Maintainability			
1	***Handles***			
a	When possible, handles are provided on covers, drawers, and components to			

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE XI. HFE checklists. - Continued.

Yes - Adequate No - Inadequate NA - Not Applicable

No.	Items	Yes	No	Remarks
	facilitate handling.			
b	When handles cannot be provided hoist and lift points are clearly marked.			
2	***Covers***			
a	Method of opening a cover is evident from the construction of the cover itself. If not, an instruction plate is permanently attached to the outside of the cover.			
b	Hinges are used where possible to reduce the number of fasteners required.			
c	When a hinged cover is used, a space equal to the swept volume of the cover is provided (e.g., opening of the cover is not obstructed by bulkheads brackets, etc.).			
d	Structural members, other components, etc., do not interfere with removal of a cover.			
e	It is evident when the cover is in place but not secured?			
f	If instructions applying to a covered unit are lettered on , hinged door, the lettering is properly oriented for reading when the door is open.			
g	A minimum number and type of fasteners are used, commensurate with requirements for stress, bonding, etc.			
h	When possible, the same size and type of fasteners are used for all covers, cases, and access doors.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE XI. HFE checklists. - Continued.

Yes - Adequate No - Inadequate NA - Not Applicable

No.	Items	Yes	No	Remarks
i	Captive nuts and bolts are used where feasible.			
3	***Location of Replaceable Components***			
a	Large components which are difficult to remove are mounted so that they do not prevent access to other components.			
b	Components are placed to allow sufficient space for use of test equipment and other required tools without difficulty or hazard.			
c	All throwaway components are accessible without removal of other components.			
d	Structural members of the frame do not prevent access to components.			
e	Delicate components are so located or guarded that they will not be damaged while the unit is being handled or worked on.			
f	Sensitive adjustments are so located or guarded that they cannot be accidentally disturbed.			
g	Internal controls are located at a safe distance from dangerous voltages or access to dangerous voltages is prevented by suitable barriers.			
4	***Conductors and Cables***			
a	Conductors are bound into cables and held by means of lacing twine or other acceptable means.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE XI. HFE checklists. - Continued.

Yes - Adequate No - Inadequate NA - Not Applicable

No.	Items	Yes	No	Remarks
b	Long conductors or cables, internal to equipment, are secured to the chassis by cable clamp.			
c	Cables are long enough so that each functioning component can be checked in a convenient place or, if this is not feasible, extension cables/devices are provided.			
d	Cables are long enough to permit jockeying or movement of components when it is difficult to connect or disconnect other cables.			
e	Electrical cables are not to routed below fluid lines.			
f	Cables are routed so they cannot be walked on or used for handholds.			
g	Cables are easily accessible for inspection and repair.			
h	Cables are so routed that they need not be bent or twisted sharply or repeatedly.			
i	Input and output cables, with the exception of test cables, do not terminate on a control-display panel.			
j	If test cables terminate on control-display panels test receptacles are located so that their associated cables do not interfere with controls and displays.			
5	***Connectors***			
a	One-turn or other quick- disconnect plugs are used.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE XI. HFE checklists. - Continued.

Yes - Adequate No - Inadequate NA - Not Applicable

No.	Items	Yes	No	Remarks
b	When dirt and moisture are a problem, plugs have an attached cover.			
c	Connectors are located far enough apart so that they can be grasped firmly for connection and disconnection.			
d	Plugs are designed so that it is impossible to insert the wrong plug in a receptacle.			
e	Socket rather than plug contacts are "hot".			
f	Test points to determine that a unit is malfunctioning are provided.			
g	Appropriate test provided when a component is not completely self-checking.			
6	***Fuses and Circuit Breakers***			
a	Fuses and circuit breakers are so located that they can be easily seen and quickly replaced or reactivated by personnel wearing clothing appropriate to environment of interest.			
b	No special tools are required for fuse replacement.			
7	***Tools***			
a	Variety of tools is held to a minimum.			
b	As few special tools as possible are required.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE XI. HFE checklists. - Continued.

Yes - Adequate No - Inadequate NA - Not Applicable


No.	Items	Yes	No	Remarks
c	Tools to be used near high voltage are adequately insulated.			
d	Metal handles are avoided on tools likely to be used in extreme cold or heat.			
8	***Lubrication***			
a	Equipment containing mechanical components either has provision for lubrication without disassembly or does not require lubrication.			
b	When lubrication is required, the type of lubricant to be used and the frequency of lubrication is specified by a label at or near the lubrication point.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

TABLE XII. Distribution of anthropometric measurement data by uniform type.

MEASUREMENT	5th Percentile				95th Percentile			
	Regular		Arctic		Regular		Arctic	
	cm	in.	cm	in.	cm	in.	cm	in.
Stature (nude)	163.8	64.5			186.0	73.2		
Functional reach	72.6	28.6	77.7	30.6	90.9	35.8	95.5	37.6
Sitting height, erect	85.1	33.5	87.9	34.6	97.0	38.2	101.5	40.0
Eye height, sitting								
Knee height	72.6	28.6	74.7	29.4	84.6	33.3	85.9	33.8
Buttock-knee length	49.8	19.6	56.4	22.2	58.7	23.1	64.0	25.2
Shoulder breadth, sitting	54.9	21.6	60.0	23.6	64.3	25.3	67.3	26.5
Hip breadth, standing	41.4	16.3	47.5	18.7	49.8	19.6	55.9	22.0
Buttock-popliteal length	30.7	12.1	41.1	16.2	38.4	15.1	48.8	19.2
Hand length								
Hand breadth	46.0	18.1	43.7	17.2	54.6	21.5	52.0	20.5
Palm length								
Weight (kg)	17.5 8.0 9.5 57.3	66.9 3.1 3.7 ---	20.8 12.7 10.4 ---	8.2 5.0 4.1 ---	20.6 9.7 11.7 91.6	8.1 3.8 4.6 ---	23.9 12.2 12.4 ---	9.4 4.8 4.9 ---

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

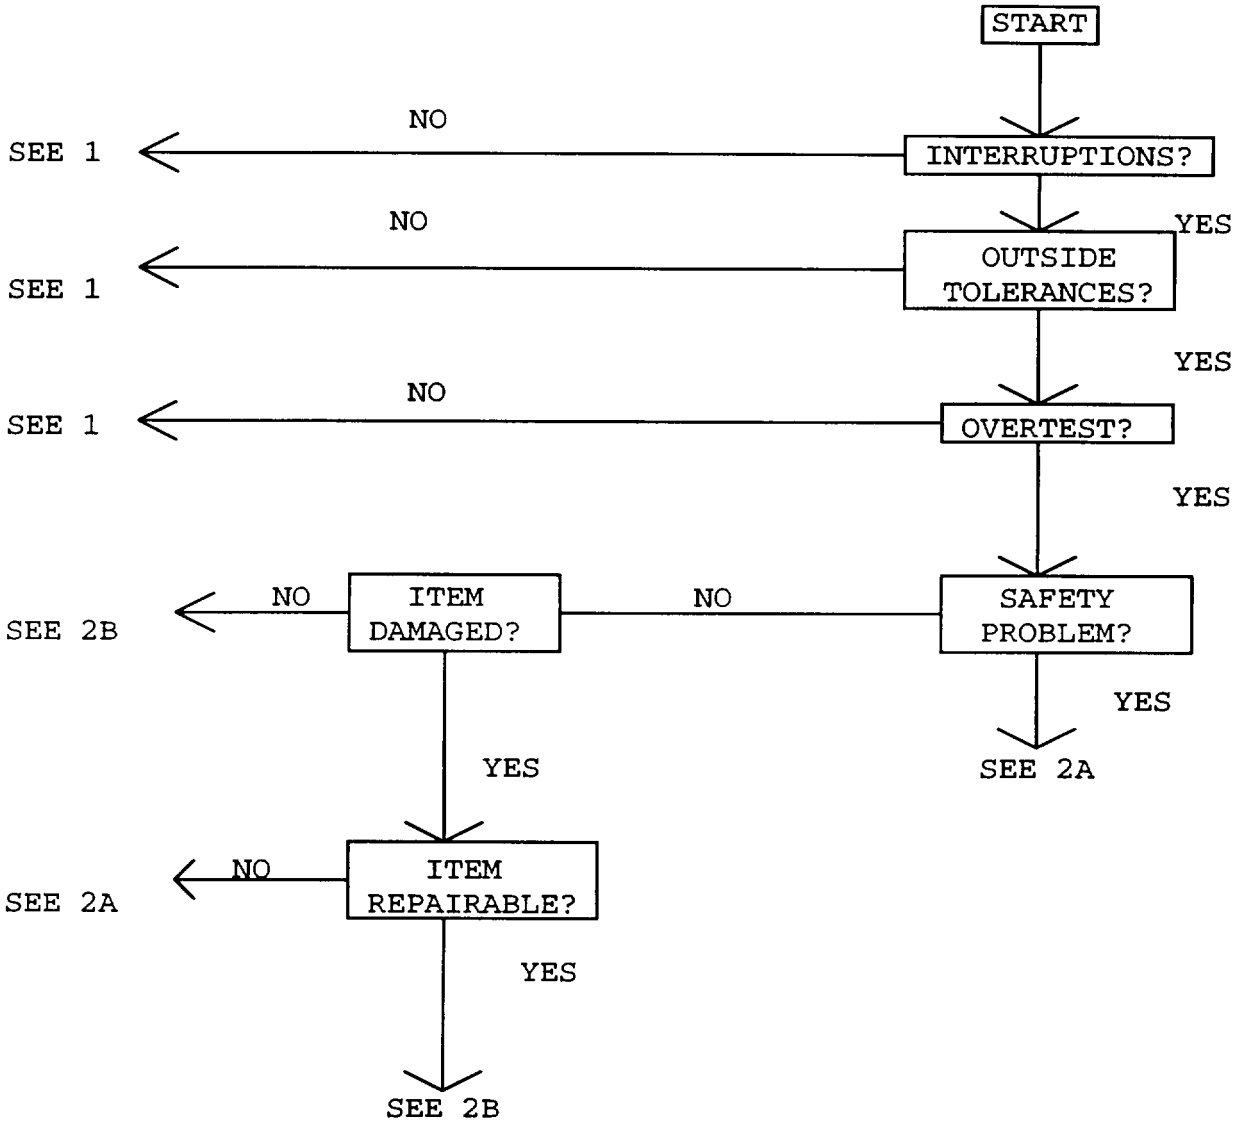

NOTES:

1. CONTINUE TEST (SEE INDIVIDUAL METHODS): EXTEND TEST TIME IF NECESSARY.

2. ALTERNATIVES:

   A. RESTART AT THE BEGINNING.

   B. COMPLETE THE TEST WITH UNDAMAGED OR REPAIRED TEST ITEM. (NOTE: TEST RESULTS WILL BE INVALID IF AN ITEM FAILURE OCCURS.)

FIGURE 1. Interrupted test cycle logic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

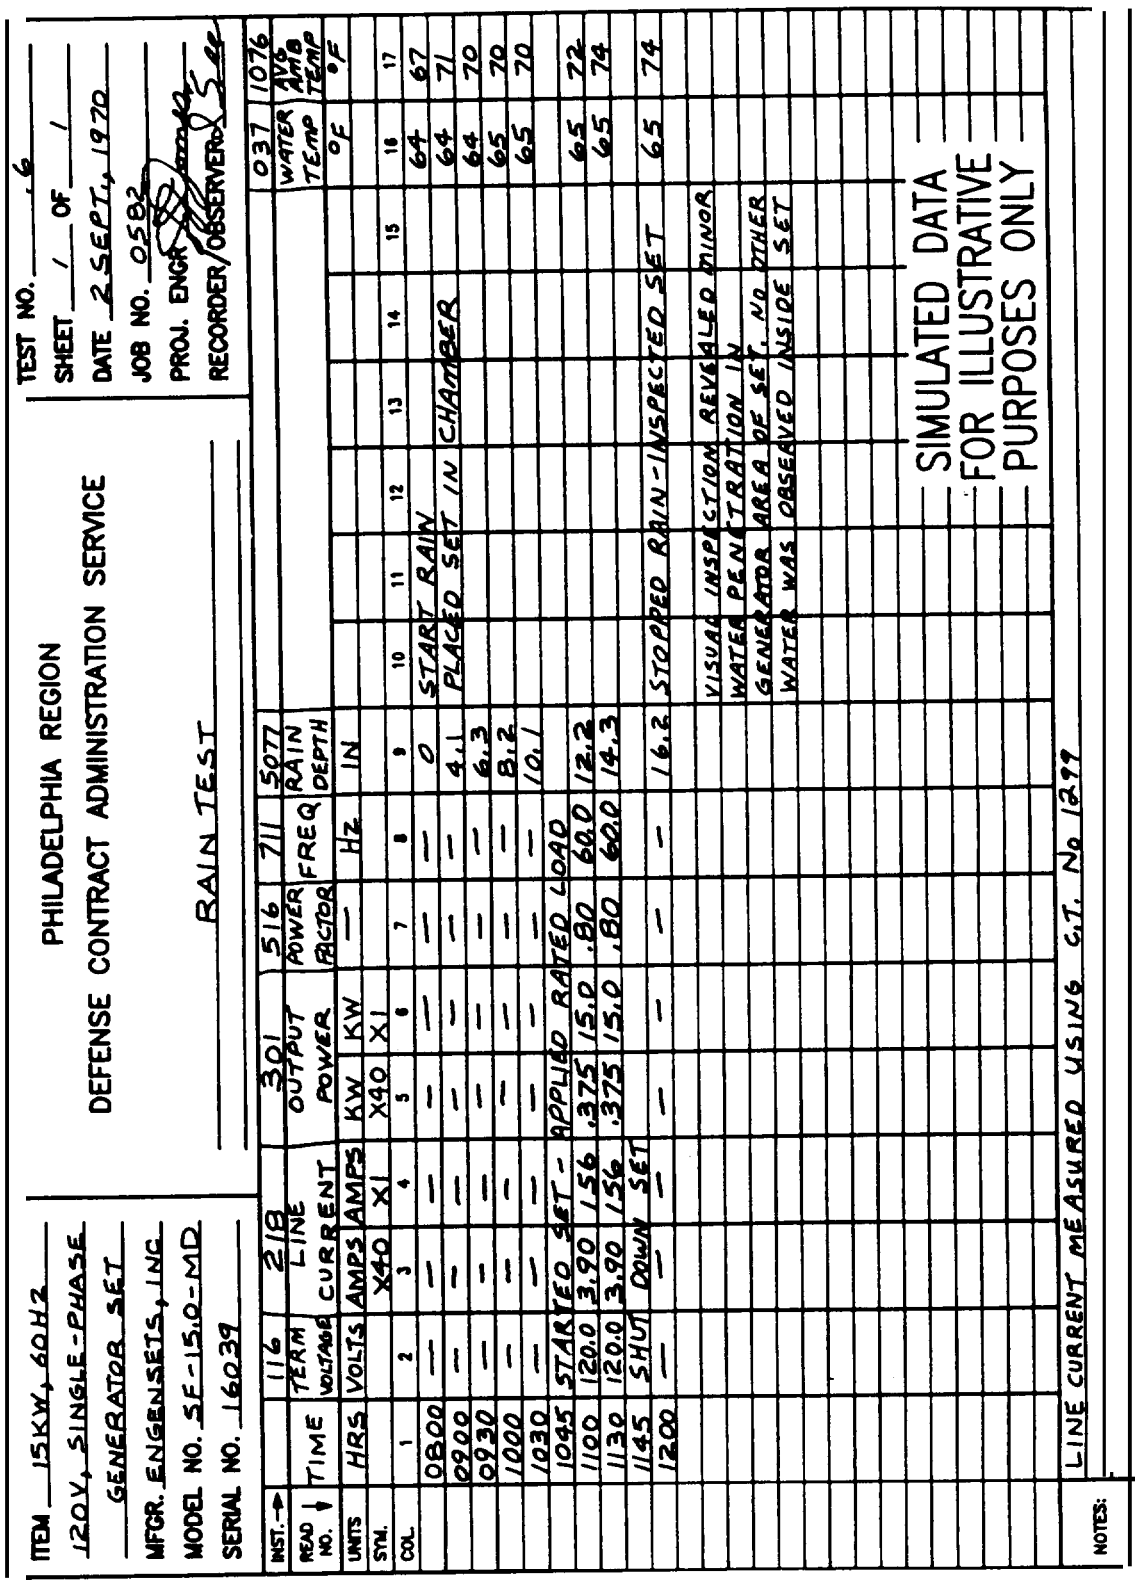


FIGURE 2. Typical test record for rain test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.


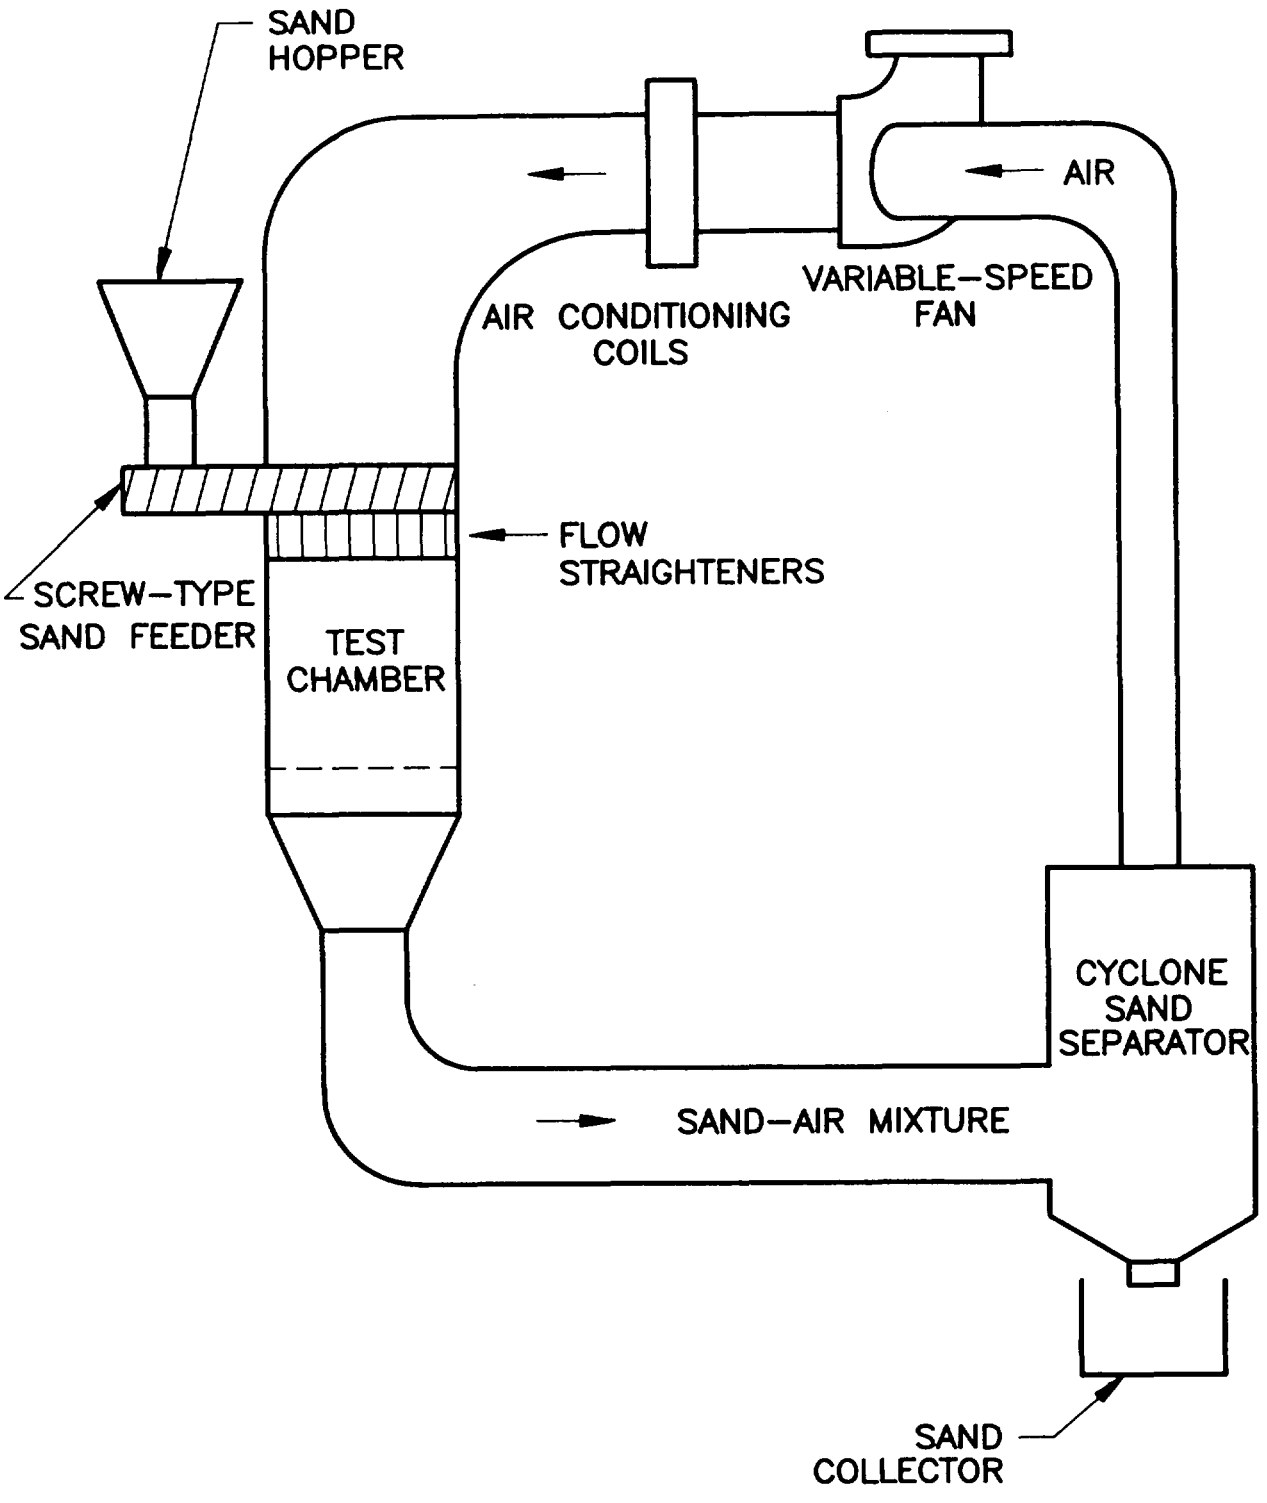


FIGURE 3.

Blowing sand test facility (vertical flow).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

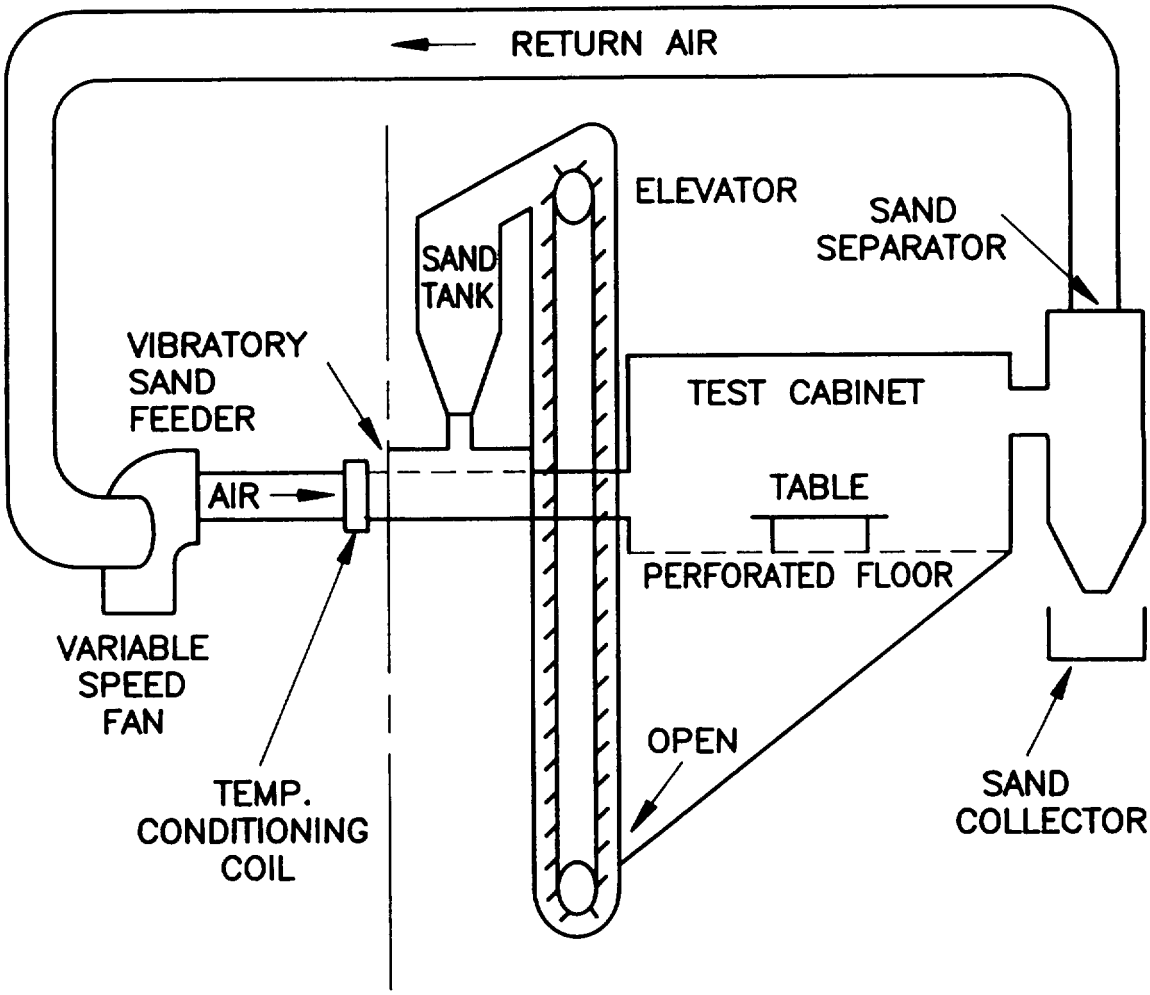


NOTE: THE LAYOUT OF THIS SYSTEM IS NOT DRAWN TO SCALE; IT IS INTENDED TO ILLUSTRATE THE ARRANGEMENT OF THE COMPONENTS. THE SPECIFICATIONS OF ALL COMPONENTS ARE NOT PROVIDED IN THIS TEST DESCRIPTION. THEY MUST BE CALCULATED BY THE ORGANIZATION SUPPLYING THE COMPONENTS. "INDUSTRIAL VENTILATION, A MANUAL OF RECOMMENDED PRACTICE" WILL PROVIDE DATA AND GUIDANCE FOR DESIGNING THE REQUIRED EQUIPMENT.

FIGURE 4.

Blowing sand test facility (horizontal flow).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

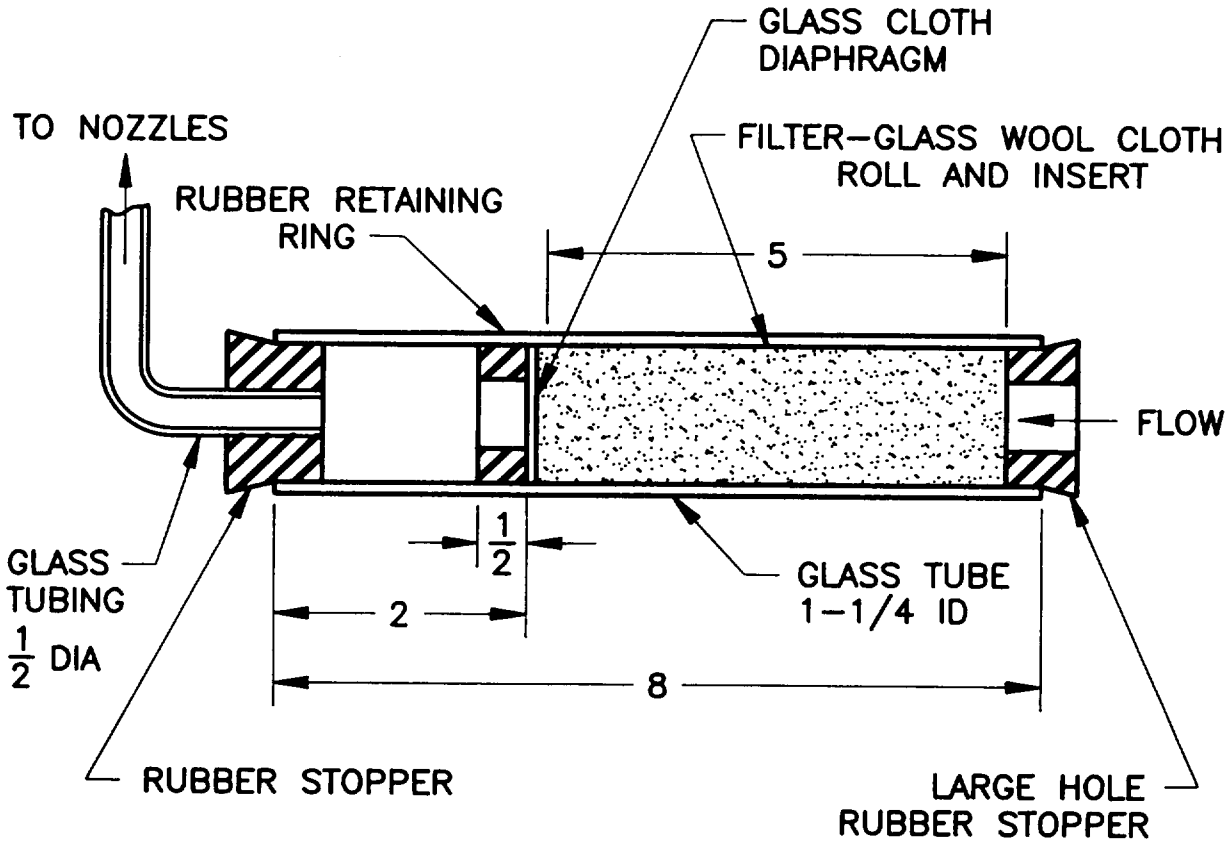

DIMENSIONS (IN INCHES) ARE FOR GUIDANCE PURPOSES.

FIGURE 5. Salt solution filter.

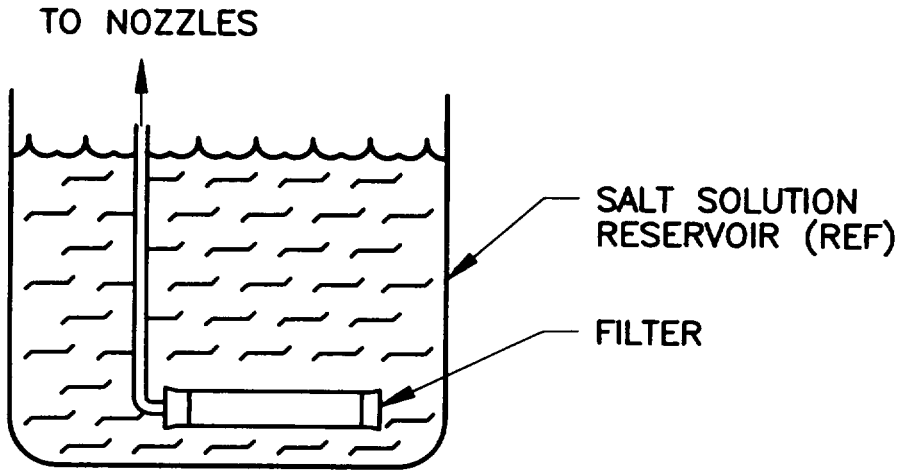


FIGURE 6. Location of salt solution filter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

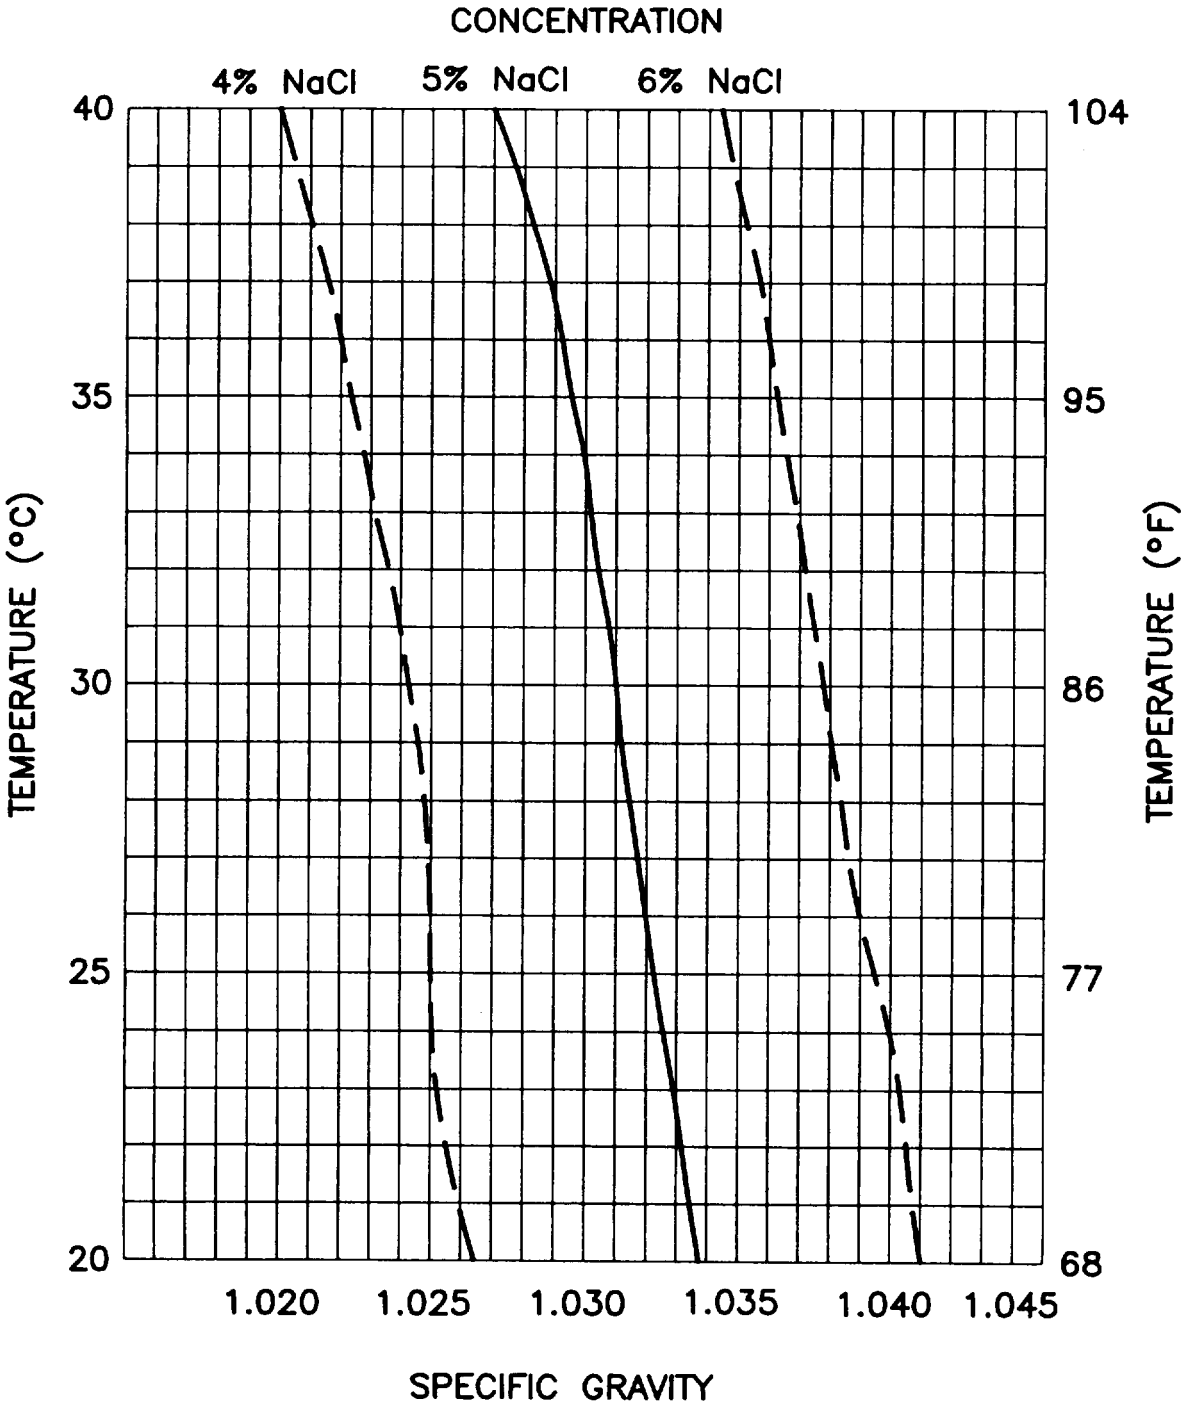


FIGURE 7.

Variation of specific gravity of salt (NaCl) solution with temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

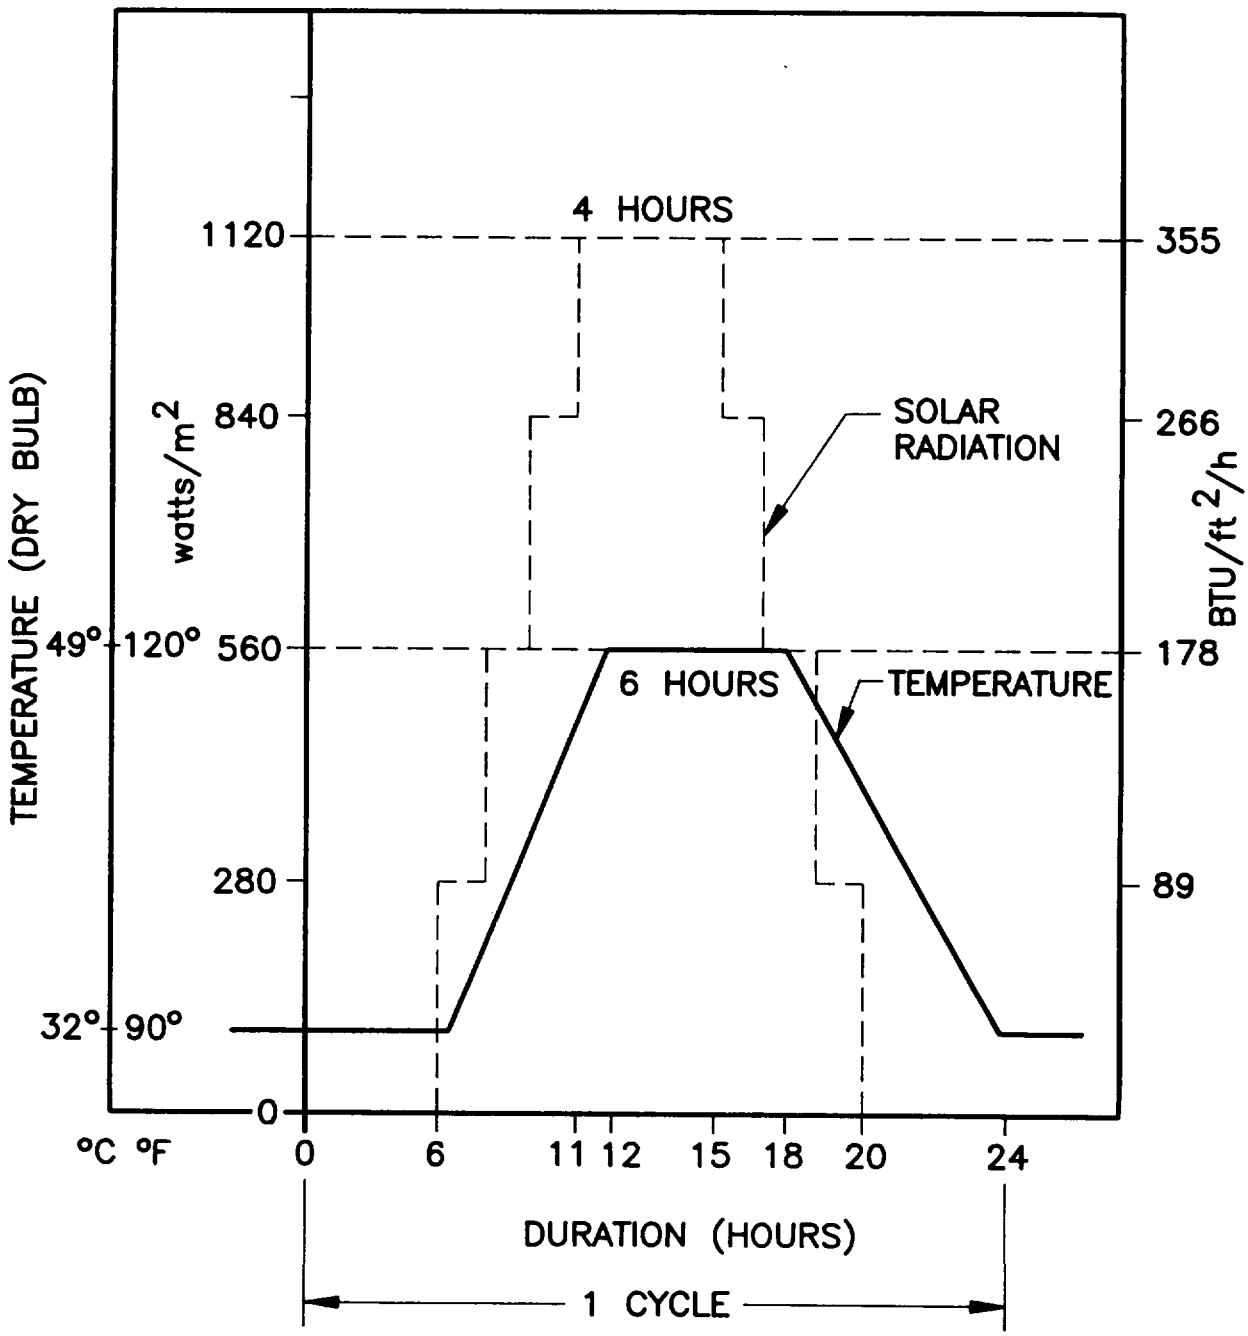


FIGURE 8.

Simulated solar radiation cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.

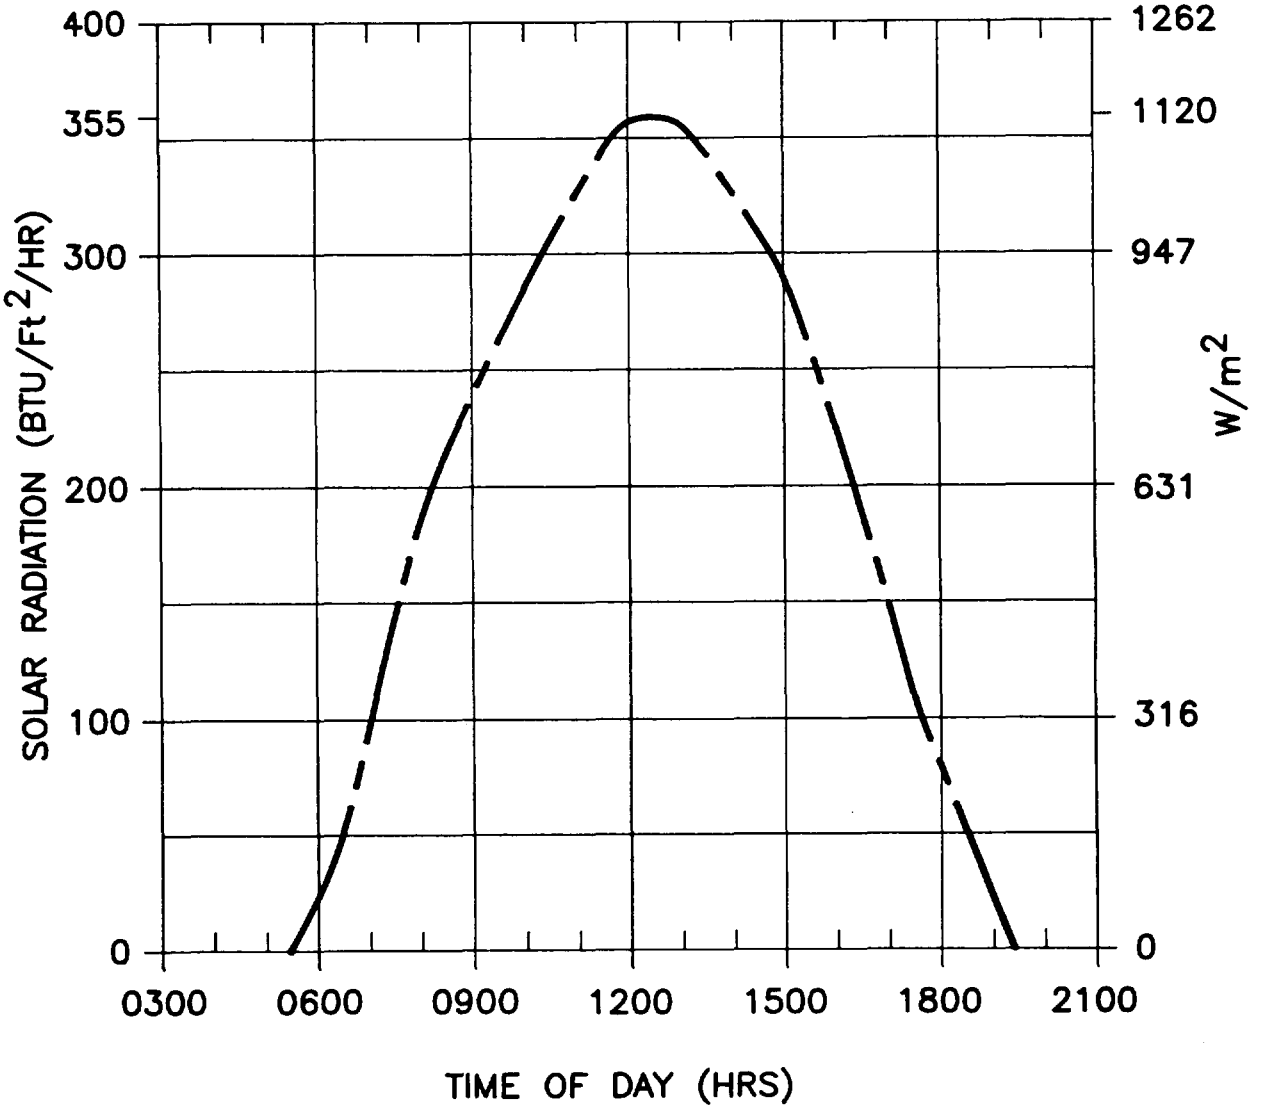


FIGURE 9. Daily solar radiation cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:12Z
Check the source to verify that this is the current version before use.