INCH POUND

MIL-PRF-44015A(GL)
22 October 1997
SUPERSEDING
MIL-R-44015(GL)
23 November 1979

PERFORMANCE SPECIFICATION

REFRIGERATOR-CONTAINER, FIELD, 8 FEET BY 8 FEET BY 10 FEET

This specification is approved for use by the U.S. Army Natick Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers an 8 foot by 8 foot by 10 foot insulated container for use with a 4,000 British thermal unit (Btu) per hour, electric motor-driven refrigeration unit.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or those recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development and Engineering Center, Natick, MA 01760-5018 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4110

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Standard. The following Government standard forms a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (6.2).

STANDARD

DEPARTMENT OF DEFENSE

MIL-STD-810 - Environmental Test Methods and Engineering Guidelines

(Unless otherwise indicated, copies of the above standard are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094).

2.2.2 Other Government documents. The following other Government document forms a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DEPARTMENT OF TRANSPORTATION (DOT)

Code of Federal Regulations

Title 49 CFR - Transportation, Parts 450-451

(Application for copies should be addressed to the Department of Transportation, Superintendent of Documents, Government Printing Office, Washington, DC 204402).

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION

ISO 668 - Series 1 Freight Containers - Classification, Dimensions and Ratings
ISO 1161 - Series 1 Freight Containers - Corner Fittings
ISO 1496-2- Series 1 Freight Containers - Specification and Testing
Part 2: Thermal Containers

(Application for copies should be addressed to the American National Standards Institute, Inc., 11 West 42nd Street, New York, NY 10036).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM F883 - Standard Performance Specification for Padlocks

(Application for copies should be addressed to the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959).

NSF INTERNATIONAL

Standard No. 2 - Food Service Equipment

(Application for copies should be addressed to NSF Intl., 3475 Plymouth Road, P.O. Box 1468, Ann Arbor, MI 48106).

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

Standard No. 70 - National Electrical Code

(Application for copies should be addressed to the National Fire Protection Association, One Battery March Park, Quincy, MA 02269-9101).

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

3.2 **Operating requirements**. The container units shall satisfy the following functional, operational and performance requirements.

3.2.1 Heat leakage. Heat infiltration or loss through the container shall be minimized.

3.2.2 Air leakage. Air leakage of the container shall be minimized.

3.2.3 Safety. The container units shall minimize flammability, operational, toxic and personnel hazards.

3.2.4 Drainage. The container shall have floor drains which provide complete and total drainage of the container. The drains shall open automatically when subjected to pressures above normal internal pressure. The drains shall be provided with manual closures. The drain openings shall be recessed below the bottom surface of the floor.

3.2.5 Door. The door shall be flush with the container exterior when closed. The door shall be provided with a means to prevent door hardware from damaging the exterior container skin when opened. The door opening shall be a minimum of 74 inches in height and 36 inches in width. External hardware shall be protected from damage and not extend beyond corner fittings. Means shall be provided to hold the doors in the full open position. The door shall open outward from the right.

3.2.6 Door handle and latch. The door shall have an external handle which shall operate a heavy duty locking device which shall securely hold the door in the closed position during all modes of shipment and rough handling. The latch shall have provisions to accept a padlock as specified in 3.3.3. With the padlock in place, the door shall be incapable of being opened from the outside. The door shall have an internal release handle to allow the door to open from the inside to permit a person in the container to exit when the container is padlocked on the outside. The handle and latch shall be protected from damage during shipping. The handle and latch shall not extend beyond the corner fittings.

3.2.7 Interior light. The container shall have a vapor proof lighting fixture mounted on the interior and a recessed or protected vapor proof switch located near door on the exterior of container. The fixture shall have a protective cover which is shatterproof and removable without tools for bulb replacement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

The fixture shall be supplied with a 100-watt 120-volt incandescent light bulb.

3.2.8 Pilot light. The container shall be furnished with a red vapor proof pilot light, located externally and protected near the door which illuminates when the interior light switch is in the "on" position.

3.2.9 Plug and receptacle. A weather-tight type receptacle, recessed, male, locking type, designed for 3-wire, 2-pole grounded service rated at 15 amperes, 125 volts, wired to the interior light fixture and located in the rear on the exterior, shall be provided. The plug provided shall form a weather-tight joint when the plug is inserted in the receptacle. The plug shall be captive to the container to prevent loss.

3.2.10 Temperature indicator. A Temperature indicator with a range of -25^{0}F to +125^{0}F shall be provided and installed on the front exterior near the door. The sensing element shall be mounted inside at a location that will provide a mean temperature reading of the container. The Temperature Indicator and sensing element shall be protected from damage by use of a guard or other suitable protective device.

3.3 **Interface and interoperability requirements**. The container units shall satisfy the following interface and interoperability requirements.

3.3.1 Dimensions. Dimensions, tolerances and diagonal differences of the container shall meet the requirements specified in ISO 668 for type 1D containers , except the minimum interior dimensions shall be 86 inches wide, 88 inches long and 83 inches in height.

3.3.2 Refrigerator interface. The end wall opposite the door end wall shall have an opening as shown on figure 1 for mounting a refrigeration unit. The end wall opening shall be of sufficient strength to support the refrigeration unit having a weight of 500 pounds. A plywood cover shall be provided when the refrigeration unit is not in place. There shall be sufficient space to mount an 18-inch deep refrigeration unit without the unit protruding outside the corner fittings (see figure 1).

3.3.3 Padlock. The container shall be supplied with a captive padlock conforming to ASTM F883 and shall be furnished with two keys.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

3.3.4 Interchangeability. Component parts of the refrigerator-container, which are replaceable, shall be interchangeable with the same parts of other containers furnished under the same contract.

3.4 **Support or ownership requirements**. The container units shall meet the following support or ownership requirements.

3.4.1 Weight. The weight of the container shall not exceed 3500 pounds.

3.4.2 Structural requirements. The containers shall be structurally suitable for conveyance by road, rail and sea, including interchange between these forms of transport.

3.4.3 Corner fittings. The container shall have corner fittings located on all eight corners.

The corner fittings shall conform to the dimensional and strength requirements of ISO 1161 and shall withstand all structural testing requirements herein.

3.4.4 Spacer block and coupler. Unless otherwise specified (see 6.2) one spacer block and one coupler shall be provided with the container. Two couplers shall be of sufficient strength to allow for the connection of the bottom end corner fittings of two containers. The spacer blocks shall maintain a 3-inch space between the containers when attached to the upper end corner fittings. A storage bracket for the spacer block and coupler shall be provided in the exterior refrigeration unit area of the container.

3.4.5 Forklift pockets. The container shall have forklift pockets conforming to the requirements of ISO 1496-2.

3.4.6 Tie-downs. The two interior side walls shall each have two recessed cargo tie-down rings located as shown in figure 1.

3.4.7 Shelving. Four individual sets of shelving shall be provided. Each shelving set shall be 42 inches long by 18 to 20 inches deep and 58 to 66 inches high with four shelves in each set adjustable in no less than 2-inch increments without the use of hand tools. Each individual shelf shall be capable of supporting the concentrated loads of 200 pounds during use without permanent deformation or distortion. Shelving shall comply with the applicable requirements of NSF Standard No. 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

Provisions shall be made to allow shelving to stand firmly on the container floor by means of foot plates or other suitable methods.

3.4.8 Data plates and marking. When procurement is for the Marine Corps (see 6.2), data plates shall be obtained from the Commandant of the Marine Corps, Code LMO-3, Washington, D.C. 20380, and securely attached to the door. The contractor shall imprint the data required in all spaces.

3.4.9 Finish. Unless otherwise specified (see 6.2) the under structure and outside surfaces of the container shall be treated and finished with a nontoxic, odor free, chemical agent resisting coating. The color shall be green (see 6.7.1).

3.4.10 Sanitary requirements. The interior surface of the container shall facilitate cleaning.

3.5 **Environmental requirements.** The containers shall operate and be functional in ambient temperatures from -25^{0}F to +125^{0}F and meet the following operational and environmental performance requirements.

3.5.1 Weatherproofness. The container door, all joints, and electrical components shall be weather-tight.

3.5.2 Corrosion resistance. The interior and exterior of the container shall withstand exposure to a salt fog atmosphere without evidence of corrosion.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.1.1)
b. Conformance inspection (see 4.1.2)

4.1.1 First article inspection. When a first article inspection is required (see 3.1 and 6.2) a sample shall be examined for all the verifications listed in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

TABLE I Verification methods

Title	Require-ment	Verification	Title	Require-ment	Verification
OPERATING REQUIREMENTS	3.2	4.3	**SUPPORT OR OWNERSHIP REQUIREMENTS**	3.4	4.5
Heat leakage	3.2.1	4.3.1	Weight	3.4.1	4.5.1
Air leakage	3.2.2	4.3.2	Structural requirements	3.4.2	4.5.2
Safety	3.2.3	4.3.3	Corner fittings	3.4.3	4.5.3
Drainage	3.2.4	4.3.4	Spacer block and coupler	3.4.4	4.5.4
Door	3.2.5	4.3.5	Forklift pockets	3.4.5	4.5.5
Door handle and latch	3.2.6	4.3.6	Tie-downs	3.4.6	4.5.6
Interior light	3.2.7	4.3.7	Shelving	3.4.7	4.5.7
Pilot light	3.2.8	4.3.8	Data plates and marking	3.4.8	4.5.8
Plug and receptacle	3.2.9	4.3.9	Finish	3.4.9	4.5.9
Thermometer	3.2.10	4.3.10	Sanitation	3.4.10	4.5.10
INTERFACE AND INTEROPERABILITY	3.3	4.4	**ENVIRONMENTAL REQUIREMENTS**	3.5	4.6.1
Dimensions	3.3.1	4.4.1	Weatherproof-ness	3.5.1	4.6.2
Refrigerator interface	3.3.2	4.4.2	Corrosion resistance	3.5.2	4.6.3
Padlock	3.3.3	4.4.3			
Interchangeability	3.3.4	4.4.4			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

4.1.2 Conformance inspection. Conformance inspection shall consist of all the verifications specified in table I. Sampling for this inspection shall be as specified in the contract or purchase order (see 6.2).

4.2 Verification methods. Verification methods can include visual examination, measurement, testing, simulation, modeling, engineering evaluation, component properties analysis, certification, and similarity to previously-approved or previously-qualified designs.

4.2.1 Verification alternatives. The contractor may propose alternative test methods, techniques, or equipment, including application of statistical process control, tool control, or cost-effective sampling procedures to verify performance (see 6.4).

4.2.2 Verification conditions. The test load within the container shall be uniformly distributed, except as otherwise specified herein. On completion of each test, the container shall be examined to determine compliance with section 3. During tests, tare weight of container is the empty weight of container.

4.2.3 Verification sequence. The container shall first be tested for weatherproofness before application of finish painting or undercoating. Other verifications shall be made after finish painting and undercoating. A second test for weatherproofness shall be made after completion of all other tests. Airtightness testing shall be conducted after all structural tests of 4.5.2, followed by heat leakage testing.

4.2.4 Certificates of compliance. Where certificates of compliance are submitted, the Government reserves the right to check and test such items to determine the validity of the certification.

4.3 **Operating requirements verification**. All operating requirements shall be verified as follows.

4.3.1 Heat leakage test. Conduct a heat leakage test in accordance with ISO 1496, Test No. 15 - *Heat leakage test*. Verify that the maximum heat leakage is no greater than 15 Watts/Kelvin (28.5 Btu/hr deg F).

4.3.2 Air leakage test. Conduct an airtightness test in

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

accordance with ISO 1496, Test No. 14 - *Airtightness test*. Verify that air leakage does not exceed 10 m^3/h (355 ft^3/h).

4.3.3 Safety. Safety requirements shall be verified as follows.

4.3.3.1 Container certification. A Convention for Safe Containers (CSC) plate shall be applied for and obtained from a designated approval authority, attached and displayed as required by the convention in accordance with CFR 49, parts 450 and 451.

4.3.3.2 Wiring certification. Wiring practices used in the containers shall be certified as conforming to NFPA Standard No. 70 by submission of the manufacturer's certification, a certified test report or appropriate labels or listing marks.

4.3.3.3 Shelving certification. The shelves supplied with the containers shall be certified as conforming to NSF Standard No. 2 by submission of the manufacturer's certification or by inspection.

4.3.4 Drainage inspection. Visually inspect the container for drains. Verify watertightness with drains in the closed position by completely filling the floor with water to a depth of not less than 1 inch. Duration of the test shall not be less than 8 hours. Upon completion of test there shall be no evidence of water leakage. Verify drainage by opening the drains after test; there shall be no presence of water puddles after draining. Verify automatic release by inducing an internal pressure above normal operating pressure inside the container until the drains automatically release. Verify that drains are provided with manual closure.

4.3.5 Door inspection. Visually inspect door area to verify that the door is flush with the container exterior when closed. Verify presence of a means to prevent door hardware from damaging container exterior skin when opened. Verify hardware does not extend beyond the corner fittings. Verify the door opens outward from the right, and has a means to hold the door in an open position. Measure door opening to verify a minimum of 74 inches in height and 36 inches in width.

4.3.6 Door handle and latch inspection. Visually inspect for the presence of an external door handle and latch which accepts the padlock of 4.4.3. Verify that the closed door cannot be opened externally with the latch closed and the lock in place.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

Verify that the door can be opened from the inside when both locked and unlocked on the outside. Verify strength of door locking device; the door shall not open by itself during any testing specified herein. Verify handle and latch do not extend beyond the corner fittings.

4.3.7 Interior light inspection. Verify the presence of a vapor proof lighting fixture with a vapor proof switch, having a protective cover which can be removed without tools. Verify the switch is located near door on the exterior and that the switch operates the 100-watt, 120-volt incandescent light bulb when the container is connected to a 120-volt power source. Verify the switch is recessed or otherwise protected from damage.

4.3.8 Pilot light inspection. Verify the presence of a pilot light enclosed in a vapor proof housing on the exterior near the door. Verify that the light illuminates red when the interior light switch is in the "on " position with 120-volt power source connected to the container. Verify the pilot light is recessed or otherwise protected from damage.

4.3.9 Plug and receptacle inspection. Visually inspect the container for a plug and receptacle located on the exterior in the rear. Verify the receptacle is designed for 3-wire, 2-pole grounded service and is rated at 15 amperes, 125 volts by connecting to a 125-volt power source and operating the light. Verify the receptacle is of the recessed, male, locking type. Verify that a captive plug is provided to seal the receptacle when not in use. Verify the plug is captive to the shelter to prevent loss.

4.3.10 Temperature indicator. Verify the presence of a Temperature indicator located on the front exterior near the door. Visually inspect to verify temperature range of -25^{0}F to +125^{0}F for proper operation and verify thermometer gauge and sensing element are protected by a guard or other device.

4.4 **Interface and interoperability requirements verification.**

4.4.1 Dimensions inspection. Verify that dimensions, tolerances and diagonal differences of the container meet the requirements specified in ISO 668 for type 1D containers , except the minimum interior dimensions shall be 86 inches wide, 88 inches long and 83 inches in height.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

4.4.2 Refrigerator interface inspection. Verify refrigerator opening and dimensions are in accordance with figure 1. Measure clearance between end wall and rear corner fittings to verify a minimum 18-inch clearance. Verify that plywood cover is provided to be used when the refrigeration unit is not in place.

4.4.3 Padlock inspection. Verify padlock and keys are as specified in ASTM F883 and fits in the latch on the door handle.

4.4.4 Interchangeability certification. The contractor shall certify that all component parts of the container which are replaceable are interchangeable with the same parts of other containers furnished under the same contract.

4.5 **Support or ownership requirements verification**. All support or ownership requirements shall be verified as follows.

4.5.1 Weight inspection. Verify, by weighing, that the container weighs no more than 3500 pounds.

4.5.2 Structural requirement tests. The structural requirements shall be verified as follows.

4.5.2.1 Stacking test. The containers shall undergo the stacking test of ISO 1496-2 Test No. 1 - *Stacking*. Upon completion of test verify that the container has no permanent deformation or abnormality which will render it unsuitable for use.

4.5.2.2 Lifting from top corner fittings test. The containers shall undergo the lifting test of ISO 1496-2 Test No. 2 - *Lifting from the four top corner fittings*. Upon completion of test verify that the container has no permanent deformation or abnormality which will render it unsuitable for use.

4.5.2.3 Lifting from bottom corner fittings test. The containers shall undergo the lifting test of ISO 1496-2 Test No. 3 - *Lifting from the four bottom corner fittings*. Upon completion of test verify that the container has no permanent deformation or abnormality which will render it unsuitable for use.

4.5.2.4 Longitudinal restraint test. The containers shall undergo the restraint test of ISO 1496-2 Test No. 4 - *Restraint (longitudinal)*. Upon completion of test verify that the

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

container has neither permanent deformation or abnormality which will render it unsuitable for use.

4.5.2.5 End wall strength test. The containers shall undergo the test of ISO 1496-2 Test No. 5 - *Strength of end walls.* Upon completion of test verify that the container has no permanent deformation or abnormality which will render it unsuitable for use.

4.5.2.6 Sidewall strength test. The containers shall undergo the test of ISO 1496-2 Test No. 6 - *Strength of sidewalls*. Upon completion of test verify that the container has no permanent deformation or abnormality which will render it unsuitable for use.

4.5.2.7 Strength of roof test. The containers shall undergo the test of ISO 1496-2 Test No. 7 - *Strength of the roof*. Upon completion of test verify that the container has no permanent deformation or abnormality which will render it unsuitable for use.

4.5.2.8 Floor strength. The containers shall undergo the test of ISO 1496-2 Test No. 8 - *Floor strength*. Upon completion of test verify that the container has no permanent deformation or abnormality which will render it unsuitable for use.

4.5.2.9 Lifting from fork lift pockets test. The containers shall undergo the test of ISO 1496-2 Test No. 11 - *Lifting from forklift pockets*. Upon completion of test verify that the container has no permanent deformation or abnormality which will render it unsuitable for use.

4.5.2.10 Container coupling test. A 20-foot configuration, two 10-foot containers, each loaded to a gross weight of 10,000 pounds, shall be coupled together by couplers between the lower corner fittings. Each opening for the refrigeration unit shall be closed with an insulated plug having the same insulation thickness as the container wall. Spacer blocks shall be used between upper corner fittings of the two containers. The coupled containers shall be lifted by the top corner fittings to a minimum of 1 foot and suspended for a minimum of 5 minutes. Upon completion of test verify that the container has no permanent deformation or abnormality which will render it unsuitable for use. Verify that the spacer blocks and couplers used have no permanent deformation or abnormality which will render them

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

unsuitable for use.

4.5.2.11 Rail impact test. The containers shall undergo the rail impact test of MIL-STD-810, Method 516.3, procedure VIII. Upon completion of test verify that the container has no permanent deformation or abnormality which will render it unsuitable for use.

4.5.3 Corner fittings inspection. Verify the corner fittings conform to the dimensional requirements of ISO 1161. Verify the corner fittings meet durability requirements during all loading, interfacing and environmental testing specified herein.

4.5.4 Spacer block and coupler inspection. Verify the presence of a spacer block and coupler conforming to the requirements of ISO 1161. Verify the presence of a storage bracket located on the exterior refrigeration unit area of the container.

4.5.5 Forklift pockets inspection. Verify the presence of forklift pockets meeting the requirements of ISO 1496-2.

4.5.6 Tie-downs inspection. Verify the presence of cargo tie-down rings located as shown in figure 1.

4.5.7 Shelving inspection. Visually inspect shelving for specified characteristics. Load each shelf with 200 pounds over a 12-inch square area in the middle of the shelf. Visually verify that there is no permanent deformation after the load has been applied for a minimum of 5 minutes.

4.5.8 Data plates and marking inspection. Verify the presence of a data plate with required data as specified.

4.5.9 Finish certification and examination. The contractor shall certify that the container’s exterior finish is green, nontoxic and chemical agent resistant, meeting Government requirements. Painted surfaces shall be visually examined to verify that there are no streaks, crops, pinholes, checks, cracks or missed areas.

4.5.10 Sanitary requirements inspection. Visually inspect the interior of the container to verify that there are no open seams, pits, narrow crevices or any areas which cannot be cleaned by conventional cleaning methods. Verify that there are no materials inside the container that would be adversely affected

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

by such cleaning methods as steam cleaning or detergents normally used.

4.6 **Environmental requirements verification**. All environmental requirements shall be verified as follows.

4.6.1 Temperature certification. Contractor should certify that the container will operate and be functional in ambient temperatures from -25^0 to +125^{0}F.

4.6.2 Weatherproofness test. Weatherproofness shall be tested in accordance with ISO 1496-2, Test No. 13 - *Weatherproofness.* Upon completion of testing, verify that no water has leaked or penetrated into the container or into any electrical enclosures.

4.6.3 Corrosion resistance test. The containers shall be tested for resistance to the effects of a salt fog atmosphere having a concentration of 5%±1%. The container shall be tested in accordance with MIL-STD-810, Method 509.3, with the container subjected to 24 hours of salt fog exposure followed by 24 hours of drying time in an ambient temperature of 70°F±5°F, followed by a second 24-hour exposure and 24-hour drying time. The container shall be tested with the door in the open position. Upon completion of testing, visually inspect to verify that there are no signs of corrosion.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or purchase order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point’s packaging activity within the Military Department of Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department’s or Defense Agency’s automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended use. The container is intended for use in the transportation and storage of food and other temperature sensitive items requiring controlled temperature. It is used with the refrigeration unit conforming to MIL-PRF-44035.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Issue of DoDISS to be cited in the solicitation, and, if required, the specific issue of individual documents referenced (see 2.2.1, and 2.3)
c. When a first article is required (see 3.1, 4.1.1 and 6.3)
d. When spacer blocks and couplers are not required (see 3.4.4)
e. When procurement is for Marine Corps (see 3.4.8)
f. When external surfaces are not to be finished (see 3.4.9)
g. Sampling for conformance inspection (see 4.1.2).
h. Packaging requirements (see 5.1)

6.3 First article. When requiring first article inspection, contracting documents should provide specific guidance to offerors. This guidance should cover whether the first article is a first article sample, a first production item, or the number of test items. These documents should also include specific instructions regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Pre-solicitation documents should provide Government waiver rights for samples for first article inspection to bidders offering a previously-acquired or tested product. Bidders offering such products who wish to rely on such production testing must furnish evidence with the bid that prior Government approval is appropriate for the pending contract.

6.4 Verification alternatives. Contracting documents should provide guidance to offerors regarding the submission of alternatives to specified verification methods (see 4.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

6.5 Technical manuals. The requirement for technical manuals should be considered when this specification is applied on a contract. If technical manuals are required, specifications and standards that have been cleared and listed in DoD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL) must be listed on a separate Contract Data Requirements List (DD Form 1423), which is included as an exhibit to the contract. The technical manuals must be acquired under a separate contract line item in the contract.

6.6 Ozone-depleting substances. A listing of ozone-depleting substances prohibited from use can be found in publication SD-14 Listing of Toxic Chemicals, Hazardous Substances, and Ozone-Depleting Chemicals. It is available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.

6.7 Finish.

6.7.1 Paint, green. Treatment and painting in accordance with type G, of MIL-T-704, and MIL-C-46168 or MIL-C-53039 (Green 383 or color Nos. 34082 or 34094 of FED-STD-595) have been used to satisfy this requirement (see 3.4.9).

6.8 Recycled, recovered or environmentally preferable materials. Recycled, recovered or environmentally preferable materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements and promotes economically advantageous life cycle costs.

6.9 Subject term (key word) listing.

Kitchen equipment
Storage, food
Refrigerator, field
ISO container

6.10 Supersession data. MIL-R-44015(GL), which provides a detail configuration of the container unit, is superseded by this performance specification. MIL-R-44015(GL) and associated drawings are available to the contractor on an information basis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

6.11 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - GL

Preparing activity:
Army - GL

(Project 4110-A514)

Review activity:
DLA - IS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.

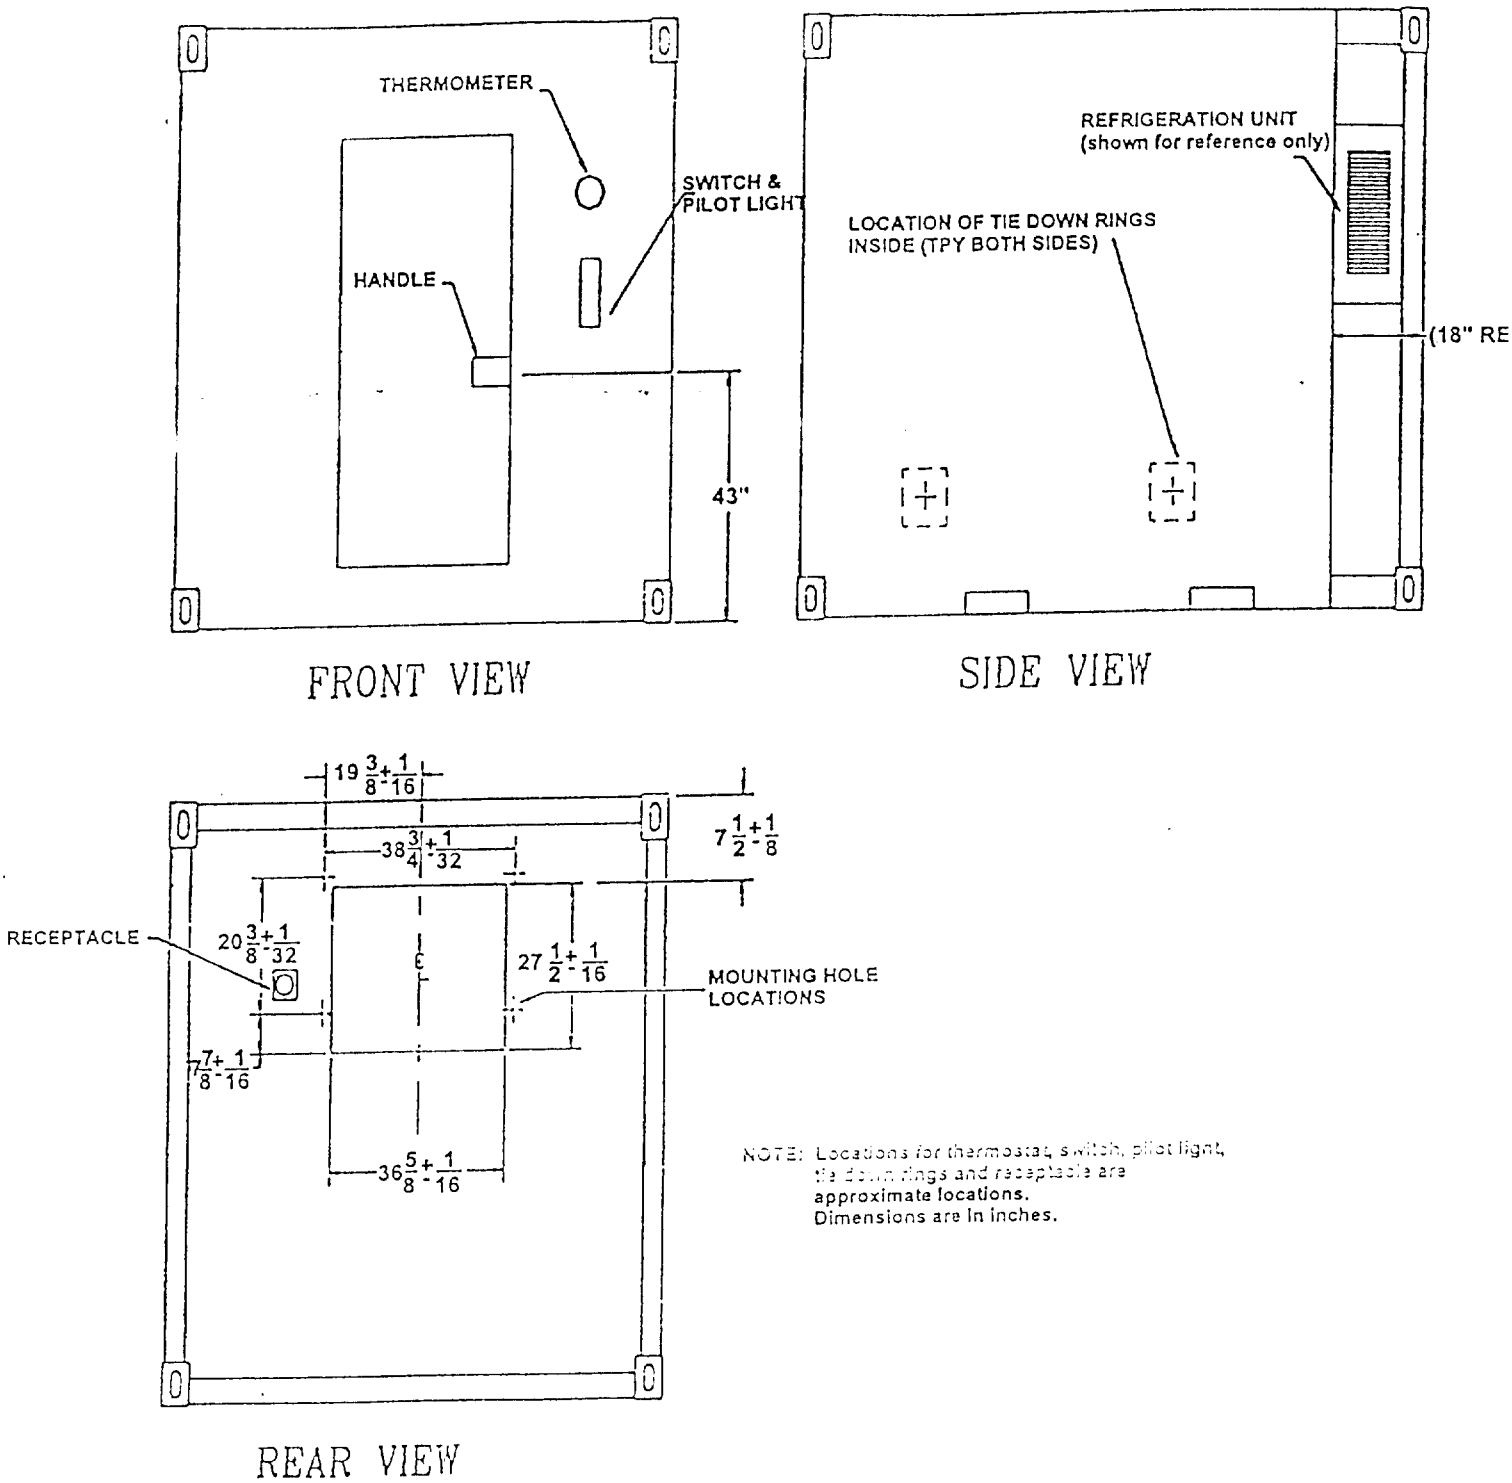


FIGURE 1. Container interface dimensions and accessory locations

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-44015A	2. DOCUMENT DATE (YYMMDD) 97-10-22

3. DOCUMENT TITLE REFRIGERATOR-CONTAINER, FIELD, 8 FEET BY 8 FEET BY 10 FEET

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	b. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)
a. NAME U.S. Army Natick RD&E Center	b. TELEPHONE (Include Area Code) (1) Commercial 508-233-5175	(2) AUTOVON 256-5175
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center Attn: SSCNC-WEF Natick, MA 01760-5018	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:22Z
Check the source to verify that this is the current version before use.