MILITARY SPECIFICATON

PUMP, PRESSURE, OIL FREE AIR
TYPE MA-2

This specificaton is approved for use within the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of portable 28 volt direct current electric motor driven, oil free air pressure pump unit, designated Type MA-2.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

PPP-B-601	Boxes, Wood, Cleated Plywood
PPP-B-1672	Boxes, Shipping, Reusable With Cushioning
TT-E-489	Enamel, Alkyd, Gloss, (For Exterior and Interior Surfaces)
TT-P-1757	Primer Coating, Zinc Chromate, Low Moisture Sensitivity

MILITARY

MIL-P-116	Preservation, Methods Of
DOD-D-1000	Drawings, Engineering and Associated List
MIL-C-5541	Chemical Conversion Coatings On Aluminum Alloys
MIL-G-5572	Gasoline, Aviation, Grades 80/87, 100/130, 115/145
MIL-P-7105	Pipe Threads, Taper, Aeronautical National Form, Symbol ANPT, General Requirements For
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series, General Specification For

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may of use in improving this document should be addressed to: Oklahoma City Air Logistics Center/MMEDO, Tinker AFB OK 73145-5990 by using the self-addressed Standardization Documents Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC: 1650
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:10Z
Check the source to verify that this is the current version before use.

MIL-D-8512	Support Equipment, Aeronautical, Special, General Specification For The Design Of
MIL-M-8609	Motors, DC, 28 Volt System, Aircraft, General Specification For
MIL-A-8625	Anodic Coatings, For Aluminum And Aluminum Alloys
MIL-C-83488	Coating, Aluminum, Ion Vapor Deposited

STANDARDS

FEDERAL

FED-STD-151	Metal, Test Methods

MILITARY

MIL-STD-105	Sampling Procedures And Tables For Inspection By Attributes
MIL-STD-129	Marking For Shipment And Storage
MIL-STD-130	Indentification Marking Of U.S. Military Property
MIL-STD-143	Standards And Specifications, Order Of Precedence For The Selection Of
MIL-STD-831	Tests Reports, Preparation Of
MIL-STD-889	Dissimilar Metals
MS 3102	Connector, Receptacle, Electric, Box Mounting
MS 33543	Criteria Temperature And Altitude Range Blast Cooled Electric Equipment
MS 33649	Boss, Fluid Connection-Internal Straight Thread
MS 33656	Fitting End, Standard Dimensions For Flared Tube Connection And Gasket Seal

(Copies of specifications, standards, and drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

ASTM B633 Zinc On Iron And Steel, Electrodeposited Coating Of

ASTM D3951 Packaging, Commercial

(Applications for copies should be addressed to: ASTM, 1916 Race St. Philadelphia, PA 19103).

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:10Z
Check the source to verify that this is the current version before use.

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services).

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order a sample shall be subjected to first article inspection (see 4.3.1 and 6.3).

3.2 Component parts. The electric motor driven oil free air pressure pump unit shall consist of an intergrated pump and motor.

3.3 Materials. Materials and processes used in the manufacture of oil free air pressure pump units shall be of high quality and suitable for the purpose intended.

3.3.1 Metals.

3.3.1.1 Dissimilar. The use of dissimilar metals shall be avoided wherever practicable, or if they must be used, they shall be treated to give satisfactory protection in service and meet the other requirements stated herein. Dissimilar metals are defined in MIL-STD-889.

3.3.1.2 Castings. Castings shall be of uniform quality and condition, free from cracks, excessive blow holes and porosity, and other injurious defects.

3.3.2 Protective treatment. When materials are used in the construction of air pressure pump units that are subject to corrosive conditions likely to occur during service usage, they shall be protected against corrosion resulting from these conditions in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of atmospheric conditions, shall be avoided.

3.3.3 Selection of materials. Specifications and standards for all materials, parts and Government certification and approval of processes and equipment, which are not specifically designated herein and which are necessary for the execution of this specification, shall be selected in accordance with MIL-STD-143, except as provided in the following paragraph.

3.3.3.1 Standard parts. Standard parts (MS, AN, or JAN) shall be used wherever they are suitable for purpose, and shall be indentified on the drawings by their part numbers. Commercial utility parts such as screws, bolts, nuts, cotterpins, etc., may be used, provided they possess suitable properties and are replaceable by the standard parts (MS, AN, or JAN) without alterations, and provided the corresponding standard part numbers are referenced in the parts list, and if practicable, on the contractor's drawings.

3.3.3.2 Recovered materials. Recovered materials shall be used to the maximum extent possible without jeopardizing the end use of the item.

3.4 Design. The pump unit shall be designed to operate primarily as a pressure pump for maintaining sea level pressure in low capacity systems at high altitudes. The pump shall deliver oil free air at the outlet.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:10Z
Check the source to verify that this is the current version before use.

3.5 Environmental.

3.5.1 Temperature. The pump unit shall be capable of starting and operating satisfactorily at temperatures ranging from minus 65 to plus 160 degrees F. at altitudes varying from zero to 50,000 feet in accordance with curve II of MS33543.

3.5.2 Operation. The pump unit shall operate satisfactorily, as defined herein, when subjected to the conditions specified in 4.3.8.

3.6 Rated capacity. The capacity of the unit shall be at least that shown in Figure 1.

3.7 Mounting position. The pump unit shall operate satisfactorily in any mounting position without causing damage or shortening the life of the equipment.

3.8 Direct current electric motors. Direct current electric motors shall be in accordance with MIL-M-8609.

3.9 Check valve. A check valve shall be incorporated within the pump unit and placed in the outlet port, to prevent any leakage of air back into the pump unit when it is not running. The valve shall show no leakage back into the pump unit when a pressure differential of 25 inches of mercury is applied. The outlet of the check valve shall be in accordance with MS33656-5, Style E, for attachment of 5/16 inch O.D. tubing.

3.10 Electrical properties.

3.10.1 Motor. The electric motor, built integrally with the pump, shall operate continuously for 15 minutes, then be cut off for a maximum of 45 minutes for 900 cycles; and 30 minutes on with a 30 minute maximum offtime for 100 cycles.

3.10.2 Power. The power consumption under any conditions, except starting as required by the Capacity of calibration inspection, shall be no greater than 120 watts at rated voltage. The current drawn for cold starting shall be no more than 20 amperes at each start and no more than six amperes 15 seconds after starting. The power consumption should be no more than 120 watts after the motor has run for a period of one minute.

3.10.3 Rated voltage. The rated voltage shall be 26.0 $\pm$2.5 volts.

3.10.4 Electrical connectors. The electrical receptacle on the motor shall be an MS3102-10S-2P with suitable fittings.

3.11 Dimensions. The pump unit dimensions, including all projections, shall be as shown in Figure 2.

3.12 Weight. The weight of the complete pump unit shall not exceed 3.5 pounds.

3.13 Construction. The pump unit shall be constructed so that no parts will work loose in service. The pump unit shall withstand the strains, jars, vibrations, and other conditions incident to shipping, storage, installation and service.

Source: https://assist.dla.mil -- Downloaded: 2026-04-17T12:10Z
Check the source to verify that this is the current version before use.

3.13.1 Maintenance. The pump unit shall be constructed so repairs may be made by personnel of operating units and overhaul bases without the use of special tools. Special tools are defined in MIL-D-8512.

3.14 Performance . The pump unit shall satisfactorily complete the performance inspections when subjected to the inspections specified in Section 4.

3.15 Lubrication. The pump unit shall not require external lubrication during its life.

3.16 Threads.

3.16.1 Screw. All machine screw threads shall conform to MIL-S-7742.

3.16.2 Pipe. Pipe threads shall not be used except for permanent closures in which case the pipe threads shall be in accordance with MIL-P-7105.

3.17 Interchangeability. All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation and performance. Changes in manufacturer's part numbers shall be governed by the drawing number requirements of DOD-D-1000.

3.18 Finish.

3.18.1 Aluminum alloy parts. Aluminum alloy parts shall be anodized in accordance with MIL-A-8625, or chemically treated in accordance with MIL-C-5541.

3.18.2 Steel parts. Steel parts shall be coated with ion vapor deposited aluminum, where practicable, in accordance with MIL-C-83488, type I or II as applicable and of a class that is adequate to achieve the degree of protection required. Other protective coating, in lieu of MIL-C-83488, may be used if demonstrated to be satisfactory and approved by the preparing activity. Cadmium plating must be avoided when alternative processes can be used. Steel parts may be zinc plated in accordance with ASTM B633.

3.18.3 Unfinished surfaces. All external surfaces, except anodized aluminum alloy, corrosion resisting metals, working surfaces, threads, and plated parts, shall be finished with one coat of primer conforming to TT-P-1757 and one coat of enamel conforming to TT-C-489, Type I except that the mounting base holes and the bottom of the mounting base shall not be enameled.

3.19 Marking. The inlet and outlet ports shall be marked "In" and "Out" respectively on the unit and shall be as shown on Figure 2.

3.20 Indentification of product. Equipment, assemblies, and parts shall be marked for indentification in accordance with Standard MIL-STD-130. The indentification data applied to the pump unit shall be as follows:

Pump, Pressure, Oil Free Air, 28V DC Type MA-2
Specification MIL-P-9388A(USAF)
Stock Number
Manufacturer's Part Number
Manufacturer's Serial Number
Contract or Order Number
Manufacturer's Name or Trademark
US Property

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:10Z
Check the source to verify that this is the currentversion before use.

3.21 Cleaning. The pump unit shall be throughly cleaned of loose, spattered, or excess solder, metal chips, or other foreign matter, before and after final assembly.

3.22 Workmanship. The pump unit, including all parts, shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to neatness and thoroughness of drilling and tapping operations, wiring, soldering, machine screw assemblies, and freedom of parts from burrs and sharp edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspections (see 4.3.1).

b. Quality conformance inspection (see 4.4).

4.3 Inspection conditions. Unless otherwise specified by the contracting activity, the pump shall be installed for inspection in accordance with conditions and apparatus a shown in Figure 3.

4.3.1 First article inspection. First article inspection shall consist of all inspections of section 4.

4.3.2 First article sample. First article sample shall consist of one pump taken from the first productin lot. On completion of first article, this pump shall be submitted to the contracting activity.

4.3.3 If required, supplier shall prepare a first article inspection report in accordance with MIL-STD-831, and one complete set of drawings in accordance with DOD-D-1000.

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:10Z
Check the source to verify that this is the currentversion before use.

4.3.4 Drawings. Assembly drawings shall have a cutaway section showing all details in their normal assembly positions, and shall carry part numbers of all details and subassemblies. The following data shall be furnished on, or together with, all assembly drawings:

a. Over-all dimensions
b. Materials of construction, treatment, and finish
c. Weight
d. Any special installation instructions

4.3.5 Calibration. The pump shall be placed in an altitude chamber using the apparatus as set-up in Figure 3. The runs in Table I shall be made for voltage of 24.5 ± 0.5 volts DC

TABLE I. Calibration inspection conditions.

Altitude	Chamber Pressure	Inlet Pressure P_1	Pump Outlet Pressure P_2
Feet	Inches of Mecury Absolute		
Sea Level	29.92 ± 2.0	24.5 ± 0.1	32 ± 0.1
10,000	20.6 ± 0.1	17.6 ± 0.1	32 ± 0.1
20,000	13.75 ± 0.1	11.7 ± 0.1	32 ± 0.1
30,000	8.9 ± 0.1	8.9 ± 0.1	32 ± 0.1
35,000	7.0 ± 0.1	6.2 ± 0.1	32 ± 0.1

For each condition specified in Table I, record P_0, P_1, P_2, T, T_1, T_2, h_w, and the power in watts. The capacity (M) under the conditions specified in Table I shall be calculated and plotted on a suitable curve. The chamber temperature during this run shall be 75 degrees plus or minus 15 degrees F. In no case shall the power consumed exceed 120 watts. The pump shall operate satisfactory under all conditions and shall be able to maintain the outlet pressure of 32 ± 0.1 inches of mercury absolute throughout inspection. The capacity shall in no case, be less than that indicated by the capacity/altitude line specified in Figure 1.

4.3.6 Low temperature. The pump shall be placed in a cold chamber maintained at a temperature of minus 65 degrees ± 5 degrees F. at sea level ambient pressure and allowed to soak for 72 hours with inspection set up as shown in Figure 3. A cold inspection run shall be made for each condition shown in P_1, and P_2 in Table I. For each run the pump shall be started and allowed to run for 15 minutes or until terminal temperatures are reached whichever is sooner, then shut down. The pump unit shall be allowed to cool to chamber temperature and to remain at this temperature for one hour before the next start. This shall be done until all runs in Table I are completed. The pump shall operate satisfactorily at the completion of the inspection. The pump shall not draw more than 20 amperes at each start, shall draw no more than six amperes 15 seconds after starting, and after the pump has run for one minute the power shall not exceed 120 watts.

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:10Z
Check the source to verify that this is the currentversion before use.

4.3.7 High temperature. The pump shall be soaked for 24 hours in an ambient temperature of 160 ± 5 degrees F., following which it shall be operated at the following conditions:

Voltage	29 ± 0.1 Volt
Inlet pressure	Ambient room pressure
Outlet pressure	32 ± 0.1 inches of mercury

The pump shall operate within maximum current limits for 15 minutes with the ambient temperature maintained at 160 ± 5 degrees F.

4.3.8 Environmental. The pump unit shall be subjected to the conditions of the following inspections: Humidity, Sand and dust, Explosion proof, Fungus, and Salt spray. The fungus inspection shall be run prior to the Salt spray.

4.3.9 Humidity inspection. The pump shall be placed in the inspection chamber and set up to simulate installed conditions. The inspection chamber shall be vented to the atmosphere to prevent the build up of pressure. Prior to the starting of the inspection period, the chamber temperature shall be between 20° and 38°C (68° and 100°F) with uncontrolled humidity. During the first two hour period, the temperature shall be gradually raised to 71°C (160°F). The temperature shall be maintained during the next six hour period. The velocity of the air throughout the inspection area shall not exceed 150 feet per minute. During the following 16 hour period, the temperature in the chamber shall be gradually reduced to 20° to 38°C (68° to 100°F) which constitutes one cycle. The relative humidity throughout the cycle shall be 95 percent. Steam or distilled water having a ph value between 6.5 and 7.5 at 25°C (77°F) shall be used to obtain the desired humidity. The cycle shall be repeated a sufficient number of times to extend the total time of the inspection to 240 hours (10 cycles). At the conclusion of the 240 hour period, the equipment shall be returned to standard conditions. Moisture shall be removed by turning the equipment upside down or wiping. Drying by air blast or in an oven will be permitted only if so specified. The equipment shall then be operated and inspected within one hour as directed in 4.8.

4.3.10 Sand and dust inspections. The equipment shall be placed in an inspection chamber and the sand and dust density raised and maintained at 0.1 to 0.5 grams per cubic foot within the inspection space. The inspection chamber shall be vented to the atmosphere. The relative humidity shall not exceed 30 percent at any time during the inspection. Sand and dust used shall be of angular structure and shall have characteristics as follows (see 4.10):

a. 100 percent of the sand and dust shall pass through a 100 mesh screen, U.S. Standard Sieve Series.

b. 98 ± 2 percent of the sand and dust shall pass through a 140 mesh screen, U.S. Standard Sieve Series.

c. 90 ± 2 percent of the sand and dust shall pass through a 200 mesh screen, U. S. Standard Sieve Series.

d. 75 ± 2 percent of the sand and dust shall pass through a 325 mesh screen, U. S. Standard Sieve Series.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:10Z
Check the source to verify that this is the current version before use.

e. Chemical analysis of the dust shall be as follows:

Substance	Percent by weight
$Si\ O_2$	97 to 99
$Fe_2\ O_3$	0 to 2
$Al_2\ O_3$	0 to 1
$Ti\ O_2$	0 to 2
Mg O	0 to 1
Ign Losses	0 to 2

Part I: The internal temperature of the inspection chamber shall be maintained at 25°C (77°F) for a period of six hours with sand and dust velocity through the inspection chamber between 100 and 500 feet per minute.

Part II: After 6 hours at the above conditions, the temperature shall be raised to and maintained at 71°C (160°F). These conditions shall be maintained for six hours. At the end of this exposure period, the equipment shall be removed and allowed to cool to room temperature. Accumulated dust shall be removed by brushing, wiping, or shaking, care being taken to avoid introduction of additional dust into the equipment. Under no circumstances shall dust be removed by either blast or vacuum cleaning. The equipment shall be operated and inspected as directed in 4.8.

4.3.11 Explosion inspection.

4.3.11.1 Fuel. Fuel used shall be gasoline, grade 100/130, conforming to MIL-G-5572F.

4.3.11.2 Purpose. The following procedure shall be used to determine the explosion producing characteristics of items of equipment not equipped with cases designed to prevent flame or explosion propagation.

4.3.11.3 Preparation for inspection.

a. The equipment to be inspected shall be installed in the test chamber in such a manner that normal electrical operation is possible and mechanical controls may be operated through the pressure seals from the exterior of the chamber. All external covers of the inspection item shall be removed or opened to insure adequate circulation of the explosive mixture. Large equipment may be inspected one or more units at a time by extending electrical connections through the cable port to the balance of the equipment located externally.

b. The equipment shall be operated to determine that it is functioning properly and to observe the location of any sparking or high temperature components which may constitute potential explosion hazards.

c. Mechanical loads on drive assemblies and servomechanical and

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:10Z
Check the source to verify that this is the currentversion before use.

electrical loads on switches and relays may be simulated when necessary if proper precaution is given to duplicating the normal load in respect to torque, voltage, current, inductive reactance, etc. In all instances it shall be considered preferable to operate the equipment as it normally functions in the system during service use.

4.3.11.4 Inspection procedures.

a. Inspections shall be conducted as follows:

(1) The inspection chamber shall be sealed and the ambient temperature within shall be raised to 71 ±3°C (160 ±5°F), or to the maximum temperature which the equipment is designed to operate (if lower than 160°F). The temperature of the inspection item and the chamber walls shall be permitted to rise to within 11°C (20°F) of that of the chamber ambient air, prior to introduction of the explosive mixture.

(2) The internal inspection chamber pressure shall be reduced sufficiently to simulate an altitude approximately 10,000 feet above the desired inspection altitude. The weight of fuel necessary to produce an air vapor ratio of 13 to 1 at the desired altitude shall be determined from consideration of chamber volume, fuel temperature and specific gravity, chamber air and wall temperature, altitute, etc. (see 4.7). A time of 3 ±1 minutes shall be allowed for introduction and vaporization of the fuel. Air shall be admitted into the chamber until a simulated altitude of 5,000 feet above the inspection altitude is attained. At this time the potential explosiveness of the resulting air vapor mixture shall be verified by a sampling method which has been approved by the contracting activity.

(3) Operation of the inspection item shall at this time be commenced, all making and breaking electrical contacts being actuated. If high temperature components are present, a warm up time of 15 minutes shall be permitted. If no explosion results, air shall be admitted into the chamber so as to steadily reduce the altitude down past the desired inspection altitude to an elevation 5,000 feet below that altitude or as close thereto as permitted by local ground level altitude. The operation of the inspection item shall be continuous throughout this period of altitude reduction and all making and breaking electrical contacts shall be operated as frequently as possible.

(4) If by the time the simulated altitude has been reduced to 5,000 feet below the inspection altitude, no explosion has occurred as a result of operation of the equipment under inspection, the potential explosiveness of the air vapor mixture shall again be verified by a sampling method which has been approved by the contracting activity. If the air vapor mixture is not found to be explosive at this time, the inspection shall be considered void and the entire procedure repeated.

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:10Z
Check the source to verify that this is the current version before use.

b. The above described inspection shall be accomplished at simulated inspection altitudes of local ground level to 5,000 feet, 10,000, 20,000, 30,000, 40,000, and 50,000 feet, unless an explosion is caused , in which case the item shall be considered to have failed to pass the inspection and no further trials need to be attempted.

4.3.12 Fungus resistance inspection. Four groups of fungi are listed below and one species of fungus from each group shall be used. In preparing the spore suspension, distilled water (having a ph value between 5.8 and 7.2 at a temperature between 22°C and 32°C (72°F and 80°F) shall be utilized. Approximately 10 ml. of the solution shall then be introduced directly into a tube culture of the fungus and the spores brought into suspension by vigorous shaking or by gentle rubbing of the spore layer with an innoculating loop without disturbing the agar surface. This process shall be repeated for each species of fungus. The separate spore suspensions from the four types of fungi shall be mixed together to provide a composite suspension. Actively growing cultures between 7 to 21 days old after initial innoculation shall be used for the preparation of the spore suspension. After preparation, the spore suspension will not be kept for more than a 24 hour period at temperatures from 22°C to 32°C (72°F to 89°F) or not more than 48 hours at temperatures from 2°C to 7°C (35°F to 45°F). The equipment, including applicable external connections, shall be placed in a mold chamber maintaining an internal temperature of 30° ±2°C (86° ±3.6°F) and a relative humidity of 95 ±5 percent and sprayed with the suspension of mixed spores. The inspection period shall be 28 days. At the end of the inspection, the parts shall be visually examined in accordance with 4.8. If so specified, the equipment shall be operated and inspected as directed in 4.8.

4.3.12.1 Organism.

Group I	-	Chaetomium globosum	6205
		Myrothecium verrucaria	9095
Group II	-	Memenoniella echinata	9597
		Aspergillus niger	6275
Group III	-	Aspergillus flavus	10836
		Aspergillus terreus	10690
Group IV	-	Penicillium citrinum	9849
		Penicillium ochrochloron	9112

4.3.12.2 Stock culture designation and source. When ordering cultures, request the cultures by name and serial number. The serial numbers of the cultures remain the same regardless of source.

Source American Type Culture Collection, 2112 M Street, N.W., Washington 6, D.C.

4.3.13 Salt spray inspection. The procedure shall be in accordance with FED-STD-151, Method 811, except as otherwise specified herein. The length of the salt spray test shall be not less than 168 hours, unless otherwise specified. At the end of the inspection period, the equipment shall be operated and inspected within one hour as directed in 4.8. Salt deposits resulting from the exposure conditions may be removed by rinsing with tap water prior to operation. Equipment shall again be operated and inspected 48 hours later, as directed in 4.8.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:10Z
Check the source to verify that this is the current version before use.

4.3.14 Starting current inspection. With the pump dry and with an ambient temperature of 60 to 80 degrees F, and with rated voltage applied to the leads, the starting current surge shall not exceed 1000 percent of the full load current. The current shall return to and stay within 300 percent of full load current within 0.5 second after first application of input voltage. The starting current oscillograms shall indicate a definite current peak and shall have no tendency to remain at peak values.

4.3.15 Radio interference inspection. The motor shall be operated at 100 percent of rated load using power from a 24 volt battery. The motor shall be mounted on a metal wall or plate which will serve as a ground return in the circuit. The unshielded cable between the battery and the motor shall be 15 feet in length and shall be located as close to the ground plate as possible. The radio noise influence shall be measured at the terminals of the motor, or at the output terminals of the filter if supplied, using a suitable noise meter capable of measuring a minimum noise of five microvolts. The frequency band shall be thoroughly searched for radio noise influence voltage. Filtering shall be provided where necessary to reduce the noise influence voltage to a value of 50 microvolts or less throughout a range of frequency from 0.015 to 30 megacycles.

4.3.16 Endurance inspection. This inspection shall be run after the completion of all other tests. The pump unit shall be subjected to the following inspection at sea level ambient chamber pressure in accordance with Table II.

TABLE II. Endurance test conditions.

Ambient Temperature	Inlet Pressure	Outlet	Cycles	Voltage
(a) 75 ± 15°F	7.0 ± 0.1	32.0 ± 0.1	900	27.0 ± 0.5
(b) 75 ± 15°F	28.0 ± 2.0	32.0 ± 0.1	100	27.0 ± 0.5

During this inspection, the pump cycle is 15 minutes running and 45 minutes maximum stopped, except for the final 100 cycles of inspection (b) when a cycle shall be 30 minutes running and 30 minutes maximum stopped. The 45 minute and 30 minute off times, above, may be reduced in order to shorten total inspection time provided the number of cycles remains the same. At the completion of the Endurance inspection, the Capacity inspection (4.4.1.2) shall be repeated. The capacity as recorded following the Endurance inspection shall not be less than 90 percent of the recorded capacities prior to the Endurance inspection or the pump shall be rejected. Following the completion of these inspections, the pump shall be disassembled and inspected for breakage of parts.

4.4 Quality conformance. Quality conformance inspection shall consist of Individual inspections and Sampling inspections.

4.4.1 Individual inspections. Each oil free air pressure pump unit shall be subjected to the following tests:

Break-in run
Capacity test
Check valve leakage test

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:10Z
Check the source to verify that this is the current version before use.

4.4.1.1 Break-in run. With the inlet and outlet ports open to room atmosphere the pump unit shall be run for 15 minutes at rated voltage.

4.4.1.2 Capacity inspection. The pump unit shall be placed in an altitude chamber at 7+ 0.1 inches of mercury pressure using apparatus as shown in Figure 3, with P_1 equal to 6.2 inches of mercury, P_2 at 32 inches ± 0.1 inch of mercury, voltage at 24.5 ± 0.5 volt direct current, and with temperature at 75 ± 15 degrees F. The capacity shall be at least 0.00328 pound per minute. (80 cu. in. per minute at 100 degrees F. and 29.92 inches of mercury absolute.)

4.4.1.3 Check valve leakage inspection. With the pump stationary, a pressure of 25 ± 0.5 inches of mercury above sea level pressure shall be applied to the outlet side of the pump unit and trapped in the air line. There shall be no change in the initial pressure for a period of five minutes.

4.4.2 Sampling inspections.

4.4.2.1 Examination of product. Acceptable quality level shall be specified by the contracting activity. Pump units shall be sampled in accordance with the provisions of MIL-STD-105, to determine conformance to this specification with respect to material, workmanship, dimensions, and markings.

4.4.3 Reinspection. Rejected pump units shall not be submitted for inspection without furnishing full particulars concerning previous rejection, and measures taken to overcome the defects.

4.5 Expendable inspection items. All parts specimens, or assemblies destroyed in making inspections required by this specification or drawings, to determine compliance with the specification or drawings, shall be in addition to the quantity specified on the contract, or purchase order, and shall be furnished without increasing the cost of the contract or order.

4.6 Air vapor ratio. In illustration of the procedure for calculating the weight of 100/130 octane gasoline required to produce the desired 13 to 1 air-vapor ratio, the following sample problem is presented:

Required information:

a. Chamber air temperature during test: 80°F.

b. Fuel temperature: 75°F.

c. Specific gravity of fuel at 60°F: 0.704.

d. Test altitude: 20,000 feet (P = 6.75 lbs/in. 2).

e. Air vapor ratio (desired): 13 to 1.

Step 1. Employing the following equation, calculate the apparent air vapor ratio:

$$AAV = \frac{A\text{-}V(\text{ DESIRED})}{1.04 \quad \frac{P}{14.696} - .04} = \frac{13}{1.04 \quad \frac{6.75}{14.696} - .04} = 29.68$$

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:10Z
Check the source to verify that this is the current version before use.

Where AF = Air fuel ratio

AAV = Apparent air vapor ratio

AV = Desired air vapor ratio

P = Pressure equivalent of altitude, lbs/in.^{2}

NOTE: At or above 10,000 feet altitude, with chamber air temperature above 60°F and at A-V ratio of 5 or greater, Air vapor ratio = Air fuel ratio for 100/130 octane fuel. Since the conditions of the explosion inspection under consideration will always be well above these values AV will equal AF in all cases.

Step 2. Since AV = AF, use figure 4 to determine weight of air and divide by AAV to obtain uncorrected weight of fuel required.

$$W_{FU} = \frac{Wa}{29.68} = \frac{3.455}{29.68} = 0.116 \text{ lbs, fuel weight (uncorrected)}$$

Step 3. Knowing fuel temperature and specific gravity at 60°F use figure 6 to determine specific gravity at given temperature.

Step 4. Using figure 6 read from specific gravity determined under Step 3 for the correction factor k. Apply factor.

$$W_{FC} = W_{FU} \times k = 0.116 \times 1.01 = 0.0117 \text{ lbs, fuel weight (corrected)}$$

NOTE: Figure 5 pertains to a specific inspection chamber and may not be used for all such inspection facilities. It is utilized herein for illustration of the method of employment only. Each inspection chamber must have its own chamber volume chart.

4.7 Vaporizing equipment. The equipment to vaporize the gasoline fuel for use in the explosion proof inspection should be so designed that a small quantity of air and gasoline vapor will be heated together to a temperature such that the gasoline vapor will not condense as it is drawn from the vaporizer into the chamber.

4.8 Evaluation of equipment. When so directed in individual inspection procedures, the equipment undergoing test shall be operated to permit performance data to be obtained, or inspected for evidence of deterioration. The performance data of the equipment following inspection shall be satisfactorily comparable to that obtained in compliance with 4.9.

4.9 Criteria for failure. Deterioration or change in performance of any components which could in any manner prevent the equipment from meeting functional maintenance and service requirements during service life shall provide reason to consider the equipment as having failed to comply with the conditions of the inspection to which it was subjected.

4.10 Sand and dust. The sand and dust specified for use is commercially known as 140-mesh silica flour. Sand dust (140 mesh silica flour) produced by the Fenton Foundry Supply Company, Dayton, Ohio, and Ottawa Silica Company, Ottawa, Illinois, or equal, is satisfactory for use in the performance of these inspections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:10Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A, C, or Industrial as specified.

5.1.1 Level A.

5.1.1.1 Cleaning. Pumps shall be cleaned in accordance with MIL-P-116, process C-1.

5.1.1.2 Drying. Pumps shall be dried in accordance with MIL-P-116.

5.1.1.3 Preservation application. Preservatives shall not be used.

5.1.1.4 Unit packaging. Unless otherwise specified by the contracting activity, each pump shall be individually packaged in accordance with MIL-P-116, submethod II-C insuring compliance with the applicable requirements of that specification.

5.1.2 Level C. Pumps shall be clean, dry and individually packaged in a manner that will afford adequate protection against corrosion, deterioration and physical damage during shipment from supply source to the first receiving activity.

5.1.3 Industrial. The Industrial preservation of pumps shall be in accordance with ASTM D3951.

5.2 Packing. Packing shall be level A, B, C, or Industrial as specified.

5.2.1 Level A. Units packaged as specified in 5.1.1 shall be packed in shipping containers conforming to PPP-B-601, Style A, or B, Class overseas, unless otherwise specified by the contracting activity. Insofar as practical, exterior shipping containers shall be of uniform shape, size, and of minimum tare and cube consistent with the protection required.

5.2.2 Level B. Pumps packaged as specified in 5.1.1 shall be packed in shipping containers conforming to PPP-B-1672, Type I, Style A, other requirements as specified in 5.2.1 above are applicable.

5.2.3 Level C. Packing shall be applied which affords adequate protection during domestic shipment from the supply source to the first domestic receiving activity for immediate use. This level shall conform to applicable carrier rules and regulations.

5.2.4 Industrial. The packaged pumps shall be packed in accordance with ASTM D3951.

5.3 Marking. In additon to any special marking required by the contract, each unit package and unitized load shall be marked in accordance with MIL-STD-129.

5.4 Inspection and test. Test of methods of preservation and packaging shall be accomplished in accordance with Section 4 of MIL-P-116, to insure compliance with Section 5 of this specification.

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:10Z
Check the source to verify that this is the currenversion before use.

6. NOTES

6.1 Intended use. The air pressure pump unit covered by this specification is intended for use in maintaining sea level pressure in systems of low capacity for use in altitudes up to 35,000 feet or equivalent inlet and surrounding conditions.

6.2 Ordering data.

a. Title, number and date of this specification.
b. Levels of preservation and packing.

6.3 First article. This specification makes provision for first article inspection (see 3.1 and 4.3.1).

6.4 Definition of terms. The following definitions shall be applicable to the letters, symbols, etc., as found in Figure 3, or elsewhere throughout this specification:

P_0 Absolute pressure in altitude chamber expressed in inches of mercury.
P_1 Absolute pressure at pump inlet expressed in inches of mercury.
P_2 Absolute pressure at pump outlet expressed in inches of mercury.
P_3 Barometric pressure at air flow meter expressed in inches of mercury.
h_w Pressure drop across flow meter expressed in inches of water.
T Temperature at flow meter in degrees Fahrenheit.
T_1 Temperature at pump inlet in degrees Fahrenheit.
T_2 Temperature at pump outlet in degrees Fahrenheit.
M^2 Rate of flow in pounds per minute.
A Amperes
V Volts

6.5 Subject Term (key word) listing.

Oil free air
Portable, 28 volt
Pump, pressure
Type MA-2

6.6 Drawing requirements. The attention of contractors is invited to the fact that Government contracts for equipment, whether required directly by the Government, or through another contractor, require that all drawings submitted must be in accordance with the requirements of DOD-D-1000.

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:10Z
Check the source to verify that this is the current version before use.

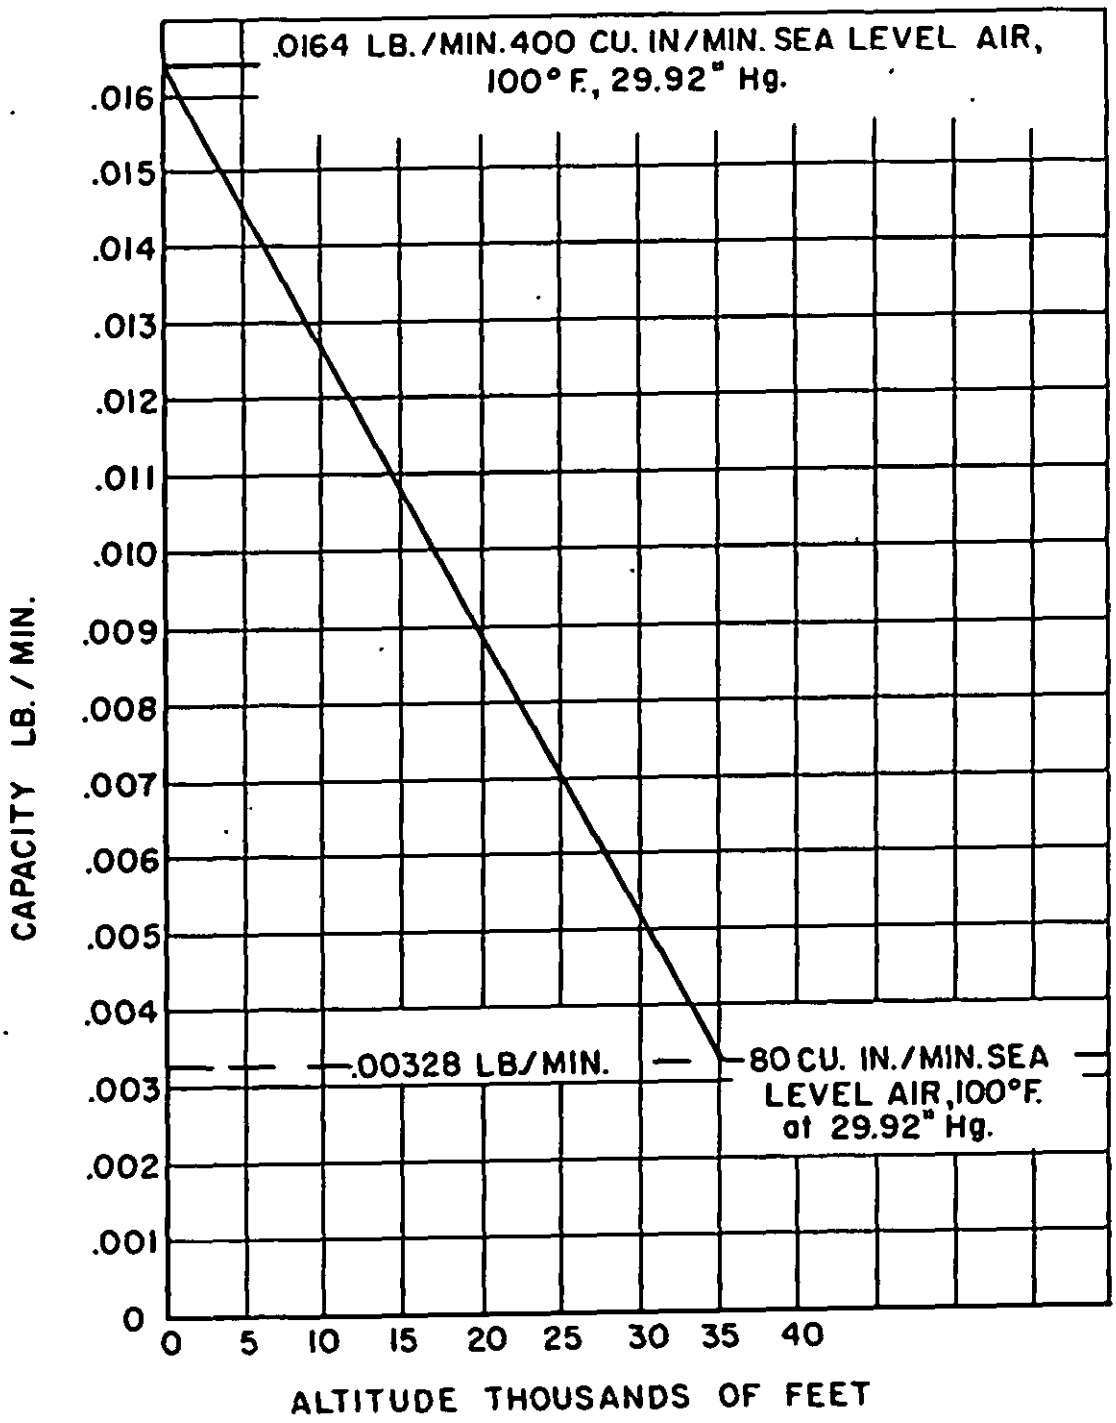


FIGURE 1. Altitude vs capacity.

Source: https://assist.dla.mil -- Downloaded: 20260-17T12:10Z
Check the source to verify that this is the current version before use.

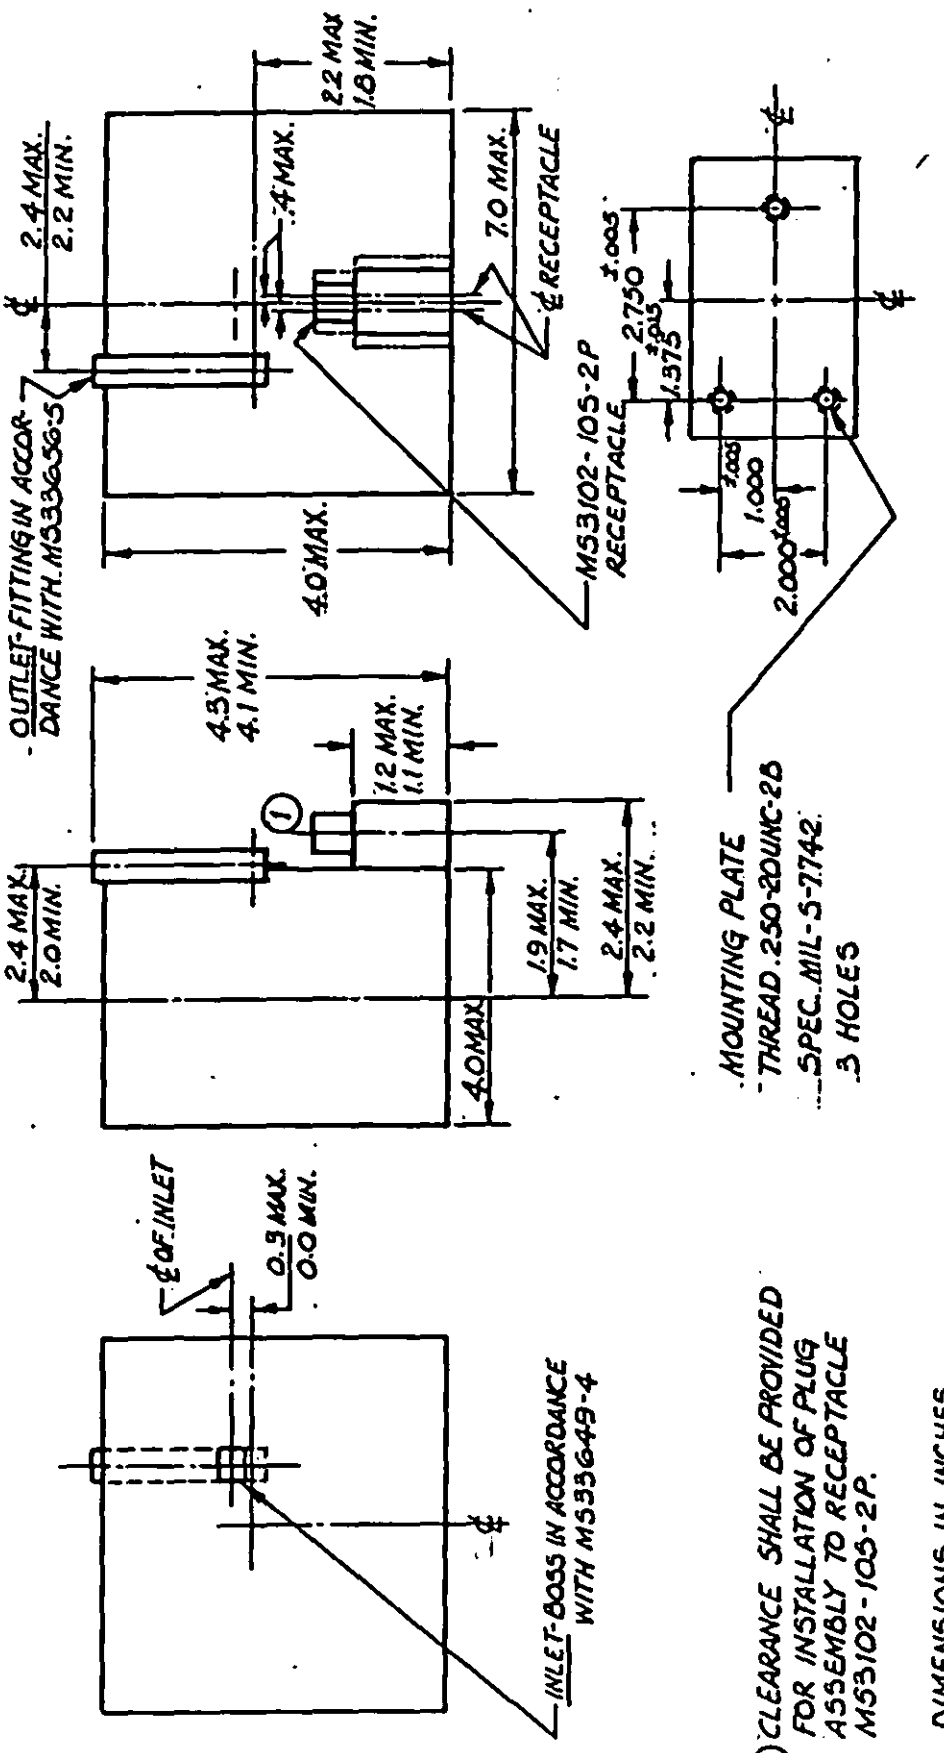


FIGURE 2. Pump dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:10Z
Check the source to verify that this is the current version before use.

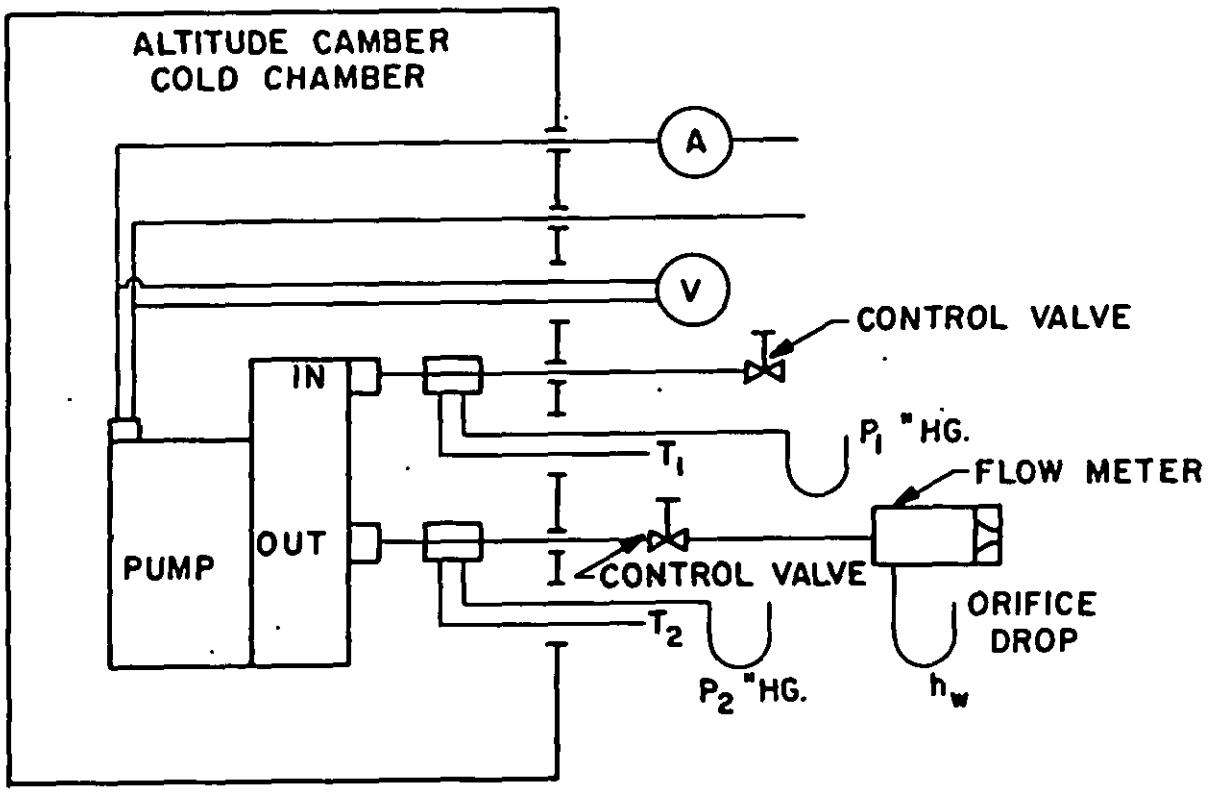


FIGURE 3. Test set-up: calibration, cold test and endurance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:10Z
Check the source to verify that this is the current version before use.

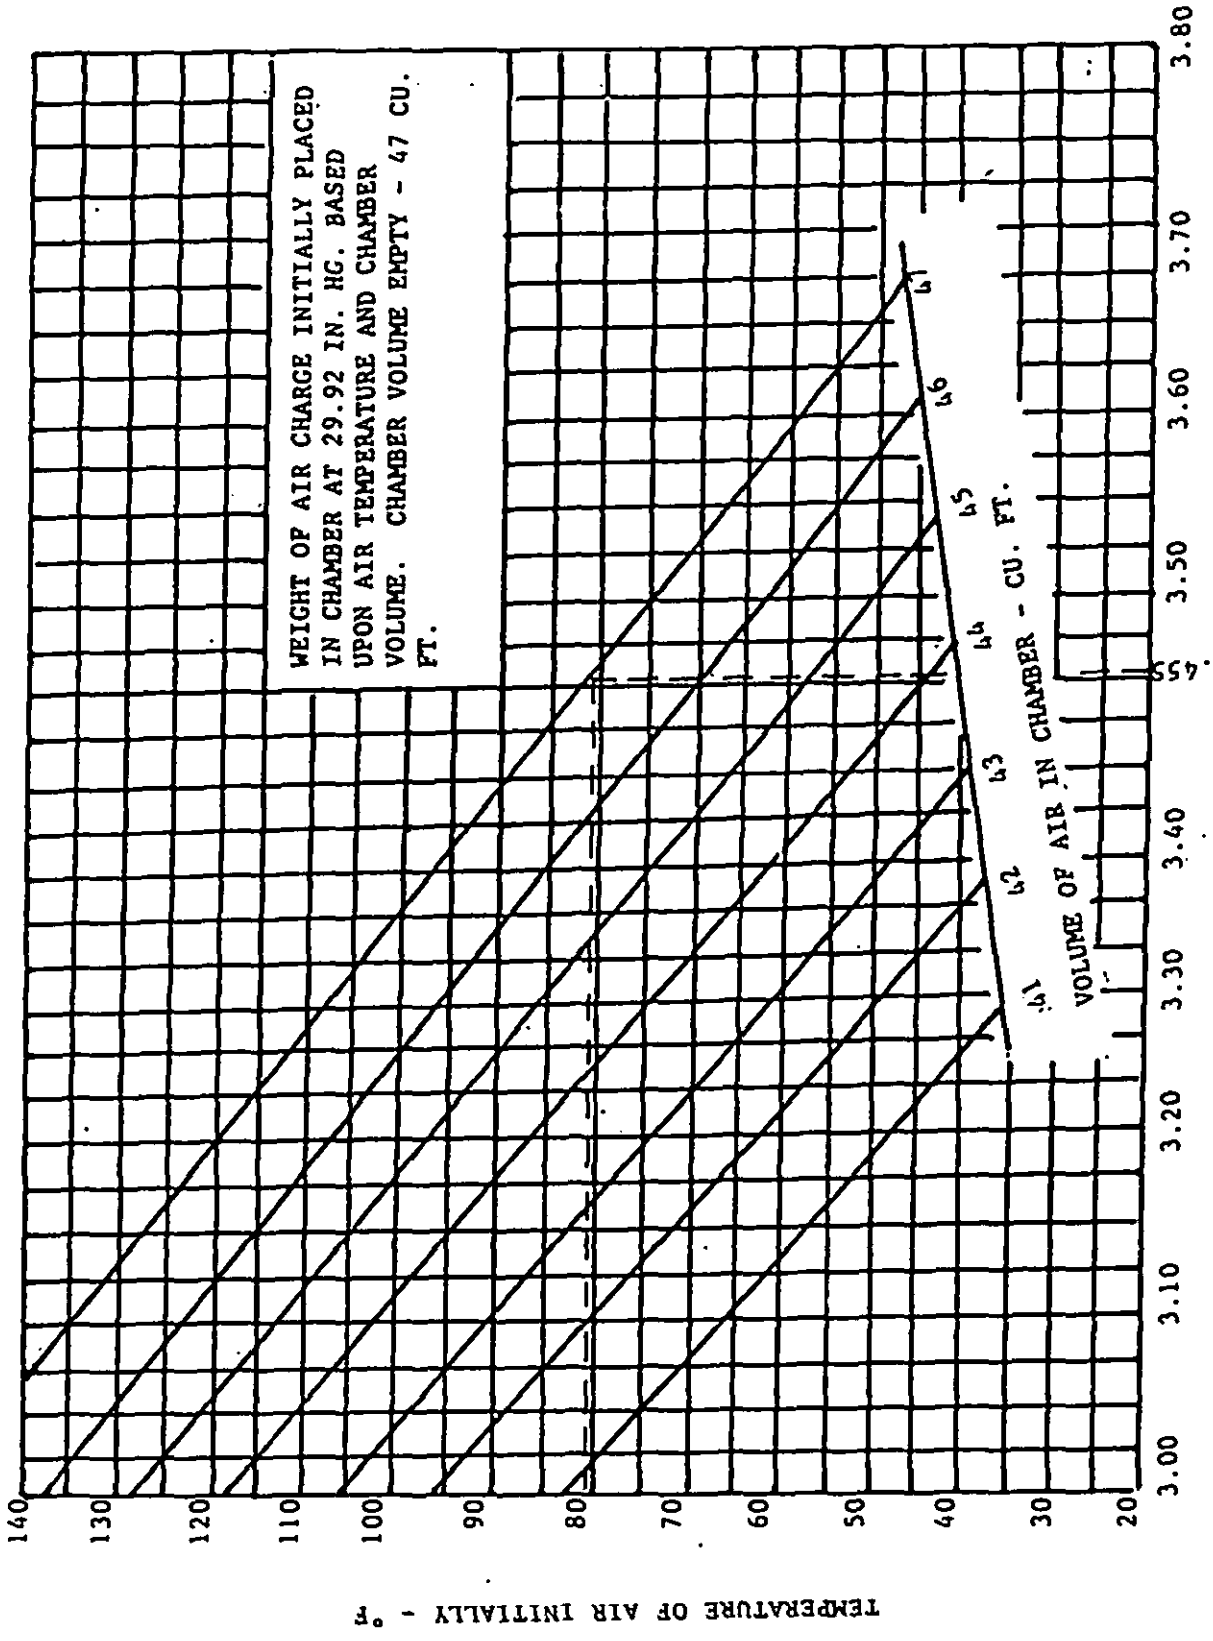


FIGURE 4. Determining weight of air.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:10Z
Check the source to verify that this is the current version before use.

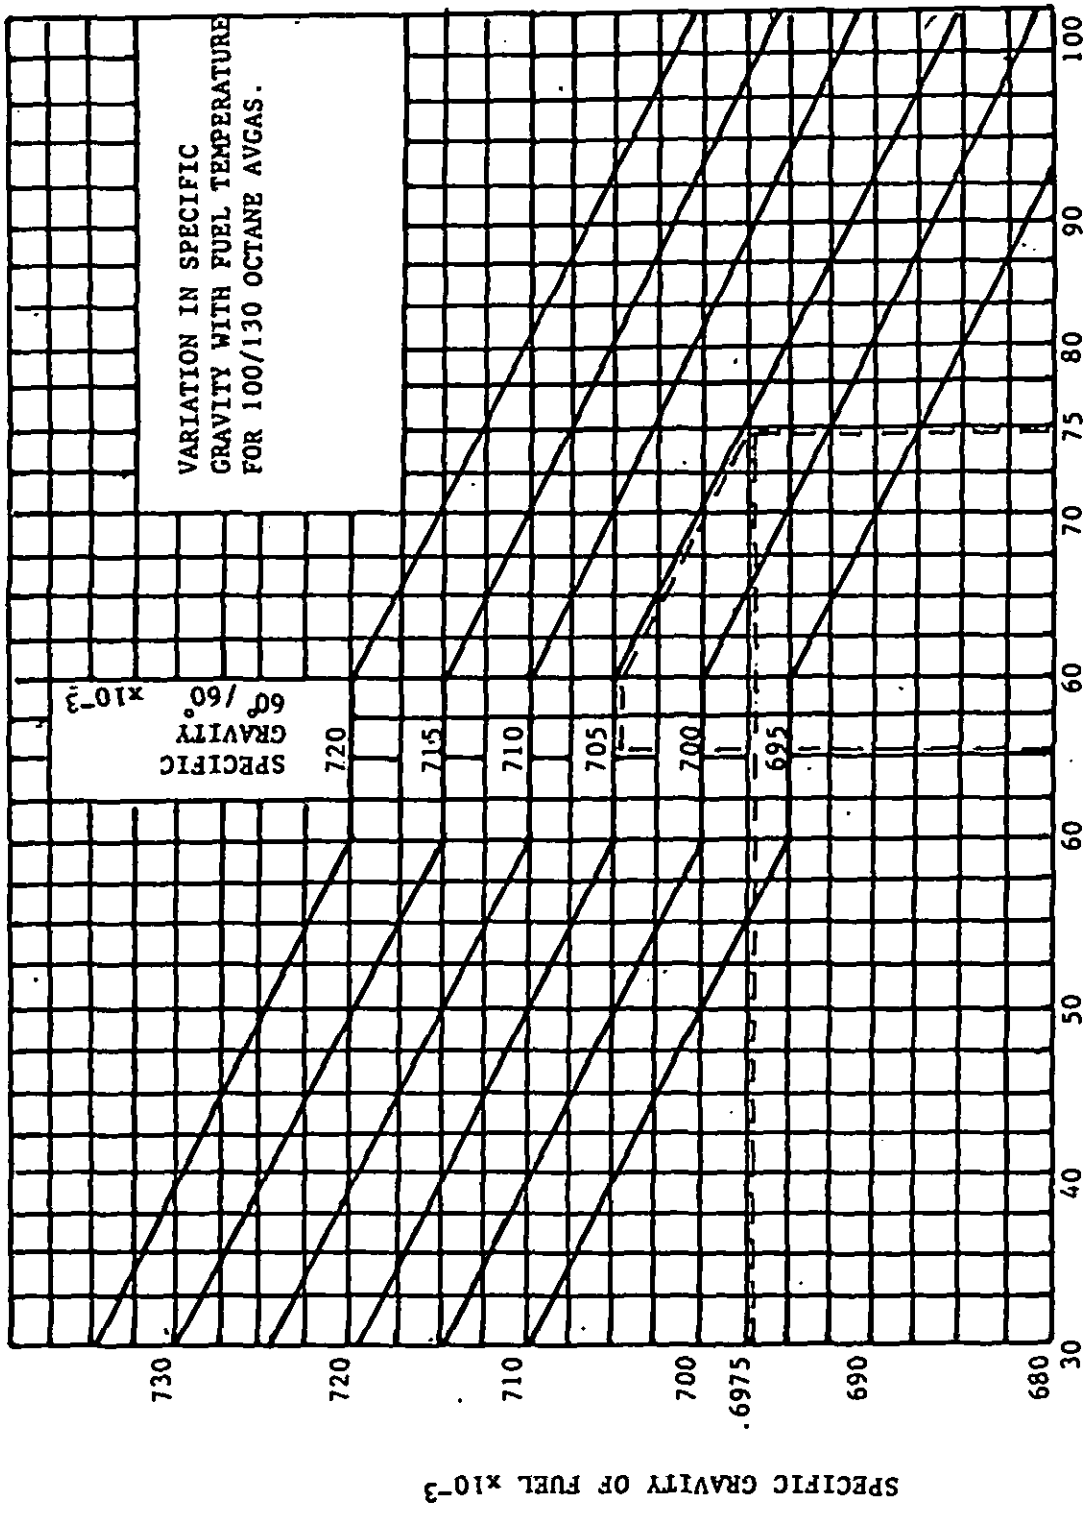


FIGURE 5. Determining specific gravity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:10Z
Check the source to verify that this is the current version before use.

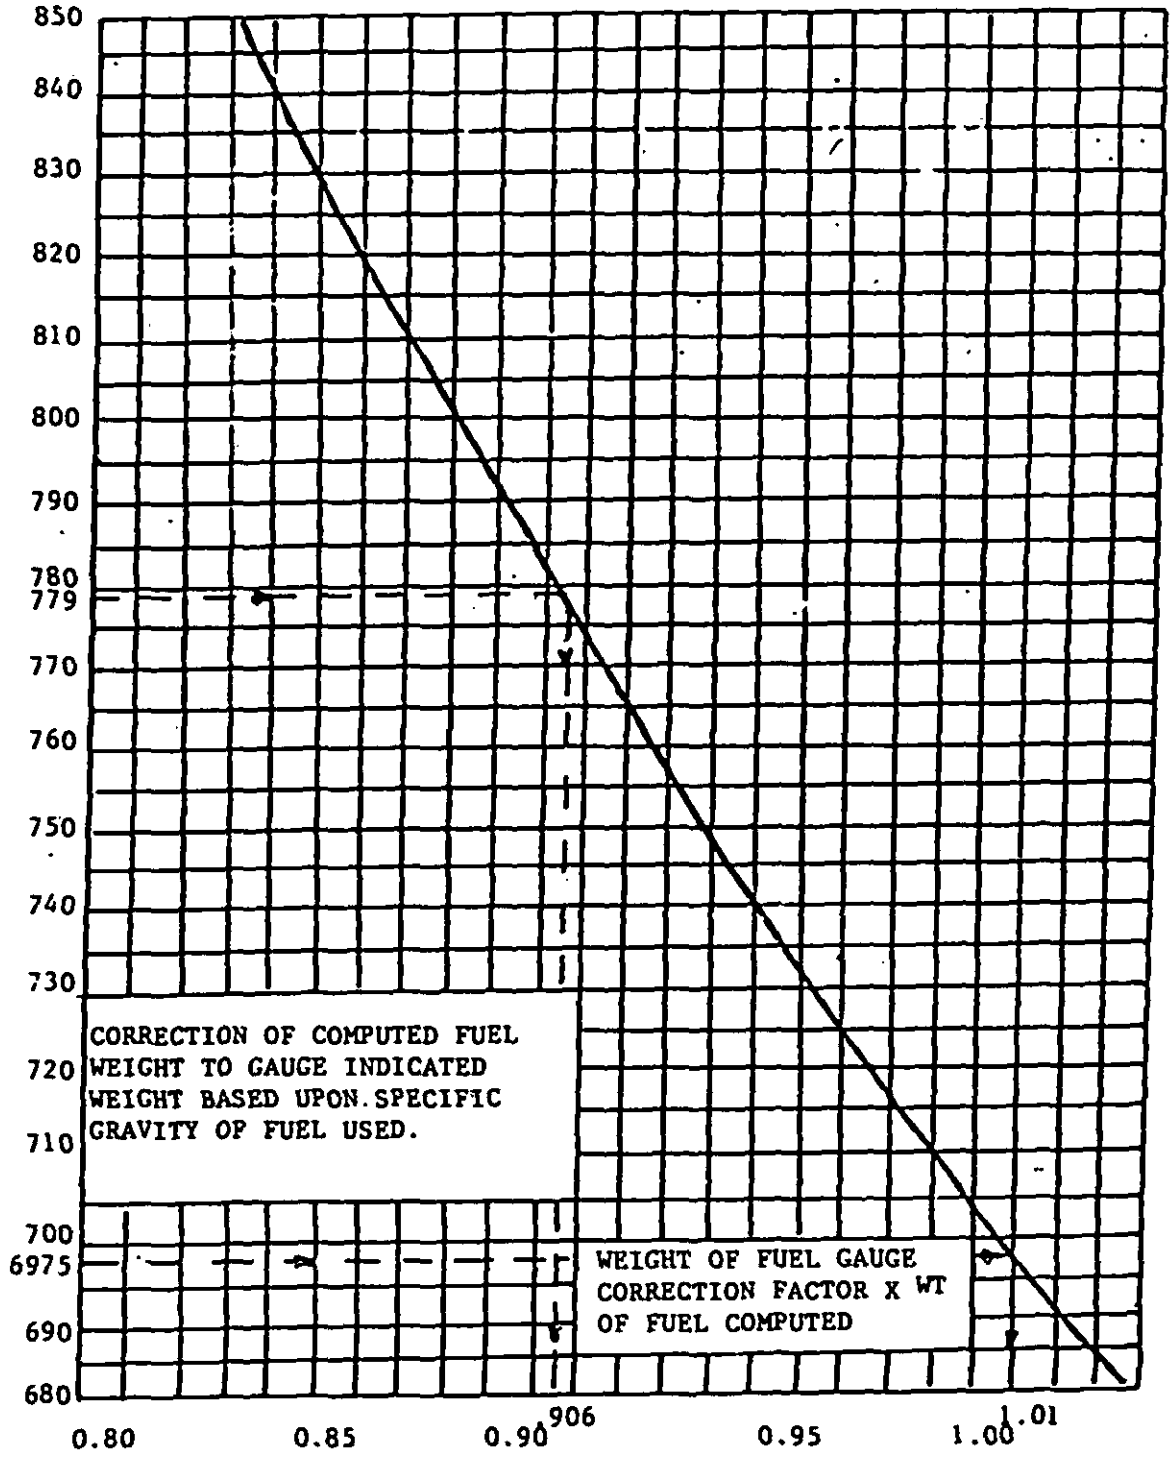


FIGURE 6. Correction factor vs specific gravity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:10Z
Check the source to verify that this is the current version before use.

NOTICE: When government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related government acquisition operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian
Air Force - 99

Preparing Activity
Air Force - 71

Project No.
1650 - F119

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:10Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

OC-ALC/MMEDO
Tinker AFB, OK 73145

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:10Z
Check the source to verify that this is the current version before use.