MIL-P-20378D (MU)
22 July 1969
SUPERSEDING
MIL-P-20378C (MU)
30 June 1965

MILITARY SPECIFICATION

PLUNGER, DELAY, M1
PARTS FOR

1. SCOPE

1.1 This specification covers the parts for one type of plunger designated as Plunger, Delay, M1 (see 6.4).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-2550	-	Ammunition and Special Weapons; General Specification for
MIL-I-45607	-	Inspection Equipment; Supply and Maintenance of

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes (ABC-STD-105).
MIL-STD-109	-	Quality Assurance Terms and Definitions
MIL-STD-1168	-	Lot Numbering of Ammunition
MIL-STD-1169	-	Packaging, Packing and Marking for Shipment of Inert Ammunition Components
MIL-STD-1235	-	Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes

FSC: 1375

Source: https://assist.dla.mil -- Downloaded: 20261O-19T07:42Z
Check the source to verify that this is the current version before use.

DRAWINGS

ARMY

8797869 - Washer, Lock Check
8797870 - Support, Plunger
8797871 - Spring, Plunger, Restraining
8797872 - Pin, Guide
8797873 - Firing Pin Assembly
8797876 - Plunger, Body Assembly
9234452 - Delay Plunger, M1, Assembly, Parts Arrangement

PUBLICATIONS

ARMY

ET-9234452 - Equipment Tabulation

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material.-Materials shall be in accordance with the applicable drawings and specifications.

3.2 Parts.-The parts shall comply with all requirements specified on Drawings (dwgs.) 8797869, 8797870, 8797871, 8797872, 8797873, 8797876 and 9234452 and with all requirements specified in applicable specifications.

3.3 Embirttlement of springs.-Centrifugal pin springs and plunger restraining springs shall not break when extended to the minimum (min.) point of permanent distortion when tested as specified in 4.4.1.

3.4 Arming.-The plunger body assembly shall have no parts fail and shall move to the armed position when rotated at a speed of not more than 2025 rpm. The armed position is that position whereby both centrifugal plunger pins are fully retracted into the body cavity and locked in that position by the centrifugal plunger pin lock. The test shall be performed as specified in 4.4.2.

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:42Z
Check the source to verify that this is the current version before use.

3.5 *Non-arming.*-The plunger body assembly shall have no parts fail and shall remain in the un-armed position when rotated at a speed of not less than 1475 rpm. The un-armed position is that position whereby the distance between the centrifugal plunger pins is less than 0.115 inch. The test shall be performed as specified in 4.4.3.

3.5.1 Non-arming.-Following the non-arming rotation, the centrifugal plunger pin lock shall be in the un-armed position (see Figure 1) and shall not be inverted (see Figure 2). This inspection shall be performed as specified in 4.4.3.1.

3.6 Pull test.-The firing pin shall show no evidence of loosening or detachment from the firing pin assembly when subjected to a pull force of 50 pounds minimum (min.). The test shall be performed as specified in 4.4.4.

3.7 Workmanship-All parts shall be fabricated and finished in a thorough, workmanlike manner. They shall be free of burrs, chips, sharp edges, cracks, unblended radii, surface defects, dirt, grease, rust, corrosion products or other foreign matter. The cleaning method used shall not be injurious to any part, nor shall the parts be contaminated by the cleaning agent. All required markings shall be neat and sharply defined.

3.8 *First article inspection.*-This specification makes provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.-Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to Standard MIL-STD-109 in order to define the terms used herein. The provisions of Specification MIL-A-2550 shall apply.

4.1.1 Submission of product.-At the time each completed lot of items deliverable under the contract is submitted to the Government for acceptance, the contractor shall supply the

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:42Z
Check the source to verify that this is the current version before use.

following information accompanied by a certificate which attests that the information provided is correct and applicable to the product being submitted:

a. A statement that the lot complies with all of the quality assurance provisions specified in this specification.
b. Drawing and specification number and date, together with identification and date of changes thereto.
c. A statement that all material purchased by the contractor meets requirements, when such material is controlled by Government or commercial specifications referenced in any of the contractual documents, and that certificates of conformance are on file and available for review.
d. Number of items in the lot.
e. Date submitted.

The certificate shall be signed by a responsible agent of the certifying organization. The initial certificate submitted shall be substantiated by evidence of the agent's authority to bind his principal. Substantiation of the agent's authority will not be required with subsequent certificates unless, during the course of the contract, this authority is vested in another agent of the certifying organization.

4.2 First article inspection

4.2.1 Submission.-The contractor shall submit a first article sample as designated by the contracting officer (see 6.5) for evaluation in accordance with the provisions of 4.2.2. The first article sample shall consist of 50 inert assemblies and 20 complete sets of parts (i.e., 20 each of every component and every subassembly) which have been produced by the contractor or furnished by a supplier, and which have been manufactured using the same production processes, procedures, and equipment which will be used in fulfilling the contract. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as will be used in regular production. Prior to submission, the contractor shall inspect the sample to the degree necessary to assure that it conforms to the requirements of the contract, and submit a record of this inspection with the sample, including statements of findings for materials, processes and tests. A sample containing known defects will not be submitted unless specifically authorized by the contracting officer. A first article sample, or portion thereof, as directed by the contracting officer, shall also be submitted whenever there is a lapse in production for a period in excess of 90 days, or whenever a change occurs in manufacturing process, material used, drawing or specification such as to significantly affect product uniformity, as determined by the Government.

Source: https://assist.dla.mil -- Downloaded: 202640-19T07:42Z
Check the source to verify that this is the currentversion before use.

4.2.2 Inspections to be performed.-Assemblies and components will be subjected by the Government to any or all of the examinations or tests specified in 4.3.2 and 4.3.3 of this specification, and any or all requirements of the applicable drawings.

4.2.3 Rejection.-If any assembly or component fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of an assembly or component to comply with any of the stated requirements.

4.3 Inspection provisions

4.3.1 Lot formation.-The term "inspection lot" as used in this specification is defined as an essentiality homogeneous collection of units of product from which a representative sample is drawn and inspected to determine conformance with applicable requirements. The sample selected shall represent only that quantity of units from which the sample was drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection has been produced by one manufacturer, in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision and complies with the provisions for submission of product as specified in MIL-STD-105. Changes to the process, specification, or drawing not affecting safety, performance, interchangeability, or storage, as determined by the Government, shall not be deemed to alter the homogeneity of an inspection lot. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein regardless of the type of sampling procedure which is being applied to determine conformance with requirements. Lot numbering, as required, shall be in accordance with MIL-STD-1168.

4.3.2 Examination.-Inspection for critical defects, (and major defects, when so specified) shall be 100 percent. Sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105, except that continuous sampling plans in accordance with Standard MIL-STD-1235 may be used if approved by the procuring activity. Also, at the option of the procuring activity, AQL's and sampling plans may be applied to individual characteristics listed, using an AQL of 0.65 percent for each minor defect and an AQL of 0.40 percent for each major defect. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.3.4.

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:42Z
Check the source to verify that this is the current version before use.

4.3.2.1 Pin, centrifugal plunger (see dwg. 8797882, covering a detail of dwg. 8797876).

Categories	Defects	Method of Inspection	Code No. (See 6.2)
Critical:	None defined.		
Major:	AQL 0.40 percent		
101.	Outside diameter	Gage	01002
102.	Profile	Gage	01007
Minor:	AQL 2.5 percent		
201.	Total length	Gage	01005
202.	Protective coating damaged, exposing base metal	Visual	01009
203.	End radius missing	Visual	01010
204.	Burrs or foreign matter present	Visual	01011
205.	Evidence of poor workmanship (see 3.7)	Visual	01012

4.3.2.2 Lock, centrifugal plunger pin (see dwg. 8797878, covering a detail of dwg. 8797876).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined.		
Major:	AQL 0.40 percent		
101.	Location of pivot pin holes	Gage	02001
102.	Profile of slot end	Gage	02002
Minor:	AQL 1.5 percent		
201.	Length, maximum (max.)	Gage	02003
204.	Protective coating damaged, exposing base metal	Visual	02006
205.	Evidence of poor workmanship (see 3.7)	Visual	02007

4.3.2.3 Pin guide (see dwg. 8797872).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined.		

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:42Z
Check the source to verify that this is the current version before use.

Major:	AQL 0.40 percent		
101.	Length	Gage	03001
102.	Diameter	Gage	03002
Minor:	AQL 1.0 percent		
201.	Chamfer missing	Visual	03003
202.	Evidence of poor workmanship (see 3.7)	Visual	03004

4.3.2.4 Pin, firing (see dwg. 8797875, covering a detail of dwg. 8797873).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined.		
Major:	AQL 0.40 percent		
102.	Point profile including diameter of portion above point	Gage	04002
Minor:	AQL 0.65 percent		
201.	Evidence of poor workmanship (see 3.7)	Visual	04004

4.3.2.5 Spring, centrifugal pin (see dwg. 8797881, covering a detail of dwg. 8797876).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined.		
Major:	AQL 0.40 percent		
101.	Solid height, max.	Gage	05001
102.	Outside diameter, max.	Gage	05002
Minor:	AQL 1.5 percent		
201.	Inside diameter, minimum (min.)	Gage	05003
202.	Ends not closed	Visual	05004
203.	Protective coating damaged, exposing base metal	Visual	05005
204.	Evidence of poor workmanship (see 3.7)	Visual	05006

4.3.2.6 Spring, plunger restraining (see dwg. 8797871).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:42Z
Check the source to verify that this is the current version before use.

Major:	AQL 0.65 percent		
101.	Solid height, max.	Gage	06001
102.	Free height, max.	Gage	06002
103.	Inside diameter, min.	Gage	06003
Minor:	AQL 1.5 percent		
201.	Outside diameter, max.	Gage	06004
202.	Ends not closed	Visual	06005
203.	Protective plating damaged, exposing base metal	Visual	06006
204.	Evidence of poor workmanship (see 3.7)	Visual	06007

4.3.2.7 Support, plunger (see dwg. 8797870).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined.		
Major:	AQL 0.65 percent		
101.	Total length	Gage	07001
102.	Outside diameter below flange	Gage	07002
103.	Width of step at pin end	Gage	07003
Minor:	AQL 2.5 percent		
201.	Inside diameter, min.	Gage	07005
202.	Concentricity of step with diameter below flange	Gage	07006
203.	Diameter of flange	Gage	07007
204.	Exterior plating damaged, exposing base metal	Visual	07008
205.	Foreign matter or burrs in flash hole	Visual	07009
206.	Evidence of poor workmanship (see 3.7)	Visual	07010

4.3.2.8 Washer, lock check (see dwg. 8797869).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined.		
Major:	AQL 1.0 percent		
101.	Diameter of large hole, min.	Gage	08001
102.	Location of large hole	Gage	08002
103.	Profile	Gage	08004
104.	Flatness	Gage	08005
105.	Diameter of small hole	Gage	08009
106.	Location of small hole	Gage	08003

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:42Z
Check the source to verify that this is the current version before use.

Minor:	AQL 1.0 percent		
201.	Height of angled lug	Gage	08006
202.	Evidence of poor workmanship (see 3.7)	Visual	08007

4.3.2.9 Body, plunger (see dwg. 8797877, covering a detail of dwg. 8797876).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined.		
Major:	AQL 1.5 percent		
101.	Depth to lock washer seat	Gage	09002
102.	Depth to bottom of delay element cavity	Gage	09003
103.	Total length	Gage	09004
104.	Centrifugal plunger pin lock cavity, inside radius to outside surface	Gage	09006
105.	Diameter of centrifugal plunger pin cavities, max.	Gage	09007
106.	Location of centrifugal plunger pin cavities	Gage	09008
107.	Diameter of delay element cavity, min.	Gage	09009
108.	Minor diameter of delay element cavity thread	Gage	09010
109.	Location of delay element cavity	Gage	09011
110.	Pitch diameter of delay element cavity thread	Gage	09012
111.	Location of lock pivot pin holes	Gage	09013
112.	Location of guide pin cavity	Gage	09015
113.	Diameter of guide pin cavity	Gage	09016
114.	Angle of delay element flash hole	Gage	09017
115.	Foreign matter or burrs in any internal surface, cavity, or hole	Visual	09018
116.	Outside diameter, min	Gage	09005
Minor:	AQL 4.0 percent		
201.	Diameter of flash hole in center	Gage	09019
202.	Diameter of external step at bottom	Gage	09021
203.	Length to external step at bottom, max.	Gage	09022

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:42Z
Check the source to verify that this is the current version before use.

204.	Diameter of angled flash hole	Gage	09023
205.	Diameter of lock check washer cavity, min	Gage	09024
206.	Depth of effective delay element cavity thread, min	Gage	09025
207.	Height of step in sidewall slot, max	Gage	09026
208.	Location of locating hole in external step	Gage	09027
209.	Depth of locating hole, min	Gage	09028
210.	Evidence of poor workmanship (see 3.7)	Visual	09029

4.3.2.10 Firing pin assembly (see dwg. 8797873 and dwg. 8797874).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined.		
Major:	AQL 1.0 percent		
101.	Location of firing pin	Gage	10001
102.	Height of firing pin point above bottom of housing	Gage	10002
103.	Length of housing	Gage	10003
104.	Inside diameter of housing	Gage	10004
105.	Outside diameter of housing, max	Gage	10005
106.	Location of three plunger support tabs in bottom of housing	Gage	10006
107.	Location of guide pin slot in sidewall	Gage	10007
108.	Diameter of plunger support seat between tabs	Gage	10008
109.	Width of guide pin slot	Gage	10009
110.	Location of inspection hole in sidewall	Gage	10021
111.	Firing pin missing or damaged (point broken, bent, mushroomed	Visual	10010
Minor:	AQL 1.5 percent		
201.	Diameter of flash hole in bottom, min	Gage	10015
202.	Protective coating damaged, exposing base metal	Visual	10016
203.	Evidence of poor workmanship (see 3.7)	Visual	10017

Source: https://assist.dla.mil -- Downloaded: 20260-19T07:42Z
Check the source to verify that this is the current version before use.

4.3.2.11 Plunger body assembly (see dwg. 8797876).

Categories	Defects	Method of Inspection	Code No.
Critical:			
1.	Spring retainer missing or loose	Visual-Manual	11001
Major:	AQL 1.0 percent		
101.	Distance between centrifugal plunger pins and lock check washer seat, max	Gage	11003
102.	Outside diameter, max	Gage	11004
103.	Lock pivot pin can be removed (stake inadequate)	Manual	11005
104.	Burrs or foreign matter in any cavity	Visual	11006
105.	Spring retainer damaged (punctured, deep scratches, etc)	Visual	11007
Minor:	AQL 0.65 percent		
201.	Evidence of poor workmanship (see 3.7)	Visual	11008

4.3.3 Testing

4.3.3.1 Arming (see 3.4), Major defect, Code No. 12001.-This test shall be performed 100 percent. Any plunger body assembly that fails to comply with the arming requirement when tested as specified in 4.4.2 shall be rejected. The test equipment to be used is specified in 4.3.4.

4.3.3.2 Non-arming (see 3.5), Critical defect, Code No. 13001.-This test shall be performed 100 percent. Any plunger body assembly that fails to comply with the non-arming requirement when tested as specified in 4.4.3 shall be rejected. The test equipment to be used is specified in 4.3.4.

4.3.3.2.1 Non-arming (see 3.5.1), Major defect, Code No. 13002.-This inspection shall be performed 100 percent. Any plunger body assembly that fails to comply with the requirements of 3.5.1 shall be removed from the lot. This inspection shall be performed as specified in 4.4.3.1.

Source: https://assist.dla.mil -- Downloaded: 202640-19T07:42Z
Check the source to verify that this is the current version before use.

4.3.3.3 Embrittlement of springs (see 3.3), Major defect, Code No. 14001.-Twenty each centrifugal pin springs and plunger restraining springs (see dwg. 8797871) shall be selected for this test. If any spring fails to comply with the requirements of 3.3 the lot shall be rejected. The test shall be performed as specified in 4.4.1, using equipment in accordance with 4.3.4.

4.3.3.4 Pull test (see 3.6), Critical defect, Code No. 15001.-Fifty (50) firing pin assemblies shall be selected for this test. If any assembly fails to comply with the requirements specified in 3.6, the lot shall be rejected. The test shall be performed as specified in 4.4.4, using equipment in accordance with 4.3.4.

4.3.4 Inspection equipment.-Equipment Tabulation number ET-9234452 identifies the inspection equipment required to perform the examinations and tests prescribed in this section. The contractor shall design inspection equipment in accordance with the instructions in paragraph 6.3.

4.3.4.1 Government rights to documentation.-Inspection equipment drawings and lists provided and revised in accordance with the requirements of the ET may be used by DOD activities for design, procurement, manufacture, testing, evaluation, production and receiving inspection, overhaul, shipping, storage, identification of stock, ordering and storage of replacement parts, inspection of items at overhaul, general maintenance of equipment, construction, survey, and whenever inspection equipment drawings are needed.

4.3.4.2 Supply and maintenance.-Supply and maintenance of the equipment listed on the ET shall be in accordance with Specification MIL-I-45607.

4.4 Test methods and procedures

4.4.1 Embrittlement of springs.-The spring shall be stretched to the minimum point of distortion to determine compliance with 3.3. Springs tested for embrittlement shall not be returned to the lot.

4.4.2 Arming.-The plunger body assembly, in the unarmed position, shall be tested by rotation in an automatic spin test machine, preferably the Hurletron Plunger Body Inspection Machine. The assembly shall be rotated in a vertical position with the slotted end facing upward. Each assembly shall be uniformly accelerated to a speed of 2025 rpm, maximum. Examination shall be made to determine compliance with 3.4. Rejected assemblies shall be removed from the lot. Upon completion of the test, the assembly shall be restored to the unarmed position by properly repositioning the centrifugal plunger pin lock.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:42Z
Check the source to verify that this is the current version before use.

4.4.3 Non-arming.-This test shall follow the arming test and shall be performed in accordance with the procedure outlined in 4.4.2, except that no assembly shall be rotated at a speed of less than 1475 rpm. Examination shall be made to determine compliance with 3.5. Rejected assemblies shall be removed from the lot.

4.4.3.1 Non-arming.-This inspection shall follow the non-arming rotation. The plunger body assembly shall be visually inspected to determine compliance with 3.5.1.

4.4.4 Pull test.-The firing pin assembly shall be assembled into an approved test fixture, and an axial tensile force of 50 pounds (min.) shall be applied to the firing pin. Assemblies subjected to this test shall not be returned to the lot.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging

5.1.1 Level C.-The parts for plunger, delay, M1, shall be packaged as specified in MIL-STD-1169.

5.2 Packing

5.2.1 Level C.-The parts for plunger, delay, M1, shall be packed as specified in MIL-STD-1169.

5.3 Marking.-Marking shall be as specified in MIL-STD-1169.

6. *NOTES*

6.1 Ordering data.-Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Data cards.-Data cards shall be prepared for each lot in accordance with the information specified in Standard MIL-STD-1167.
c. Provisions for submission of first article samples.

6.2 Inspection code numbers.-The five-digit code numbers assigned to the inspections herein are to facilitate future data collection and analysis by the Government.

6.3 Inspection equipment.-The contractor shall design inspection equipment as required by the inspection Equipment Lists (EL) referenced on the applicable ET in accordance with the instructions of paragraphs 6.3.1 through 6.3.5.

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:42Z
Check the source to verify that this is the current version before use.

6.3.1 Inspection Equipment Lists (EL).-Inspection Equipment Lists indicate the availability of inspection equipment designs by showing in the "number" column of the list of inspection equipment (Form SMUPA-1010) the numbers of drawing or Federal Stock numbers of existing equipment designs or codes, as indicated in paragraph 6.3.2. Design action required of the contractor is described in paragraphs 6.3.3 and 6.3.4. The contractor will be required to prepare detailed drawings in accordance with 6.3.4 for all the equipment coded as "Contractor Design" in the number column. These contractor designs must be approved by the Government prior to fabrication or procuring of the equipment. Designs shall be submitted for approval, as specified in 6.3.5.

6.3.2 Inspection equipment list codes.-The inspection equipment, as defined in 6.3.3 and 6.3.4, will be designated in the EL by the following codes:

CD - Contractor design, on controlled contractor format and/or commercial equipment.
MU - Army design, mandatory for use.

6.3.3 Army designs.-Army designs are reflected on detailed drawings which completely depict all the information necessary for the fabrication of the item of inspection equipment. The contractor need provide no design when an Army design is listed for an item of inspection equipment. Army designs fall into two basic classifications; mandatory (designated "MU") and non-mandatory (indicated by drawing or Federal Stock Number). When an inspection equipment list references mandatory Army designs, the contractor shall comply with, and use these designs accordingly. The contractor may, however, in connection with non-mandatory designs, and with the approval of the Government, design alternate inspection equipment or use comparable commercial equipment to facilitate his operations. Such contractor-prepared designs or commercial equipment selections must be approved by the Government prior to fabrication or procuring of the equipment. Designs shall be submitted for approval as specified in 6.3.5.

6.3.4 Contractor designs.-Contractor designs are designs of inspection equipment for which the Government has assigned design responsibility to the contractor. Contractor designs shall be supported by detailed drawings which depict all information necessary to completely fabricate, calibrate, and operate an item of inspection equipment. This requires that the necessary views, dimensions, materials, finish, notes, operating and calibration instructions be properly depicted in accordance with approved practices to the extent that further calculation or clarification will not be required. Unless otherwise specified,

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:42Z
Check the source to verify that this is the current version before use.

contractor designs may be developed on the format the contractor normally employs in his equipment design procedure, provided such format reflects the detail and information specified above, subject to the following controls: All submitted contractor designs shall conform to MIL-D-1000, Category E, Form 2. Legibility and reproducibility shall permit conventional making of clearly understandable, high contrast reproductions. Contractors shall submit three copies of final designs as a flat set. Designs shall be submitted for approval as specified in 6.3.5.

6.3.5 Submission of contractor designs.-All submitted designs shall contain a reference to the applicable five-digit code number contained in Section 4 of this specification, and the appropriate component or assembly drawing number and revision letter to which the specific design applies. Unless otherwise specified on the EL, all designs of equipment for inspection of defects classified as critical and major shall be submitted for approval to the Commanding Officer, Picatinny Arsenal, ATTN: SMUPA-ND7. All other designs of inspection equipment shall be approved by the inspection element of the agency administering the contract; submission shall be as directed by the contracting officer. Partial submission of inspection equipment designs is permissible and encouraged. However, the Arsenal completion date for design review will be based on the date of the final submission of designs. Picatinny Arsenal design review will be accomplished normally within one month after receipt.

6.4 Intended use.-It is intended that the item of this specification will be used with various artillery fuzes.


6.5 Submission of first article samples.-Instructions as to the location for evaluation of the first article shall be obtained from the contracting officer. Upon receipt of such request, the contracting officer shall advise Picatinny Arsenal, and instructions will be issued accordingly. All inquiries should be forwarded to: Commanding Officer, Picatinny Arsenal, ATTN: SMUPA-NI.

Custodian:
Army-MU

Preparing Activity:
Army-MU

Project Number: 1375-A-1090

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:42Z
Check the source to verify that this is the current version before use.

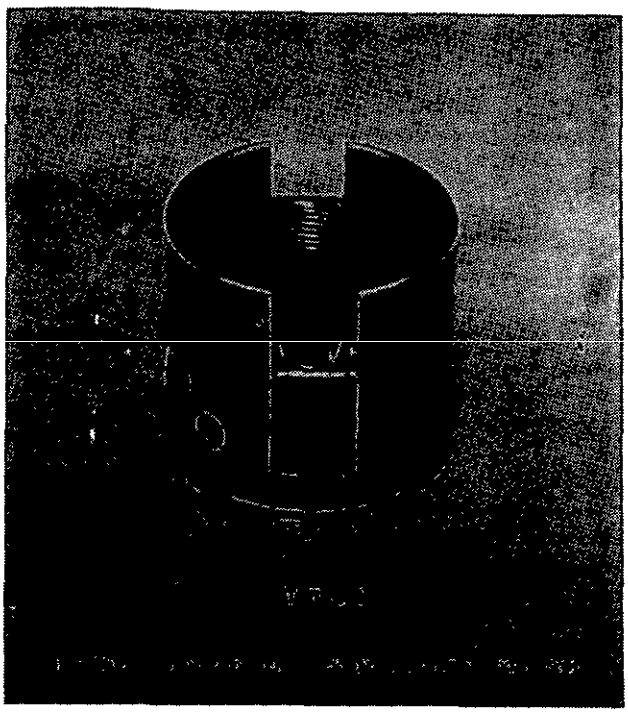

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:42Z
Check the source to verify that this is the current version before use.