MILITARY SPECIFICATION

MOUNTING, ELECTRICAL EQUIPMENT
MT-6330/ARC

This specification is approved for use within the Naval Air Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the design, performance, and acceptance requirements for MT-6330/ARC Electrical Equipment Mounting hereinafter referred to as the mounting. The mounting covered herein provides support and interconnecting wiring for the RT-1250A/ARC receiver-transmitter AM-7177A/ARC radio frequency amplifier, and the F-1556/ARC bandpass filter AN/ARC-182(V) units.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specification and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendtions, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commaning Officer, Naval Air Engineering Center, Systems Engineering and Standardization Department (SESD) Code 53, Lakehurst, NJ 08733-5100, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

AMSC N/A

FSC 5821

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Federal

QQ-P-416	Plating Cadmium, (Electro deposited)

Military

MIL-B-5087	Bonding, Electrical, and Lightning Protection, for Aerospace Systems
MIL-W-5088	Wiring; Aerospace vehicle
MIL-E-5400	Electronic Equipment, Airborne, General Specification for
MIL-T-5422	Testing, Environmental, Aircraft Electronic Equipment
MIL-C-5541	Chemical conversion coatings on aluminum alloys
MIL-E-17555	Electronic and Electrical Equipment, Accessories, and Repair Parts, Packaging and Packing of
MIL-T-18303	Test Procedures; Preproduction, Acceptance and Life for Aircraft Electronic Equipment, Format for
MIL-N-18307	Nomenclature and Identification for Electronic, Aeronautical, and Aeronautical Support Equipment Including Ground Support Equipment
MIL-S-25879	Switch, Coaxial, Radio Frequency Transmission Line
MIL-C-26482	Connector, Electrical, (Circular, Miniature, Quick Disconnect, Environment Resisting), Receptacles and Plugs, General Specification for
MIL-M-38510	Microcircuits General Specification for
MIL-C-38999	Connectors, Electrical, Circular, Miniature, High Density, Quick Disconnect, Environmental Resistant, Removable Crimp Contacts, General Specification for
MIL-C-39018	Capacitor, Fixed Electrolytic (Aluminum Oxide), General Specification for
MIL-H-46855	Human Engineering Requirements for Military Systems, Equipment and Facilities
MIL-P-55110	Printed Wiring Boards

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

MIL-C-83723	Connectors, Electrical, (Circular, Environment Resisting), Receptacles and Plugs, General Specification for

STANDARD

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-275	Printed Wiring for Electronic Equipment
MIL-STD-415	Test Provisions for Electronic Systems and Associated Equipment, Design Criteria for
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-461	Electromagnetic Emission and Susceptibility Measurements for the Control of Electromagnetic Interference
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-471	Maintainability Demonstration
MIL-STD-704	Electric Power, Aircraft, Characteristics and Utilization of
MIL-STD-781	Reliability Tests; Exponential Distribution
MIL-STD-785	Reliability Program for Systems and Equipment Development and Production
MIL-STD-883	Test Methods and Procedures for Microelectronics
MIL-STD-965	Parts Control Program
MIL-STD-1472	Human Engineering Design Criteria for Military Systems, Equipment and Facilities
MIL-STD-1562	Lists of Standard Microcircuits
MIL-STD-1679	Weapon System Software Development
MIL-STD-2074	Failure Classification for Reliability Testing
MIL-STD-2076	Unit Under Test Compatibility with Automatic Test Equipment, General Requirements for
~~MIL-STD-2077~~	Test Program Sets, General Requirements for
MIL-STD-2084	Maintainability of Avionics and Electronic Systems and Equipment, General Requirements for

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents. The following other Government documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DOCUMENTS

Naval Air Systems Command

EI-669	Avionics Installation Instructions for Radio Set AN/ARC-182
AD-1115	Electromagnetic Compatibility Design Guide for Avionics and Related Ground Support Equipment
WS-6536	Process Specification Procedures and Requirements for Preparations and Soldering of Electrical Connections

Department of the Navy

NAVMAT P-4855.1	Navy Power Supply Reliability
NAVMAT P-9492	Navy Manufacturing Screening Program

(Copies of specifications, standards and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item description. The mounting covered herein shall provide support and interconnecting wiring for the RT-1250A/ARC receiver-transmitter, AM-7177A/ARC radio frequency amplifier, and the F-1556/ARC filter, bandpass AN/ARC-182(V) units. The MT-6330/ARC with the above units installed shall have provisions for attaching directly to the MT-2653/ARC. This mounting shall provide vibration isolation and cooling facilities as necessary such that the assembly has environmental capability, comparable to that of the AN/ARC-51 system, as specified herein. This mounting shall also include switching and fault sensing circuitry in conjunction with the attached unit functions to provide the performance and switching as delineated in the system specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

3.1.1 Module complement. The mounting shall contain the following shop replaceable assemblies (SRA's):

a. A1 - Chassis Assembly

b. A2 - Audio/Control Circuit Card

c. A3 - Pulse Blanker Assembly

d. A4 - Regulator Assembly

e. A5 - Cooler Assembly

3.2 First article. When specified in the contract or purchase order (see 6.2.1), a sample shall be subjected to first article inspection (see 4.4 and 6.3).

3.3 Parts. In the selection of parts, the prime considerations are fulfillment of performance requirements, logistics supportability, and reliability assurance in a cost effective design. The following shall govern in parts selection.

a. Subassemblies shall be designed and fabricated to be repairable. Maximum economic standardization of parts and materials shall be exercised. Parts selection shall be made in the following order of precedence:

(1) Military Standard parts shall be selected in accordance with MIL-STD-454.

(2) Nonstandard parts previously qualified for other programs.

(3) Nonstandard parts.

b. Nonstandard parts and nonestablished reliability military standard parts shall be screened to the requirements of the most similiar military standard or standard nonestablished reliability part integrated circuits and hybrids shall use MIL-STD-883, Method 5004, Class B, as a basis for tailored screens. Purchase specifications shall specifically delineate screening requirements.

3.3.1 Component rescreening. The contractor shall conduct 100 percent incoming inspection of all active components used in production equipment and spares. Functional and parametric checks of active components will be performed at the components rated temperature extremes and at ambient. Components which are not compliant with their specifications shall not be used in the ARC-182.

3.3.2 Parts derating and application. All parts used shall be applied well within their ratings. The derating shall encompass the appropriate and meaningful application conditions such as voltage, current, power, temperature, mechanical, and duty cycle. Electronic and electromechanical parts shall conform to Table I electronic parts derating for worst case electrical and environmental stress unless formal written approval is received from the procuring activity prior to incorporation into the design. Part level stress analysis shall be used to verify that all parameter stresses are

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:51Z
Check the source to verify that this is the current version before use.

TABLE I. Electronic parts derating.

Part Type	Parameter	Maximum Allowable Application Stress
Capacitor	Applied Voltage (Ripple Voltage for Tantalum)	50% of rating 1/
Resistors	Power Voltage	50% of rating 70% of rating
Diodes	Power Current Voltage Junction Temperature	50% of rating 75% of rating 60% of rating 2/
Transistors	Power Voltage Junction Temperature	55% of rating 60% of rating 2/
Integrated Circuits		
Digital	Fan-Out, Fan-In Junction Temperature	80% of rating 2/
Linear	Power Junction Temperature	75% of rating 2/
Transformers, Inductive Devices	Parts shall be used at a winding temperature of at least 30 degrees below rated temperature. In addition, the maximum voltage between windings or between a winding and a shield shall be not greater than 60% of rated voltage for the steady state conditions and 90% of rated voltage with transients. General purpose inductors, audio and power transformers shall be applied at no more than 70% of rated current.	

1/ For solid tantalum and all electrolytic capacitors, the maximum applied voltage shall be not greater than 70 percent of the vendor rated value. "Applied voltage" is the sum of the applied peak ripple voltage and the applied DC voltage. For high Q ceramic capacitors, the applied voltage shall be not greater than 80 percent of the vendor rated value.

2/ Semiconductor devices shall be mounted and operated in such manner to insure worst-case junction temperature does not exceed 110 degrees C at +71 degrees C ambient temperature. Any deviation requires procuring activity approval. Power semiconductor devices, on a very selective basis, may be mounted and operated with worst case junction temperatures not to exceed 150 degrees C at +71 degrees C ambient temperatures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

within the derated values at worst case circuit and environmental conditions. The following limitations on parts usage shall apply:

a. Prohibited application

(1) Non-hermetically sealed semiconductors except power transistors
(2) Photo couplers (photo transistors)
(3) Hot carrier (Schottky) power rectifiers
(4) Microcircuit sockets
(5) Non-hermetically sealed wet tantalum capacitors

3.3.3 Parts control program. The contractor shall establish and maintain a parts control program in accordance with the requirements of MIL-STD-965, Procedure I and as specified herein. The program shall control part standardization and the criteria for the selection, application, and testing of parts to achieve the reliability required. As a minimum, a parts program equivalent to that specified herein shall be required of subcontractors and suppliers.

3.3.4 Non-standard parts approval. The contractor shall obtain (from the procuring activity) approval of all non-standard parts used in the equipment. Standard parts are defined in MIL-E-5400. In addition to the MIL-E-5400 requirements for standard parts, microelectronic parts are standard only if:

a. The device is listed in MIL-STD-1562, and

b. Sources (at least two) are listed on the Qualified Parts List (QPL), and

c. The part is procured from one of the qualified sources, and

d. Quality level "B" (or better) of MIL-M-38510 is required.

The approval procedure shall be in accordance with MIL-E-5400 and MIL-STD-965, Procedure I. In addition to the requirements of MIL-E-5400, approval of non-standard parts will be based on:

a. Suitability for the application

b. Conformance to this specification and to MIL-E-5400

c. Interchangeability

d. Screening (burn-in) method

3.3.5 Samples of non-standard parts. Samples of non-standard parts and materials are not required unless specified in the contract. Where non-standard parts samples are specified in the contract, the sample shall be in accordance with MIL-E-5400. (See 6.2.1)

3.3.6 Cabling and connections.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:51Z
Check the source to verify that this is the current version before use.

3.3.6.1 Cables and connectors. The mounting shall provide for the use of cables and connectors in accordance with MIL-E-5400. The design of the connectors shall be such that improper assembly, mating, or installation is impossible. Non-RF connectors shall meet the requirements of MIL-C-38999 with the exception of the filter and HPA interface connectors. All external connectors shall be scoop-proof, have cadmium plating finish in accordance with QQ-P-416 (over a suitable underplating) to withstand a 500 hour salt test, and provide 360 degrees circumferential grounding techniques for grounding prior to contact engagement. The HPA and filter interface connectors shall meet the requirements of MIL-C-26482 or MIL-C-83723.

3.3.6.2 Interconnection cabling. The mounting shall be capable of required operation using external wiring in accordance with the applicable requirements of MIL-W-5088. The external wiring shall be unshielded, except that a minimum number of the individual wires may be shielded when demonstrated as necessary to meet interference control requirements and provide the assembly of the cable to its plugs may be easily accomplished. External cables and that portion of the connectors attached to the cables shall not be supplied as part of the mounting.

3.3.7 Interchangeability. Physical and functional interchangeability shall exist for all units and replaceable assemblies, subassemblies, and parts of the mounting in accordance with MIL-E-5400. The mounting shall be constructed to preclude the requirement for any adjustment when replacing an item by another item of the same type designation.

3.4 Design and construction. The mounting shall conform with all the applicable requirements of MIL-E-5400 for design and construction except where otherwise specified herein. In any case, it is a condition of final acceptance that the mounting shall meet all the performance requirements of this specification.

3.4.1 Reliability. Unless otherwise specified in the contract or purchase order, the contractor shall establish a reliability program conforming to MIL-STD-785 (see 6.2.1). Task 104 of MIL-STD-785 shall be implemented to establish and maintain a closed-loop failure reporting system. This system will identify failure trends and patterns at all levels of assembly prior to acceptance of the hardware and will also identify failure trends related to field failures throughout the contract period. The contractor shall develop and implement corrective action for significant failure trends. The reliability program shall include provisions for assuring the reliability of the mounting or any portion of the equipment when supplied for use as spare or repair part.

3.4.1.1 Operational stability. The mounting shall operate with specified performance for at least the specified mean (operating) time between failures without the necessity for readjustment of any controls which are inaccessible to the operator during normal use.

3.4.1.2 Operating life. The mounting shall have a total operating life of 20,000 hours with minimal servicing and replacement of parts. Parts requiring scheduled replacement shall be specified by the contractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

3.4.1.3 Reliability in MTBF (mean time between failure). The mounting, including, any built-in-test (BIT) provisions, shall have a specified mean (operating) time between failures, upper test MTBF (θ_0) of 5,000 hours (as specified in MIL-STD-781), and a lower test MTBF (θ_1) of 2,500 hours when tested and accepted as specified under the requirements of 4.4.5 and 4.5.4.

3.4.2 Maintainability. Maintainability (built-in test features, construction and packaging, provision for test points, and other maintainability parameters) shall be as specified herein with MIL-STD-2084 being used as a guide. The mounting shall be considered a WRA; all packages within the mounting including chassis and wiring shall be considered SRA's.

3.4.2.1 Maintainability design. All electrical or electronic circuits and parts shall be packaged on replaceable and repairable, plug-in modules. SRAs (Shop Replacement Assemblies) shall be QRAs (Quick Replaceable Assemblies) as specified in MIL-STD-2076. SRA arrangement shall be such that access to any SRA does not require the removal of adjacent SRAs or parts other than access panels. The use of a special tool or tools shall not be required for SRA removal. Fuses may be used in lieu of circuit breakers in the blower assembly only.

3.4.2.1.1 Keying. Connectors shall be keyed to prevent the insertion of a connector or subassembly into an improper location within or on the mounting. All mount interface connectors shall be legibly marked with reference designations.

3.4.2.1.2 Access panels. Access panels shall be retained by fasteners suitable to the procuring agency.

3.4.2.1.3 Service access. Fasteners required for removal of the WRA shall be held by retaining devices suitable to the procuring agency.

3.4.2.1.4 Adjustments. No adjustment or alignment shall be required at the organizational level. Adjustment or alignment if required at a higher maintenance level (intermediate or depot), may require the removal of the SRA.

3.4.2.1.5 Test points. All test points shall be as specified herein to accommodate approved test equipment. MIL-STD-2084 and MIL-STD-415 shall be used as guides. MIL-STD-2084 takes precedence over MIL-STD-415 requirements. The sub-SRA test points and related connector requirements of MIL-STD-2084 are waived where prohibited by space or circuit performance considerations. The sub-SRA test points and related connector requirements philosophy shall be reflected in appropriate maintenance data.

3.4.2.1.5.1 Module test points. Test points shall become accessible with minimum removal of protective covers or enclosures.

3.4.2.1.5.2 Test points utilized at intermediate or depot level. Test points shall be provided for verification of faulty equipments at the intermediate level and repair of equipments and modules at the depot level.

3.4.2.1.5.2.1 Power supply test points. Individual test points shall be accessible after partial disassembly of the power supply section.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:51Z
Check the source to verify that this is the current version before use.

3.4.2.1.6 Organizational level maintainability (MTTR). For organizational maintenance, the MTTR shall be not greater than 20 minutes to remove and replace and verify operation of the replaced equipment. The mounting design shall be such that no ancillary test equipment is required for organizational level maintenance.

3.4.2.1.7 Intermediate level maintainability. Intermediate level maintenance may be performed with the assistance of separate test equipment to isolate a fault to the SRA level. The time to verify performance at the intermediate level shall be not greater than 20 minutes.

3.4.3 Transportability. The mounting shall be transportable by air, rail, truck and ship when packaged as specified in Section 5.

3.4.4 Standard conditions. The following conditions shall be used to establish normal performance characteristics under standard conditions and for making laboratory bench tests, except that required field tests may be conducted under outside ambient conditions:

a.	Temperature	Room ambient
b.	Altitude	Normal ground
c.	Vibration	None
d.	Humidity	Room ambient up to 90 percent relative humidity
e.	Input voltage	DC 28 $\pm$ 0.5 VDC
		AC 3 phase, 400 Hz, 115V $\pm$ 5% VAC

3.4.4.1 Service conditions. The mounting shall operate as required under any of the environmental service conditions or combination of these conditions as specified in MIL-E-5400 for Class 1 equipment.

3.4.4.1.1 Sinusoidal vibration. The mounting shall operate as required when subjected to a sinusoidal vibration test in accordance with MIL-T-5422 when operated in the system configuration. The mount shall be tested to Curve IIA of MIL-E-5400 with isolators removed (hard mounted to the vibration table) and to Curve IVA of MIL-E-5400 with vibration isolators in place.

3.4.4.1.2 Random vibration. The mounting shall operate as required when subjected to the random vibration requirements specified in 4.4.4.

3.4.4.1.3 Thermal conditions. The mounting shall operate as required under the thermal conditions specified by MIL-E-5400, Class 1.

3.4.4.1.4 Temperature shock. The mounting shall meet the temperature shock requirements of MIL-T-5422.

3.4.4.2 Warm-up time. The time required for the mounting to warm up prior to operation shall be kept to a minimum and shall be not greater than 10 seconds at standard conditions. Under service conditions, the warm-up time shall be not greater than 20 seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

3.4.4.3 Electromagnetic interference (EMI). The unit shall comply with the requirements of MIL-STD-461 for Class A1b equipment except as modified by this specification. For purposes of this specification, MIL-STD-461, Part 1 is modified by the following additions and deletions:

a. Add

(1) NAVAIR AD-1115

b. Delete

(1) AFSC DH 2-5
(2) AFSC DH 2-7
(3) AMC Pamphlet 706,235
(4) NAVELEX 01001,106

3.4.4.3.1 Conducted and radiated emissions limits. The conducted and radiated emissions of the mounting shall comply with the limits of the following requirements of MIL-STD-461 except the RE02 transmit frequency may be up to 35 dB above the limit, and harmonics may be up to 15 dB above the limit.

a. CE01

b. CE03

c. CE07

d. RE01

e. RE02

3.4.4.3.2 Conducted and radiated susceptibility limits. The mounting shall comply with conducted and radiated susceptibility limits of the following requirements of MIL-STD-461:

a. CS01

b. CS02

c. CS06

d. RS01

e. RS02

f. RS03

The mounting shall exhibit no susceptibility as specified in 3.4.4.3.3. when subjected to an RS03 test to the limits of Table II. In addition, the mounting shall exhibit no susceptibility in accordance with the criteria of 3.4.4.3.3b when subjected to signals at the levels of Table III.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:51Z
Check the source to verify that this is the current version before use.

TABLE II. RS03 signals

Frequency (MHz)	Modulation				Power Density (mW/cm^2) Peak 5/	Ave	v/m (ref) 6/
0.014-850	AM 90% 1 kHz Sine Wave				-	.106	20
215-225	PAM1/	20 usec[2]	PW[3]	200 pps	.317	-	35
215-225	PAM	200 usec	PW	200 pps	.317	-	35
400-450	PAM	15 usec	PW	300 pps	.106	-	20
850-940	PAM	10 usec	PW	1000 pps	.106	-	20
850-940	PAM	125 usec	PW	300 pps	.106	-	20
1215-1365	PAM	10 usec	PW	3000 pps	.106	-	20
1365-2900	PAM	1 usec	PW	1000 pps	.106	-	20
2900-3100	PAM	3 usec	PW	1000 pps	1.6	-	78
2900-3100	PAM	70 usec	PW	200 pps	1.6	-	78
3100-9000	PAM	1 usec	PW	1000 pps	.106	-	20
9000-14000	PAM	0.2 usec	PW	1000 pps	.106	-	20
14000-18000	PAM	0.2 usec	PW	50000 pps	.106	-	20

1/ Pulse Amplitude Modulation.
2/ Microseconds.
3/ Pulse Width.
4/ Pulses Per Second.
5/ Peak Power Density for PAM signals is defined as the power density measured by an average power measuring device if the generator is run CW; average power density within the pulse envelope.
6/ Volts Per Meter equivalent shown for reference only.
7/ Frequency ranges listed with more than one modulation shall be repeated as necessary to include all different modulations and field strength shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

TABLE III. High level RS03 signals

Frequency (MHz)	Modulation				Power Density (mw/cm^2) 5/	v/m (ref) 6/	Scan Rate (sec) 7/	Dwell Time (msec) 7/
220 8/	PAM1/	10 usec2/	PW3/	200 pps4/	10.6	200	4	500
220	PAM	200 usec	PW	200 pps	10.6	200	4	500
425	PAM	15 usec	PW	300 pps	10.6	200	10	200
900	PAM	2 usec	PW	1000 pps	10.6	200	5	50
900	PAM	125 usec	PW	300 pps	10.6	200	5	50
1250	PAM	10 usec	PW	3000 pps	10.6	200	5	50
1350	PAM	5 usec	PW	3000 pps	10.6	200	5	50
3000	PAM	3 usec	PW	1000 pps	10.6	200	5	50
3000	PAM	70 usec	PW	200 pps	10.6	200	5	50
3600	PAM	1 usec	PW	1000 pps	10.6	200	5	50
5600	PAM	1 usec	PW	600 pps	10.6	200	5	50
9100	PAM	0.5 usec	PW	1000 pps	10.6	200	5	50
9375	PAM	0.2 usec	PW	1000 pps	10.6	200	5	50
13900	PAM	0.2 usec	PW	50000 pps	10.6	200	0	CONT
15500	PAM	0.2 usec	PW	50000 pps	10.6	200	0	CONT
33200	PAM	0.2 usec	PW	2000 pps	10.6	200	0	CONT

1/ Pulse Amplitude Modulation.
2/ Microseconds.
3/ Pulse Width.
4/ Pulses Per Second.
5/ Peak Power Density for PAM signals is defined as the power density measured by an average power measuring device if the generator is run CW; average power density within the pulse envelope.
6/ Volts Per Meter equivalent shown for reference only.
7/ Scan and Dwell refer to simulated antenna rotation. The signal shall be disabled except for the specified dwell. The signal shall be periodically enabled for the specified dwell time with the period equal to the specified scan time.
8/ Frequency ranges listed with more than one modulation shall be repeated as necessary to include all different modulations shown.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:51Z
Check the source to verify that this is the currentversion before use.

3.4.4.3.3 Susceptibility. The following criteria shall be applied to determine whether the mounting is susceptible:

a. Any failure of the mounting to comply with the requirements of 3.6.1.5, 3.6.1.6, and 3.6.1.7 shall be considered an indication of susceptibility.

b. Any repeatable non-commanded change in the mode of operation or tuned frequencies of the mounting shall be considered an indication of susceptibility. This shall apply whether the failure is transient (momentary) or non-transient (permanent) in nature. In addition the inability to change radio frequency or mode of operation while exposed to the susceptibility signal be considered indication of susceptibility.

3.4.4.3.4 Ground plane interference. All mounting interface circuits shall be capable of specified performance when subjected to the following aircraft chassis noise between the WRA's.

a. Three volts rms from 320 Hz to 500 Hz. (Not to be greater than 150ma rms applied current.)

b. One volt rms from 500 Hz to 20 MHz. (Not greater than 150ma rms applied current for frequencies between 500 Hz and 50 kHz. Not to be greater than 1 watt (CW) from a 50-ohm source for frequencies above 50 kHz.)

c. ± eight volt pulses, 100 usec wide at 100 pps. (Not to be greater than 15a peak current spikes.)

In addition, to the susceptibility of 3.4.4.3.3, the radio shall maintain intelligible communications during a "talk thru" test with another radio set using a low level signal (not greater than 20 microvolts inputs to the receiver).

3.4.4.3.5 Conducted susceptibility test, interconnecting and signal leads. The unit shall exhibit no susceptibility, as specified by 3.4.4.3.3 when subjected to 100mv rms 2 to 30 MHz coupled into its interconnecting and signal leads.

3.4.4.3.6 Grounding requirements. The grounding system between WRA's of the equipment shall be compatible and consistent with the following aircraft grounding scheme specified in 3.4.4.3.6.1 through 3.4.4.3.6.3. All WRA'S shall be grounded in such a manner as to prevent ground loops and common ground returns for signal and power circuits, provide effective shielding for signal circuits, minimize EMI, and to protect personnel from electrical hazards.

3.4.4.3.6.1 Chassis grounds. A ground wire of minimum length connected internally to the WRA chassis shall be provided at a pin on each primary power connector. No circuit shall be allowed to utilize this wire as its primary return.

3.4.4.3.6.2 Shielding grounding. A separate connector pin shall be provided for each aircraft wire shield unless suitable grounding is provided in external cable backshells. The connector shield pins shall be grounded to the equipment chassis inside the WRA adjacent to the connector mounting and by the shortest means practical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

3.4.4.3.6.3 Component grounds. All externally exposed metal parts, shields, control shafts, switch handles, connectors, bushings, shall be grounded to the chassis.

3.4.4.3.7 Shielding gaskets. Shielding gaskets and similar devices for RF applications shall avoid the use of materials which represent severe dissimilar metal combinations with the interface.

3.4.5 Dimensions. The dimensions of the mounting shall be as shown on Figure 1.

3.4.6 Weight. The weight of the mounting shall be not greater than 10.8 pounds.

3.4.7 Finish. The exterior finish of the mounting shall be natural aluminum finish with chemical film, Class 3, in accordance with MIL-C-5541.

3.4.8 Nameplates and identification marking. Nameplate approval and identification marking shall be in accordance with MIL-N-18307.

3.4.8.1 Decals, nameplates, and marking locations. All decals, nameplates, and marking shall be affixed to the mounting in accordance with Figure 1.

3.4.8.2 Serial Numbers. Serial numbers will be assigned by the procuring activity for the mountings under contract or purchase order. The contractor shall serialize sequentially all mountings which are delivered under contract.

3.4.9 Input electrical power.


3.4.9.1 Operating power. The mounting shall meet all applicable requirements of MIL-STD-704 and shall give specified performance when energized from the following power sources having characteristics and limits as specified in MIL-STD-704. The voltage supplied shall be +28 volts dc (70 watts) and 115 volts, 400 Hz, 1 phase (30 watts). These values do not include the power passing through the mounting to the normal attaching RT-1250A/ARC, AM-7177A/ARC and F-1556/ARC units. These units require additional 28 volt dc and 115 volt, 400 Hz, 3 phase power.

3.4.9.2 Emergency voltage. During operation in the emergency steady state electric power condition as specified in MIL-STD-704, the mounting shall remain safe and control functions shall be maintained. The emergency power source will impose an interval of zero voltage at time of loss of primary power for a maximum period of 30 seconds. The mounting is not required to perform during this period of power loss but shall return to performance as specified above after return to emergency power conditions in accordance with MIL-STD-704 and following the first new instruction from the control system.

3.4.9.3 Undervoltage protection. The mounting shall not be damaged by voltages below the minimums specified by MIL-STD-704, and shall be capable of resuming normal operation when the voltage returns within normal limits.

3.4.9.4 Reverse polarity protection. The mounting shall be protected such that it will not be damaged by application of reverse polarity voltages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

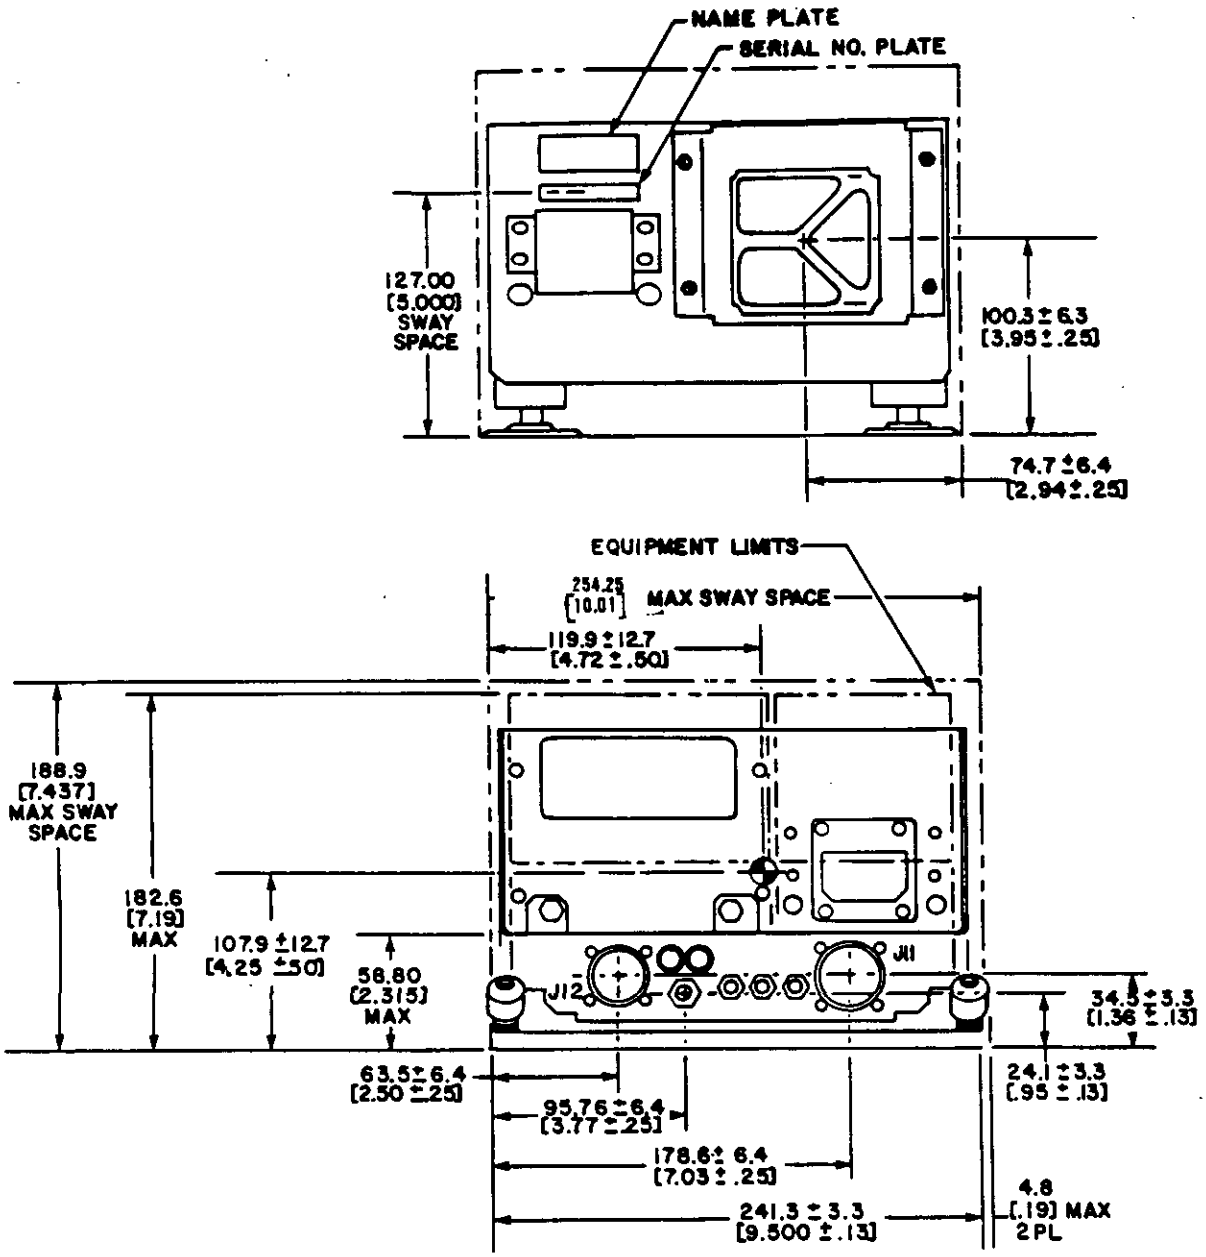

DIMENSIONS ARE IN MILLIMETERS [INCHES]

FIGURE 1. Outline dimensions for MT-6330/ARC Electrical Equipment Mounting

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

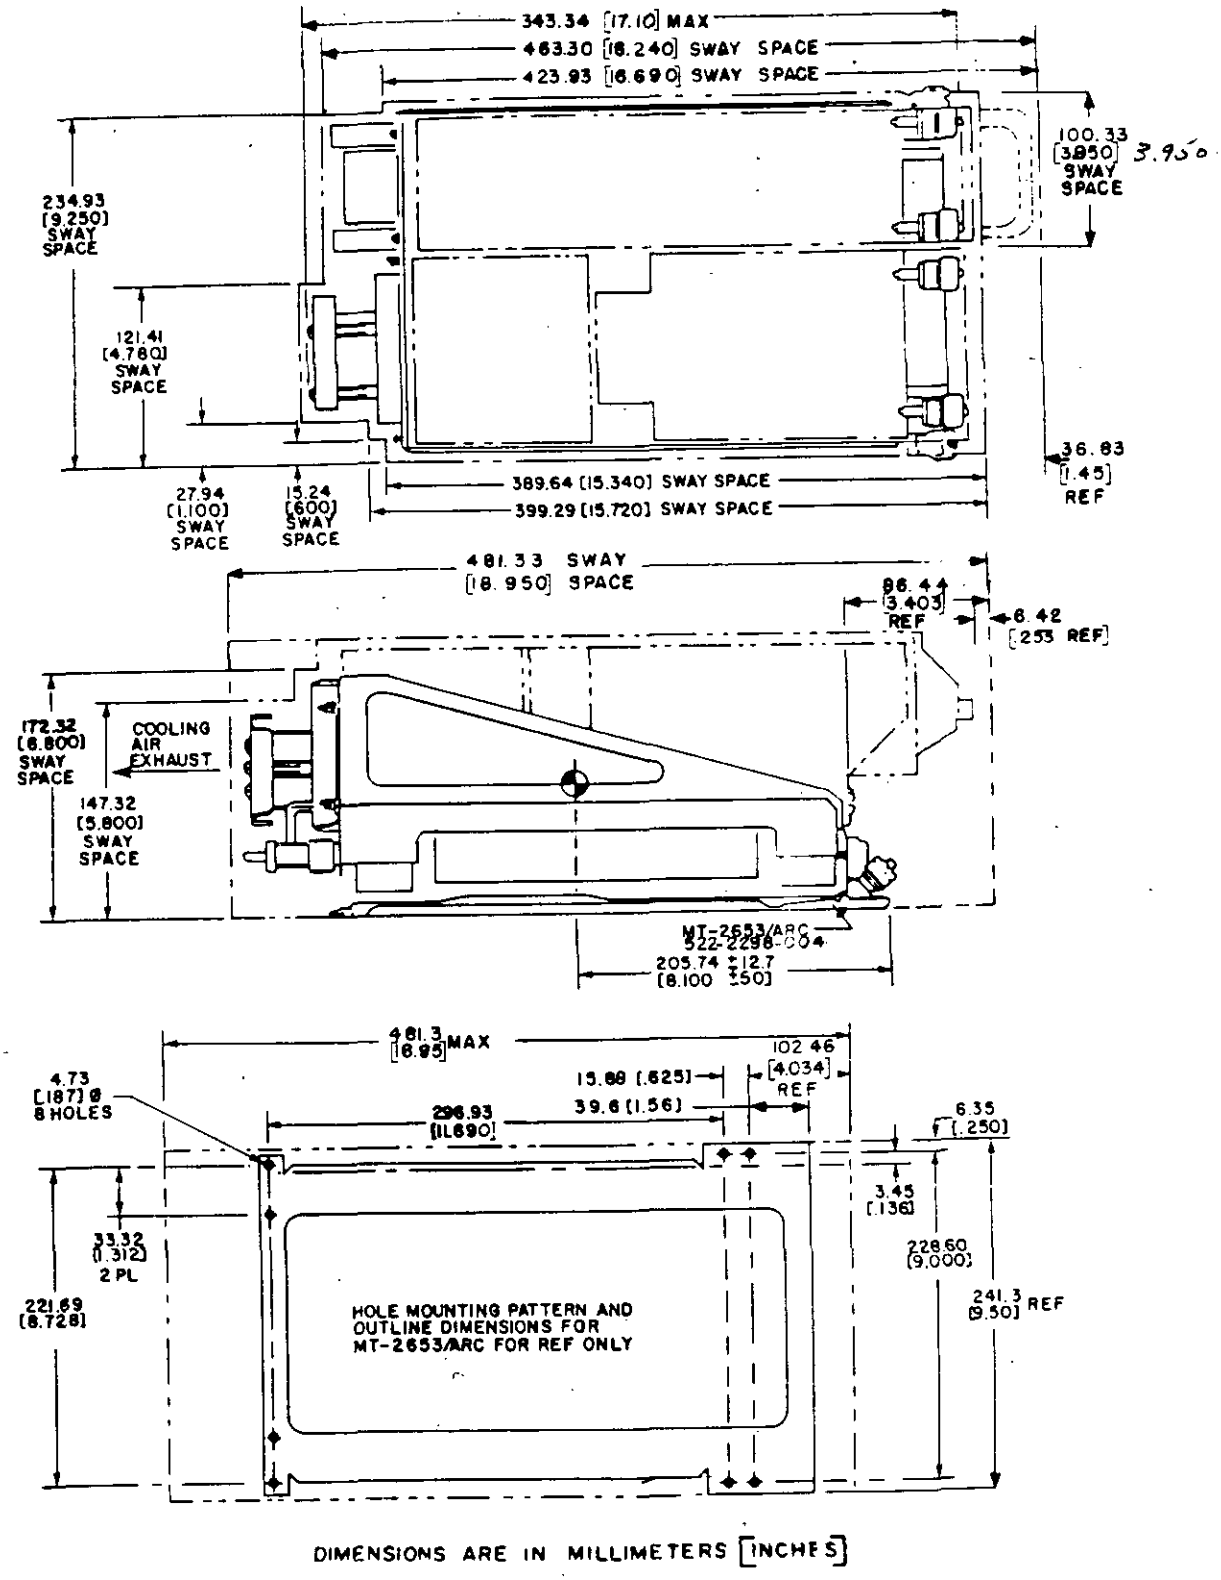


FIGURE 1. Outline dimensions for MT-6330/ARC Electrical Equipment Mounting-continued

Source: https://assist.dla.mil --Downloaded: 202610-26T04:51Z
Check the source to verify that this is the current version before use.

3.4.10 Manufacturing requirements. The mounting shall be manufactured in accordance with the manufacturing processes, workmanship, and quality assurance provisions of MIL-STD-454, MIL-STD-275, MIL-P-55110, WS-6536, NAVMAT P-4855.1, and NAVMAT P-9492.

3.5 Performance. Unless otherwise specified herein, values set forth to establish specified performance apply to performance under both standard and extreme service and input power conditions. When reduced performance under the extreme conditions is acceptable, tolerances or values setting forth acceptable variations from the performance under the standard conditions will be specified herein.

3.5.1 Operation. The mounting shall provide the functions and capabilities specified in 3.1 for operation in military aircraft and helicopters. Additionally the mounting shall be compatible with associated equipment listed in 6.4 to provide operations specified in 3.6.

3.6 Detail requirements.

3.6.1 Electrical Equipment Mounting MT-6330. The mounting shall attach directly to the MT-2653/ARC in the aircraft and provide mounting provisions and interface wiring and functions for the RT-1250A/ARC, AM-7177A/ARC, and F-1556/ARC units. The mount and attached units shall have capability and provisions for control from an external unit such as the C-10319A/ARC or C-11128/ARC.

3.6.1.1 Function. The mounting shall provide the following functions during communication in the respective frequency bands:

a. Low VHF FM - 30 MHz through 87.975 MHz

b. VHF AM - 108 MHz through 155.975 MHz

c. VHF FM - 156 MHz through 173.975 MHz

(1) The mounting shall provide for normal operation of the RT-1250A/ARC and shall cause the AM-7177A/ARC and F-1556/ARC to be in standby mode. The RF circuitry shall bypass the standby units thus connecting the RT-1250A/ARC direct to the external antenna circuit.

d. UHF AM or FM 225 MHz through 399.975 MHz

(1) The mounting shall provide switching for normal operation of the AM-7177A/ARC and F-1556/ARC. The RT-1250A/ARC antenna circuit shall pass through these units for RF selectivity filtering and for amplification in transmit mode. The MT-6330/ARC shall contain fault sensing circuitry coupled with the respective unit circuitry such that if a fault occurs in either the AM-7177A/ARC or F-1556/ARC the defective section will be identified by the output fault indication signal. The mount shall also contain a blower for forced air cooling of the AM-7177A/ARC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

(2) The interconnect aircraft wiring shall be via two power connectors and one antenna connector located at the front of the unit.

3.6.1.2 Controls. Control of the mounting and attached units shall be via external control such as the C-10319A/ARC or 11128/ARC control unit.

3.6.1.3 Operation modes.

a. Off. In this mode, there shall be no energized circuitry or power usage.

b. Main receiver-transmitter mode (T/R). In this mode the attached RT-1250A/ARC shall operate normally on the frequency as selected by an external control source. In the VHF frequency bands the AM-7177A/ARC and F-1556/ARC shall be bypassed. In the UHF frequency band, the AM-7177A/ARC and F-1556/ARC shall be operative.

c. ADF mode. In this mode the MT-6330/ARC shall connect the RT-1250A/ARC ADF RF input to the external antenna cabling.

3.6.1.4 Electrical connections. Connections to external circuits shall be in accordance with MIL-C-38999, Series III and Table IV.

TABLE IV. Connections to external circuits

Reference Designation	Receptacle Type	Function
J11	M8372372R2028N	Power/Control
J12	MS3112E-16-26P	Power/Control
J13	Cannon 150211-4050	RF Antenna
P1	TNC	RT Antenna
P2	D38999/26WE35SN	RT Power/Control
P3	TPS	RT ADF Input
J19	P.N. 370-0508-010	Filter Pwr/Ctrl/RF
J2	SMB	HPA RF Input
J3	SMB	HPA RF Output
J17	M24308-1-13	HPA Power/Control
J20	MS3112E10-65	Blower Power

Note: Nonstandard Abbreviations

HPA = AM-7177A/ARC High Power Amplifier
RT = RT-1250A/ARC Receiver-Transmitter

3.6.1.4.1 Connector pin assignments. The connector pin assignments for power/control connectors are detailed in Table V.

3.6.1.4.2 Control/audio lines. The mounting with the AM-7177A/ARC and F-1556/ARC attached shall interface with other equipment of the system and with the primary power source via the connectors and pin assignments as listed for J11 and J12 in Table V. Connector pin assignments for the MT-6330/ARC and the attached units are provided in the respective RT-1250A/ARC, AM-7177A/ARC and F-1556/ARC unit specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

TABLE V. Mounting connector interface characteristics


MTG BASE MT-6330/ARC J11		
CONTROL POWER OUT	1	2 AMP CIRCUIT BREAKER TO +28 VDC
SWITCH GENERAL PURPOSE POWER OUT	2	2 AMP CIRCUIT BREAKER TO +28 VDC
SPARE	3	
EMC FAULT (OUT)	4	LOGIC 0 = 0 ± 0.5 VDC = NO FAULT; LOGIC 1 = 4 ± 1.5 VDC = FAULT
SPARE	5	
MANUAL BYPASS	6	OPEN CKT = NORM; GND = BYPASS
FAULT RESET	7	LOGIC 1 = 4 ± 1.5 VDC = RESET; LOGIC 0 = 0 ± 0.5 VDC = NO RESET
HPA/ANT FAULT	8	LOGIC 0 = 0 ± 0.5 VDC = NO FAULT; LOGIC 1 = 4 ± 1.5 VDC = FAULT
SPARE	9	
BANDWIDTH CONT	10	OPEN CKT = NARROW; GND = WIDE
CLOCK HIGH	11	LOGIC 0 = 0 + 0.5 VDC LOGIC 1 = +5 ± 0.5 VDC (20 µs PW, 10 kHz PPS)
CLOCK LOW	12	LOGIC 0 = +5 ± 0.5 VDC LOGIC 1 = 0 ± 0.5 VDC (20 µs PW, 10 kHz PPS)
DATA HIGH	13	LOGIC 0 = 0 + 0.5 VDC LOGIC 1 = +5 ± 0.5 VDC
DATA LOW	14	LOGIC 0 = +5 ± 0.5 VDC LOGIC 1 = 0 ± 0.5 VDC
RAW +28 VDC	15	+28 VDC INPUT POWER
ECCM STROBE	16	0 TO +1 VDC = NO STROBE; +4 TO +5 = STROBE (10 µs MIN PW)
XMTR BLANKING	17	OPEN CKT = NORM; 0 TO +1 VDC = INHIBIT
NORM/ECCM	18	OPEN CKT = NORM; 0 TO +5 VDC = ECCM
CHASSIS GROUND	19	GROUND
GUARD PRECEDENCE	20	OPEN CKT = NORM FREQ SEL; 0 TO +5 VDC = 243 MHz
DELAYED PTT	21	OPEN CKT OR +5 VDC = RCV; GND = XMT
UHF MODE OUT	22	OPEN CKT = UHF MODE; 0 TO 1.7 VDC = VHF MODE
CHASSIS GROUND	23	GROUND
LOW VHF FM BAND INDICATOR	24	0 ± 0.5 = LOW VHF BAND
ISOLATED PTT	25	OPEN CKT OR +5 VDC = RCV; GND = XMT
X-MODE SELECT	26	OPEN CKT = PLAIN TEXT AUDIO; 0 TO +5 VDC = X-MODE
SPARE	27	
PROCESSED PTT	28	OPEN CKT = RCV; 0 TO 1 VDC = XMT

NOTE:

NONSTANDARD ABBREVIATION.
HPA . HIGH POWER AMPLIFIER.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:51Z
Check the source to verify that this is the current version before use.

TABLE V. Mounting connector interface characteristics-continued

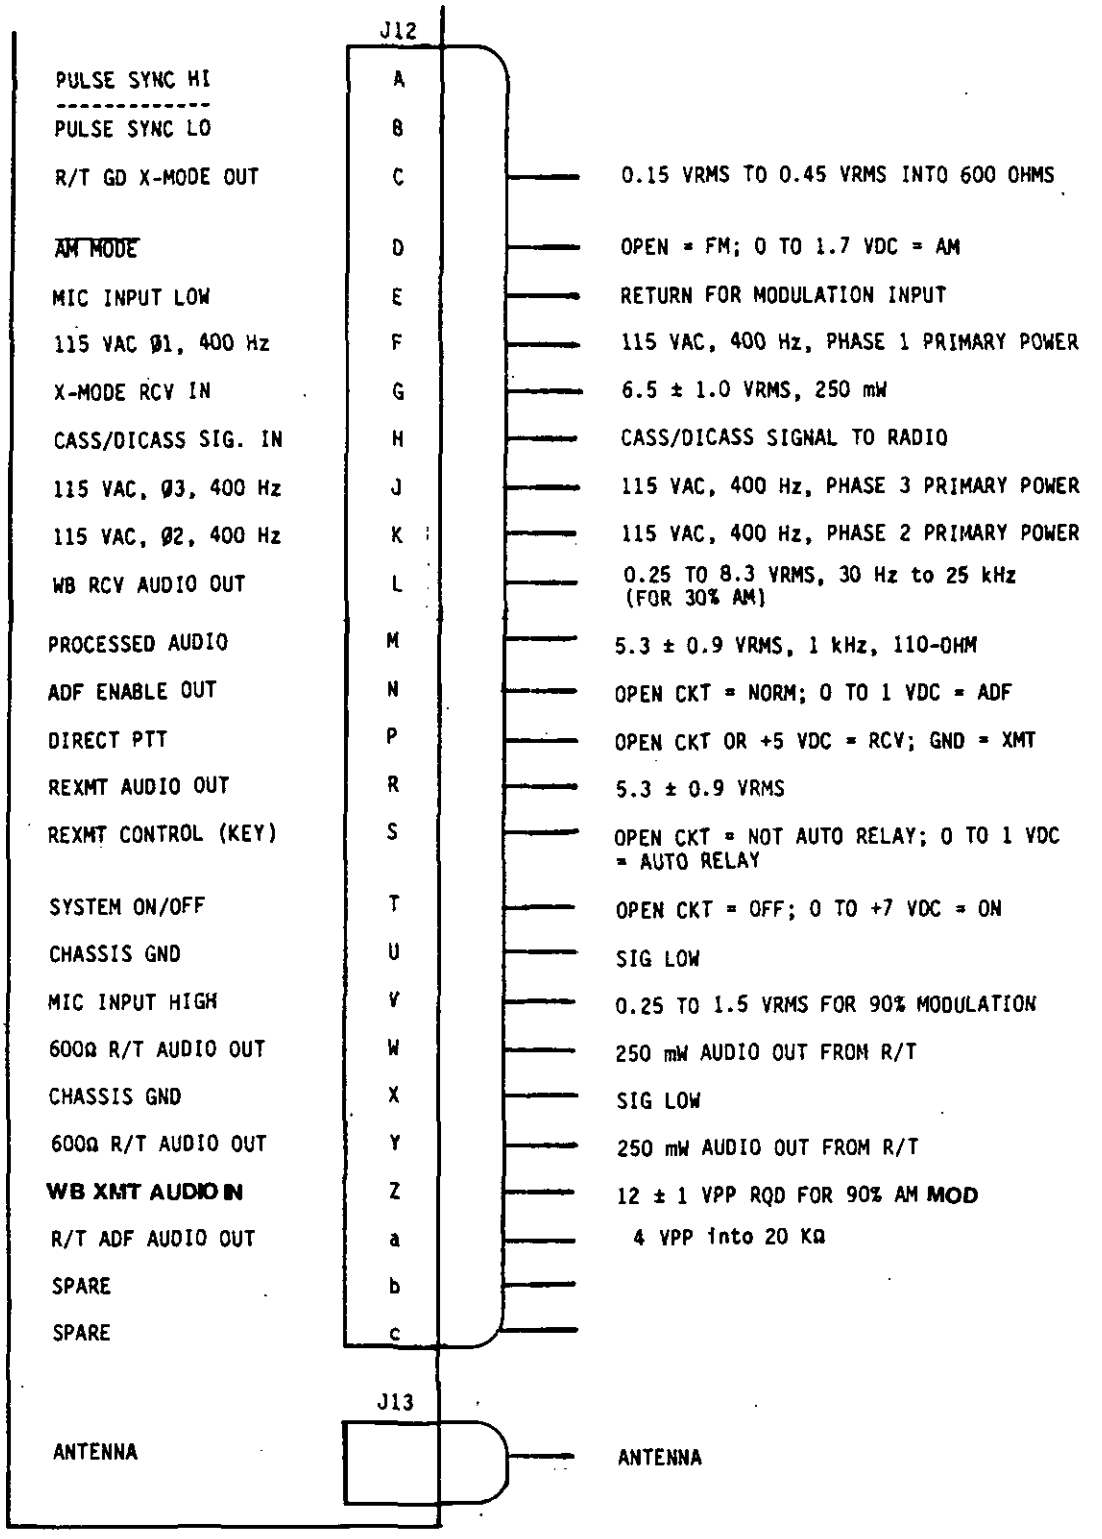

NOTE: INTERNAL 3Ø NEUTRAL IS GROUNDED TO CHASSIS

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:51Z
Check the source to verify that this is the current version before use.

3.6.1.5 Receiver operation (UHF). In the receive mode, the mounting shall pass the received signal from the external antenna circuit to the receive input of the F-1556/ARC filter and from the receive output of the filter to the RT-1250A/ARC. The signal will also be blanked by the pulse blanker (A3) which is controlled by pulse sync lines from the external control circuitry (see 3.6.1.5.3).

3.6.1.5.1 Manual bypass. A "Manual Bypass" condition may be selected which provides a direct connection from the RT-1250A/ARC to the antenna.

3.6.1.5.2 Other inputs and outputs. The mount shall incorporate audio circuitry to process receive audio from the RT-1250A/ARC, and to provide transmit UHF AM sidetone. The processor shall use the R/T wideband audio and an external pulse signal (pulse sync in Table V) to generate a blanked receive audio power output signal in all bands except 30 MHz to 88 MHz. The audio circuit shall utilize audio filtering designed to minimize pulse stretching effects. The audio processor shall incorporate a sample and hold circuit to improve audio signal to noise ratio.

3.6.1.5.2.1 Audio processor. The processed audio output level shall be 5.3 $\pm$ 0.9 volts rms when loaded with 110 $\pm$ 5 percent ohms for an audio input of 0.3 vrms into the wideband audio input at P2. Under service conditions, the audio output level shall be not less than 4.0 vrms. The frequency response shall be $\pm$ 2 dB over 300 Hz to 3500 Hz. At 28 vdc line input and with 0.3 vrms audio input to the wideband input while loaded with 110 $\pm$ 5 percent ohms, the distortion shall be not greater than 6 percent. Under service conditions the distortion shall be not greater than 10 percent. The audio output shall be relay-switched to the RXMT AUD OUT line, the UNATTENUATED AUD OUT line, and the X-MODE RCV AUD lines in accordance with Table VI.

3.6.1.5.3 RF pulse blanker. The mount shall incorporate an RF pulse blanker that is active in the UHF receive mode only. The circuit shall be bypassed in VHF bands of operation. The blanker shall provide not less than 50 dB of attenuation for 21 +4, -2 microseconds. The blanking period shall begin 4.5 $\pm$ 0.5 microseconds after the leading edge of the sync pulse.

3.6.1.6 Transmit operation (UHF). The mounting shall pass the transmit signal from the RT-1250A/ARC to the F-1556/ARC, from the F-1556/ARC to the AM-7177A/ARC, and from the AM-7177A/ARC to the external antenna circuitry. The manual bypass condition may be selected to provide direct connection of the RT-1250A/ARC to the antenna in both transmit and receive modes. Three key lines are input to the mounting: direct push-to-talk (PTT), delayed PTT, and isolated PTT. Either delayed PTT or isolated PTT is sufficient to key the RT-1250A/ARC. If direct PTT is keyed first, delayed or isolated PTT must follow before the receiver-transmitter (R/T) is keyed. The designed method of keying is direct PTT first which will set up the relays with delayed PTT following. After initiating either a direct or delayed PTT (whichever is first) there is a 21 $\pm$ 4 millisecond delay before the R/T is keyed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

TABLE VI. Audio output functions

Logic Input Levels				Connection		
LOW VHF	AM MODE	X-MODE AUD SEL	PTT	J12-M UNATTEN AUD	J12-G X-MODE RCV AUD	J12-R REXMT AUD OUT
0	-	-	-	RT UNATTEN	RT X-MODE RCV	RT REXMT AUD
-	1	-	0	AUDIO	AUDIO	
1	0	0	-	J12-G	J12-M	PROCESSED AUD
1	-	0	1			
1	0	1	-	PROCESSED	OPEN	PROCESSED AUD
1	-	1	1	AUD		

Symbols: 1. Dash (-) means don't care
2. "0" is 0 Vdc = logic 1 = presence of function
3. "1" is open = absence of function

3.6.1.6.1 Transmitter sidetone. An input shall be provided for sidetone audio input to the mount audio circuitry. When operating in the AM mode in the UHF band, the sidetone shall appear on the processed (unattenuated) audio output at J12-M. With an input level of 0.50 vrms ± 0.01 vrms to the sidetone input at J17, the sidetone output at J12-M shall be 2.4 vrms ± 0.3 vrms into 110 ohms ± 5 percent ohms. Under environmental conditions, the sidetone output shall be 1.7 vrms minimum. When operating in the FM mode or in VHF bands, sidetone audio provided by the RT-1250A shall also appear at J12-M audio output.

3.6.1.6.2 MIC audio. The mount shall incorporate an audio amplifier circuit to buffer the MIC audio input to the R/T unit. The amplifier shall have a gain of 4 ± 0.5 dB, have an input impedance of 150 ohms ± 5 percent ohms, and shall provide filtered DC bias for operation of external MIC circuitry.

3.6.1.7 ADF operations (UHF). ADF operation will be identical to that of normal receive operation except that the incoming signal will be delivered to the ADF antenna input of the RT-1250A/ARC.

3.6.1.8 AM-7177A/ARC cooler. The rear of the mounting accommodates a cooling unit to force air to cool the high power amplifier AM-7177A/ARC. Air flow is from the HPA front with discharge out the rear of the mounting and a mass flow of nominally 25 CFM.

3.6.1.9 Fault circuitry. Fault circuitry in the mounting shall accept fault inputs from the filter, and high power amplifier (HPA). These inputs shall be latched and output to the external control circuitry. The fault indication can be reset by the external control circuitry.

3.6.1.9.1 Fault indicators. The following fault indicators shall be provided on the mounting:

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:51Z
Check the source to verify that this is the current version before use.

a. HPA fault indicator. A yellow lamp on the mount shall be lit when the AM-7177A/ARC is in a fault condition during operation in the UHF band.

b. Antenna fault indicator. A red lamp on the mount shall be lit when high VSWR is presented to the AM-7177A/ARC in the UHF mode except when in ECCM mode and operating at a frequency of 390 MHz or greater.

c. HPA/ANT fault sense indicator. A combined HPA and antenna fault low level sense signal shall be available for external monitoring. A logic 1 = 4 vdc ± 1.5 vdc shall be provided when the AM-7177A/ARC is in a fault condition or when a high VSWR is presented to the AM-7177A/ARC in the UHF mode, and a logic 0 = 0 vdc ± 0.5 vdc shall be provided in UHF normal operation. The circuit shall be capable of driving a 5K ohm load with any connected source voltage of not greater than 5.5 vdc.

3.7 Cooling. See 3.1, 3.1.1, and 3.4.4.1.3.

3.8 Safety. The mounting safety requirements shall be in accordance with MIL-E-5400 except resistance from ground pin to chassis shall be not greater than 20 milliohms.

3.8.1 Human performance/human engineering. MIL-STD-1472 and MIL-H-46855 shall be used as a design guide for the mounting and all component parts therein.

3.9 Bonding. Bonding shall be in accordance with MIL-B-5087.

3.10 Workmanship. Workmanship for the mounting shall conform with MIL-STD-454, Requirement 9.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of section 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Standard conditions. Unless otherwise specified herein, all inspections shall be performed with conditions specified as follows:

a.	Temperature	Room ambient (25 ± 10°C)
b.	Altitude	Normal ground
c.	Vibration	None
d.	Humidity	Room ambient up to 90 percent relative humidity
e.	Input voltage	DC 28 ± 0.5 vdc AC 3 phase, 400 Hz, 115 V ± 5% VAC

4.4 First article inspection. First article inspection shall be conducted by the contractor on mountings representative of the production mountings to be supplied under the contract. First article tests shall be accomplished under the authorized test procedures (see 4.6). No first article inspections shall be conducted prior to acceptance of the first article test procedure by the procuring activity. First article inspection shall consist of all the tests described in 4.4.1.

4.4.1 Scope of first article tests. First article tests shall include all tests in the approved test procedures to determine that the mounting meets all the requirements of this specification and the contract. First article tests shall include environmental tests in accordance with the procedures of MIL-T-5422 including temperature shock, a random vibration test as specified in 4.4.4, and an electromagnetic compatibility test in accordance with MIL-STD-461 and MIL-STD-462, as modified in 4.4.3. The first article test may also include a reliability qualification test.

4.4.2 First article approval. Approval of the first article sample will be by the procuring activity upon completion of all tests and the first article test report being prepared for the procuring activity.

4.4.3 Electromagnetic interference tests. Compliance with the requirements of 3.4.4.3 and subparagraphs shall be demonstrated by tests. These tests shall be performed in accordance with MIL-STD-462, with Notice 2 as modified herein. These tests shall be performed on the mount configured as a system with RT-1250A/ARC, F-1556/ARC, and AM-7177A/ARC installed.

4.4.3.1 EMI test plan. The contractor shall perform EMI tests in accordance with an EMI Test Plan. The Test Plan shall describe all EMI tests required to demonstrate compliance with the requirements of 3.3.6, and shall address all anomalies, inconsistencies, and omissions (if any). The Test Plan shall detail a combination of operating modes and frequencies to be tested.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

The combination shall represent all operating modes of the receiver-transmitter and at least three frequencies as specified by 4.4.3.2. The Test Plan shall be approved by the procuring activity prior to the commencement of EMI testing.

4.4.3.2 Ground plane interference. The contractor shall prepare a procedure to demonstrate that the mounting complies with the requirements of 3.4.4.3.4. The procedure shall be included in the EMI Test Plan.

4.4.3.3 Conducted susceptibility test, interconnecting and signal leads. In addition to the requirements of MIL-STD-461 the following RF susceptibility test shall be conducted. No malfunction, undesirable response, or change in indication beyond the tolerance given in the equipment specification or approval test plan shall be produced in any equipment when the RF signal levels listed in Table VII are coupled into the interconnecting wiring.

TABLE VII. Susceptibility test signals

Frequency	Required Signal Levels In One Turn Loop
2 to 30 MHz	100 MV RMS

The RF signal shall be modulated 80 percent with 400 Hz and with that frequency and the type of modulation to which the test sample is most susceptible. This requirement applies to all interconnecting wires or cables. Between component parts of subsystems, and to wires and cables connected to other equipment. The RF signal shall be measured in the one-turn loop with an RF voltmeter as shown on Figure 2. The signal generator shall have an output impedance of 50 ohms or less and a maximum open-circuit voltage of not less than 3 volts rms. The test procedure shall be as follows:

a. With the current probe clamped around the wire bundles under test, set the signal generator for maximum output and slowly scan from 2 MHz to 30 MHz.

b. At those frequencies where a response is noted, move the current probe along the wire for maximum indication. Reduce the signal generator output and determine the threshold of susceptibility of the wire bundle. When a response is found on an interconnecting wire bundle, probe each wire in the bundle separately to determine the susceptible wire(s).

c. Record and include in the test report the threshold of susceptibility data (frequency, amplitude, and description of responses) obtained in (b) above. Also include in the test report the corrective action required for each wire that does not meet the required level.

Wire bundles may be tested in sections if the current probe will not fit around the complete wire bundles. Chassis or circuit grounds not normally routed with the interconnecting wiring shall be measured individually and shall not be included in the wire bundle under test. Power ground return leads shall not be placed in the probe.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:51Z
Check the source to verify that this is the currentversion before use.

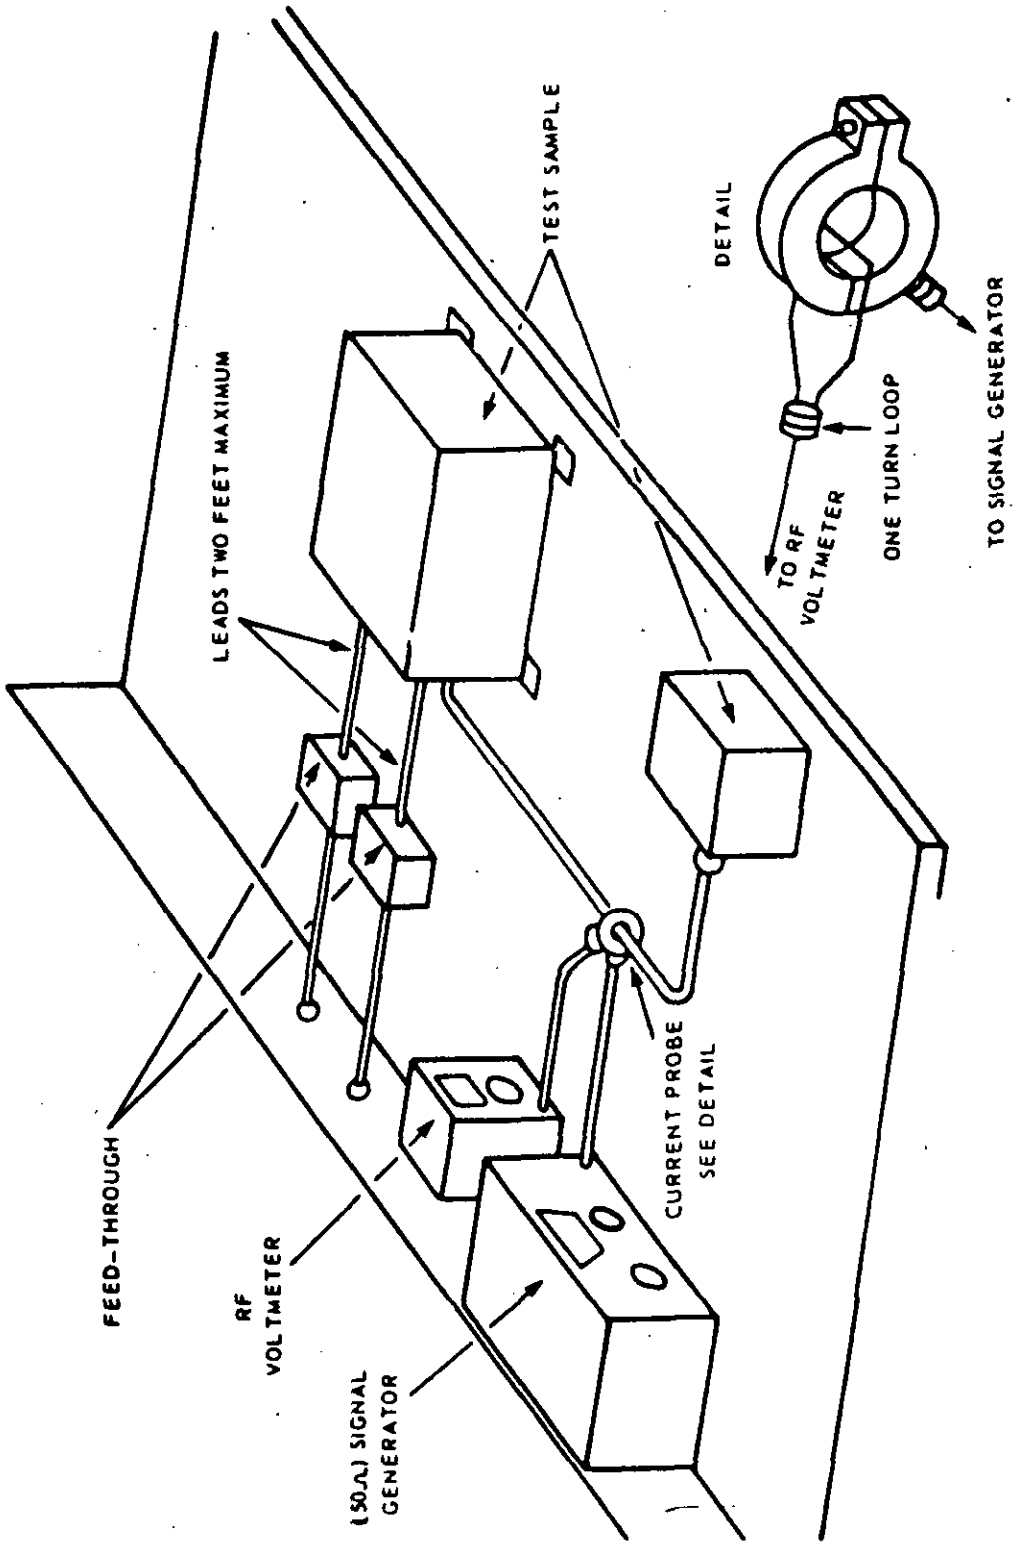


FIGURE 2. Conducted susceptibility test set up

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

4.4.3.4 CE03 test procedure. The CE03 requirement of 3.4.4.3.1 shall be demonstrated using MIL-STD-462 Notice 2 Test Method CE03 for all power leads and MIL-STD-462 Notice 2 Test Method CE04 for all control and signal leads tested.

4.4.3.5 CE07 test procedure. The supplier shall prepare a test to demonstrate compliance with the CE07 requirement of 3.4.4.3.1. This test shall be included as a part of the EMI Test Plan.


4.4.4 Random vibration test. A random vibration test shall be conducted in accordance with 4.4.4.1 through 4.4.4.4.

4.4.4.1 Test item operation. The test item shall be operated during application of random vibration so that the functional effects caused by these tests may be evaluated. The test item shall meet performance requirements, as specified, while the functional vibration levels are being applied and immediately preceding and following the application of the endurance levels.

4.4.4.2 Mounting techniques. The test item shall be mounted directly to the vibration exciter or transition table by means of a MT-6330/ARC mount with an F-1556/ARC filter, AM-7177A/ARC amplifier, and RT-1250A/ARC receiver-transmitter in the normaal system mounting configuration. Precautions shall be taken in the establishment of mechanical interfaces to minimize the introduction of extraneous responses in the test setup. The test load shall be distributed as uniformly as possible on the vibration exciter table in order to minimize effects of unbalanced loads. The input control sensing device(s) shall be rigidly attached to the vibration table, or fixture if used, as near as possible to the attachment point(s) of the test item. Additional vibration sensors shall be located in or on the test item to determine resonant frequencies and amplification factors. Locations to be selected should include main structure, printed circuit boards, large components, and modules, where practicable. The sensor sizes and weights shall be limited so that their effect on the dynamic responses being measured is minimal. The mounting shall be tested in normal system configuration with other WRA's or equivalent weights.

4.4.4.3 Performance of test. The individual equipment test item shall be subjected to broadband random vibration excitation with the power spectral density envelope shown on Figure 3. The test item shall be attached to the vibration exciter according to 4.4.4.2. Vibration shall be applied sequentially along each of the three orthogonal axes of the test item. Two test levels are required, a functional level and an endurance level. For each axis, one half of the functional test shall be conducted first, then the endurance test, followed by the second half of the functional test. The equipment shall perform according to the operating requirements as specified in 4.4.4.1. The acceleration power spectral densit (g^2/Hz) of applied vibration, as measured on the test fixture at mounting points of the test item, shall be as specified in 4.4.4.4. Test times shall, for each axis, be one hour each for functional and endurance levels. The instantaneous random vibration acceleration peaks may be limited to three times the rms acceleration level. The power spectral density of the test control signal

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:51Z
Check the source to verify that this is the currentversion before use.

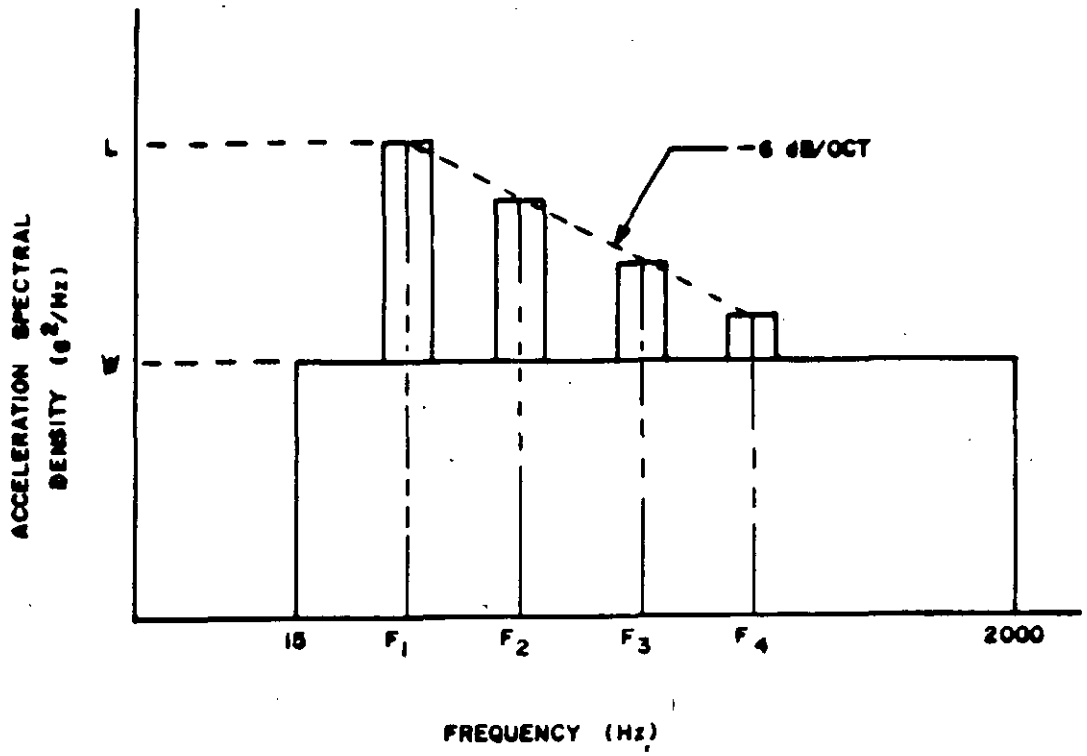

L SEE 4.4.4.4
W SEE 4.4.4.4
F_1 = 68 Hz, $F_2 = 2F_1$, $F_3 = 3F_1$, $F_4 = 4F_1$
BANDWIDTH AT EACH F_1 = ± 5% F_1
OVERALL LEVEL = 2.45 grms

FIGURE 3. Random vibration envelope (see 4.4.4.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

shall not deviate from the specified requirements by more than +100, -30 percent (+3, -1.5 dB) below 500 Hz and +100, -50 percent (+3 dB) between 500 Hz and 2,000 Hz except that deviations as large as +300, -75 percent (+6 dB) shall be allowed over a cumulative bandwidth of 100 Hz maximum, between 500 and 2,000 Hz. Tolerance levels in terms of dB are specified as:

$$dB = 10 \text{ Log}_{10} \frac{W1}{W0}$$

Where W1 = measured acceleration power spectral density in g^2/Hz units, the term W0 defines the specified level in g^2/Hz units. Confirmation of these tolerances shall be made by use of an analysis system providing statistical accuracies corresponding to a bandwidth-time constant product, BT=50 minimum. Specific analyzer characteristics shall be as specified below or equivalent, subject to the BT=50, minimum limitation.

a. On-line, contiguous mounting, equalization/analysis system having a bandwidth as follows:

B=25 Hz, maximum between 20 and 200 Hz
B=50 Hz, maximum between 200 and 1,000 Hz
B=100 Hz, maximum between 1,000 and 2,000 Hz

b. Swept frequency analysis systems characterized as follows:

(1) Constant bandwidth analyzer.

(a) Filter bandwidth as follows:

B=25 Hz, maximum between 20 to 200 Hz
B=50 Hz, maximum between 200 to 1,000 Hz
B=100 Hz, maximum between 1,000 to 2,000 Hz

(b) Analyzer averaging time =T= 2 RC = 1 second, where T= true averaging time constant

(c) Analysis sweep rate (linear) =

$$R = \frac{B}{4RC} \text{ or } \frac{B^2}{8} \text{ (Hz/second)}$$

(2) Constant percentage bandwidth analyzer

(a) Mounting bandwidth - pfc=one-tenth of center frequency maximum (0.1 fc) where p=percentage and fc=analyzer center frequency

(b) Analyzer average time = T = $\frac{50}{pfc}$, minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

(c) Analysis sweep rate (logarithmic) =

$$T = \frac{pfc}{4RC} \text{ or } \frac{(pfc)^2}{8}$$

(Hz/second), maximum, whichever is smaller

Digital power spectral density analysis employing quantization techniques providing accuracies corresponding to the above approach.

4.4.4.3.1 Worst case axis. During the vibration testing, data shall be obtained to identify the worst case axis for purpose of vibration screening tests on production equipments.

4.4.4.4 Test levels. For the purpose of the random vibration test, the following test levels shall be used:

a. Functional Level-W = $0.01g^2$/Hz, L = $0.3g^2$/Hz (4.9g rms minimum)

b. Endurance Level-W = $0.2g^2$/Hz, L = $0.6g^2$/Hz (6.9g rms minimum)


4.4.5 Reliability qualification test. A reliability qualification test may be included in the first article tests. A maximum of six mountings shall be tested in accordance with MIL-STD-781 using the reliability qualification test - mission profile in this specification. (See Figures 4 and 5.) Each mounting shall have successfully completed the normal burn-in and all equipment test (AET) prior to the start of RQT. The mission profile test cycle should begin at the "12 hour" point which is a cold day ground stabilization (-54°C) prior to ground operation and flight in a cold day. Random vibration should be applied with RT-1250A, filter, and amplifier mounted on the MT-6330/ARC or equivalent weights. The accept-reject criteria imposed shall be those of MIL-STD-781, Test Plan IIIC, with the upper test MTBF specified in 3.4.1.3.

4.4.6 Maintainability demonstration. A maintainability demonstration for intermediate level requirements shall be conducted in accordance with MIL-STD-2084 and MIL-STD-471. Test Method 1, Test Plan B of MIL-STD-471, shall be used.

4.4.7 Production mountings. Mountings supplied under the contract shall in all respects, including design, construction, workmanship, performance and quality, be capable of successfully passing the same tests as specified herein.

4.5 Quality conformance inspection. The contractor shall furnish all samples and shall be responsible for accomplishing the quality conformance tests. All inspection and testing may be under the supervision of the procuring activity representative. The contractor shall retain test data showing quantitative results for all quality conformance tests. Such tests shall be signed or stamped by an authorized representative of the contractor or laboratory, as applicable. Acceptance or approval of material during the course of manufacture shall not be construed as a guarantee of the acceptance of the finished product. Quality conformance tests shall consist of the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

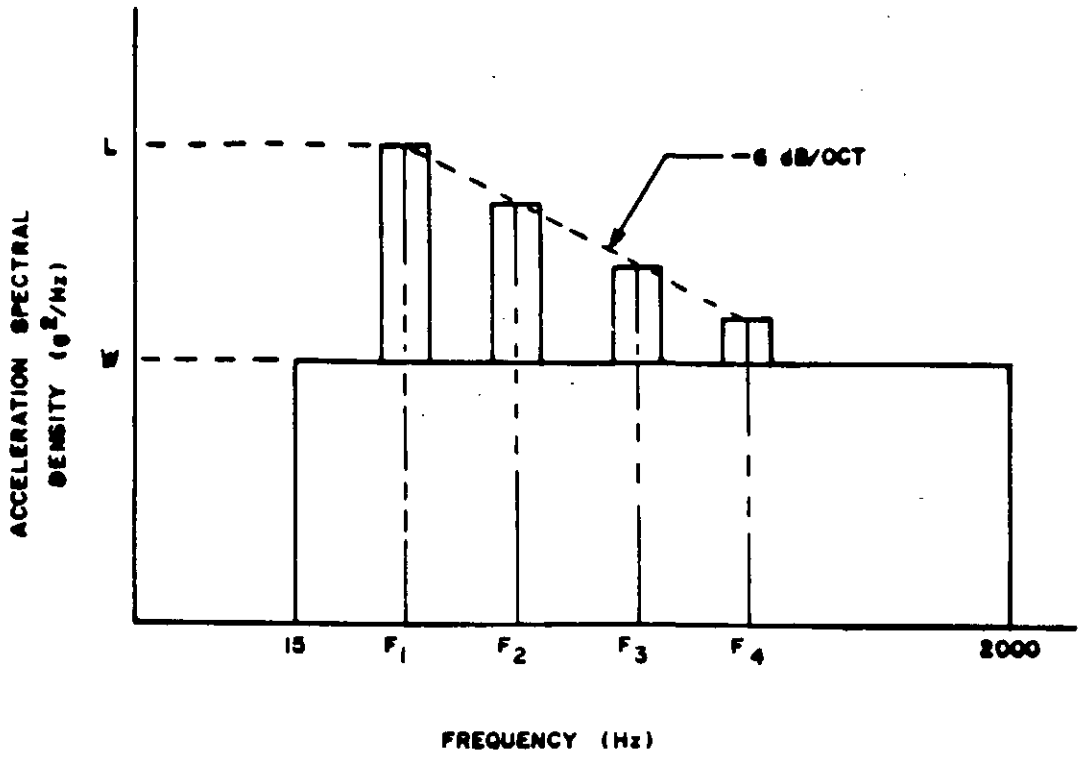

L = .075 g^2/Hz

W = .0025 g^2/Hz

F_1 = 68 Hz, $F_2 = 2F_1$, $F_3 = 3F_1$, $F_4 = 4F_1$

BANDWIDTH AT EACH F1 = ± 5% F1

OVERALL LEVEL = 2.45 grms

FIGURE 4. RQT vibration profile (see 4.4.5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

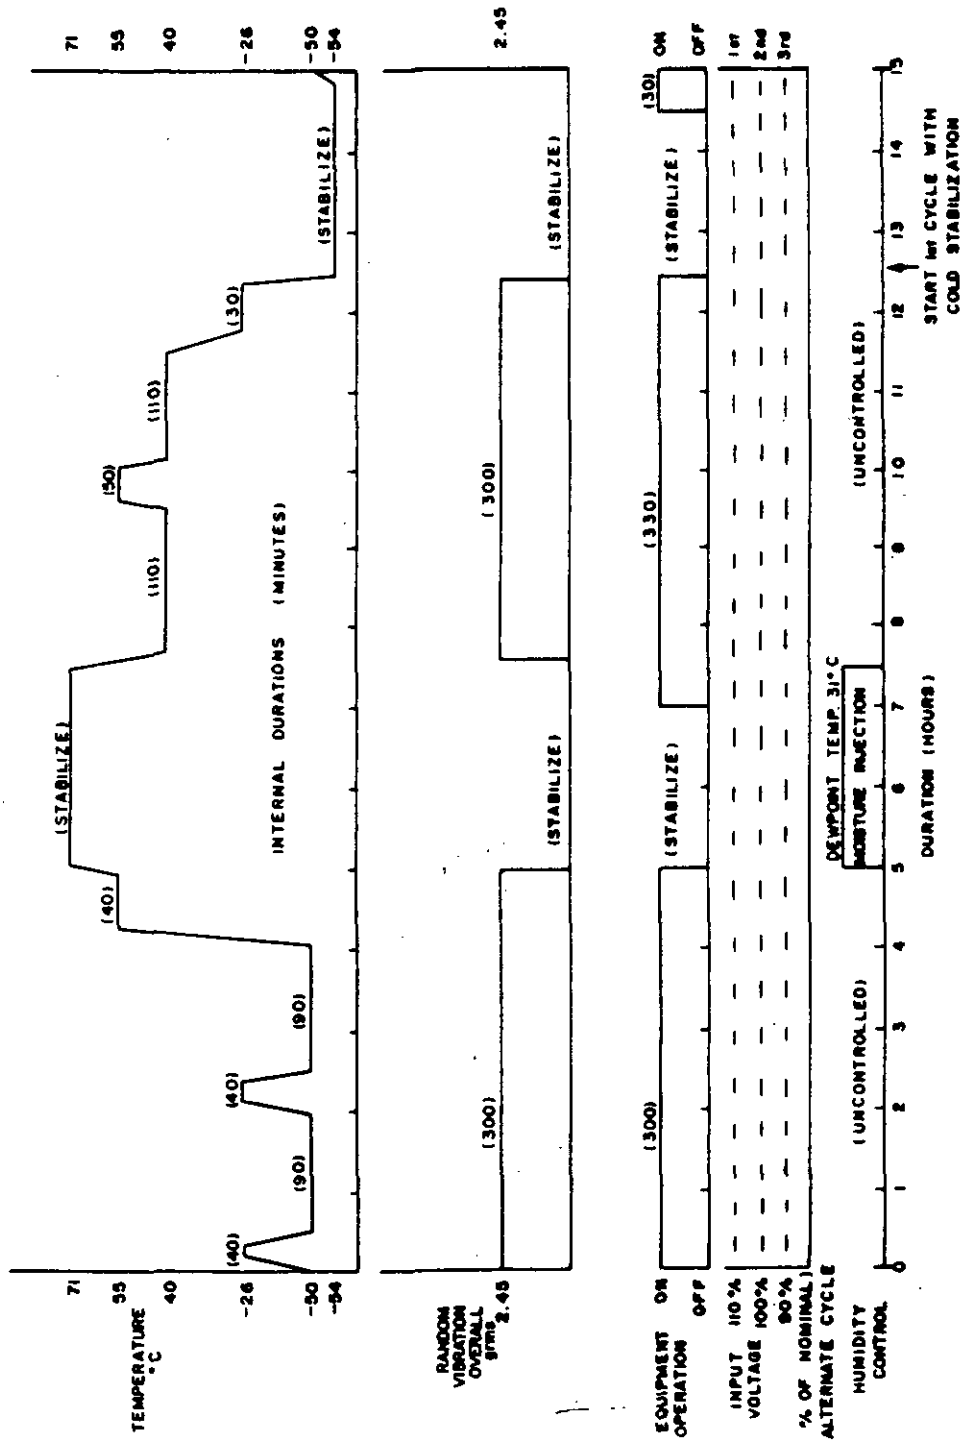


FIGURE 5. Environmental cycle (ref. 4.4.5)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:51Z
Check the source to verify that this is the current version before use.

a. Individual tests (see 4.5.1)

b. Manufacturing screening (see 4.5.2)

c. Sampling tests (see 4.5.3)

d. Reliability assurance tests (see 4.5.4)

e. Special tests (see 4.5.5)

4.5.1 Individual tests. Each mounting submitted for acceptance shall be subjected to the individual tests. The tests shall be adequate to determine compliance with the requirements of materials, workmanship, operational adequacy and reliability. As a minimum, each mounting accepted shall have passed the following tests:

a. Examination of product (see 4.5.1.1)

b. Operational test (see 4.5.1.2)

4.5.1.1 Examination of product. Each mounting shall be examined carefully to determine that the material and workmanship requirements have been met.

4.5.1.2 Operational test. Each mounting shall be operated long enough to permit the equipment temperature to stabilize and to check sufficient characteristics and record data to assure specified equipment operation.

4.5.2 Manufacturing screening. The contractor shall subject each mounting to manufacturing screening prior to undergoing sample tests or reliability assurance tests. Manufacturing screening shall consist of random vibration and temperature cycling. An additional screening period may be used at the option of the contractor. If an additional screening period is to be used, the details thereof shall be included in the approved test procedures and shall be the same for all equipment, including spare units.

4.5.2.1 Random vibration. Prior to conducting temperature cycling, each mounting shall have completed a 10-minute failure-free vibration screen at 3.3g rms. Power spectral density shall cover 20-2000 Hertz. Pseudo-random vibration methods are acceptable. The mounting shall be hard mounted without vibration isolators. Vibration envelope is shown on Figure 6.

4.5.2.2 Temperature cycling. Each mounting shall undergo 25 temperature cycles between -54°C and 55°C. The rate of temperature change between extremes shall be at least 5°C per minute. When the mounting temperature has stabilized within 5°C of either temperature extreme, the mounting shall be soaked. Hot soak at +55°C shall be two hours; cold soak duration at -54°C shall be one hour. At the conclusion of each soak, the next temperature ramp shall begin. The mounting shall be energized throughout temperature cycling except during the cooldown period from +5 C to -54 C and during the 60 minute soak at -54 C. In addition, the mounting shall be turned off for one minute at points 30, 60, and 90 minutes into each hot soak period. Mounting performance shall be periodically checked during each cycle and repairs shall be made to correct failures. The last five consecutive temperature cycles

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

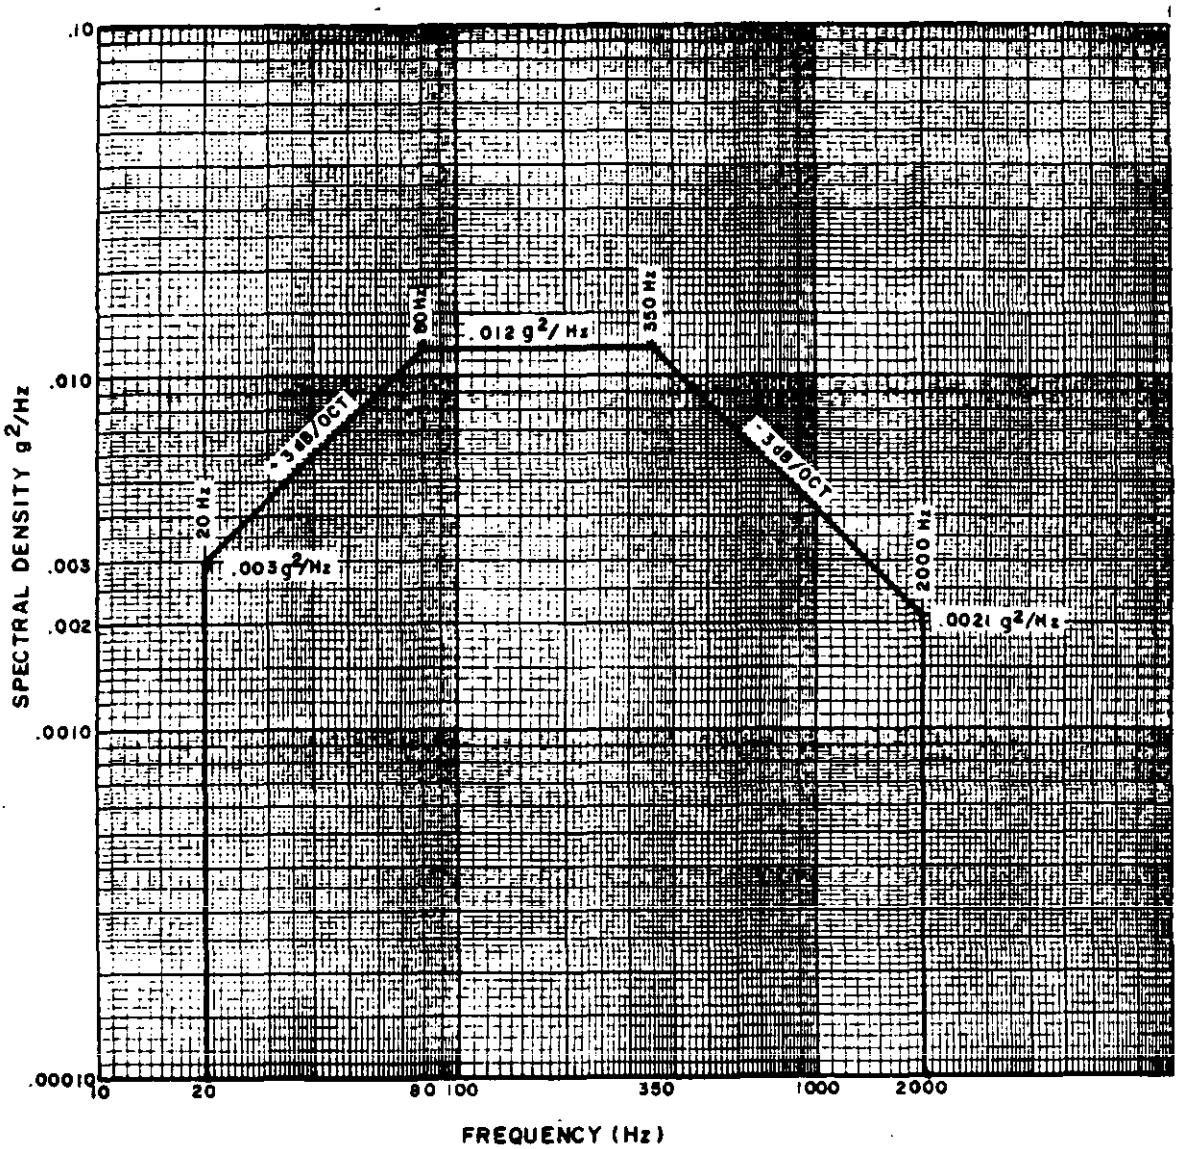


FIGURE 6. Manufacturing screening random vibration envelope (see 4.5.2.1)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:51Z
Check the source to verify that this is the current version before use.

shall be failure free. One temperature cycle is defined as: operation at +55°C for the 120 minute hot soak (including three minutes "off"), non-operational cooldown to -54°C, 60 minute non-operational cold soak at -54°C, operational temperature increase to +55°C.

4.5.3 Sampling tests. Mountings shall be subjected to sampling tests. Mountings selected for sampling tests shall first have passed the individual tests. Mountings will be selected for sampling tests by the government inspector in accordance with Table VIII.

TABLE VIII. Sampling test sample selection

Quantity of equipments offered for acceptance	Quantity to be selected for sampling test
First 10	1
Next 50	1
Next 75	1
Next 100	1
	1 for each additional 200 or fraction thereof

Sampling tests are not required when reliability assurance tests are conducted.

4.5.3.1 Scope of sampling tests. As a minimum, each mounting selected for sampling tests shall be subjected to the following tests:

a. Complete operational test at ambient room conditions, making all necessary measurements to assure that all applicable specification requirements have been met.

b. Operational test at certain environmental conditions. The conditions may vary for each mounting tested and should be based on results of the first article, individual and special tests.

c. Reliability sample test specified in 4.5.4.2. Each failure shall be analyzed as to cause and remedial action necessary to reduce the possibility of its recurring in future equipment taken.

4.5.4 Reliability assurance tests. A reliability assurance test shall be conducted using MIL-STD-781. Classification of failure shall be in accordance with 4.5.7.

4.5.4.1 All equipment test. Each mounting shall be tested as specified in MIL-STD-781 and modified herein. Environmental cycling shall be as shown on Figure 5. No vibration is required. Each mounting shall have successfully completed manufacturing screening as specified in 4.5.2 prior to the start of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

the test. Each equipment (WRA) shall be tested for 125 equipment operating hours with the last two cycles failure free. For determining MTBF compliance each equipment shall be tested separately as opposed to testing as an equipment system. The test MTBF shall be as listed in 3.4.1.3. To determine whether the MTBF is being met at any time during the contract the operating time and the failures therein (not counting any burn-in failures or burn-in operating time) shall be totaled and the results compared with the reject line of Test Plan XVIIIC of MIL-STD-781. (Extend the line as necessary to accommodate the data.) These totals shall accumulate so that at any time the experience from the beginning of the contract is included. At any time that the current totals of test hours and test failures plotted on Test Plan XVIIIC curves show a reject situation, the procuring activity shall be notified. The procuring activity reserves the right to stop the acceptance of the mounting at any time that a reject situation exists pending a review of the contractors efforts to improve the equipment, the equipment parts, or the equipment workmanship, so that the entire compilation will show other than a reject decision. The mounting shall have the other WRA's or equivalent weights mounted.

4.5.4.2 Reliability sample test. When specified in the contract (see 6.2.1) a monthly sample test of equipments shall replace the reliability test of 4.5.4.1. Units shall be tested as specified in MIL-STD-781 as modified herein. Temperature cycling and power on/off cycling are required and shall be as shown on Figure 5. Each sample equipment shall be tested for 256 hours with the last two cycles failure free. For determining MTBF compliance each designated equipment (WRA) shall be tested separately as opposed to testing as an equipment system. The MTBF for each designated equipment shall be those listed in 3.4.1.3. To determine whether the MTBF is being met at any time during the contract the operating test hours and the failures therein (not counting any burn-in failures or burn-in operating time) shall be totaled and the results compared with the reject line of Test Plan IIIC of MIL-STD-781. (Extend the line as necessary to accommodate the data.) These totals shall accumulate so that at any one time the experience from the beginning of the contract is included. The sample size shall be based on the production quantity of that equipment for the month as specified in Table IX.

TABLE IX. Reliability test sample size

Production Quantity	Sample Size
2 - 5	1
6 - 25	2
26 - 50	3
51 - 100	4

4.5.4.3 Test details. Test details such as the performance criteria to be measured, special failure criteria, preventive maintenance to be allowed during the test, shall be part of the test procedures to be prepared by the contractor prior to the beginning of the reliability assurance tests.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:51Z
Check the source to verify that this is the current version before use.

4.5.5 Special tests. When specified in the contract, special tests shall be conducted for the purpose of checking the effect of any design or material change on the performance of the mounting and to assure quality control (see 6.2.1). The mounting selected for special tests may be selected from mounting previously subjected to the sampling or reliability tests.

4.5.5.1 Special test schedule. Selection of mountings for special tests shall be made as follows:

a. On an early equipment after an engineering or material change.

b. Whenever failure reports or other information indicate that additional tests are required. (This will be determined by the procuring activity.)

4.5.5.2 Scope of special tests. Special tests shall consist of such tests as authorized by the procuring activity. Test procedures previously approved for the first article tests shall be used where applicable. When not applicable, the contractor shall prepare a test procedure for the procuring activity for acceptance prior to conducting the tests.

4.5.6 Equipment failure. Should a failure occur during either the sampling, reliability qualification, reliability assurance or special tests, the following action shall be taken:

a. Determine the cause of failure and the equipment BIT performance in detecting and isolating the failure.

b. Determine if the failure is an isolated case or design defect or pattern failure.

c. Prepare proposed corrective action intended to reduce the possibility of the same component or BIT failure(s) occurring in future tests or documented justification where no corrective action is proposed.

d. Where practical, include a test in the individual test to check all mountings for this requirement until assurance is obtained that the defect has been corrected.

4.5.7 Failure classification. All incidents occurring during reliability assurance tests shall be classified and reported as either relevant or non-relevant in accordance with MIL-STD-2074 and MIL-STD-781. Only those incidents classified as relevant failures shall be accountable for making an accept/reject decision.

4.5.7.1 Relevant failures. All test incidents shall be considered as relevant failures unless determined to be non-relevant in accordance with the criteria of MIL-STD-2074.

4.5.7.2 Non-relevant failures. Although non-relevant failures are not used for reliability assurance test accept/reject decisions, all test article incidents and equipment failures shall be recorded and reported.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

4.6 Test procedures. The procedures used for conducting all tests required by Section 4 shall be prepared by the contractor. The right is reserved by the procuring activity or the government representative to modify the tests or require any additional tests deemed necessary to determine compliance with the requirements of the specification or the contract (see 6.2.1). MIL-T-18303 shall be used as a guide for preparation of test procedures.

4.7 Testing of spares and repair parts. Equipment delivered as spare or repair parts shall undergo acceptance tests to ensure that the items meet performance and reliability requirements not less than those imposed in production.

4.7.1 Weapons replaceable assemblies. All items to be delivered as spares at the weapons replaceable assembly (WRA) or higher level shall receive performance, manufacturing screening and reliability assurance tests commensurate with that afforded the original production equipment.

4.7.2 Shop replaceable assemblies. All items to be delivered as spares at the shop replaceable assembly (SRA) or sub-SRA level shall receive functional checks and manufacturing screening under conditions and for a duration commensurate with that imposed on that assembly in the original production.

4.7.3 Repair parts. All electronic component parts to be delivered as repair parts shall receive functional and screening tests equivalent to those imposed for the nearest military standard part.

4.7.4 Test details. The details of acceptance and screening tests to be performed on SRA's and WRA's supplied as spare or repair parts shall be incorporated into item specifications, drawings and test procedure.

4.8 Presubmission testing. No item, part, or complete equipment shall be submitted until it has been previously tested by the manufacturer and found to comply, with all applicable requirements of this specification and the contract.

5. PACKAGING

5.1 General. All major units and parts of the mounting shall be preserved, packaged, packed, and marked in accordance with MIL-E-17555 for the level of shipment specified in the contract or purchase order (see 6.2.1).

5.2 Marking. Shipments shall be marked in accordance with requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The mounting is part of a combination of units that can be used to meet the prime and back-up UHF voice plus prime UHF/VHF/AM/FM voice and data communication requirements in any tactical aircraft.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification

b. If a first article inspection is required (see 3.2)

c. If samples of non-standard parts and materials are not required (see 3.3.5)

d. If reliability program is not to be established by contractor (see 3.4.1)

e. Test procedure modifications or additional tests, if required (see 4.4.5, 4.6)

f. Selection of applicable levels of packaging and packing (see 5.1)

g. Whether all Equipment Test or Reliability Sample Test is required. (See 4.5.4.1, 4.5.4.2)

6.2.2 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DOD FAR Supplement, Part 27, Sub-Part 27.410-6 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification are cited in the following paragraphs:

Paragraph	Data requirement title	Applicable DID no.
3.3.2	Engineering Change Proposals (ECPs) and Requests for Deviations and Waivers (Long Form)	DI-E-2037
3.3.3	Program Parts Selection List (PPSL)	DI-MISC-80072
3.4.1.2	Part Approval Request	DI-MISC-80071
3.4.8	Request, Assignment of Nomenclature	UDI-E-21582
	Request for Confirmation of Nomenclature	DI-CMAN-80194
	Request for Assignment of Serial Number and Serial Number Prefix Letters	DI-CMAN-80195
	Request for Approval of Identification Plate Drawings	DI-CMAN-80196

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

Paragraph	Data requirement title	Applicable DID no.
4.4, 4.6	First Article Inspection Procedure	DI-T-4901
4.4.2	First Article Inspection Report	DI-T-4902
4.4.3.1, 4.4.3.2, 4.4.3.5	Electromagnetic Interference Test Plan	DI-EMCS-80201
4.4.3.3	Electromagnetic Interference Test Report	DI-EMCS-80200
4.5.4.1, 4.5.4.2	Reliability Test Report	DI-RELI-80252
4.5.4.3	Reliability Tests Procedures	DI-RELI-80251
4.5.5.2	Production/Acceptance Inspection Procedures	DI-T-4903
4.5.6c	Plan, Failure Data Collection, Analysis and Corrective Action	UDI-T-23719
4.5.7.2	Failed Item Analysis Report	DI-RELI-80253
4.7.4	Drawings, Engineering Drawings and Associated Lists	DI-E-7031

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5010.12L, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Options. The following options are available:

a. An additional manufacturing screening period is allowable at the option of the contractor. (See 4.5.2)

b. Acceptance of equipment may be stopped any time a reject situation exists in the all equipment test. This is at the option of the procuring activity. (See 4.5.4.2)

6.4 First article. When a first article inspection is required, the item should be a first article sample. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirements for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

6.5 Associated equipment. The mounting shall operate with the associated equipment listed in Table X which should not be supplied as part of this equipment:

TABLE X. Associated equipment

Item	Equipment Designation	Military Specification
Receiver-Transmitter	RT-1250A/ARC	MIL-R-85664
Filter, Radio Frequency	F-1556/ARC	MIL-F-85675
Amplifier, Radio Frequency	AM-7177A/ARC	MIL-A-85672
Control, Radio Set	C-10319A/ARC C-10776A/ARC C-11131/ARC	MIL-C-85666 MIL-C-85666 MIL-C-85666
Antenna	AS-3191A/A AS-3238/A	MIL-A-85670 AS-4580(AV)
Switch	SA-521A/A with Selector	MIL-S-25879

6.6 Subject term (key word) listing.
AN/ARC-182 (v) Radio Set
Mount, Remote
Pulse Blanker
Ultra High Frequency (UHF)
Very High Frequency (VHF)

Preparing Activity:
Navy AS

(Project 5821-N195)

U.S. GOVERNMENT PRINTING OFFICE: 1987 - 704-036/74239

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:51Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Air Systems Command (AIR 51122)
Washington, DC 20361

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:51Z
Check the source to verify that this is the current version before use.