GENERATOR, THERMAL NOISE SG-419( )/U

1. SCOPE

1.1 Scope. - This specification covers one type of broadband, high-powered, self-contained, random noise generator designated Generator, Thermal Noise SG-419( )/U. (See 6.1 and 6.5.)

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

UU-T-111	Tape, Paper, Gummed (Sealing and Securing).
PPP-B-636	Box, Fiberboard.
PPP-F-320	Fiberboard. Sheet, Stock and Cut Shapes.
PPP-T-76	Tape, Pressure-Sensitive Adhesive Paper, Water Resistant (for Carton Sealing).
PPP-T-97	Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	Preservation, Methods of.
MIL-B-117	Bags, Interior Packing.
MIL-B-131	Barrier Material, Water Vaporproof, Flexible.
MIL-D-3464	Desiccants, Activated, Bagged, Packaging Use and Static Dehumidification.
MIL-P-11268	Parts, Materials and Processes.
MIL-M-13231	Marking of Electronic Items.
MIL-F-14072	Finishes for Ground Signal Equipment.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.

MIL-STD-169	Extreme-Temperature Cycle.
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects.
MS-20003	Indicator, Humidity, Card, Three Spot, Impregnated Areas.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer. Both the title and number or symbol should be stipulated when requesting copies.)

3. REQUIREMENTS

3.1 Procurement model. - A procurement model of the equipment will be available for inspection by prospective bidders and will be lent to the contractor. Unless otherwise specified herein or in the invitation for bids, physical construction of the equipment shall conform to the model and the equipment shall incorporate all features of the model. (Note In case of conflict between specified performance characteristics for the equipment and the performance of the model, the specified performance characteristics govern.)

3.2 Preproduction samples. - The contractor shall furnish two preproduction samples for approval, if required by the invitation for bids and contract. (See 4.3.)

3.3 Parts, materials, and processes. - In addition to the requirements of this specification, the requirements of Specification MIL-P-11268, including the selection requirements therein, shall apply.

3.3.1 Cable assemblies. - Power and audio frequency cable and cord assemblies used for voltages up to and including 600 volts alternating-current (ac) or corresponding direct-current (dc) shall conform to all requirements of Specification MIL-C-3885.

3.3.2 Finish, protective. - Equipment shall be given protective finish in accordance with Specification MIL-F-14072. This includes finish of hardware, such as handles, hinges, screws, etc., and necessary touch-up after mounting. The final paint film on type I surfaces shall be final film E, semigloss, light-gray enamel, conforming to Specification MIL-F-14072.

3.3.3 Marking. -

3.3.3.1 General. - Marking shall conform to Specification MIL-M-13231, except that any group I, II, or III marking and any material and process for labels, as described in that specification, may be used for surfaces exposed to view during use or storage of the equipment. (See 4.4.)

3.3.3.2 Visibility. - Wherever practicable, parts shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.

3.3.3.3 Serial numbers. -Each Generator, Thermal Noise SG-419( )/U shall be serial numbered.

3.4 Preconditioning. - The equipment shall be capable of meeting the requirements herein, without subsequent processing. after subjection to the bounce preconditioning of 4.6. (Also see 4.5.)

3.5 Service conditions. - The equipment shall meet the service conditions specified in 3.5.1 through 3.5.3. Where a test is referenced, meeting the test shall be considered as compliance with the requirement.

3.5.1 Operation. - Continuous use for a period of five years, under the worldwide environmental conditions specified in 3.5.2 through 3.5.3, with a duty cycle of 8 hours on and 16 hours off and with no more than normal maintenance and replacement of parts. Where the contractor is required to make a selection of parts materials, processes, construction methods etc., he shall be guided by this requirement. Approval of the preproduction sample (see 3.2) shall be considered as compliance with this requirement.

3.5.2 Temperature. (See 4.7.1.)-

(a) Operating. Ambient temperature in the range of 0° F to + 125° F, exposure at the low temperature extreme not to exceed 72 hours and at the high temperature extreme not to exceed four hours, at any one time.

(b) Nonoperating Exposure in the range of -80°F to -160°F, exposure at the low temperature extreme not to exceed 24 hours, and at the high temperature extreme not to exceed four hours, at any one time.

3.5.3 Vibration and shock. -

3.5.3.1 Vibration, equipment. (see 4.7.2.) - The natural frequency of the equipment shall be between 25 and 35 cycles per second (cps). The amplitude of vibration of the mounted equipment shall not exceed three times the amplitude of the applied vibration at any frequency between 10 and 25, or between 35 and 55 cps.

3.5.3.2 Shock, bench-handling. - The equipment shall meet full specification performance and shall show no physical damage after subjection to the bench-handling test of 4.7.3.

3.6 Electrical requirements. -

3.6.1 Power source - The equipment shall operate from a 115 volt ± 10 percent 60 cps ± 5 percent single-phase ac source. (See 4.8.1.)

3.6.2 Filament voltage. - The filament voltage of the noise generating diode shall be regulated to ± 1 percent for a ± 10 percent change in line voltage. (See 4.8.2.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.

3.6.3 Power consumption. - The power consumption of the equipment shall be approximately 50 watts. (See 4.8.3.)

3.6.4 Frequency spectrum. - The equipment shall generate noise covering a frequency spectrum from 3 to 500 megacycles (mc). (See 4.8.4.)

3.6.5 Noise power output. - The equipment shall produce a power output of not less than 19 decibels referring to one milliwatt in 600 ohms (dbm), when controls are set for maximum signal output. (See 4.8.5.)

3.6.6 Output impedance. - The output impedance shall be 50 ohms, ± 10 percent, unbalanced. (See 4.8.6.)

3.6.7 Voltage standing wave ratio (VSWR). - The residual VSWR in the output impedance shall not exceed 1.2 over the entire frequency spectrum. (See 4.8.7.)

3.6.8 Accuracy. - The equipment shall have an accuracy of ±0.5 db over the entire frequency spectrum. (See 4.8.8.)

3.7 Interchangeability. - Like units, assemblies subassemblies and replaceable parts shall be physically and functionally interchangeable, without modification of such items or of the equipment. Individual items shall not be hand-picked for fit or performance however, matched pairs or sets when permitted, may be interchangeable as such. Reliance shall not be placed on any unspecified dimension, rating, characteristic, etc. (See 4.9.)

3.8 Final operation. - Just prior to packaging, the equipment shall be examined visually and electrically as specified in 4.10. The electrical examination shall be performed without any signal input.

3.9 Technical literature, tools and running spare parts. - Technical literature, tools, and running spare parts shall be furnished if specified in the contract. Running spare parts shall be identical to corresponding parts in the equipment furnished on order. (See 6.2.)

3.10 Workmanship. - The equipment shall be manufactured and assembled in accordance with the applicable portions of the following paragraphs:

In Specification MIL-P-11268

General requirements for plastic material and plastic parts.

Wiring and cabling.

Soldering.

Riveting.

Welding.

Cleaning

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor's responsibility. - The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. - Inspection shall be classified as follows

(a) Preproduction inspection. (See 4.3.)
(b) Acceptance inspection.
  (1) Acceptance inspection of equipment before preparation for delivery. (See 4.4 and 4.5.)
  (2) Acceptance inspection of preparation for delivery. (See 4.12.)

4.3 Preproduction inspection. - This inspection will be performed by the Government unless otherwise specified in the contract. It shall consist of the preproduction inspection specified in table I, the inspection specified in 4.4, and the inspection specified for group A and group B (see table II and 4.5.2, respectively). The preproduction inspection will normally be performed in this order (1) vibration and (2) shock, bench-handling, other preproduction inspection may precede, follow, or be interspersed between the foregoing.

Table I - Preproduction inspection

Inspection (For additional preproduction see 4.5.)	Req para	Test method para
Temperature - - - - - - -	3.5.2	4.7.1
Vibration, equipment - - -	3.5.3.1	4.7.2
Shock, bench-handling - -	3.5.3.2	4.7.3

4.4 Acceptance inspection covered by subsidiary documents. - The following shall be inspected under the applicable subsidiary documents as part of the acceptance inspection before preparation for delivery:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.

Item	Where required
Cable assemblies	3.3.1
Finish	3.3.2
Marking	3.3.3

4.5 Acceptance inspection of equipment before preparation for delivery.- The contractor, to demonstrate compliance with specified requirements, shall perform the inspection specified in 4.4, 4.5.1 and 4.5.2. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition, the Government, at its discretion, may perform all or any part of the specified inspection, to verify the contractor's compliance with specified requirements. (See 6.6.) Test equipment for Government verification inspection shall be made available by the contractor. Each unit, which will be subjected to group A and group B inspection shall be preconditioned after final assembly.

4.5.1 Group A inspection.- This inspection, including sampling, shall conform to table II and the ordinary inspection procedures of Standard MIL-STD-105. Group A inspection shall be performed in any order which is satisfactory to the Government, except that the operational inspection (see 4.10.) shall be last.

Table II. - Group A inspection

Inspection	Req para	Test method para	AQL Major	AQL Minor
Visual and mechanical	3.10	4.11	2.5 dphu*	10 dphu
Electrical				
Power source - - -	3.6.1	4.8.1	2.5 dphu combined	**
Filament voltage - -	3.6.2	4.8.2		
Power consumption -	3.6.3	4.8.3		
Frequency spectrum-	3.6.4	4.8.4		
Noise power output - -	3.6.5	4.8.5		
Output impedance - -	3.6.6	4.8.6		
Voltage standing wave ratio.	3.6.7	4.8.7		
Accuracy - - - - - -	3.6.8	4.8.8		
Final operation - - -	3.8	4.9	1 %	

* Defects per hundred units.
** All electrical defects are in major category.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.

4.5.2 Group B inspection. - This inspection shall consist of the inspection specified for interchangeability in 4.17 and shall conform to the special procedures for small-sample inspection of Standard MIL-STD-105. The AQL shall be 6.5 percent defective and the inspection level shall be L-7 for normal and tightened inspection and L-5 for reduced inspection. The reduced inspection procedure shall be R-1. Group B inspection shall normally be performed on inspection lots that have passed group A inspection and on samples selected from units that have been subjected to and met the group A inspection.

4.6 Bounce preconditioning. - The unit shall be placed in its normal operating position on the table of the Package Tester, Type 1000-SC, as made by the L.A.B. Corporation, Skaneateles, New York , or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a 1/32-inch-thick strip of material under one corner or edge of the unit to a distance of three inches as the unit bounces. The unit shall be subjected to this preconditioning for one minute. After bounce preconditioning, the unit shall not be repaired, alined, cleaned, or otherwise changed prior to subjection to acceptance inspection.

4.7 Service conditions. -

4.7.1 Temperature test. (See 3.5.2.)- The equipment shall be subjected to the temperature cycle shown on Standard MIL-STD-169. Performance shall be as follows.

Step	Paragraph	Measurement	Performance
1, 4, 9 and 10	4.8.2	Filament voltage	Full specification performance
	4.8.3	Power consumption	Full specification performance
	4.8.4	Frequency spectrum	Full specification performance
	4.8.5	Noise power output	Full specification performance

4.7.2 Vibration, equipment. (See 3.5.3.1.)- The equipment shall be tested as follows:

(a) Secure the equipment to a vibration table that can be controlled within 10 percent of the specified amplitude. The equipment shall be mounted in its normal operating position with connections (such as cable assemblies) in place.

(b) Vibrate the equipment successively, in three mutually perpendicular directions, over a frequency range of 10 to 55 cycles per second. The total excursion of the applied vibration shall be 0.030 inch, however, this may be reduced if necessary, to prevent excessive excursion at or near resonance provided that the excursion can still be measured.

(c) In each of the three directions, change the frequency in steps of one cycle per second and maintain each frequency for at least 10 seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.

(d) Measure amplitude of the applied vibration and the vibration of the equipment, for frequencies between 10 and 25 and between 35 and 55 cycles per second.

(e) Determine the natural frequency of the equipment; the frequency at which the ratio of the equipment vibration to the applied vibration is greatest shall be considered the natural frequency.

4.7.3 Shock, bench-handling. (See 3.5.3.2.)- The chassis-and-front panel assembly shall be removed from its enclosure and placed in a suitable position for servicing on a solid two-inch fir bench top. The test shall be performed as follows, in a manner simulating shocks liable to occur during servicing

(a) Tilt up the assembly through an angle of 30 degrees, using one edge of the assembly as an axis, and permit the assembly to drop back fully to the horizontal. Repeat, using other practicable edges of the same horizontal face as axes, for a total of four drops.

(b) Repeat (a), with the assembly resting on other faces, until it has been dropped for a total of four times on each face on which the assembly might practically be placed during servicing.

4.8 Electrical tests. -

4.8.1 Power source. -The equipment shall be operated from a power source of 105, 115 and 125 volts ac at 57, 60, and 63 cps single-phase, to determine conformance to 3.6.1. (This test may be performed in conjunction with 4.8.2.)

4.8.2 Filament voltage. - With the equipment operating in a normal manner, the input supply source shall be varied over the range specified in 3.6.1 and the filament voltage measured for compliance with the requirement of 3.6.2. (This test may be performed in conjunction with 4.8.1.)

4.8.3 Power consumption. - With the equipment operating, the power consumption shall be measured for conformance to 3.6.3.

4.8.4 Frequency spectrum. - The equipment output shall be coupled into a spectrum analyzer and the spectrum observed for conformance to 3.6.4.

4.8.5 Noise power output. - With the equipment operating from a 115 volt ± 10 percent, 60 cps ± 5 percent, single-phase ac source, the controls shall be turned to maximum positions and the panel meters shall be observed. The results shall conform to 3.6.5.

4.8.6 Output impedance. - The output impedance of the equipment shall be measured. The results shall conform to 3.6.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.

4.8.7 Voltage standing wave ratio. - With no power input to the equipment the residual VSWR in the output impedance shall be measured using the test setup specified in figure 1. Measurements shall be made with the signal generator set to deliver 3 mc, 30 mc, 100 mc, 250 mc, and 500 mc successively. The results shall conform to 3.6.7.

4.8.8 Accuracy. - With the equipment operating from a power source as specified in 3.6.1 the rectified input to the noise-generating diode shall be measured using a d-c milliammeter with an accuracy of ± 0.25 percent. Measurements shall be made at panel meter indications of 0, 2, 4, 6, 8, 10, 12, 14, 16 and 19 db. The noise figure shall be calculated by converting the current indications to db using one ma as a reference. The calculated values shall be compared to the panel meter indications. The results shall conform to 3.6.8.

4.9 Inspection for interchangeability. - The dimensions listed below shall be gaged or measured to determine conformance to the physical interchangeability requirement of 3.8. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

(a) External and internal dimensions of cases, covers, and insertable assemblies, when such dimensions affect mating of parts.

(b) Dimensions of cavities, when such dimensions affect insertion of items.

(c) Location of hinges and fasteners on separable parts or assemblies which must mate, such as cases, covers, and mountings.

(d) Location of connectors, locking pins, fasteners, slides, and mountings which receive mating parts of plug-in assemblies and major units, and location of the mating parts on the plug-in assembly or major unit.

(e) Size and form of special threads.

4.10 Final operational test. - Prior to packaging, the equipment shall be checked visually for damage, loose parts and completeness. All electrical circuits shall be checked for apparent malfunction. (See 3.8.)

4.11 Visual and mechanical inspection. - Equipment shall be examined for the defects listed in Standard MIL-STD-252.

4.12 Acceptance inspection of preparation for delivery. - Preparation for delivery shall be inspected in accordance with Specification MIL-P-116 to determine conformance to the requirements of section 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.

4.13 Rough handling test (preparation for delivery). - When rough handling test in accordance with Specification MIL-P-116 is required by the contract (see 6.2), the following functional tests shall be conducted to determine freedom from operational malfunction caused by the rough handling:

Noise power output as specified in 4.8.5
Accuracy as specified in 4.8.8

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. -

5.1.1 Level A. - Each Generator, Thermal Noise SG-419( )/U shall be packaged in accordance with Item 1 through 12 of figure 2 and table III.

5.1.2 Level C. - Each Generator Thermal Noise SG-419( )/U shall be packaged in accordance with Items 1 through 5 and 9 of figure 2 and table III, except the Method of packaging for Item 2 shall be Method III.

5.1.3 Package performance. - Packaging testing shall be performed in accordance with the requirements of Specification MIL-P-116. The rough handling test or the cyclic exposure test and the functional test will be performed only when invoked in the bid request or contract.

5.2 Packing. -

5.2.1 Level A. - Four each Generators, Thermal Noise SG-419( )/U shall be packed in accordance with Items 13 through 15 of figure 2 and table III.

5.2.2 Level B. - Four each Generators, Thermal Noise SG-419( )/U shall be packed in accordance with Items 13 and 14 of figure 2 and table III, except the Fiberboard Box shall be Type I, Class 1.

5.2.3 Level C. - Each Generator, Thermal Noise SG-419( )/U shall be packed in shipping containers of the type, size and kind commonly used for the purpose, in a manner that will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with the Rules or Regulations of the common carrier, applicable to the mode of transportation.

5.3 Marking. - Interior package and exterior shipping containers shall be marked in accordance with Military Standard MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.


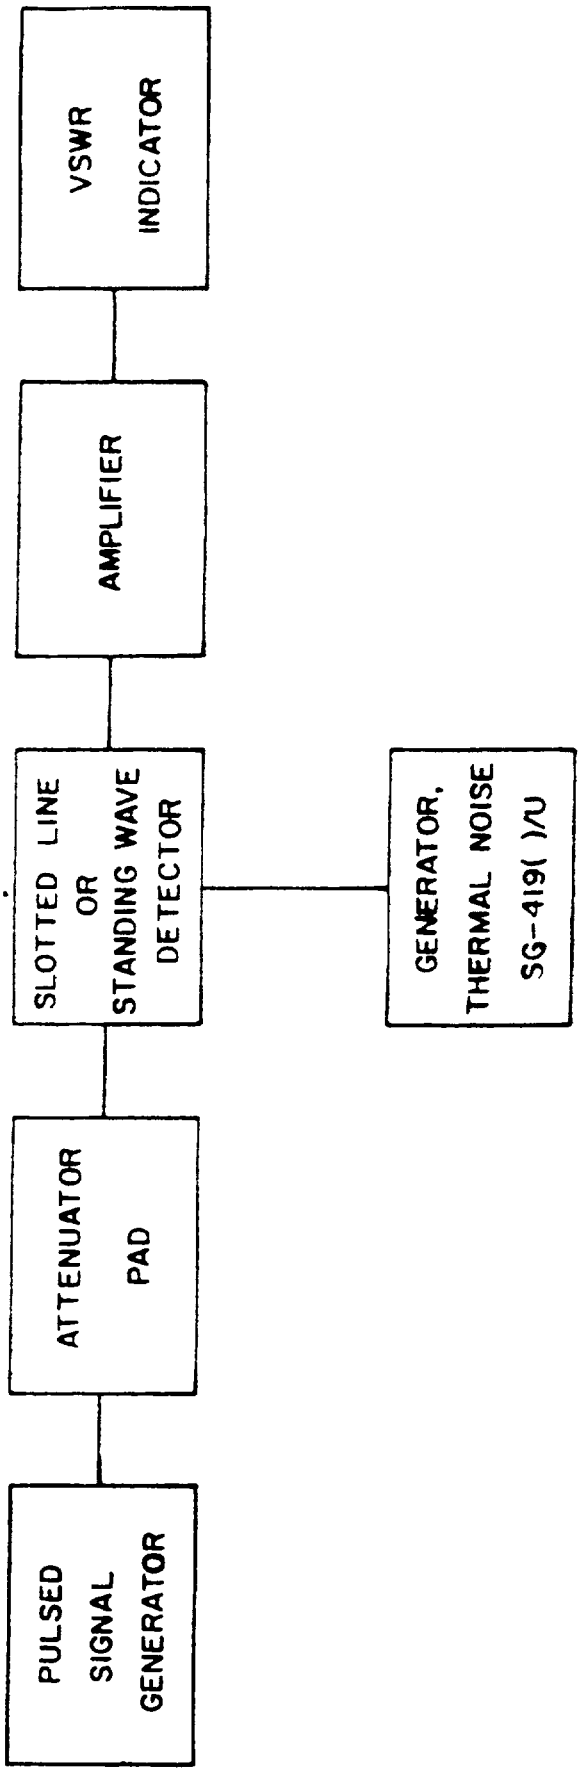


FIGURE 1 VSWR TEST SETUP

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.

GENERATOR THERMAL NOISE
SG-419()/U

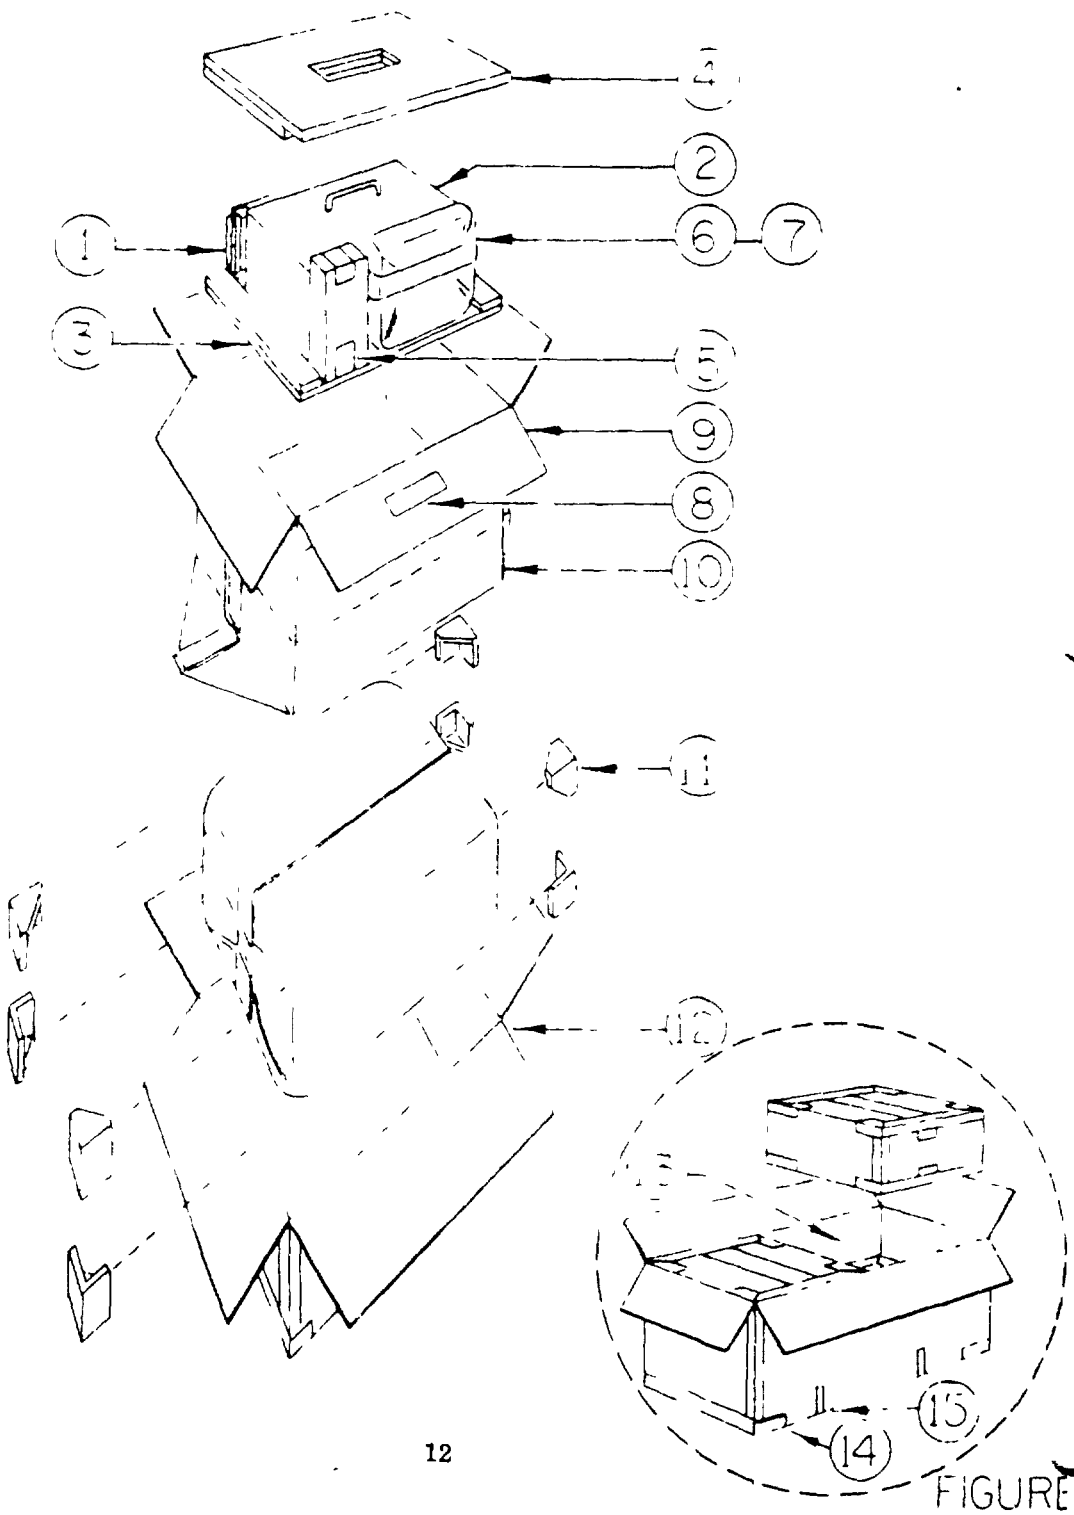

FIGURE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.

BILL OF MATERIAL
TABLE III

REF No.	ITEM Nomenclature	No. Reqd.	Method MIL-P-116	SIZE-INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	F	S
1	Technical Manual	2	IC-6										
	Bag, Barrier	2		13	10		MIL-B-117	II	d				
2	Generator Thermal Noise SG-419()/U	1	IIb	10-5/8	7-3/4	8-3/4	(Bare Weight 12 Lbs. 6 oz.)						
3	Pad, Bottom	1		12-7/8	9-3/4	1-3/4	PPP-F-320	CF	Dom		SW	200	
4	Pad, Top	1		12-7/8	9-3/4	1-3/4	PPP-F-320	CF	Dom		SW	200	
5	Box, Running Spares	1		7	3	1	PPP-B-636	1	1				OPF
6	Desiccant	24	(3 each-8 Units)				MIL-D-3464						
7	Kraft Paper		(Wrap Desiccant in Kraft Paper)										
8	Indicator Card	1					MS-20003						
9	Box, Fiber	1		12-7 8	9-3/4	9-1/2	PPP-B-636	1	1				RSC
	Tape, Gummed	2		17	3		UU-T-111		1				
10	Bag, Barrier	1		29	22-1/2		MIL-B-131		1				
11	Corner Pads, Top and Bottom	8		4	4	1/2	PPP-F-320	CF		SW	W6		
12	Box, Fiber	1		14-1/2	11	11	PPP-B-636	1	2		W5	C	RSC
	Tape, Pressure-Sensitive	2		19	3		PPP-T-76						
13	Generator, Thermal Noise SG-419( )/U	4											
14	Box Fiber	1		29	23	11-1/2	PPP-B-636	1	2		W5	C	RSC
15	Tape, Filament	4		33	1		PPP-T-97	III					

Lev. A - PACKED WEIGHT 4 Units - 62 lbs.
Lev. A - PACKED VOLUME 4 Units - 4.89 Cu. Ft.

T - Type V-Variety F-Flute
C - Class G-Grade S-Style

SA-SC Form 2176 Rev
1 Oct 1961

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. - The thermal noise generator covered by this specification is intended to be used as a broadband, high-power noise source equipment for laboratory testing. It may be inserted in place of a standard crystal mixer or detector circuit for noise level test purposes.

6.2 Ordering data. - Procurement documents should specify the following:

(a) Title, number and date of this specification and any amendment thereto.

(b) Levels of preservation, packaging and level of packing required for shipment. (See sect 5.)

(c) The specific paragraphs of section 5 which are applicable to the particular procurement.

(d) Marking and shipping of samples.

(e) Place of final inspection.

(f) Technical literature, quantity of tools and running spare parts required (see 3.9).

(g) If rough handling test or cyclic exposure test and functional test is required, (see 4.13) so state.

6.3 Dimensional data. - Sizes of packaging materials prescribed in section 5 are based on the dimensions of the equipment cited in the applicable Bill of Material. When the dimensions of the equipment vary from those cited, the sizes of the packaging materials shall be adjusted accordingly. When shown in the Bill of Materials (see section 5), corrugated fiberboard manufactured with A, B or C fluting may be used at the option of the contractor. When fluting used is not the same as that cited in the Bill of Material the dimensions of the affected packaging and packing materials will be adjusted accordingly.

6.4 Location of operational inspection. - It is desirable that the operational inspection (4.10) be performed at a location that will minimize handling (which might cause damage to the equipment) after this inspection is completed. It is recommended that the entire lot (including all previously inspected sample units) be sampled and inspected immediately prior to packaging.

6.5 Nomenclature. - The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design, for example SG-419 W/U. The contractor should apply for nomenclature in accordance with the applicable clause in the contract. (See 1.1.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.

6.6 Verification inspection. - Verification by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product, and will normally be identified by the categories listed below

(a) Type A--The total of that inspection set forth in the Quality Assurance Provisions of this specification or the contract. Included in this category is that amount of inspection referred to as normal and tightened inspection by Military Standard 105.

(b) Type B--That inspection set forth in the Quality Assurance Provisions of this specification or the contract reduced in amount under the reduced inspection provisions of Military Standard 105.

(c) Type C--A reduced inspection procedure resulting in a material reduction in the amount of inspection set forth in the Quality Assurance Provisions of this specification. The amount of inspection is less than that provided for in type B and is based upon a consistently acceptable product resulting from a planned quality control system voluntarily employed by the contractor in the production of the product.

NOTICE When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:38Z
Check the source to verify that this is the current version before use.