MILITARY SPECIFICATION

SHOP EQUIPMENT, WOODWORKING TRAILER MOUNTED

This specification is approved for use by the USA Belvoir Research and Development Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers woodworking equipment mounted on a 1-1/2-ton trailer.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-781	- Strapping, Steel, and Seals.
UU-T-81	- Tags, Shipping and Stock.
DDD-A-1466	- Aprons, Construction Workers.
GGG-S-58	- Saws, Radial-Overarm, Woodworking.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-640	- Box, Fiberboard, Corrugated, Triple Wall.
PPP-H-1581	- Hardware (Fasteners and Related Items), Packaging and Packing for Shipment and Storage of.
PPP-P-40	- Packaging and Packing of Hand Tools.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research and Development Center, ATTN: STRBE-DS, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.

PPP-T-60	- Tape: Packaging, Waterproof.
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-T-10579	- Trailer, Cargo 2 Wheel, 1/4 Ton to 1-1/2 Ton.
MIL-V-13811	- Varnish, Waterproofing, Electrical, Ignition.
MIL-M-18058	- Machinery, Metal and Woodworking, Support Equipment and Associated Repair Parts, Preparation for Delivery of.
MIL-G-20241	- Gasket Material, Wool Felt Impregnated Adhesive Pressure-Sensitive.
MIL-P-23377	- Primer Coating, Epoxy Polyamide, Chemical and Solvent Resistant.
MIL-G-28554	- Generator Sets, Mobile Electric Power; Packaging of.
MIL-G-52732/11	- Generator Set, Gasoline Engine Driven 10 KW, 60 Hertz, Type 1, Class 2.
MIL-G-52889/2	- Generator Set, Diesel Engine Driven, 10 KW, 60 Hertz, Tactical, Utility.
MIL-S-81733	- Sealing and Coating Compound, Corrosion Inhibitive.

STANDARDS

FEDERAL

FED-STD-H28	- Screw-Thread Standards for Federal Services.

MILITARY

MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-281	- Automobiles, Trucks, Truck-Tractors, Trailers and Trailer Dollies; Preservation and Packaging of.
MIL-STD-731	- Quality of Wood Members for Containers and Pallets.
MIL-STD-781	- Reliability Tests: Exponential Distribution.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.
MIL-STD-1474	- Noise Limits for Army Materiel.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:15Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

ME

TA13219E4100 - Shop Equipment, Woodworking, Trailer-Mounted.

ME - designates U.S. Army Belvoir R & D Center, Ft. Belvoir, VA.

TA

F8681929 - Installation Kit, Support Leg.

TA - designates U.S. Army Tank Automotive Command, Warren, MI.

U. S. DEPARTMENT OF COMMERCE

Product Standard

PS-1 - Soft wood, Plywood; Construction and Industrial.

(Application for copies should be addressed to the U. S. Department of Commerce, Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

(Copies of specifications, standards, and drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/HPMA - HP-1983, American National Standard for Hardwood and Decorative Plywood.

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The shop equipment shall conform to TA13219E4100 and be mounted on a 1-1/2-ton military M104 of M105 series trailer modified with a hydraulic tailgate as indicated in TA13219E4100, and shall include equipment-mounting devices as specified herein (equipment and trailer hereinafter called "shop"). The shop shall be fitted with all items specified in set components list as compiled from SC 3220-97-CL-E01 (see 6.7) and as specified herein. One generator set will be loaned to the contractor by the Government for first article model fabrication and testing (see 6.8). The equipment shall be mounted on the trailer as indicated on TA13219E4100.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the shop. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.2 First article. Unless otherwise specified the contractor shall furnish one shop for examination and testing within the time frame specified (see 6.2) to prove prior to starting production that his shops comply with the requirements of this specification. Examination and tests shall be as specified in section 4; and, unless otherwise specified herein, all examinations and tests shall be conducted by the contractor subject to surveillance and approval by the Government (see 6.3). When specified (see 6.2), the Government will conduct any or all of the first article examination and tests, as specified (see 6.2).

3.3 Reliability. The specified mean-time-between-failure shall be 75 hours when tested as specified in 4.5.2.5.

3.3.1 Maintainability. The availability shall be not less than 95 percent and the maintenance ratio shall be not greater than 0.12.

3.4 Material. Material shall be as specified herein and on the drawings. Material not specified shall meet the following.

3.4.1 Material deterioration and control. The shop shall be fabricated from compatible materials, inherently corrosion resistant or treated to be resistant to the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environment to which the shop may be exposed.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

3.4.1.1 Dissimilar metals. Dissimilar metals as defined in MIL-STD-889 shall be electrically insulated from one another to minimize or prevent galvanic corrosion. Insulation may be provided by a barrier such as a coat of epoxy primer conforming to MIL-P-23377, or corrosion inhibiting sealant conforming to MIL-S-81733 or chromate tape conforming to MIL-G-20241.

3.4.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components or sub-components, and shall make information available, upon request, to the contracting officer or designated representative.

3.5 Roadability. When loaded with the tools and equipment specified herein, the shop shall withstand towing on paved roads, unimproved roads, and cross-country trails. The towing shall include abrupt stops and sharp turns. During or following the towing, there shall be no damage to or displacement of any component, accessory part, or tool installed in or on the shop; and there shall be no evidence of defective welded, bolted, or riveted connections on the shop. The road mileage will be sufficient to satisfy the total test time as required by 4.5.2.5.

3.6 Trailer modification. The Government-furnished 1-1/2-ton M104 or M105 series trailer (see 3.14) shall be modified by removing existing tailgate and brackets, installing a tailgate, toolboxes, saw holddowns and slides for saw in accordance with TA13219E4100. The rear support legs shall be installed as shown on Drawing F8681929 except that two legs shall be installed, one at each rear corner.

3.7 Operation. The radial saw shall be connected to the generator set so that the saw may be operated throughout the range of the tailgate positions. The tool installation shall be within the design limits of the tailgate and support legs. When operated as specified in 4.5.2.3 and 4.5.2.4, the saw dust curtain installation shall prevent discharge of sawdust into the trailer, and there shall be no evidence of permanent deformation or damage.

3.8 Lubrication. All surfaces requiring lubrication shall be provided with a means for lubricating.

3.9 Identification marking. The shop shall be identified in accordance with MIL-STD-130.

3.10 Treatment and painting. The portions of the shop which have been fabricated by the contractor or reworked shall be cleaned, treated, and painted in accordance with MIL-T-704, type A.

3.11 Safety. All rotating or reciprocating parts and other parts subject to high operational temperatures that are of such a nature or are so located as to be a hazard to operating personnel, shall be guarded or insulated to the extent necessary to eliminate the hazard. Guards and other protective devices shall be provided for the operator(s) of the shop tools but shall not impair the operating function.

3.12 Environmental. The shop shall start and operate at temperatures ranging from -25° F to +120° F. The shop shall not be damaged and its operation not

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

impaired when stored at an ambient temperature of +155° F for 4 hours and at -50° F for a continuous period of 6 hours. The shop shall show no evidence of damage, malfunction or irregular operation when subjected to extreme conditions of rain, wind and humidity.

3.13 Noise. The noise level of the shop shall be in accordance with MIL-STD-1474, for steady state noise when tested in accordance with 4.5.2.6.1. (Aural nondetectability and impulse noise do not apply). The precautions of MIL-STD-1474 (see 6.12) shall be provided if the sound level exceeds 85dB(A) when tested in accordance with 4.5.2.6.2. Hearing protectors shall not be supplied with the shop. Hazard signs, when required, shall state "CAUTION, HEARING PROTECTION REQUIRED WITHIN _____ FEET", giving the safe distance. Sign posting and lettering shall be in accordance with MIL-STD-1474, 4.3.

3.14 Government-furnished property. Unless otherwise specified (see 6.2) the following property in the quantities indicated will be furnished by the Government (see 6.6) for incorporation into the set:

Item No.	Description	Identification	Quantity for each shop
1.	Trailer, Cargo M104 or M105, 1-1/2 Ton, 2 Wheel.	MIL-T-10579	1
2.	Installation Kit, Support Leg.	DWG F8681929	2
3.	*Generator, Set (MAP only).	MIL-G-52732/11 or MIL-G-52889/2	1

*For MAP Procurements only.

3.15 Government-loaned property. Unless otherwise specified (see 6.2) the following property in the quantities indicated will be loaned by the government (see 6.8).

Item No.	Description	Identification	Quantity
1.	Generator Set GED or Generator Set DED	MIL-G-52732/11 MIL-G-52889/2	1

3.16 Workmanship. The shop shall be free from defects such as incomplete welds, rust, cracks, or any other defect that could impair its operation or serviceability. All screw threads shall be in accordance with FED-STD-H28.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.1.2 Disassembly inspection. Failure of any test by the first article model shall be cause for disassembly, in the presence of a Government representative, of the first article model to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with the specification and referenced drawings in regard to materials, dimensions, tolerances and workmanship. Parts not complying with such requirements shall be rejected.

4.2 Classification of inspections. Inspections shall be classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection comparison (see 4.6).
d. Inspection of packaging (see 4.7).

4.3 First article inspection.

4.3.1 First article examination. Examine the shop as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 First article tests. Test the shop as specified in 4.5.2.2, 4.5.2.3, 4.5.2.5, 4.5.2.6 and 4.5.2.7. Failure of any test shall be cause for performing the inspection specified in 4.1.2.

4.4 Quality conformance inspection.

4.4.1 Examination. Examine each shop as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Test. Test each shop as specified in 4.5.2.4. Failure of the tests shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The shop shall be examined as specified herein for the defects listed in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

TABLE I. Examination schedule.

Number	Defects	Requirement Paragraph
1	2	3
101.	Dimensions not as specified.	applicable dwgs.
102.	Assembly incomplete or incorrect.	applicable dwgs.
103.	Parts, components, tools, or equipment missing.	3.1
104.	Safety not as specified.	3.11
105.	Material not as specified.	3.4
106.	Material not corrosion resistant or treated to be corrosion resistant for applicable storage and operating environment.	3.4.1
107.	Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.	3.4.1.1
108.	Contractor does not have documentation available for identification of material, material finishes or treatments.	3.4.1.2
109.	Identification marking not as spcecified.	3.9
110.	Lubrication not as specified.	3.8
111.	Treatment and painting not as specified.	3.10
112.	Accessories, operating instruction, or manuals missing.	3.2
113.	Workmanship not as specified.	3.16

4.5.2 Tests.

4.5.2.1 Test schedule.

TABLE II. Test schedule.

First Article	Quality Conformance	Test	Test Paragraph	Requirement Paragraph
1	2	3	4	5
X		Road test.	4.5.2.2	3.5
X	X	Operational test.	4.5.2.3	3.7
	X	Production test.	4.5.2.4	3.7
X		Reliability.	4.5.2.5	3.3
X		Noise level measurement.	4.5.2.6	3.13
X		Maintenance evaluation.	4.5.2.7	3.3.1

4.5.2.2 Road test. Tow the completely loaded shop including the generator set at maximum safe speeds for 25 miles on paved roads, 25 miles on secondary roads, and 25 miles on cross-country trails. In addition, tow the shop on paved surfaces to include not less than 15 abrupt stops from a speed of 25 mph in the

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

forward direction, not less than 5 abrupt stops at a speed of 5 mph in the reverse direction, and not less than 20 sharp turns (10 to the right and 10 to the left) at maximum safe speeds in forward gear. Damage to or displacement of any component, accessory, part, or tools installed in or on the trailer, or evidence of defective welded, bolted, or riveted connections shall constitute failure of this test.

4.5.2.3 Operational test. Lower the trailer-support legs and lock them into position on the ground. Swing the tailgate down level with the trailer. Using the handles, pull the radial saw onto the tailgate and lock the saw into position with the holddowns. Lower the tailgate to its lowest position and then raise the tailgate until the saw table is approximately 34 inches from the ground. Position the tailgate-support legs on the ground and attach the roller conveyor tables to the saw. Secure the rear curtain extension in place behind the saw. Using the specified generator set for power, operate the radial saw for a period of 1 hour, making all the cuts as specified in GGG-S-58. Operate the circular saws and electric drill for 2 minutes performing sawing and drilling operations. Failure of the trailer-support legs to support the trailer, inability of the tailgate to operate without exceeding the design limits as specified on the drawings, inability of the saw to operate in all tailgate positions, failure of the curtain to prevent the discharge of sawdust into the trailer, damage or permanent deformation of any part or component shall constitute failure of this test.

4.5.2.4 Production test. Test the shop as specified in 4.5.2.3, except operate the saw for a period of 5 minutes and do not make the cuts. Failure of any item to operate as specified herein shall constitute failure of this test.

4.5.2.5 Reliability. The first article model will be tested in accordance with MIL-STD-781, test plan II. Sample size required for the qualification phase test plan shall be as specified in 4.2.3.1 of MIL-STD-781 or as specified in the contract. The test operation will be in accordance with the mission procedure below. If the specified test time does not satisfy the total test time required by MIL-STD-781, additional test time in proportional increments of operation will be added. A mission is defined as an 8-hour period with the shop equipment operating in the following manner. Tow the loaded shop, including the generator set and all tools, at maximum safe speeds for 25 miles on paved roads, 25 miles on secondary roads, and 25 miles on cross-country trails. Locate the shop at a sawing site. Using the instructions furnished with the shop, set the shop up for operation. Prior to conducting cutting tests, adjust the radial-overarm saw according to the instructions for the saw. Using the generator set for power, start and operate the saw for a period of 1 hour, making cross cuts and miter cuts through boards. Operate the circular saws and electrical drill for a period of 5 minutes each. Prepare the shop for movement to another location. Damage to or displacement of any component, accessory, part or tool installed in or on the trailer, or evidence of defective welded, bolted or riveted connections, failure of the trailer-support legs to support the trailer, inability of the tailgate to operate properly, excessive sawdust entering the trailer, or any permanent deformation or damage or any malfunction a qualified operator or mechanic cannot remedy in 30 minutes with available tools and repair parts, shall constitute failure of this test. The remaining time in the mission will be considered as time when other equipment such as hammers and handsaws are being used.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

4.5.2.6 Noise level measurement.

4.5.2.6.1 Operator's station. Measure the noise at the operator's station at the tailgate in accordance with MIL-STD-1474 for steady state noise with the generator running and the radial saw operating at idle (not sawing). Nonconformance to 3.13 shall constitute failure of this test.

4.5.2.6.2 Hazard precautions. Measure the noise level at all personnel occupied areas, such as the operator's station, maintenance and control positions, while operating at the maximum noise condition for those positions. Should the noise level exceed 85dB(A) at any position, failure to provide the precautions specified in 3.13 shall consititue failure of this test.

4.5.2.7 Maintenance evaluation. Maintenance operations required during preproduction test shall be accomplished as specified in 3.3.1. Any support elements, i.e. technical manuals, repair parts, special tools, etc., provided under the contract for assisting or conducting maintenance will be evaluated. Failure of the shop to be maintained as specified shall constitute failure of this test.

4.6 Inspection comparison. The Government may select shops at any time during the contract production period and subject these shops to the examination specified in 4.5.1 and the tests specified in 4.5.2.2, 4.5.2.3, 4.5.2.5, 4.5.2.6 and 4.5.2.7. The inspection will be performed by the Government at a site selected by the Government. Shops will be selected at random from those which have been accepted by the Government and will not include the previously inspected first article model.

4.6.1 Inspection failure. Failure of any shop when examined and tested as specified in 4.5 may be considered cause for refusal by the Government to continue acceptance of shops until objective evidence furnished by the contractor reveals that corrective action has been taken to eliminate the condition which caused the rejection.

4.7 Inspection of packaging.

4.7.1 First article pack inspection.

4.7.1.1 Examination. The first article pack shall be examined for the defects specified in 4.7.2. Presence of one or more defects shall be cause for rejection.

4.7.2 Quality conformance inspection of pack.

4.7.2.1 Inspection stages. Inspection shall be in three stages as follows:

a. The first stage shall include inspection of preservation methods and marking, prior to placing the items into the consolidation containers.
b. The second stage shall include inspection of closure and marking of the consolidation containers, and the arrangement, blocking and bracing of the items and consolidation containers within the trailer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.

c. The third stage shall include inspection of the closed, strapped and marked trailer as prepared for shipment.

4.7.2.2 Unit of product. For the purpose of inspection, all preserved items, consolidation boxes, or trailer, prepared for any applicable inspection stage shall be considered a unit of product.

4.7.2.3 Examination. Each unit of product shall be examined for the following defects. Presence of one or more defects shall be cause for rejection. Defective items shall be corrected and re-examined for compliance with requirements.

114. Trailer and components not preserved as specified.
115. Hydraulic system not preserved as specified for level A.
116. Bows not bundled as specified for level A.
117. Canvas cover not folded and secured as specified for level A.
118. Generator not preserved and packed in accordance with referenced document.
119. Radial overarm saw not preserved in accordance with referenced document for level A.
120. Portable circular saws and accessories not preserved as specified.
121. Tools not preserved in accordance with referenced document for level A.
122. Repair parts not preserved as specified.
123. Screws not preserved in accordance with referenced document for level A.
124. Aprons not packaged in accordance with referenced document for level A.
125. Twine not preserved as specified for level A.
126. Pencils not packaged as specified for level A.
127. Technical publications not preserved as specified for level A.
128. Consolidated packing not as specified for level A.
129. Radial arm saw base not secured in the forward position as specified.
130. Items not placed on trailer as specified in referenced drawing.
131. Toolbox lids not secured as specified for level A.
132. Center of gravity of trailer not forward of axle when prepared for shipment.
133. Closure of trailer not as specified for level A.
134. Marking illegible, incorrect, incomplete or missing.

5. PACKAGING

5.1 First article pack. The contractor shall furnish a first article pack for examination within the time frame specified (see 6.2) to prove, prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examination shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.9). The first article pack may be accomplished utilizing either the first article shop or a production shop. If the first article shop is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government to facilitate comparison between the first article shop and production shops.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:15Z
Check the source to verify that this is the currentversion before use.

5.2 Preservation. Preservation shall be level A or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Unprotected surfaces. Unprotected exterior metal surfaces of components not specified herein requiring the application of a contact preservative in accordance with MIL-P-116 shall be coated with type P-1 preservative. The preservative shall conform to the applicable specification listed in and shall be applied in accordance with MIL-P-116. Unprotected ferrous metal identification and instruction plates shall be coated with varnish conforming to MIL-V-13811.

5.2.1.2 Trailer. The trailer components shall be preserved in accordance with the applicable portions of the level A (mobile) preservation requirements of MIL-STD-281 as specified for cargo vehicle bodies and with the following additional requirements.

5.2.1.2.1 Hydraulic system. The hydraulic fluid supply tank shall be filled to the operating level with the approved hydraulic fluid. The pump shall be actuated to insure coating of all interior surfaces of the system. Exposed pistons shall be coated with type P-6 or P-11 preservative and wrapped with barrier material conforming to MIL-B-121, type I, grade A, class 2. The wrap shall be secured with tape conforming to PPP-T-60, type IV. A cloth tag conforming to UU-T-81, type A shall be attached indicating that the system is filled with the approved operating fluid. Printing thereon shall be with waterproof ink. Lines shall not be disconnected. The handle shall be secured to the barrel of the pump.

5.2.1.2.2 Bows and cover. The bows and cover shall be removed. The cover shall be folded to dimensions approximately 36 inches by 30 inches, compressed to its minimum thickness and secured with a minimum of two ties lengthwise and two ties girthwise of cord or cotton tape. The bows shall be secured together with a minimum of three ties. Tape conforming to PPP-T-97, type II may be used for securing the bows.

5.2.1.3 Generator (MAP Item). When furnished, the generator shall be preserved and packed in accordance with MIL-G-28554, level A. Note: The generator shall be shipped separate from but at the same time as the shop.

5.2.1.4 Radial overarm saw. The radial arm of the saw shall be lowered to the maximum and secured with its locking mechanism to prevent any swinging movement. The radial overarm saw and accessories shall be preserved in accordance with MIL-M-18058, level A.

5.2.1.5 Tools. Tools shall be preserved in accordance with PPP-P-40, level A.

5.2.1.6 Repair parts. The preservative application criteria and applicable method(s) of preservation of MIL-P-116 shall be used to preserve repair parts.

5.2.1.7 Technical publication. Technical publications shall be preserved in accordance with MIL-P-116, method IC-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.

5.2.1.8 Screws. Screws shall be preserved in accordance with the level A requirements of PPP-H-1581.

5.2.1.9 Aprons. The aprons shall be preserved in accordance with level A requirement of DDD-A-1466.

5.2.1.10 Twine. Each ball of twine shall be preserved in accordance with method IC-1 of MIL-P-116.

5.2.1.11 Pencils. Pencils in the contractor's commercial box, shall require no additional preservation.

5.2.1.12 Consolidation. Preserved and unpreserved accessories, carpenter tools, repair parts, maintenance tools and technical publications shall be consolidated in the toolboxes, if space permits. When there is not sufficient space, the remainder of the items shall be consolidated together in a close-fitting box conforming to PPP-B-621, class 2, style optional, or PPP-B-601, overseas type, style optional.

5.2.2 Level C. The components of the shop shall be preserved to afford protection against deterioration and damage during shipment from the contractor to the initial destination for immediate use. Consolidation shall be as specified in 5.2.1.12 except that wood boxes shall be domestic type, or shall conform to PPP-B-640, class 2, style E.

5.3 Packing. Packing shall be level A or C as specified (see 6.2). CAUTION: Placement of the radial arm saw and consolidation boxes on the trailer shall be such that the center of gravity of the trailer is forward of the axle.

5.3.1 Level A. Each shop shall be packed for mobile shipment as follows: Anchoring, blocking, bracing and cushioning of components shall be in accordance with MIL-STD-1186. Placement of the items on the trailer shall be in accordance with Top Assembly TA13219E4100 and the following.

a. The conveyor tables and stands furnished with the radial overarm saw shall be nested together and placed on edge on the floor against and secured to the slatted front of the trailer with the legs extending along the right hand or curb side of the trailer.
b. The bows shall be positioned on top of the toolbox on road side of trailer with the ends pointing up and secured to the stake side of the trailer.
c. The top cover (canvas) shall be placed on top of the saw base and secured in place with tape conforming to PPP-T-97, type II or with steel strapping conforming to QQ-S-781, type I, class 3, grade 1, 1/2 inch wide by 0.020 inch thick.
d. The radial arm saw shall be secured in the forward portion of the trailer.
e. The toolboxes containing the tools, repair parts, accessories and technical publications shall be closed and the lids secured to assure maximum protection against pilforage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.

f. Boxed items shall be secured in the trailer.
g. Closure of the trailer shall be in accordance with figures 1 and 2.

5.3.2 Level C. Accessories, tools, and repair parts shall be placed in the tool boxes or consolidated in separate boxes as specified for level A, except that consolidation containers may be commercial wood boxes or domestic fiberboard boxes. Conveyor tables, the radial arm saw, and boxed items shall be secured as specified for level A to prevent movement during transport and handling. The top bows and canvas cover shall be mounted in its normal position.

5.4 Marking. Individually packaged items, consolidation containers, and the complete shop shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The shop is intended for use by personnel engaged in carpentry and construction repair in the field.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Date of issue of DoDISS applicable and exceptions thereto (see 2.1.1).
c. Time frame required for submission of the first article (see 3.2).
d. When the Government will conduct any or all of the first article examination and tests. When the Government will conduct some but not all of the first article examination and tests, the contracting officer should specify which examination and tests will be conducted by the Government and which examination and tests shall be conducted by the contractor (see 3.2).
e. If a gasoline or diesel generator set will not be loaned (see 3.15).
f. When government furnished property is to be other than as specified in 3.14.
g. Time frame required for submission of the first article pack (see 5.1).
h. Level of preservation and level of packing required (see 5.2 and 5.3).

6.3 First article. When a first article inspection is required, the item should be a preproduction model. The first article should consist of 1 unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, tests and approval of the first article test results and disposition of the document's first article.

6.4 First article model. Any change or deviations of production shops from the approved first article model during production will be subject to approval of the contracting officer. Approval of the first article model will not relieve the contractor of this obligation to furnish shops conforming to this specification.

6.5 Definitions. The following definitions apply to the text of this specification.

6.5.1 Maintenance ratio. The ratio of the number of maintenance manhours required for both scheduled maintenance and unscheduled repairs, to the number of hours of operation.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

6.5.2 Mean-time-between-failure (MTBF). Mean-time-between-failure (MTBF), for a particular interval, is the total functioning life of a population of an item divided by the total number of failures within the population during the measurement interval. The definition holds for time, cycle, miles, events, or other measure of life units.

6.5.3 Total test time (TTT). Total test time is total unit hours of "equipment on" time and is expressed in multiples of the specified MTBF.

6.6 Government furnished property. The contracting officer should arrange to furnish the property listed in 3.14 and, when specified a gasoline generator conforming to MIL-G-52732/11 or a diesel generator conforming to MIL-G-52889/2 shall be overpacked for MAP shipments.

6.7 Components list. The contracting officer should arrange to furnish information concerning items specified in the set components list as compiled from SC 3220-97-CL-E01.

6.8 Government-loaned property. The contracting officer should arrange to lend the property listed in 3.15.

6.9 First article pack. Any changes or deviations of production packs from the approved first article pack will be subject to the approval of the contracting officer. Approval of the first article pack will not relieve the contractor of his obligation to preserve, pack, and mark the shops in accordance with this specification.

6.10 Data requirements. The contracting officer should include requirements for such data as technical publications, instructional materials, illustrated parts lists, foundation and anchor bolt plans, wiring diagrams and suppliers maintenance and operation manual to be furnished with each shop.

6.11 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instructions on shipment of shops. A suggested paragraph is as follows:

"Shipment of shops shall include repair parts, maintenance tools, operational instructions, and accessories, unless exceptions are provided elsewhere in the contract."

6.12 Noise limits. When the noise level of the shop exceeds 85dB(A), the appropriate discussion of the noise hazard in accordance with MIL-STD-1474 (Manuals paragraph) shall include the requirement for hearing protection, the noise level of the shop, the distance from the shop at which 85dB(A) will always be met, and what operational situation or system configuration will reduce the level to 85dB(A).


Custodian:
Army - ME

Preparing activity:
Army - ME

Project 3220-A141

☆U.S. GOVERNMENT PRINTING OFFICE: 1984—705-040/A4292

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.

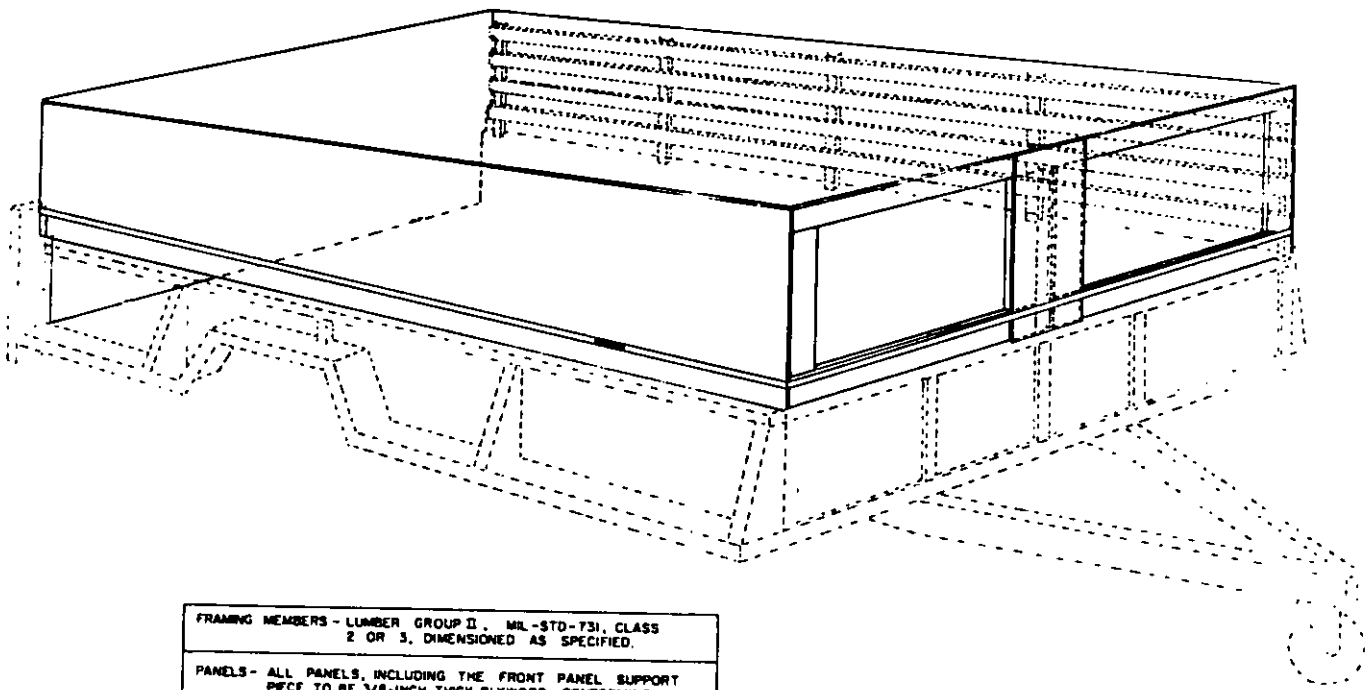

FRAMING MEMBERS - LUMBER GROUP II, MIL-STD-731, CLASS 2 OR 3, DIMENSIONED AS SPECIFIED.
PANELS - ALL PANELS, INCLUDING THE FRONT PANEL SUPPORT PIECE TO BE 3/8-INCH THICK PLYWOOD CONFORMING TO ANSI/HPMA HP 1983, TYPE I, GRADE 3-4, OR TO PS-1, GRADE CD WITH EXTERIOR GLUE.
STRAPPING - QQ-S-781, TYPE I OR IV, CLASS B, .035 BY 3/4 INCH, POSITIONED AS SHOWN.

Figure 1. Trailer cap.

X 946B

Source: https://assist.dla.mil -- Downloaded: 20260-22T21:15Z
Check the source to verify that this is the current version before use.

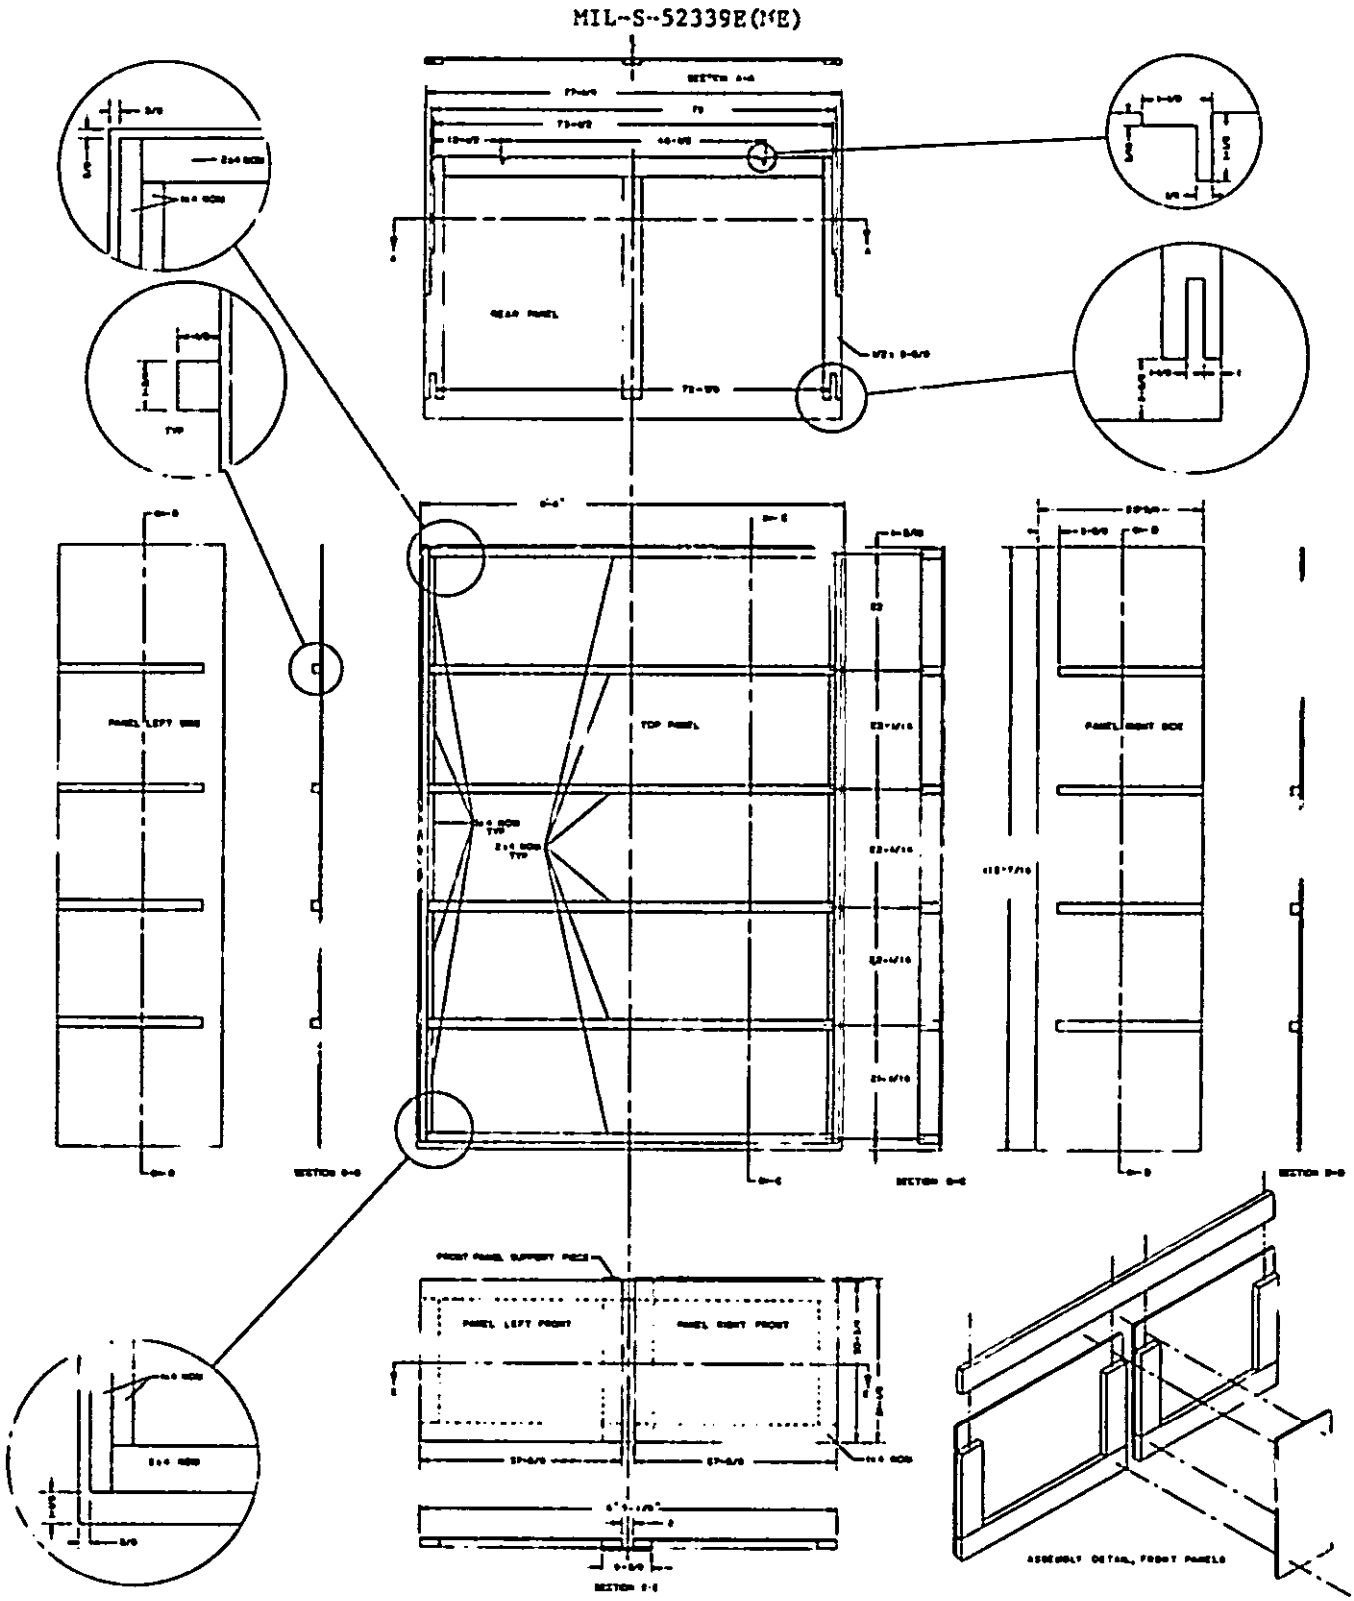


Figure 2. CONSTRUCTION DETAILS, TRAILER CAP.

X 947A

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the currentversion before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
USA Belvoir R&D Center
STRBE-DS
Fort Belvoir, VA 22060-5606

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Belvoir R&D Center
STRBE-DS
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-52339E(ME)	Shop Equipment, Woodworking Trailer Mounted

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.