MIL-B-26195B
28 May 1968
Superseding
MIL-B-26195A
25 May 1962

MILITARY SPECIFICATION

BOXES, WOOD-CLEATED, SKIDDED, LOAD-BEARING BASE

This specification is mandatory for use by all departments and agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the requirements for new wood boxes, wood-cleated with skidded load-bearing bases. Boxes covered herein are designed for domestic and overseas shipments of loads less than 2,500 pounds and not greater than 16 feet in length.

1.2 Classification. Boxes shall be furnished in the following types, styles, and classes (see 6.2).

Type I - For Domestic Shipment

Type II- For Overseas Shipment

Style A- Regular Cleating Arrangement (see figure 1)

Style B- Lock Corner Cleating Arrangement (see figure 1)

Style C- Partial Cleating Arrangement (see figure 2)

Class 1- Plywood Base (see figure 3)

Class 2- Lumber Base (see figure 3)

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

FSC 8115

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Federal

FF-B-561	Bolt Lag
FF-B-571	Bolts, Nuts, Studs and Tap Rivets (and Materials for Same)
FF-N-105	Nails, Wire Brads and Staples
NN-P-530	Plywood, Flat Panel
TT-W-572	Wood-Preservative, Water-Repellent
PPP-B-576	Box, Wood-Cleated, Veneer, Paper Overlaid
PPP-B-591	Box, Fiberboard, Wood-Cleated
PPP-B-601	Box, Wood, Cleated-Plywood
PPP-B-636	Box, Fiberboard
PPP-F-320	Fiberboard, Corrugated and Solid, Sheet Stock, (Container Grade) and Cut Shapes
PPP-V-205	Veneer, Paper-Overlaid, Container-Grade

Military

MIL-C-16173	Corrosion Preventive Compound, Solvent Cutback, Cold-application

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-731	Quality of Wood Members for Containers and Pallets

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials

3.1.1 Lumber. Lumber for all components shall conform to the requirements of MIL-STD-731. Lumber for superstructure components shall conform to the requirements for cleated panel boxes and lumber for base components to those for light-duty crates.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

3.1.2 Plywood. Unless otherwise specified, plywood used in the fabrication of Type I boxes shall conform to CS 35, Type II, Grade 3-4; PS1, Standard interior. Plywood used to fabricate Type II boxes shall conform to CS 35, Type I, Grade 3-4, PS1, standard interior with exterior glue. Minimum acceptable grade and type plywood conforming to NN-P-530 referenced commercial and product standards. (This plywood is furnished unsanded and untreated. The contract or purchase order will specify sanding or treatment if they are required. (see 6.2) Water repellant conforming to TT-W-572 shall be used when treatment is specified.)

3.1.3 Fiberboard. Unless otherwise specified, fiberboard shall conform to PPP-F-320. Type SF, Class domestic, grade 500 or 600 shall be used in the fabrication of Type I boxes. Type SF, class Weather-resistant, grade V2s, V3s, or V4s shall all be used in the fabrication of Type II boxes.

3.1.4 Paper-Overlaid Veneer. Unless otherwise specified, paper-overlaid veneer for Type I and Type II boxes shall be in accordance with PPP-V-205 Type I and Type II respectively.

3.1.5 Fasteners. Nails and staples shall be steel and shall be in accordance with the applicable requirements of FF-N-105. Unclinched nails shall be cement coated, chemically etched, hellically threaded, or annular grooved. Lag bolts shall be in accordance with the requirements of FF-B-561. Carriage bolts shall be in accordance with the requirements of FF-B-571.

3.2 Base Components. The base components are illustrated in figure 3. Lumber used in the skids shall be in accordance with the requirements of 3.1.1, except that group I woods shall not be used. The dimensions of skids shall be as shown in Table I, and those with retangular cross sections are intended to be used flatwise. For boxes whose outside width does not exceed 36 inches, 2 skids shall be required. When the outside width exceeds 36 inches, a third skid conforming to Table I shall be placed equidistant between and parallel with the outer skids. The lower half of the ends of each skid shall be beveled approximately 45 degrees. Lumber used for load-bearing floor members shall be in accordance with the requirements of 3.1.1 and shall be selected in accordance with Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

TABLE I NOMINAL SIZES AND MAXIMUM LENGTHS OF SKIDS

Weight of Contents (Pounds)	Load Condition 1/	Nominal Sizes Maximum Length of Skid (Feet)					
		2 x 4	2 x 6	2 x 8	4 x 4	4 x 6	6 x 6
0 - 100	A	16					
	B	16					
	C	16					
	D	16					
	E	16					
101 - 200	A	16					
	B	16					
	C	16					
	D	16					
	E	16					
201 - 400	A	11	15	16			
	B	13	16				
	C	8	12	16			
	D	10	15	16			
	E	13	16				
401 - 600	A	8	11	14	16		
	B	9	14	16			
	C	5	8	11	16		
	D	7	10	14	16		
	E	9	14	16			
601 - 800	A	7	9	11	16		
	B	7	10	14	16		
	C	4	6	8	16		
	D	5	8	10	16		
	E	7	10	14	16		
801 - 1000	A	6	8	10	16		
	B	5	8	11	16		
	C	3	5	7	16		
	D	4	6	8	16		
	E	5	8	11	16		
1001 - 1200	A	6	7	8	16		
	B	4	7	9	16		
	C	3	4	5	13	16	
	D	3	5	7	16		
	E	4	7	9	16		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

TABLE I NOMINAL SIZES AND MAXIMUM LENGTHS OF SKIDS (CONTINUED)

Weight of Contents (Pounds)	Load Condition 1/	Nominal Sizes Maximum Length of Skid (Feet)					
		2 x 4	2 x 6	2 x 8	4 x 4	4 x 6	6 x 6
1201 - 1400	A	5	7	8	14	16	—
	B	5	6	8	16	—	—
	C	0	4	5	11	16	—
	D	3	4	6	14	16	—
	E	5	6	8	16	—	—
1401 - 1600	A	5	6	7	13	16	—
	B	3	5	7	16	—	—
	C	0	3	4	18	15	16
	D	3	4	5	12	16	—
	E	3	5	7	16	—	—
1601 - 1800	A	5	6	7	12	16	—
	B	3	5	6	15	16	—
	C	0	3	4	9	14	16
	D	0	3	4	11	16	—
	E	3	5	6	15	16	—
1801 - 2000	A	4	5	6	11	15	16
	B	3	4	5	13	16	—
	C	0	0	3	8	12	16
	D	0	3	4	10	15	16
	E	3	4	5	13	16	—
2001 - 2200	A	4	5	6	10	14	16
	B	0	4	5	12	16	—
	C	0	0	3	7	11	16
	D	0	3	4	9	14	16
	E	0	4	5	12	16	—
2201 - 2400	A	4	5	6	10	13	16
	B	0	3	4	11	16	16
	C	0	0	3	7	10	16
	D	0	0	3	8	13	16
	E	0	3	4	11	16	—
2401 - 2500	A	4	5	6	9	13	16
	B	0	3	4	10	16	—
	C	0	0	3	6	10	16
	D	0	0	3	8	12	16
	E	0	3	4	10	16	—

1/ The load condition is determined by the manner in which the load is applied to the skids (see figure 4 and 5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

TABLE II. Allowable load (pounds) per inch of width of load-bearing floor members (group I and II woods)1/

Length between Outside of Skids (Inches)	Nominal 1-inch thick boards (lbs per inch)	Nominal 2-inch thick boards (lbs per inch)	Nominal 3-inch thick boards (lbs per inch)
12	38	176	459
18	26	118	306
24	19	88	230
30	15	70	183
36	13	58	154
42	11	52	131
48	10	44	115
54	9	39	102
60	7	35	92

1/ If group III or IV woods are used, the above allowable loads may be increased by 20 percent.

3.2.1 Lumber-floored base. Lumber used for floorboards shall be as specified in 3.1.1. Floorboards shall not be less than 1 inch (nominal) thick nor less than 4 inches (nominal) wide.

3.2.2 Plywood base. Plywood base shall be in accordance with 3.1.2. The minimum thickness of the plywood shall be 3/8 inch.

3.2.3 Headers. End headers shall be placed at the ends of all bases. They shall be of nominal size lumber conforming to 3.1.1 and shall be unspliced. When the container width is 36 inches or less, 2 x 4 inch headers shall be used. When container width exceeds 36 inches 4 x 4 inch headers shall be used.

3.2.4 Rubbing strips for skids. When specified (see 6.2), rubbing strips shall be applied to skids to facilitate forklift entry. Rubbing strips shall be fabricated from one piece of nominal 1 inch and one piece of 2 inch nominal material or one piece of 3 inch nominal material. Rubbing strips shall be applied with two staggered rows of twelve-penny nails spaced 12 inches apart in each row. The strips shall be beveled full depth at an angle of 45 degrees at sling and forklift openings. Openings for forklift access shall be 12 inches in length, 28 inches center to center and positioned to straddle the center of gravity of the loaded container. Sling openings

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

shall not be less than four inches in length at end of crate. The center pieces of rubbing strips shall be 16 inches in length. On short crates, forklift openings may also serve as sling openings where crate length does not permit both.

3.2.5 Superstructure components. The sides, tops and ends shall be of cleated panel construction. Panels shall be plywood, fiberboard or paper-overlaid veneer as specified, (see 6.2) and shall meet the material requirements of 3.1.2, 3.1.3 or 3.1.4 respectively. The sizes of the components for the cleated plywood, cleated fiberboard and cleated paper-overlaid veneer superstructures shall comply with the applicable requirements of PPP-B-601, PPP-B-591 and PPP-B-576 respectively. The maximum size components given in the aforementioned specifications shall be used for net weights in excess of 1,000 pounds.

3.2.5.1 Cleats. When intermediate cleats are required on top panels, their lengths shall be equal to the width of the container. The longitudinal cleats of style A and B boxes shall be applied as filler cleats. All filler cleats shall be 1/4 inch less in length than the distance between the intermediate cleats. Cleat arrangement on top panels is illustrated in figures 1 and 2. All vertical cleats of side panel shall be 1/4 inch less in length than the distance between the longitudinal cleats.

3.2.5.2 Joists. Unless otherwise specified, (see 6.2) joists shall be provided for all boxes in excess of 26 inches long and 16 inches wide. Lumber used for joists shall be in accordance with the requirements of 3.1.1. Joists shall be applied with their broad surfaces in contact with the panel of the top and shall be spaced equal distances apart along the length of the box, but not to exceed 24 inches apart (center to center). The sizes of the joists shall be in accordance with Table III. When joists are required, they shall be supported vertically by supports which shall be in accordance with the provisions of 3.3.2.1.2 and laterally by supports which shall be in accordance with 3.3.2.1.3.

TABLE III. SELECTION OF JOISTS

Nominal joist size (Inches)	Outside width of box (Inches)
None rq'd	0-16
1 x 2	17-24
1 x 4	25-36
2 x 4	37-60

3.3 Fabrication requirements.

3.3.1 Base fabrication.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

3.3.1.1 Plywood flooring to skids. The plywood may be the full length and width of the container base or it may be a centrally located square piece with each side equal to the base width as illustrated in figure 3. Plywood flooring shall be oriented so that the grain direction of face plies is perpendicular to skid length. If more than 1 plywood panel is used, a spacing of 1/4 inch shall be left between panels for drainage. Nailing of the plywood to the skids shall be as illustrated in figure 7. The lateral edges of all plywood flooring shall be flush with the outer edges of the outside skids. When the plywood flooring is the full length of the base, end headers and load-bearing floor members shall be placed on top of the plywood and bolted to the skids after the plywood is in place. A drainage hole one half inch in diameter shall be drilled in each corner of full length plywood bases. An additional drainage hole shall be placed along the sides of the base for each 3 feet of the inside length. When load-bearing floor members are placed over plywood panels, at least one drainage hole shall be placed on each side of the base between the load-bearing floor members.

3.3.1.2 Lumber flooring to skids. Nailing of lumber flooring to the skids shall be as illustrated in figure 7. Lumber shall be laid at right angles to the skids. The edges of adjacent boards shall be separated 1/8 to 1/4 inch to allow for swelling and drainage. The ends of boards shall be flush with the outer edges of the skids.

3.3.1.3 Load-bearing floor members to skids. Load-bearing floor members over 2 inches thick and up to 4 inches in width shall be bolted to each skid with one carriage bolt. Load-bearing floor members over 2 inches thick and 4 inches wide shall be bolted to each skid with 2 carriage bolts. The load-bearing floor members shall be fastened to the skids with 1/2 inch carriage bolts. Bolt holes shall be of the same diameter as the shank of the bolt. Plain washers shall be placed under the nuts of all bolts. After tightening, nuts shall be prevented from turning by the application of unthinned lead paint to projecting threads or by the use of equivalent locking means. Load-bearing members less than 2 inches in thickness shall be nailed to the skids. Nails shall be as large as possible without splitting the piece. The load-bearing floor members shall be flush with the outer edges of the skids.

3.3.1.4 End headers to skids. End headers in accordance with 3.2.3 shall be fastened to the skids with 1/2 inch carriage bolts. Headers shall be placed back from the ends of the skids a distance equal to the thickness of the end panels as illustrated in figure 3, and shall be flush with the outer edges of the skids as illustrated in figure 8. When plywood is used full length of the base, headers shall be placed on the plywood.

3.3.2 Superstructure fabrication. Except as noted in 3.2.5.1 and 3.3.2.1, fabrication of cleated plywood, cleated fiberboard, and cleated paper-overlaid veneer panels, which form the superstructure, shall conform to the applicable requirements of PPP-B-601, PPP-B-591 and PPP-B-576 respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

3.3.2.1 Fabrication of side panel.

3.3.2.1.1 Joist supports. When top bracing joists are used, vertical and lateral joist supports shall be affixed to the side panels as illustrated in figure 6. The vertical and lateral supports shall conform to the material requirements for cleat stock except that the thickness shall not be less than 1 inch nominal for container loads of 1,000 pounds and under, nor less than 2 inch nominal for loads in excess of 1,000 pounds.

3.3.2.1.2 Vertical joist supports. The vertical joist supports shall be fastened to the side panels with nails spaced not greater than 3 inches on centers (see figure 6). The nails shall be staggered as shown. Nails shall be of sufficient length to pass through the joist support, the panel, the intermediate cleat of the side panel when matching occurs, and permit a clinch of not less than 1/8 inch when group II, III or IV woods are used and 1/4 inch when group I woods are used. These supports shall be of sufficient length to extend from the under surface of the joist to the upper surface of the base decking or floor boards.

3.3.2.1.3 Lateral joist supports. The lateral joist supports shall be fastened to the side panels with not less than two nails. Nails shall be of sufficient length to pass through the support block, the panel, the longitudinal cleat of the side panel, and permit a clinch of not less than 1/8 inch when group II, III, or IV woods are used and 1/4 inch when group I woods are used. These support blocks shall not be less than 3-1/2 inches long.

3.4 Assembly requirements.

3.4.1 Assembly of superstructure panels. Assembly of cleated plywood, cleated fiberboard, and cleated paper-overlaid veneer superstructures shall comply with the applicable requirements of PPP-B-601, PPP-B-591 and PPP-B-576, respectively.

3.4.2 Assembly of superstructure to base. The end and side panels shall be assembled to the base with lag bolts specified in 3.1.5 and as illustrated in figure 8. Side panels shall not extend below the bottom of the skids. When specified, boxes may be furnished assembled (see 6.2).

3.4.2.1 Side to skid. A lag bolt shall be placed through each end of the lower longitudinal cleat of the side panel and into the skid at a distance of not less than 3 inches from the end of the cleat. Additional bolts shall be equally spaced between the two end bolts with no distance exceeding 12 inches.

3.4.2.2 End to header. A lag bolt shall be placed through each end of the lower filler cleat and into the end header at a distance not less than 2 inches nor more than 3 inches from the end of the filler cleat. Additional bolts shall be equally spaced between the end bolts with no distance to exceed

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

12 inches. A minimum of two lag bolts are required through each end filler cleat.

3.4.2.3 Size and placement of lag bolts. Lag bolts shall be 3/8 inch in diameter and 3 inches in length. Entry holes for lag bolts shall be 3/8 inch in diameter. Lead holes shall be 1/4 inch in diameter for group I, II, and III woods and 5/16 inch in diameter for group IV woods. (See figure 8) The combined depth of the entry and lead holes shall equal the total length of the shank and threaded portions. Lag bolts shall be turned in their holes the full distance. They shall not be driven by hammer. If for any reason the threads in the holes become stripped, the lag bolt shall be removed and placed in a new hole near the old position. There shall be a washer under the head of each lag bolt. Countersinking for lag bolts shall not be permitted.

3.5 Workmanship. All boxes and components shall be free from imperfections which may affect their utility. Boxes shall be free from defects which will result in damage to the contents.

3.6 Special markings:

The following warning shall be placed on the ends and side panels of the assembled boxes:

CAUTION: LIFT BY BASE ONLY

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling for inspection. Sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except as otherwise indicated herein.

4.2.1 Component and material inspection. In accordance with 4.1 components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

4.3 Inspection of the end item. Examination of the end item shall be made in accordance with the classification of defects, inspection levels, and acceptable quality levels (AQLs) set forth below. The lot size for the purpose of determining the sample size shall be expressed in units of boxes for examinations under 4.3.1 and in units of bundles or crates of knocked-down boxes, as applicable, for examination in 4.3.2.

4.3.1 Examination of the end item for defects in material, construction, dimensions, appearance, and workmanship. The sample unit for this examination shall be one completely fabricated box including box top.

Examine	Defect	Category	
		Major	Minor
Panels	Panel up to and including 48 inch width by 72 inch length made up of more than one piece of plywood		201
	Note: Panels which exceed either of the above dimensions may be of one or two pieces and lap or butt joined. Lap joint of two-piece panel less than three inches and either piece greater than 3/16 inch in thickness.		
	Lap joint not secured by two rows of metal stitches passing through both pieces	101	
	Stitches not parallel		202
	Stitches spaced less than 2 inches apart .		203
	Spacing of stitches more than 4 inches apart	102	
	Butt joint of 2-piece panel not secured with wood cleat centered over joint . .	103	
	Cleat not fastened to each piece of panel as required for fabrication of panels (see 3.2.5.1)	104	
	Joint cleat for domestic type box or for overseas type box, as applicable, not as specified	105	
Construction of panel	Cleat not properly positioned	106	
	Cleat not sufficient length		204
	Intermediate or additional cleat missing where required (see 3.2.5.1)	107	
	Skids not in accordance with requirements (see 3.2)	108	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

Examine	Defect	Category	
		Major	Minor
Construction of panel (cont'd)	Assembly not in true alignment		205
	Staple or other fastener not fully and securely driven through adjoining members as specified	109	
	Staple leg or other fastener point not completely clinched 1/8 inch or more	110	
	Protrusion of fastener point through side member	111	
	Fastener does not pass through plywood and cleat or cleat and plywood as applicable to permit clinching	112	
	Bearing surface of staple crown or nail head overdriven in excess of 1/32 inch in plywood less than 1/4 inch thick	113	
	Joist and joist supports not as specified .	114	
Base	Base components not as specified (see 3.2).	115	
	Rubbing strips not spaced properly not proper size or missing	116	
	Carriage bolts not as specified(see 3.3.1.3)	117	
	Lag bolts not spaced properly or missing .	118	
Box	Not type and style box specified	119	
	Spacing between metal fasteners in excess of maximum length specified		206
	Fasteners positioned lengthwise of cleats not staggered where possible to form two parallel rows		207
	Less than 3/8 inch between nearest edge of fastener and edge of cleat	120	
Material	Fasteners not type and size specified; not cement coated, acid etched, or mechanically deformed, as applicable	121	
	Plywood less than specified thickness . . .	122	
	Cleats less than specified width and thickness	123	

4.3.2 Examination of preparation for delivery. Examination shall be made to determine that packaging, packing, and marking comply with the requirements of section 5 and special requirement of contract, when applicable. The sample unit shall be one crate or bundle of unassembled boxes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

Examine	Defect	Category	
		Major	Minor
Packaging	All unassembled units not complete (Base, side panels, end panels and assembling hardware) within crate or bundle	101	
	Units not uniform, neat or securely bundled or crated	102	
	Over-all height of stacked units not within 43 inch limitation	103	
Identification Marking	Bundle or crate not marked to identify contents	104	
Marking for Shipment	Omitted, incomplete, incorrect, illegible; of improper size, location, sequence, or method of application	105	

4.3.3 Inspection levels and AQLs for examinations. The inspection levels for the purpose of determining the sample size and the AQLs expressed in defects per hundred units shall be as follows:

Examination para.	Inspection level	AQL	
		Major	Total
4.3.1	S-4	2.5	6.5
4.3.2	S-2	4.0	4.0

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level C. Boxes shall be shipped assembled or unassembled. (see 6.2) The assembled or unassembled unit will consist of the complete fabricated top, sides, and end panels, secured to the base in a manner which will insure carrier acceptance and safe delivery to the destination specified in the procurement document. Hardware, for unassembled boxes, required for final assembly of the box shall be treated with corrosion preventive compound, MIL-C-16173 of grade 1 and placed in a cotton draw string bag in a protected location and secured in such a way as to prevent separation of the hardware from the packaged unit. Provisions for strapping shall be in accordance with PPP-B-601. Stacking of the unassembled box units shall not exceed 43 inches in height.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

5.2 Marking. In addition to any special marking required in contract or purchase order (see 6.2) shipments of crates shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. Boxes covered by this specification are intended to be used for items which can be attached to a load-bearing base. It is intended that the entire load be carried on the base, the superstructure providing only for superimposed loads and protection against the elements. When the physical protection afforded by the superstructure is not required for storage and shipment, the superstructure may be removed. It is not intended for the box to be lifted and moved other than by the base.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Type, style and class of box required (see 1.2).

(c) Type of flooring for base (see 1.2).

(d) If rubbing strips are required (see 3.2.4).

(e) Type of superstructure (see 3.2.5).

(f) Weight of contents (see Table I).

(g) Inside dimensions specified in inches to the nearest one half inch in order of: length by width by depth.

(h) Load condition (see figures 4 and 5).

(i) Assembled or knocked-down (see 3.4.2 and 5.1)

(j) Packing instructions if different (see 5.1).

(k) Special marking if required (see 5.2).

(l) Plywood Sanded

(m) Plywood Treated

(n) Joist requirement (see 3.2.5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

Military custodians:

Army - GL

Navy - SA

Air Force - 69

Review activities:

Army - AT, WC, SM, MI, MU

Navy - SA, AS, SH, YD

Air Force - 69, 70

User activities:

Army - AV, EL, CE, SM

Navy - MC, OS

Air Force - 26

Other interest:


Coast Guard - User

Preparing activity:

Air Force - 69

Project No. 8115-0117

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

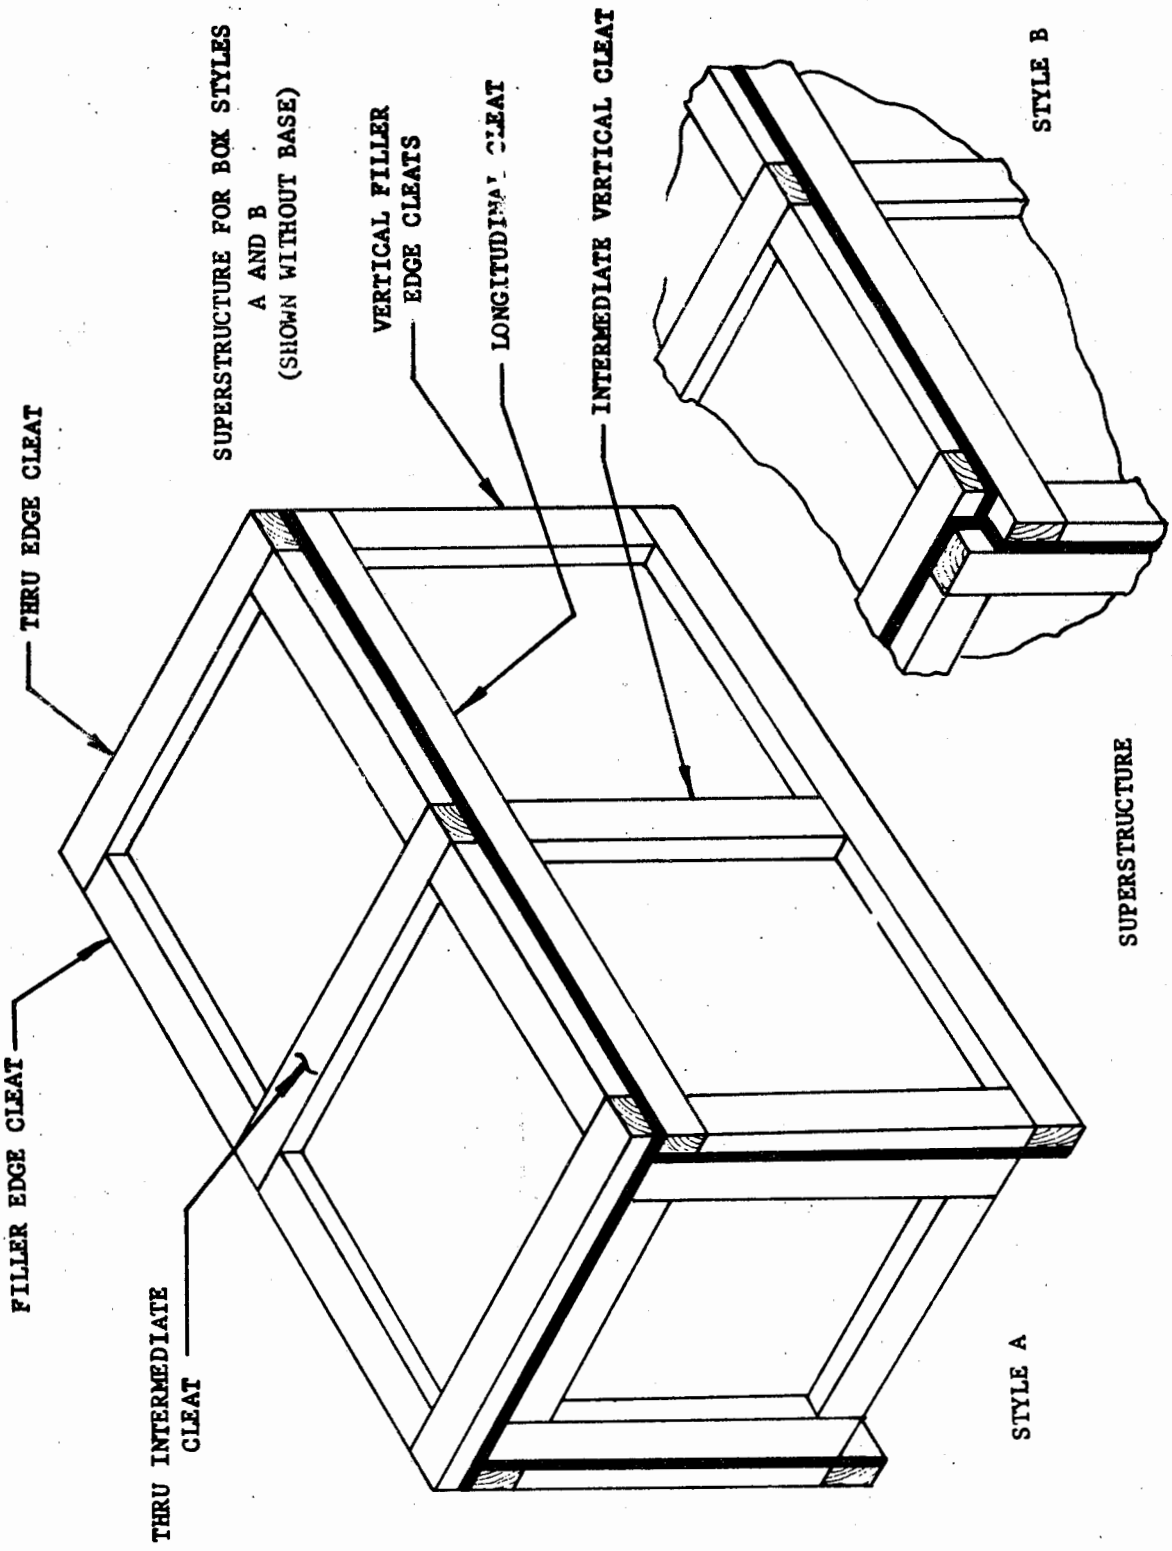


SUPERSTRUCTURE

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.


SUPERSTRUCTURE FOR BOX STYLE C
(SHOWN WITHOUT BASE)

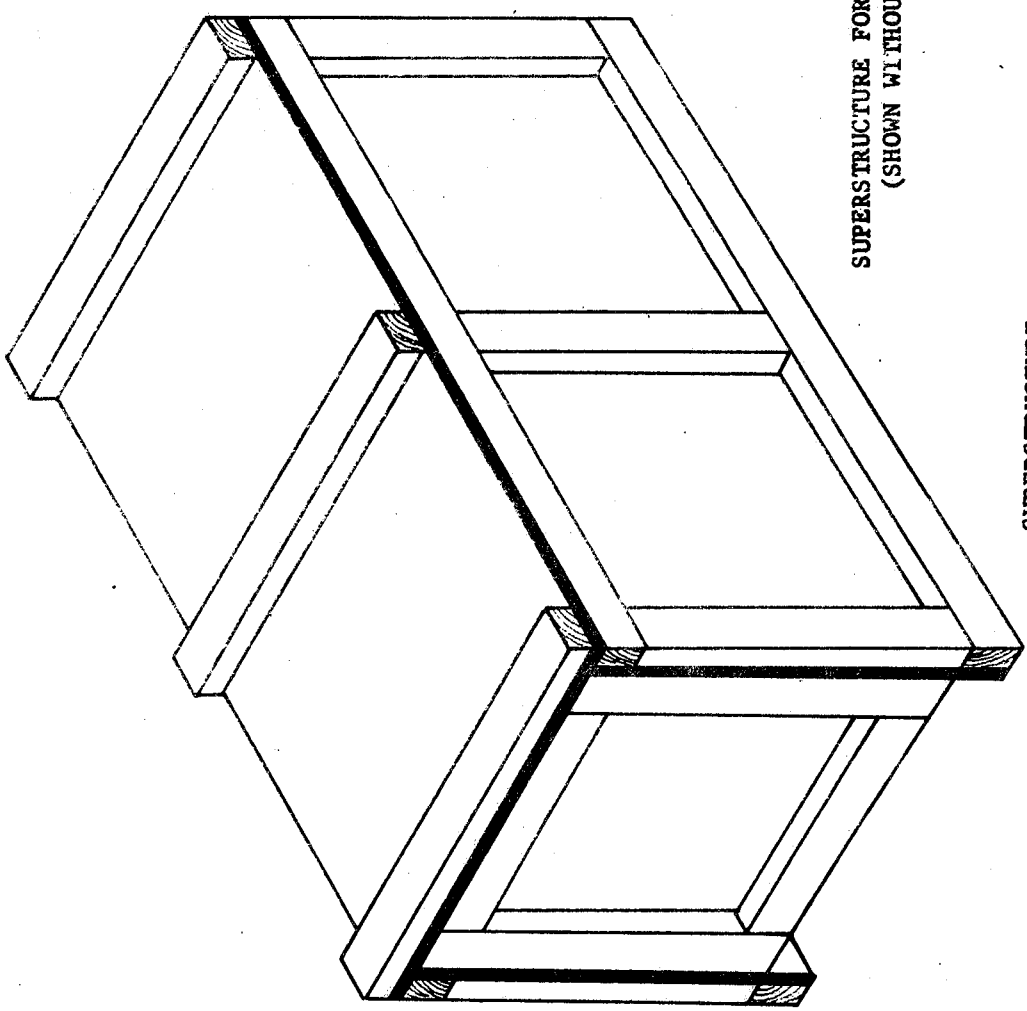

SUPERSTRUCTURE

FIGURE 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

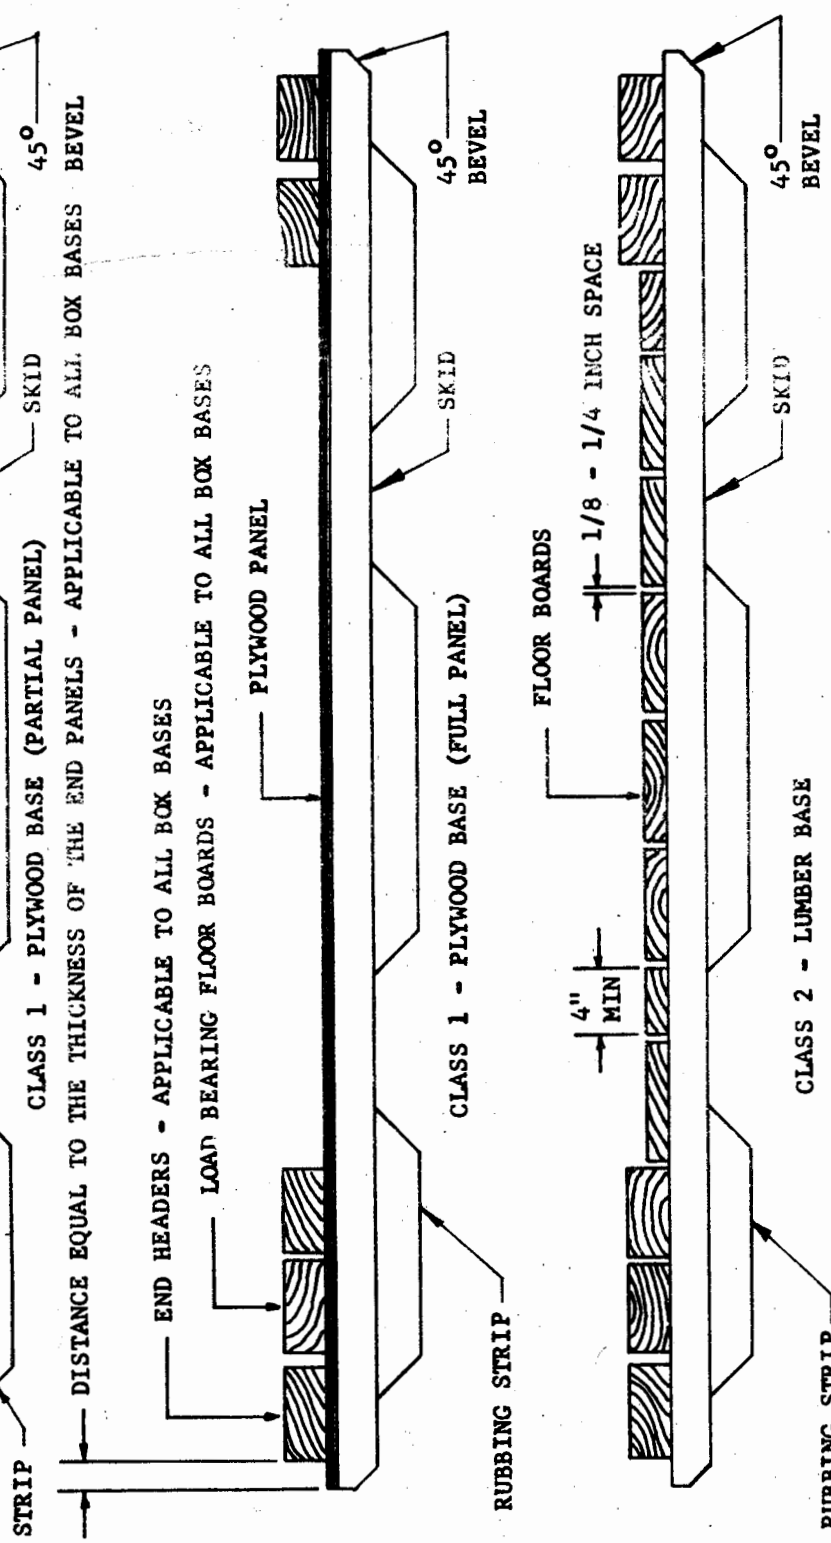


BASE COMPONENTS

FIGURE 3


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

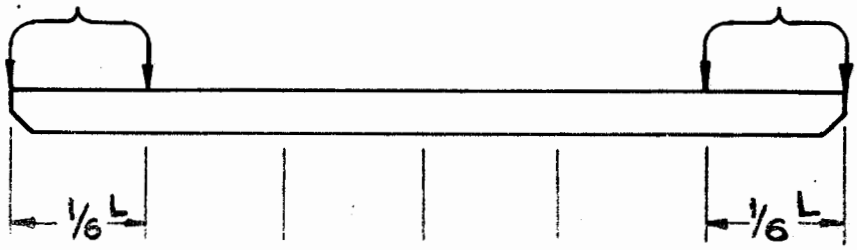

LOAD CONDITION A - LOAD BEARING POINTS ON OUTER ONE-SIXTHS OF SKID LENGTH

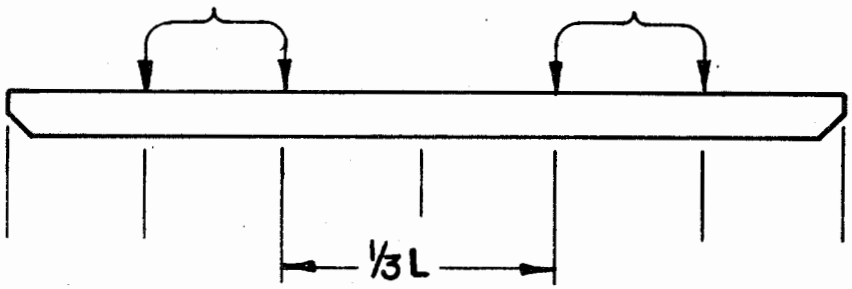


LOAD CONDITION B - LOAD BEARING POINTS OUTSIDE OF CENTRAL ONE-THIRD OF SKID LENGTH BUT NOT IN OUTER ONE-SIXTHS OF SKID LENGTH

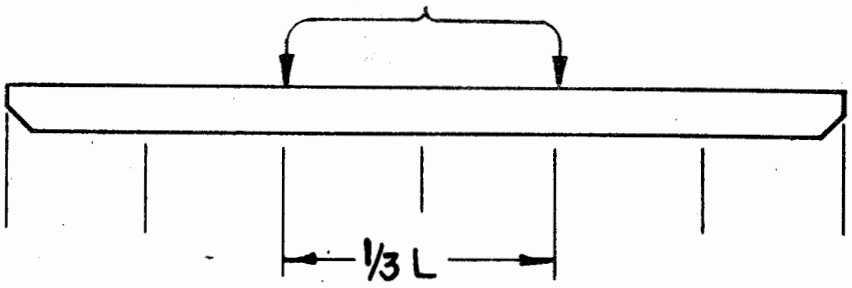


LOAD CONDITION C - LOAD BEARING POINTS WITHIN CENTRAL ONE-THIRD OF SKID LENGTH OR LOAD EVENLY DISTRIBUTED WITHIN CENTRAL ONE-THIRD OF SKID LENGTH

FIGURE 4. LOAD CONDITIONS A, B, AND C

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

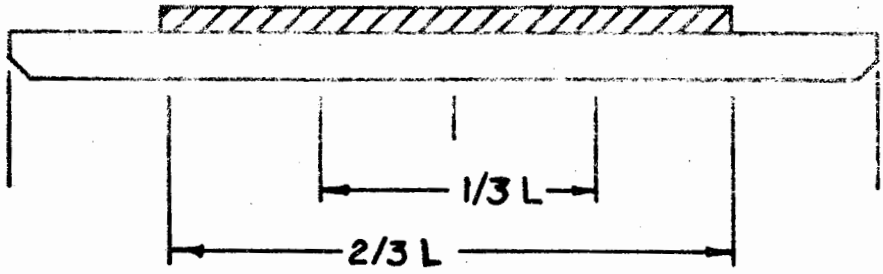

LOAD CONDITION D - LOAD EVENLY DISTRIBUTED OVER MORE THAN CENTRAL ONE-THIRD OF SKID LENGTH BUT NOT OVER MORE THAN CENTRAL TWO-THIRDS OF SKID LENGTH

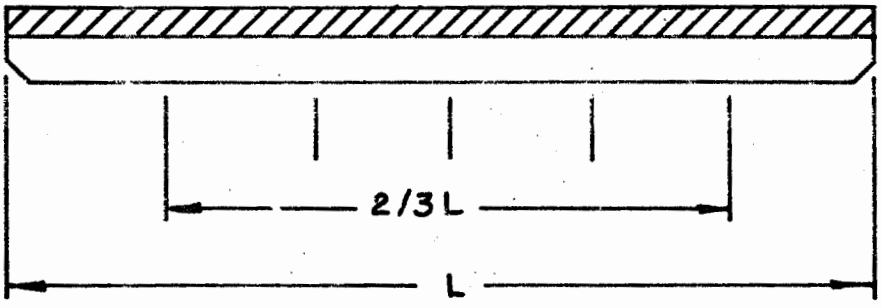


LOAD CONDITION E - LOAD EVENLY DISTRIBUTED OVER MORE THAN CENTRAL TWO-THIRDS OF SKID LENGTH

FIGURE 5. LOAD CONDITIONS D AND E

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.


1. LATERAL SUPPORT FOR JOIST
2. VERTICAL SUPPORT FOR JOIST
3. VERTICAL SUPPORT TO REST ON FLOOR OF BASE OR ON LOADBEARING MEMBERS AS APPLICABLE

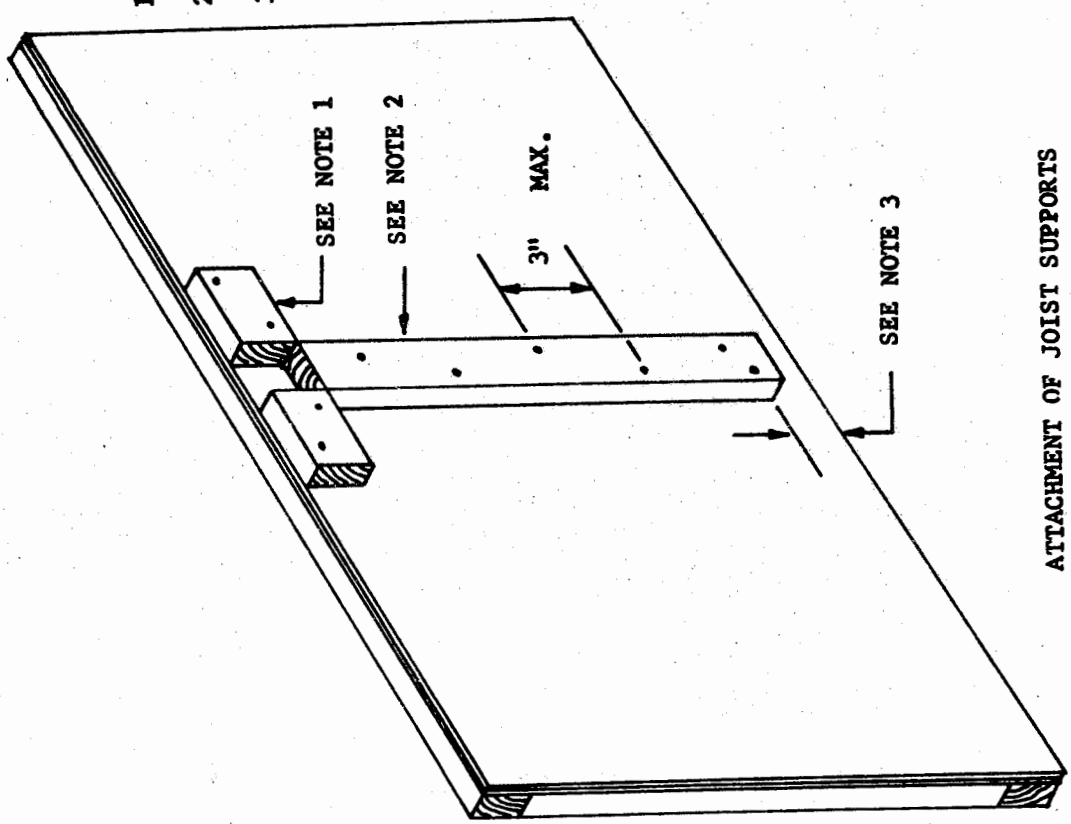


ATTACHMENT OF JOIST SUPPORTS

FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

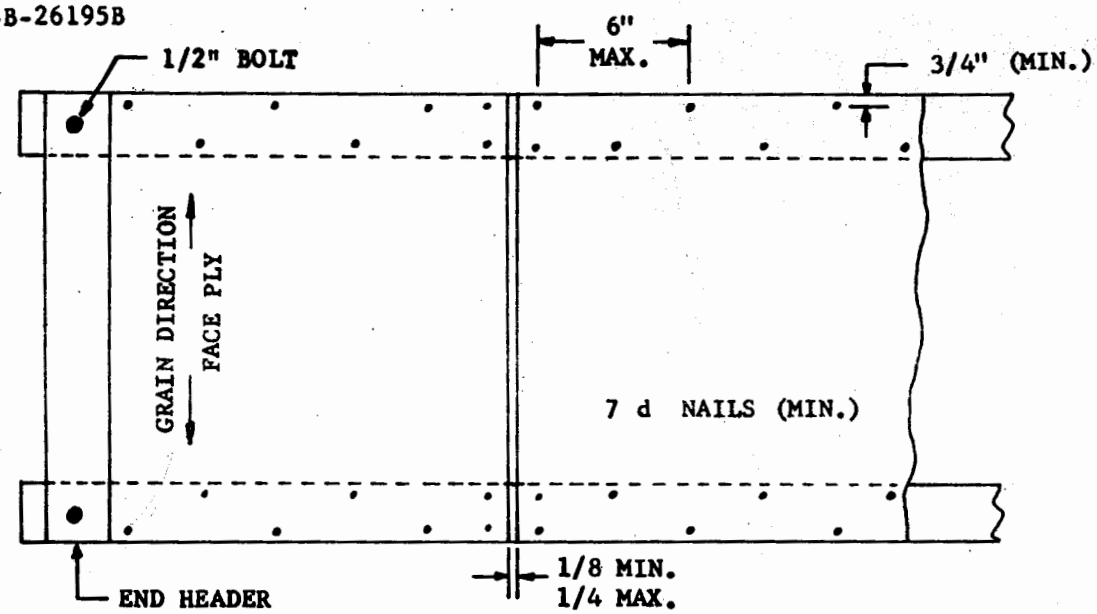

PLYWOOD FLOORING

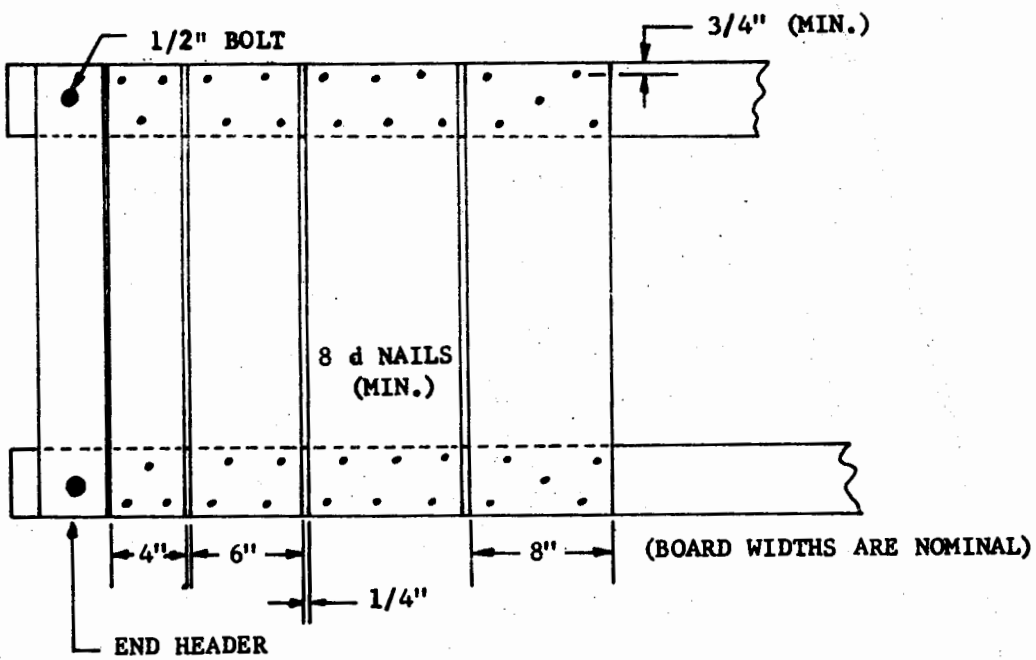

LUMBER FLOORING

NAILING PATTERN FOR BASE

FIGURE 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

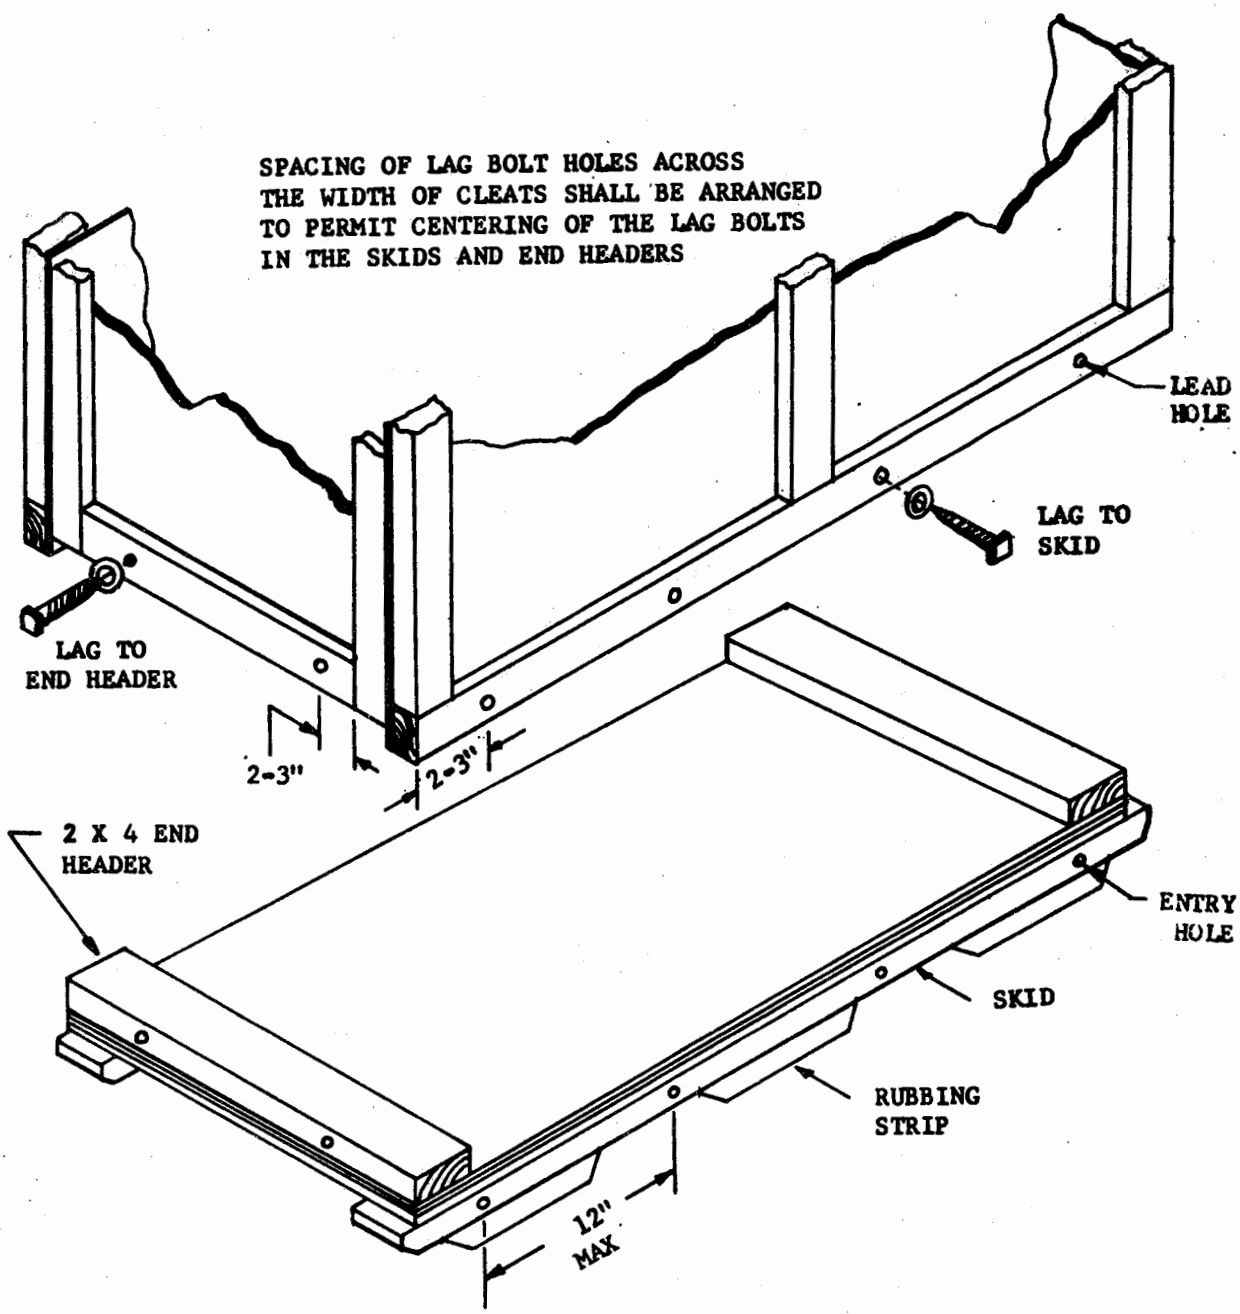


FIGURE 8 ASSEMBLY OF PANELS TO BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.