MIL-P-62331(AT)
30 March 1984
SUPERSESSION
(see 6.4)

MILITARY SPECIFICATION

PUMP ASSEMBLY, BILGE, ELECTRIC MOTOR DRIVEN, DIRECT CURRENT

This specification is approved for use by US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance and design requirements for an electric motor driven pump assembly which evacuates water from M60 series tanks.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Command, ATTN: DRSTA-GSS, Warren, MI 48090, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

FSC 4320

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS
FEDERAL

J-W-1177A/GEN	- Wire, Magnet , Electrical.

MILITARY

MIL-M-13786	- Motors, Fractional Horsepower, Direct Current and Universal.
MIL-V-24092	- Insulating Varnish, Electrical Impregnating, Solvent Containing.

STANDARDS
MILITARY

DoD-STD-100	– Engineering Drawing Practices.
MIL-STD-105	– Sampling Procedures for Tables for Inspection by Attributes.
MIL-STD-129	– Marking for Shipment and Storage.
MIL-STD-130	– Identification Marking of U.S. Military Property.
MIL-STD-193	– Painting Procedures, Tactical Vehicles.
MIL-STD-202	– Test Methods for Electrical and Electronic Component Parts.
MIL-STD-454	– Electronic Equipment, Standard General Requirements for.
MIL-STD-461A Notice 4	– Electromagnetic Interference Characteristics Requirements for Equipment.
MIL-STD-462	– Electromagnetic Interference Characteristics Measurements of.
MIL-STD-810	– Environmental Test Methods.
MIL-STD-45662	– Calibration System Requirements.

2.1.2 Other Government documents, drawings, and publications. The following documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS
ARMY

7059833	- Bilge Pump Assembly.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, If applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

MG1-4.21 - Method of Measuring the Motor Vibration (dynamic balance).

(Application for copies should be addressed to the National Electrical Manufacturers Association, 2101 L Street, NW, Washington, DC 20037.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified, the contractor shall furnish pump assemblies which shall be subjected to first article inspection (see 4.4 and 6.2). First article inspection samples, properly marked with identifying information shall be representative of the unit to be furnished to the Government. All subsequent pump assemblies delivered to the Government shall conform to these samples in all of their pertinent physical and performance attributes.

3.2 Materials. Materials shall be comparable with the requirements of this specification and as specified in referenced specifications, standards, and drawings. Materials shall be free of defects which adversely affect performance or serviceability of the finished product (see 4.1.2 and 6.3).

3.2.1 Metals and finishes. Exposed functional parts shall be fabricated from suitable corrosion resistant material or treated to prevent corrosion. Exposed nonfunctional parts shall be painted white per MIL-STD-193 (see 4.1.2)

3.2.2 Fungistatic materials. All non-metallic materials shall be inherently fungistatic or treated to resist fungus growth except when used for components of potted or otherwise moisture sealed assemblies (see 4.1.2).

3.3 Design and construction. Pump assemblies, acquired in accordance with this specification shall conform to Drawing 7059833, and specifications and standards to the extent specified herein (see 4.1.2).

3.3.1 Interchangeability. All similar parts including repair parts of the motor assembly furnished on the same order or built to the same drawings shall be completely interchangeability without further machining selective assembly or hand Fitting of any kind (see 4.1.2).

3.3.2 Standards of design. Unless otherwise specified and where applicable the motor shall conform to the following requirements of MIL-M-13786 (see 4.1.2):

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.

a. Wire superseded by J-W-l 177A/14.
b. Impregnation varnish or MIL-V-24092.
c. Lubricants.
d. Bearing.
e. Soldering, except tin/lead (Sn/pb) ratio.
f. Brushes and holders except spares not required.
g. Commutator.
h. Commutation.

3.4 Performance. Unless otherwise specified, the pump assembly shall meet the performance requirements under the following conditions:

a.	Air temperature	73 + 18 degrees Fahrenheit (“F)
b.	Pressure	28.5 + 2.0 inches of mercury - 4.5
c.	Humidity	50 + 30 percent
d.	Voltage	27.5 ± 0.5 volts direct current (vdc)

3.4.1 Voltage range. The pump assembly shall operate between 18 and 30 vdc. The output at 18 volts shall be not less than 30 gallons per minute (GPM) minimum at a 12 foot total discharge head (TDH) and at 30 volts not less than 115 GPM at a 12 foot TDH (see 4.6.1).

3.4.2 Current draw. The current draw of the pump assembly shall be as shown in figure 1 (see 4.6.2).

3.4.3 Efficiency. The pump assembly shall have an efficiency as shown in figure 1 (see 4.6.3).

3.4.4 Flow rate. The pump assembly shall have a free flow rate of 130 GPM, a flow rate of 125 GPM at a 6 foot TDH, and a 30 foot minimum stall TDH (see figure 1 and 4.6.4).

3.4.5 Durability. The pump assembly shall show no evidence of performance degradation after 140 hours of operation at variable voltage according to the schedule of figure 2, followed by 3600 cycles of operation at one minute off and one minute pumping against a 6 ft TDH with 27 + 5 vdc supplied.

3.4.6 Electromagnetic interference. The assembly shall meet the requirements of MIL-STD-461A, Notice 4 Methods CE04 for conducted emissions and RE02 for radiated emissions (see 4.6.6).

3.4.7 Dielectric strength. There shall be no continuing sparkover, no breakdown of dielectric material and no damage to the insulation which would cause failure of the pump assembly when tested in accordance with 4.6.7.

3.4.8 Insulation resistance. The insulation resistance of the pump assembly shall not be less than 12 megohms when tested at 500 VDC (see 4.6.8).

3.4.9 Dynamic balance. The pump assembly shall conform to the requirements of NEMA Standards Section MG1-4.21. The maximum peak-to-peak displacement in any direction shall not exceed .002 inch (see 4.6.9).

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T01:33Z
Check the source to verify that this is the currentversion before use.

3.4.10 Temperature. The assembly shall meet the performance requirements specified herein at temperatures ranging from 0°F to +125°F. The assembly shall not be damaged by temperatures ranging from -65°F to +160°F while not operating (see 4.6.10).

3.4.11 Vibration resistance. The assembly shall be capable of operating as specified herein after withstanding the vibration profile per figure 3 for a period of 80 minutes (including up to 4 resonance dwells of 13-1/3 minutes each) in each of the 3 mutually perpendicular axes, X, Y, and Z, shown in figure 4 (see 4.6.11).

3.4.12 Shock resistance (non-operating). The assembly shall be capable of operating as specified herein after exposure to three half sine wave shock pulses of 40 + 4 gravity units (g) peak for a duration of 18 ± 3 milliseconds applied in both directions along the 3 mutually perpendicular axes, X, Y, and Z shown in figure 4 (see 4.6.12).

3.4.13 Corrosion resistance. The assembly shall be capable of operating as specified herein after exposure to a 5% sodium chloride atomized spray for 96 hours (see 4.6.13).

3.4.14 Waterproofness. The pump assembly shall perform as specified herein after it is totaly submerged and tested for leakage in accordance with 4.6.14.

3.5 Marking. A nameplate conforming to MIL-STD-130 shall be attached securely to the pump assembly as shown on Drawing 7059833. The nameplate shall be marked to include the Military part number, National stock number, manufacturer's name, serial number and date of manufacture. In addition, the Military part number shall be permanently inscribed on the pump assembly in a clearly visible location not covered by the nameplate (see 4.5.2.2).

3.6 Workmanship. The pump assembly shall be free of any electrical, mechanical, or physical defect which would affect its reliability or performance. Workmanship shall conform to MIL-STD-494, requirement 9 (see 4.5.2.2).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform or witness any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.

4.1.1 Inspection equipment. Unless otherwise specified-in the contract, the supplier is responsible for the provision and maintenance of all inspection equipment necessary to assure that supplies and services conform to contract requirements. Inspection equipment must be capable of repetitive measurements to an accuracy of 10 percent of the component tolerance. Calibration of inspection equipment shall be in accordance with MIL-STD-45662.

4.1.2 Materials and construction. To determine conformance to 3.2 through 3.3.2, inspection and material certification records shall be maintained by the contractor. Records shall be subject to review by the Government and shall include date, part, or characteristic identification, inspection results, and disposition of lot (accepted or rejected). Corrective action taken on noted defects shall be subject to approval by the Government.

4.2 Classification of inspection:

a. First article inspection (see 4.4).
b. Quality conformance inspections (see 4.5).
    1. Examination (see 4.5.2).
    2. Acceptance tests (see 4.5.3).
    3. Control tests (see 4.5.4).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be conducted under the following conditions:

a.	Air temperature	73° + 18°F
b.	Pressure	28.5 + 2.0 inches of mercury - 4.5
c.	Humidity	50 + 30 percent
d.	Voltage	27.5 + 0.5 vdc

4.4 First article inspection. First article inspection shall be performed on preproduction or initial production samples as specified herein. Approval of the first article sample by the Government shall not relieve the contractor of the obligation to supply pump assemblies that are fully representative of those inspected as a first article sample. Any changes or deviation of the production units from the first article sample shall be subject to the approval of the contracting officer.

4.4.1 Preproduction inspection. When specified (see 6.2), the preproduction sample shall consist of two pump assemblies. Preproduction inspection samples shall be examined per table I and inspected per table II.

4.4.2 Initial production inspection. Unless otherwise specified (see 6.2), the Government shall select two pump assemblies, from the first twenty pump assemblies produced under the production contract for initial production inspection. Initial production units shall be examined per table I and inspected per table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.

4.4.3 First article inspection failure. Failure of any first article sample to pass specified examinations or tests shall be cause for refusal to grant first article approval until corrective action by the contractor has been approved by the Government.

4.5 Quality conformance inspection.

4.5.1 Sampling.

4.5.1.1 Lot formation. An inspection lot shall consist of all the pump assemblies of one type and part number, from an identifiable production period, from one manufacturer, submitted at one time for acceptance.

4.5.1.2 Sampling for examination. Samples for quality conformance examination shall be selected in accordance with general inspection level II of MIL-STD-105.

4.5.2 Quality conformance examinations.

4.5.2.1 Acceptable quality level. Each sample selected in accordance with 4.5.1.2 shall be examined to determine conformance co the following acceptable quality levels (AQL) on the basis of percent defective.

Classification	AQL
Major	2.5
Minor	6.5

4.5.2.2 Classification of defects. For examination purposes, defects shall be classified as listed in table I.

4.5.3 Quality conformance tests.

4.5.3.1 Acceptance tests (100 percent). Each pump assembly shall be subjected to the tests specified in table II.

4.5.3.2 Control tests. Control tests shall be conducted on one pump assembly from each lot of 200 units consecutively produced, except that not more than one test shall be performed in a three month period, nor less than one test in a six month period. The pump assemblies shall be subjected to the tests specified in table II.

4.5.4 Failure. Failure of any pump assembly to pass any of the specified inspections shall be cause for the Government to refuse acceptance of the production quantity represented, until action taken by the contractor to correct defects and prevent recurrence has been approved by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T01:33Z
Check the source to verify that this is the currenversion before use.

TABLE 1. Classification of defects.

Category	Defect	Method of examination
Major		
101	Dimensions affecting interchangeability not within tolerances (see 3.3).	SIE 1/
102	Metal not corrosion resistant or inadequately corrosion protected (see 3.2.1).	Visual
103	Exposed nonfunctional parts inadequately painted (see 3.2.1).	Visual
104	Fungastatic materials not furnished or properly certified (see 3.2.2).	Visual
Minor		
201	Dimensions not affecting interchangeability not within tolerances (see 3.3).	SIE
202	Improper marking (see 3.5).	Visual
203	Improper workmanship (see 3.6).	Visual
204	Pump not packaged as specified (see 5.1).	Visual

1/ SIE = Standard Inspection Equipment.

4.6 Method of inspection. Unless otherwise specified the tests listed in table II shall be performed as specified herein.

4.6.1 Voltage range. Operate the assembly at an input voltage of 18 vdc against a 12 foot TDH for 15 minutes. Raise the voltage to 30 vdc and operate for an additional 15 minutes. Verify that the assembly operates as specified in 3.4.1. The assembly may be immersed in water for cooling after the initial 15 minutes of operation.

4.6.2 Current. Subject the assembly to 27.5 ± 0.5 vdc at a 6 foot TDH. Repeat at 20 foot and 30 foot TDH. Verify that the current is as specified in 3.4.2.

4.6.3 Efficiency. Subject the assembly to 6, 20, and 30 foot TDH. Verify that the efficiency is as specified in 3.4.3.

4.6.4 Flow rate. Subject the assembly to 0, 6, and 30 foot TDH and verify that the flow rate is as specified in 3.4.4.

4.6.5 Durability. To determine conformance to 3.4.5 the pump assembly shall be subjected to 140 hours of continuous running at each of the voltage variations of figure 2. After the initial 15 minutes of operation the body of the assembly may be submerged in water for cooling. After 140 hours of continuous operation, subject the assembly to 3600 cycles on operation consisting of one minute pumping a 6ft TDH at 27. 5 + 0.5 vdc followed by one minute at zero voltage. The body of the pump may be submerged in water for cooling. Upon completion of the cycling test subject the assembly to the efficiency test of 4.6.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of tests.

Title	Requirement	Test	First article	Quality conformance	
				Acceptance (100%)	Control
Voltage range	3.4.1	4.6.1	X		
Current draw	3.4.2	4.6.2	X		X
Efficiency	3.4.3	4.6.3	X		X
Flow rate	3.4.4	4.6.4	X		X
Durability	3.4.5	4.6.5	X		X
Electromagnetic interference	3.4.6	4.6.6	X		X
Dielectric strength	3.4.7	4.6.7	X		
Insulation resistance	3.4.8	4.6.8	X		
Dynamic balance	3.4.9	4.6.9	X		X
Temperature resistance	3.4.10	4.6.10	X		X
High		4.6.10.1			
Low		4.6.10.2			
Vibration resistance	3.4.11	4.6.11	X		
Control		4.6.11.1			X
Shock resistance	3.4.12	4.6.12	X		
Control		4.6.12.1			X
Corrosion resistance	3.4.13	4.6.13	X		
Waterproofness	3.4.14	4.6.14		X	

4.6.5.1 Control. The control test shall be the same as 4.6.5 except the continuous running shall be for six hours at each voltage level of figure 2 for a total of 36 hours, and the cycling shall be for a total of 15 hours of "on" time.

4.6.6 Electromagnetic interference. To verify conformance to 3.4.6, subject the assembly to the electromagnetic interference tests specified in MIL-STD-462, methods CE04 and RE02. At the conclusion of this test a certification shall be provided attesting that the assembly meets the corresponding requirements of MIL-STD-461A, Notice 4.

4.6.7 Dielectric strength. To verify conformance to 3.4.7, prior to final assembly perform the dielectric strength test on the armature and field windings separately in accordance with MIL-STD-202, method 301. Apply 500 volts root mean square (vrms) at a frequency of 60 Hertz (Hz) for a period of 75 + 5 seconds. Verify that there is no continuing sparkover, no breakdown of Dielectric material, and no damage to the insulation which would cause failure of the pump assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.

4.6.8 Insulation resistance. Prior to final assembly, to verify conformance to 3.4.8, stabilize the assembly at 77°F + 10°F and measure the insulation resistance between (1) the positive lead and frame ground for each field circuit, and (2) between commutator and shaft for the armature circuit in accordance with MIL-STD-202, method 302, test condition B. Verify that the resistance is not less than 12 megohms for each field circuit and for the armature circuit including the insulated brush holders.

4.6.9 Dynamic balance. Place the assembly on an elastic mounting in an operating position. The weight of the assembly should compress an elastic mounting approximately 0.25 inch, or position the assembly such that the natural frequency is one quarter or less of the operating rpm. Operate the assembly at reduced voltage, full load speed. Measure the amplitude of running vibration at the drive end in three axes and verify that it does not exceed 0.002 inch displacement as required in 3.4.9.

4.6.10 Temperature resistance. To verify conformance to 3.4.10 perform the tests of 4.6. 10.1 and 4.6.10.2.

4.6. 10.1 High temperature. Test the pump assembly at the required high temperature of 3.4.10 in accordance with MIL-STD-810, method 501.1, procedure II. At the conclusion of step 4 (at 160°F), stabilize the assembly and water to be used in the test at 125°F and test the pump assembly in accordance with 4.6.3. During the initial 15 minutes of operation, only the pump section of the assembly shall be submerged. Return the pump assembly to ambient temperature and test in accordance with 4.6.3.

4.6.10.2 Low temperature. Test the pump assembly at the required low temperature of 3.4.10 in accordance with MIL-STD-810, method 502.1, procedure 1. Maintain the temperature of step 2 at 65°F for a period of 12 hours minimum. At the conclusion of this time, stabilize the pump assembly at 0°F and test it in accordance with 4.6.3. Return the assembly to standard ambient temperature and test in accordance with 4.6.3.

4.6.11 Vibration resistance. To determine conformance to 3.4.11 the assembly shall be mounted as shown in figure 4 and subjected to the vibration test specified in MIL-STD-810C, method 514.1, procedure VIII, except as follows:

a. Test level shall be the vibration curve shown in figure 3. Time schedule shall be 40 minutes per axis including 6-2/3 minutes dwell time at each resonance.

b. Connections and instrumentation shall be attached to the assembly to permit testing as specified in c through g.

c. Conduct resonant frequency search along each axis at room temperature and with input power applied over the frequency range of 5 to 500 Hz. Up to four resonant frequencies shall be identified (the four most severe resonant frequencies if more than four are present) in each axis for the resonant dwell test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.

d. Place the assembly in a 125°F ambient temperature chamber.

e. Conduct sinusoidal vibration cycling and resonant dwell tests at 125°F and at the test levels and time schedules identified in "a" above.

f. Repeat the test described in "d" and "e" above except the ambient temperature shall be 0°F.

g. At the conclusion of the vibration test of "f" above return the assembly to room temperature and subject it to the efficiency test of 4.6.3.

4.6.11.1 Control. The control test shall be the same as 4.6.11 except the temperature shall be 73 + 18°F and the time schedule shall be 40 minutes per axis including two minutes dwell time at each resonance.

4.6.12 Shock resistance. To determine conformance to 3.4.12 mount the assembly as specified in figure 4 and apply three half wave sine pulses in both directions along each of 3 mutually perpendicular axes, X, Y, and Z. Test in accordance with MIL-STD-810, method 516, procedure I for a total of 18 shock pulses. Peak amplitude shall be 40 + 4 gravity units (g) with a time duration of 18 + 3 msec measured at the 10 percent amplitude points. At the conclusion of this test, test the assembly in accordance with 4.6.3.

4.6.12.1 Control. This test shall be the same as 4.6.12 except that the shock level shall be limited to 30 + 3g.

4.6.13 Corrosion resistance. Subject the assembly to the corrosion resistance test specified in MIL-STD-810, method 509. Verify conformance to 3.4.13. At the conclusion of this test, test the assembly in accordance with 4.6.3.

4.6.14 Waterproofness. To determine conformance to 3.4.14 the assembly shall be submerged in clear water at ambient temperature with the electrical connector capped and with the uppermost surface of the assembly a minimum of one inch below the surface of the water. A pressure differential of 6 psi shall be developed such that the assembly's internal air pressure exceeds the external pressure. the pressure differential shall be maintained for a two minute period without evidence of leakage. Bubbles which are the result of entrapped air on exterior surfaces of the assembly shall not be considered a leak. The pump assembly shall not be electrically operated during immersion. At the conclusion of the test, subject the assembly to the efficiency tests of 4.6.3.

5. PACKAGING

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking for the desired level shall be in accordance with the applicable packaging standard or packaging data sheet specified by the contracting authority (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The assembly is intended for use on the M60 series tanks to evacuate water from the crew compartment.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Applicable drawing (see 3.3).
c. Applicable level of packaging, packing and marking (see 5.1).
d. If first article samples are not required (see 3.1).
e. If responsibility for inspection shall be other than as specified (see 4.1).
f. If responsibility for inspection equipment shall be other than as specified (see 4.1.1).
g. If inspection conditions shall be other than as specified (see 4.3).
h. If preproduction inspection is required (see 4.4.1).
i. If initial production inspection is required (see 4.4.2).

6.3 Recycled materials. The use of recycled materials which meet the requirements of the applicable material specifications without jeopardizing the intended use of the item shall be encouraged (see 3.2).

6.4 Supersession data. This military specification supersedes purchase description M60PD-P-62331, 6 July 1981.

Custodian:
Army - AT

Preparing activity:
Army - AT

Project No. 4320-A203

U S GOVERNMENT PRINTING OFFICE 1984—705-040/A2038

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.

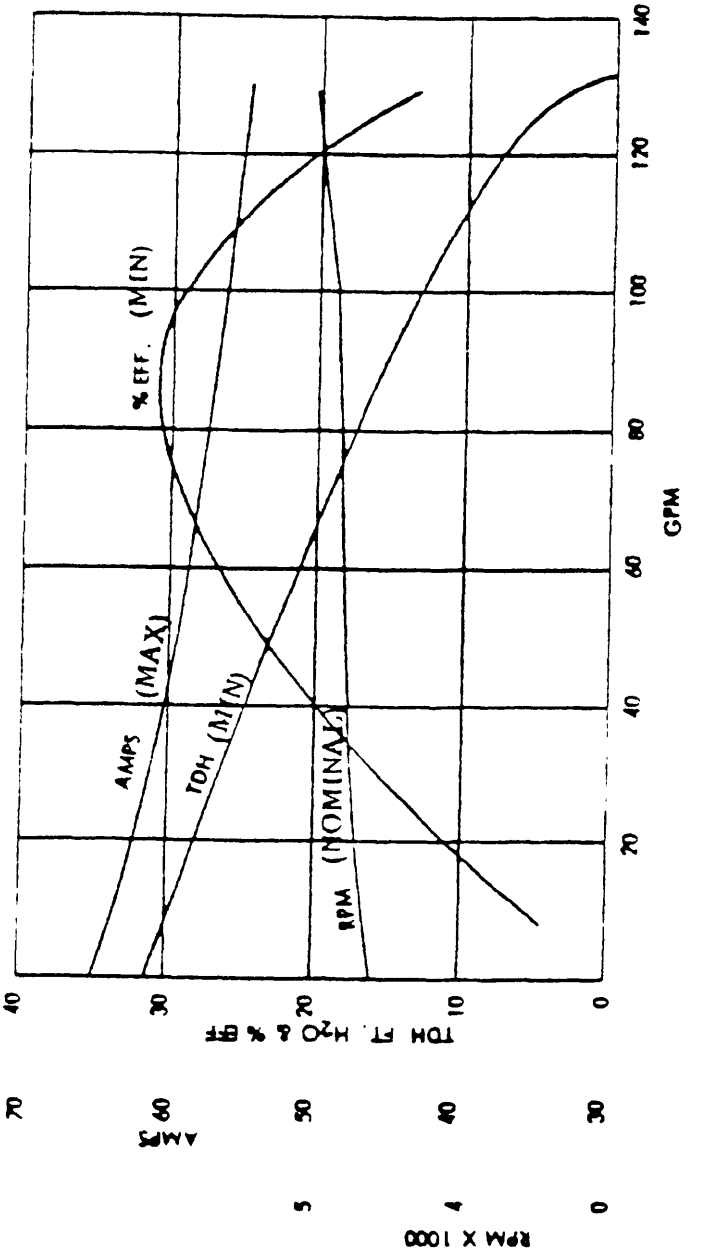


Figure 1. Performance curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.

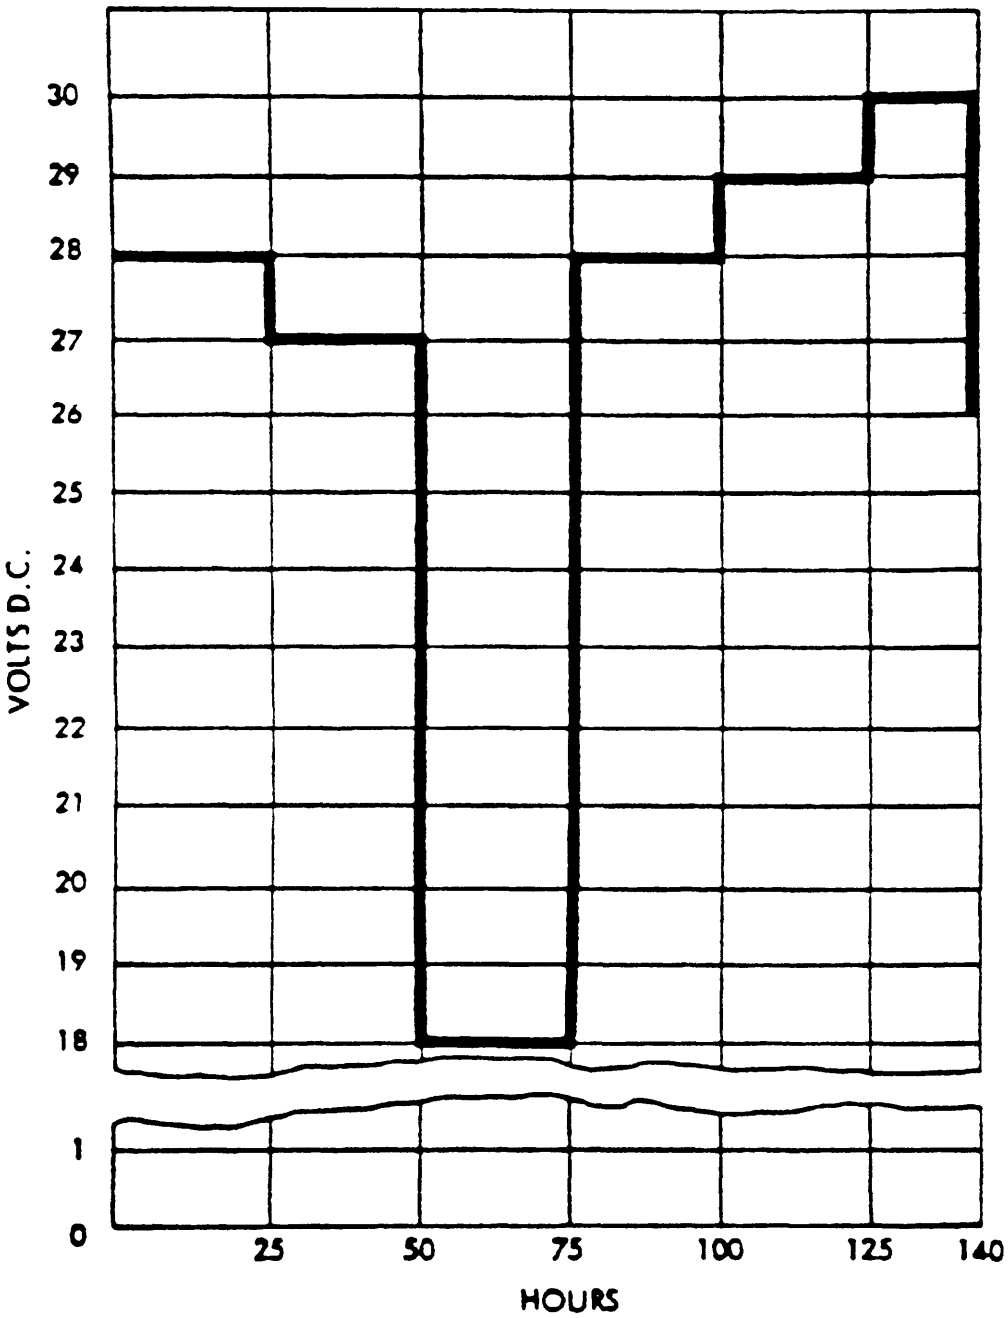


Figure 2. Endurance - Continuous running.

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:33Z
Check the source to verify that this is the currentersion before use.

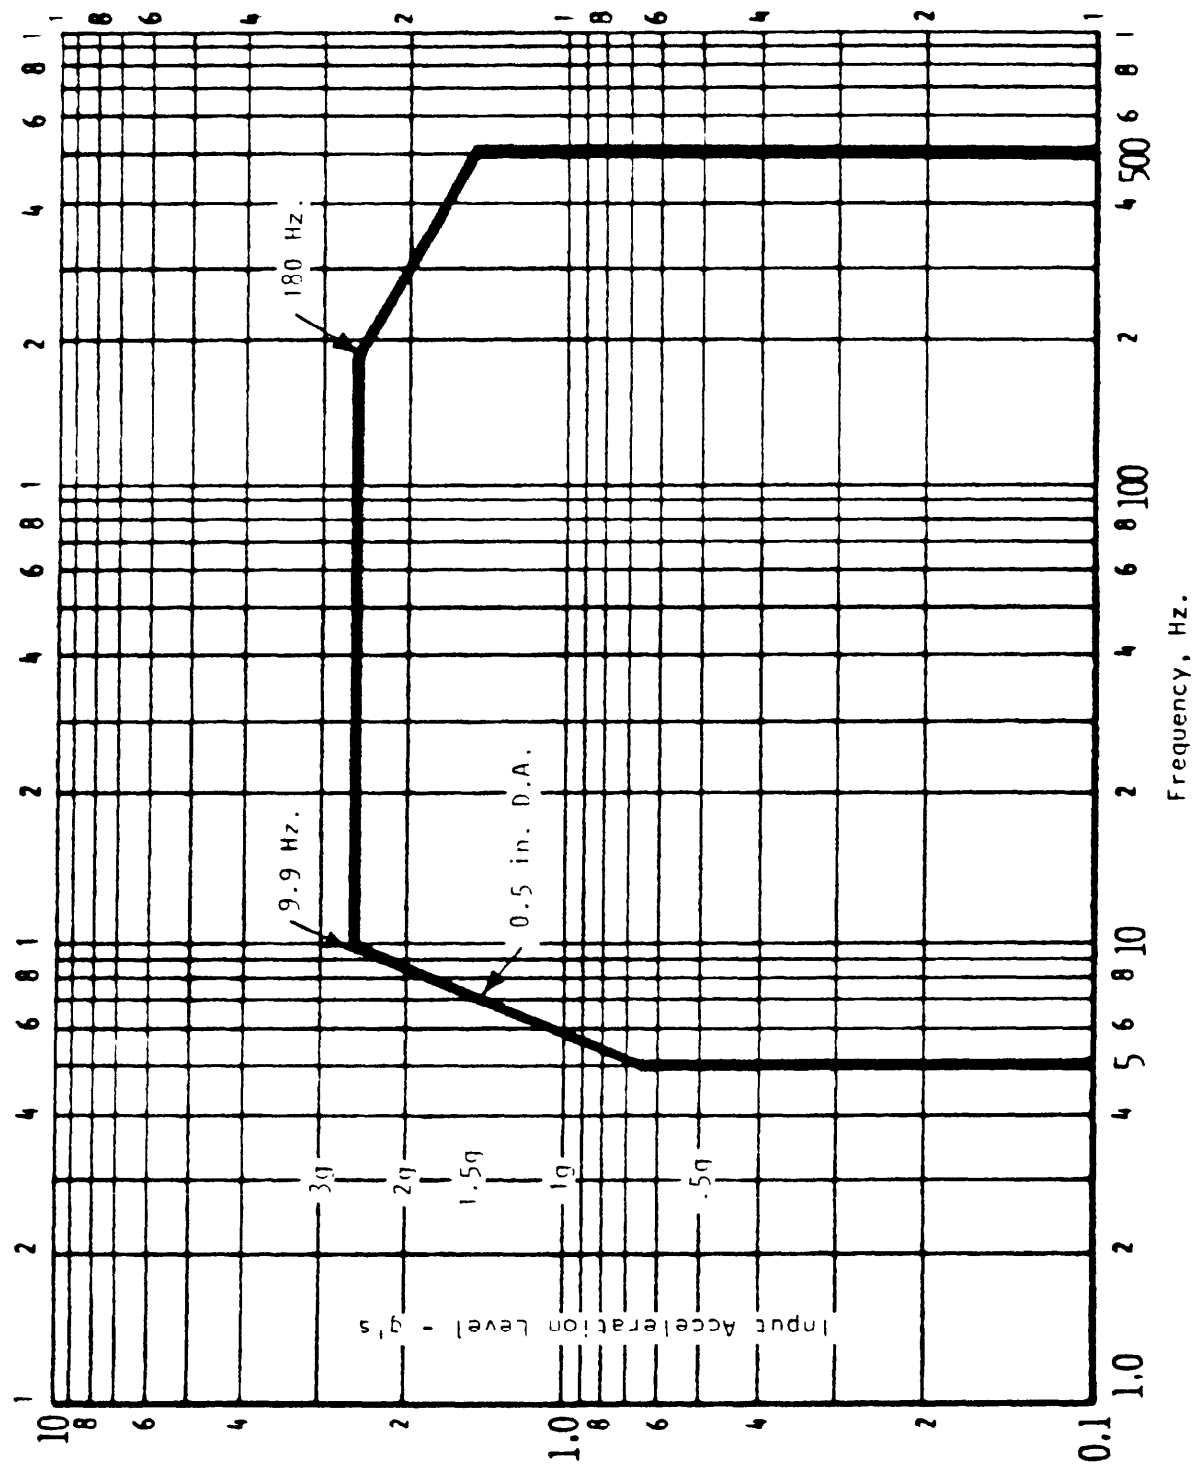


Figure 3. Vibration profile

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:33Z
Check the source to verify that this is the current version before use.

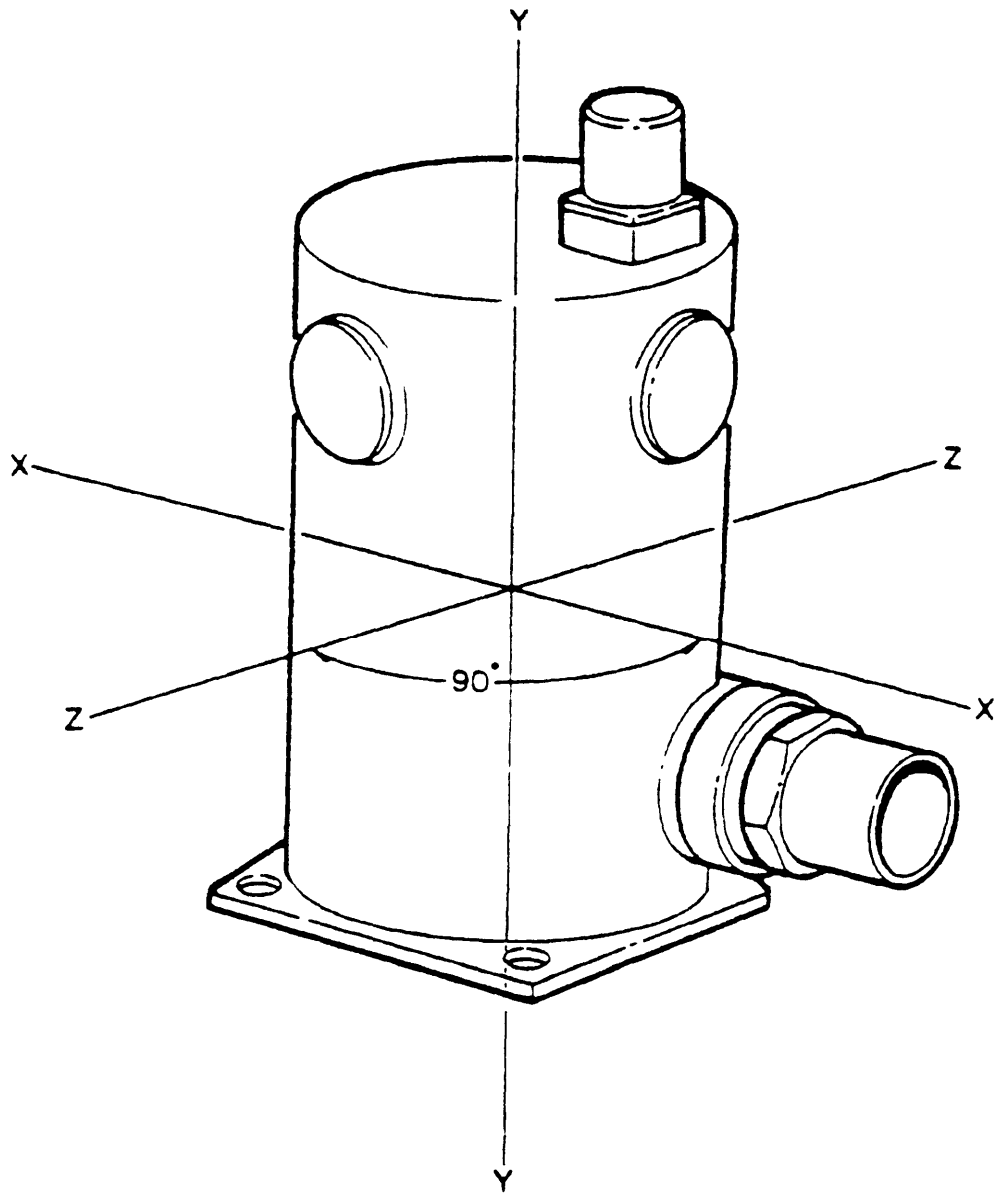


Figure 4. Shock and vibration axis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use submitting comments and suggestions for improvements. All users of military standardization documents are invited to provi suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, a mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAG
NECESSAR
IF MAILED
IN THE
UNITED STA

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Tank-Automotive Command
ATTN: DRSTA-GSS
Warren, MI 48080

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:33Z
Check the source to verify that this is the current version before use.