MILITARY SPECIFICATION

PUMP, SEA WATER

This amendment forms a part of MIlitary Specification MIL-P-82442(OS) dated 10 May 1966.

Wherever it appears in specification delete ‘Bureau of Naval Weapons" and substitute "Naval Sea Systems Command’; also, delete "BuWeps" and substitute "NAVSEA".

PAGE 1

Paragraph 2.1, under SPECIFICATIONS: Delete "MIL-G-4343" and its title.

* Paragraph 2.1, under STANDARDS: Delete "MS-29561, Packing, Preformed, O, Ring, Synthetic Lubricant Resistant”.

Paragraph 2.1, under DRAWINGS: Delete "Pump Assemnly, Sea Water" and substitute “Pump Assembly, Sea Water”; delete "Packing, Preformed" and substitute ‘Packing, Preformed".

At the bottom of page, add ‘the following:

"Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Ordnance Station, Standardization/Documentation Division (Code 3730), Indian Head, MD 20640-5000".

PAGE 3

Paragraph 3.3.1. Delete and substitute:

"3.3.1 Pressure and flow requirements. The pump shall deliver 8.3 gallons per minute (gpm) minimum during The initial test of 1-1/2 minutes duration, when operating at 3880 +10 revolutions per minute (rpm) and having an inlet pressure of 15 ±2 pounds per square inch gage (psig) and outlet pressure adjusted to 265 ±10 psig. The flow rate of the pump, when operated under the same conditions as above, must be at least 7.5 gpm during the first six duty cycles of the operational service life of the pump, and at least 6.8 gpm during the remaining four duty cycles".

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:08Z
Check the source to verify that this is the current version before use.

PAGE 5

Paragraph 4.1. Delete and substitute:

"4.1 Responsibility for inspection. Unless otherwise specified in the contract. the contractor is responsibile for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the Inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the Inspection set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements".

PAGE 9

Paragraph 4.4.4.1. Delete and substitute:

'4.4.4.1 Operational test. Install the pump In the pump test stand and connect it to The appropriate fittings in accordance with Figures 1 and 2. With the drive unit operating the pump at 3880 ±10 rpm and with an inlet pressure of 15 ±2 psig, the output pressure shall be adjusted to 265 ±10 psig. The flow rate shall be at least 7.5 gpm during the first six duty cycles of the operational service life, and at least 6.8 gpm during the remaining four duty cycles, The pump shall operate for one complete duty cycle of 7 minutes on salt water, Post-test servicing and maintenance shall be performed in accordance with 4.5.7".

PAGE 10

Paragraph 4.4.4.4, lines 4 and 5: Delete 'in accordance with Table VIII in the sequence shown' and substitute "in accordance with Table VIII. Test sequence is optional.Q

Table VIII: Delete "Test Sequence" column entirely.

PAGE 13

Paragraph 4.5.3, line 4: Delete "charcteristics indicated:" and substitute "characteristics indicated: (See Figure 2)". .

Paragraph 4.5.3(a): Delete 'Pressure gage " and substitute 'Pressure gage, outlet:"

Paragraph 4.5.3(b): Del ete 'Horsepower: two nominal" and substitute 'Horsepower: two minimum".

Paragraph 4.5.3(e): Delete and substitute:

"(e) Variable orifice:

When connected in the test configuration, the orifice shall be capable of restricting the outlet water flow to produce a pressure of 265 ±10 psig minimum as indicated on the outlet pressure gage".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:08Z
Check the source to verify that this is the current version before use.

Paragraph 4.5.3 Add the following subsections:

"(f) Pressure gage, inlet:

Range:	O to 25 psig
Accuracy:	±2% full" scale
Operating temperature	+25°F to +150°F minimum
Gage size:	6-inch minimum"

‘(9) Filter:

Element ;	50 microm maximum
Operating pressure	50 psig minimum
Flow capacity:	10 gpm minimum"

‘(h) Flow meter:

Range:	0 - 10 gpm, accuracy to ±2% full scale
Minimum operating temperature:	+25°F to +lOO°F"

PAGE 14

Paragraph 4.5.4.2. Delete and substitute:

"4.5.4.2 Operation. Install the pump in the pump test stand and connect it to the appropriate fittings in accordance with Figures 1 and 2. With the drive unit operating the pump at 3880 ±10 rpm and with an inlet pressure of 15 ±2 psig, the output pressure shall be adjusted to 265 ±10 psig. The flow rate shall be at least 8.3 gpm. The pump shall operate for 1 1/2 minutes on tap water. Post-test servicing and maintenance shall be performed in accordance with 4.5.7. When this acceptance test is performed as part of the preproduction test schedule, the minimum flow rate shall be 7.5 gpm".

Paragraph 4.5.7. Delete and substitute:

"4.5.7 Post-test servicing and maintenance. The pump shall be disassembled and cleaned after each run. All packing preforms shall be replaced. The pump shall then be reassembled. ‘The vanes must be Installed in their original position with regard to rotation and contact edge, but may be interchanged from slot to slot. The wear plate shall not be reversed from its original position. The pump shall be lubricated in accordance with instruction on Drawing 1568923’.

After paragraph 4.5.7 add new paragraph as follows:

"4.5.8 Packaging. packing, and marking. Packaging, packing, and marking shall comply with the requirements of Section 5’.

PAGE 17

Paragraph 4.7.3. Delete the following:

‘Grease	MIL-G-3278
Lubricant	MIL-L-4343"

*Paragraph 4.7.4, Under IDENTIFICATION delete "MS-29561-012, 014, 016" and substitute ‘1550752-15, 16, 17’.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:08Z
Check the source to verify that this is the current version before use.

PAGE 18

* Paragraph 4.7.4. Under IDENTIFICATION delete "NAS-617-4" and substitute "1.557052-24'.

PAGE 22

Replete Figure 2 with new Figure 2, attached.

The margins of this amendment are marked with an asterisk to Indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any Inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian
Navy - OS

Preparing Activity
Navy - OS
Project No. 1355-N

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:08Z
Check the source to verify that this is the current version before use.

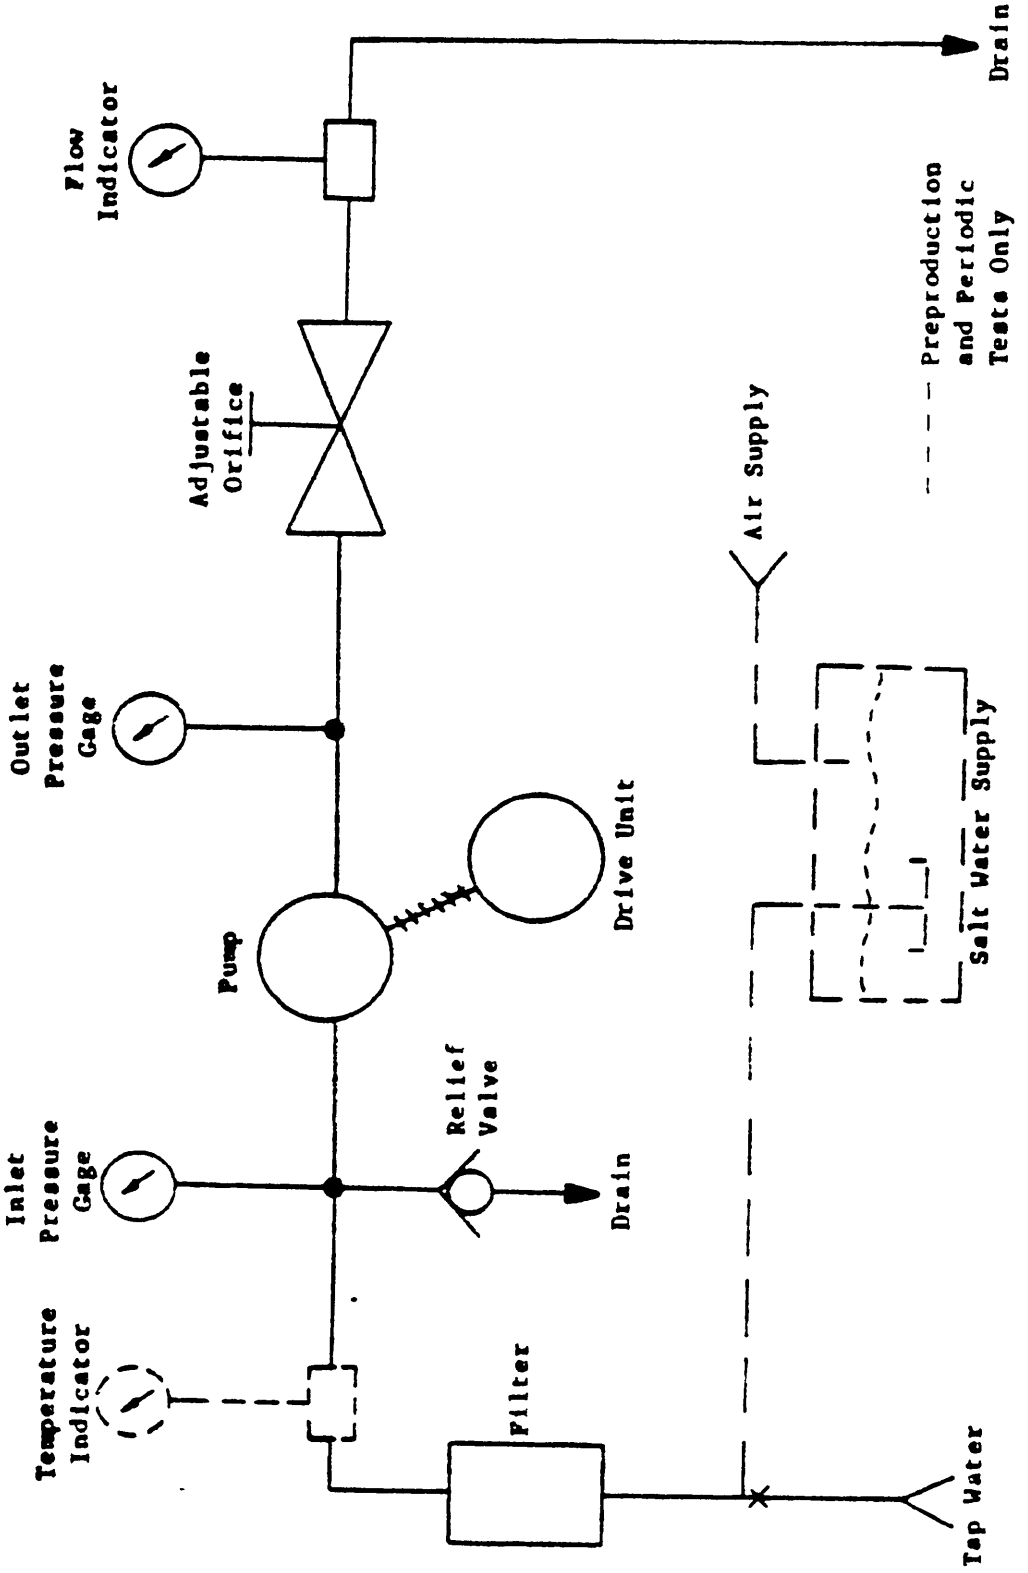

Figure 2, Seawater Pump Flow Diagram

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:08Z
Check the source to verify that this is the current version before use.