MIL-T-22477(Wep)
22 April 1960
SUPERSEDING
NAVORD OS 7172 C
2 December 1958

MILITARY SPECIFICATION

TRANSFORMER ASSEMBLY MARK 1 MOD 0

This specification has been approved by the
Bureau of Naval Weapons, Department of the Navy.

1. SCOPE

1.1 This specification describes the requirements for the procurement of Transformer Assembly Mark 1 Mod 0, Bureau of Naval Weapons LD 479305.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Fiber

MILITARY

MIL-I-6865	Radiographic Inspection
MIL-P-116	Preservation, Methods of

FSC 1135

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:40Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-354	Temperature and Humidity Tests

DRAWINGS

NAVY DEPARTMENT

LD 479305	Transformer Assembly, Mark 1 Mod 0

PUBLICATIONS

BUREAU OF ORDNANCE

NAVORD OP 400	General Instructions for the Design, Manufacture, and Inspection of Naval Ordnance Equipment

(Copies of specifications, standards, drawings, and publications required by the contractor in connection with specific procurement functions should be obtained from the procuring activity, or as directed by the contracting officer.)

2.2 Other publications. - The following documents form a part of this specification. Unless otherwise indicated, the issue in effect on the date of invitation for bids shall apply.

Source: https://assist.dla.mil -- Downloaded: 20261 0-19T12:40Z
Check the source to verify that this is the current version before use.

AMERICAN STANDARDS ASSOCIATION

Standard No. Z54.1 -1946-Safety Code for the Industrial use of X-Rays

(Copies of this standard may be obtained upon application to the American Standards Association, 70 East 45th Street, New York 17, New York).

NATIONAL BUREAU OF STANDARDS PUBLICATIONS

Handbook H28 and 1950 Supplement- Screw Thread Standards for the Federal Services

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington 25, D. C.)

3. REQUIREMENTS

3.1 Description. - The Transformer Assembly, Mark 1 Mod 0, includes two transformers, each of which has one primary and five secondaries. The transformer is part of the Battery Power Supply, Mark 107 Mod 0, and Mod 1, and its function is to initiate the Battery Power Supply.

3.2 General requirements.

3.2.1 Preproduction samples. - Unless otherwise specified in the contract or order, preproduction samples of the Transformer Assembly, Mark 1 Mod 0, shall be manufactured using the methods and

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:40Z
Check the source to verify that this is the current version before use.

procedures proposed for the production lot. These samples will be tested as specified in section 4 herein and are for the purpose of determining that the production item meets the requirements of this specification and the design. See 4.1.2.

3.2.2 Materials. - Unless otherwise specified in the contract, requisition or order, all materials and purchased parts entering into the final assembly of the Transformer Assembly, Mk 1 Mod 0, shall conform strictly to the detailed requirements indicated on the drawings and specifications listed in BUORD LD 479305.

3.2.3 Finishes, coatings, construction, and dimensions. - Finishes, coatings, construction, and dimensions for the Transformer Assembly, Mk 1 Mod 0, shall be strictly in accordance with the applicable drawings, specifications, and publications listed in BUORD LD 479305.

3.2.4 Markings. - Marking of assemblies, sub-assemblies and parts shall be in accordance with the applicable drawings listed in BUORD LD 479305.

3.2.5 Interchangeability. - Component parts of assembled units (unless otherwise specified on the applicable drawings) fabricated in strict accordance with their applicable drawings shall be interchangeable and shall assemble with mating components of the unit without selection or fitting. If, during the assembly of the fabricated parts of a unit, selection or fitting is required, then changes in dimensions are necessary and revision and correction of the applicable drawings is required. See 3.2.9.

3.2.6 Gages. - The contractor shall provide himself with whatever gages are necessary and adequate to insure that the material to which this specification applies will meet the dimensional requirements shown on the applicable drawings. If so stipulated in the contract, order or requisition, the Government will furnish drawings of the pertinent Navy Final Inspection Gages for guidance in the design of the contractor's inspection gages. However, such procedure shall not serve to relieve the contractor of his responsibility, in the design and manufacture of such gages as may be required in the satisfactory fulfillment of the contract requirements, but is intended to facilitate acceptance of all components and assemblies by Navy Final Inspection Gages.

3.2.7 Threads. - Unless otherwise specified, all threads shall be in accordance with the National Bureau of Standards Handbook H28 and

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:40Z
Check the source to verify that this is the current version before use.

Supplements thereto. The class or fit for threads shall be as specified on the applicable drawings, and the NOT-GO gaging practice shall be as set forth in the supplement to the aforementioned Handbook H28.

3.2.8 Requests for deviation. - Requests for deviation from this specification, applicable drawings, specifications, publications, materials and processes specified herein, shall be as set forth in OP 400.

3.2.9 Conflicting requirements. - Conflicting requirements arising between this specification and any specifications, publications, or drawings listed herein shall be referred in writing to the procuring agency or appointed agent for interpretation, clarification, and resolution (or correction).

3.2.10 The requirements and procedures established in OP 400 shall be complied with, as applicable.

3.3. Definitions. - For the purpose of this specification, the following definitions are applicable:

3.3.1 Transformer assembly. - Reference to the transformer assembly, unless otherwise indicated, shall mean Transformer Assembly Mark 1 Mod 0 as covered by BUORD LD No. 479305.

3.4 Performance requirements and product characteristics. - The transformer assembly shall meet the following performance requirements and product characteristics:

3.4.1 Circuit resistance. - The transformer assembly shall be subjected to the circuit resistance tests as specified in 4.5.4.1 to assure continuity of all circuits connected by design. The measured resistance of each circuit tested shall be as indicated in 4.5.4.1.

3.4.2 Insulation resistance. - The transformer assembly shall be subjected to the insulation resistance tests as specified in 4.5.4.2 and the resistance between each circuit and all non-connected circuits and the transformer case tied to ground shall be greater than 100 megohms.

3.4.3 Potting. - The transformer assembly shall be radiographed and inspected as specified in 4.5.4.3. The transformer case shall be completely filled and there shall be no voids in the potting material at a level more than 1/8 inch below the terminal board.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:40Z
Check the source to verify that this is the current version before use.

3.4.4 Operability. - When the transformer assembly is tested as specified in 4.5.4.4, the output windings 1 thru 4 shall deliver a pulse of at least 3 volts of 1.9 milliseconds and the output windings number 5 shall deliver a pulse of at least 6 volts for 1.9 milliseconds.

3.5 Environmental requirements.

3.5.1 Storage life. - The transformer assembly, with no packaging, shall be subjected to the heat and temperature conditions as specified in 4.6.1.1 as an indication of satisfactory five year storage life and thereafter shall show no damage and shall meet the performance requirements and the product characteristics of this specification.

3.5.2 Vibration, aircraft, test. - The transformer assembly shall be subjected to the vibration schedule as specified in 4.6.1.2 and thereafter shall show no damage and shall meet the performance requirements and the product characteristics of this specification.

3.5.3 Shock, operational, test. - The transformer assembly shall be subjected to the shock test as specified in 4.6.1.3 and thereafter shall show no damage and shall meet the performance requirements and the product characteristics of this specification.

3.6 Clean-up. - Prior to and after final assembly all parts, components and the assembly shall be thoroughly cleaned of loose, spattered or excess solder, metal chips, and other foreign matter. Burrs and sharp edges as well as rosin flash shall be removed.

3.7 Workmanship. - The equipment, including all parts and accessories, shall be constructed and finished in a manner to assure compliance with all requirements of this specification. Particular attention shall be paid to neatness and thoroughness of soldering, wiring, marking of parts and assemblies, machine screw assemblage, and freedom of parts from burrs and sharp edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Government inspection. - The Government inspector will observe the quality control operations of the contractor and, as necessary, will perform or participate in verifying tests and inspections to assure that the transformer assembly covered by this specification conforms to all applicable requirements.

4.1.1 Sampling. - Unless otherwise specified, and when applicable, the sampling plans and procedures used by the Government inspector in the determination of the acceptability of products submitted by a supplier for Government inspection shall be in accordance with the

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:40Z
Check the source to verify that this is the current version before use.

provisions set forth in MIL-STD-105.

4.1.2 Preproduction sample. - Unless otherwise specified for each contract or order, a representative sample of six (6) transformer assemblies shall be manufactured using the methods and procedures proposed for the production lot. These shall be submitted to the Government inspector for preproduction tests at an activity designated in the contract or by the Bureau of Ordnance, for purposes of determining compliance with the requirements of the contract, specifications, and drawings. Further production of the item by the contractor prior to approval of the contracting activity or the satisfactory completion of the tests on preproduction samples shall be at the contractor's risk. Preproduction samples accepted will be supplied as part of the quantity specified by the contract or order.

4.1.3 Lot size. - As applied to Government inspection of units of product the term "lot" shall mean "inspection lot", i.e., a collection of units of product submitted by a supplier for Government inspection. Unless otherwise specified, the number of units of product in "inspection lots" will be determined by the Government inspector and may differ from the quantity designated in the contract or order in a lot for production, shipment, or other purposes.

4.1.4 Periodic production samples. - From each succeeding lot of one hundred (100) or less, a random sample of three (3) transformer assemblies will be selected by the Government inspector for submission to a Bureau of Ordnance designated activity to determine compliance of the sample with the requirements of the contract, specification, and drawings. The lot of transformer assemblies shall be considered satisfactory only if each unit of the sample meet all pertinent specification and drawing requirements, and withstands the tests as specified in 4.5 and 4.6 inclusive.

4.2 Contractor's inspection. - Unless otherwise specified, the contractor shall perform all tests and inspections listed in this specification and as otherwise required, to determine that the transformer assembly conforms to all applicable requirements.

4.3 Classification of tests. - The inspection and testing of the transformer assembly shall be classified as follows:

4.3.1 Acceptance tests. - The acceptance tests are to be accomplished on each transformer assembly being submitted for

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:40Z
Check the source to verify that this is the current version before use.

acceptance under contract. Acceptance tests shall be performed by the manufacturer and witnessed by the Government inspector. These tests are detailed in 4.5.

4.3.2 Preproduction and periodic production tests. - Preproduction tests are those which are accomplished on samples selected as specified in 4.1.2 and 4.1.4 which are representative of the production of the transformer assembly after award of the contract, to determine that the production meets the requirements of this specification. These are detailed in 4.6. Acceptance shall be based on no defects in a sample. Failure of a sample to comply with these requirements will result in rejection of the lot or cessation of production as determined by the procuring activity.

4.4 Test equipment.

4.4.1 Test and inspection equipment and facilities. - The manufacturer shall furnish and maintain all necessary test equipment, facilities, and personnel for performing all acceptance tests. The test equipment shall be adequate in quantity, and of sufficient accuracy and quality to permit performance of the required acceptance tests.

4.4.2 List of equipment. - The following items of test equipment are required to perform the acceptance tests set forth in this specification.

4.4.2.1 Resistance Bridge, 0.30-3.0 ohms accurate to ± 2%.

4.4.2.2 Megohmmeter capable of measuring 10-200 megohms at 500 VDC ± 10%, accurate to ± 10%.

4.4.2.3 Test circuits (see figures 1, 2, 3, and 4).

4.4.2.4 Electronic Counter accurate to ± .01 milliseconds from 1.00 to 2.00 milliseconds.

4.4.2.5 D.C. voltmeter of 0-10 volts range accurate to 1/2% fullscale and at least 5,000 ohms/volt.

4.4.2.6 Test Set BUORD LD No. 486045.

4.4.2.7 Conditioning Chamber, BUORD LD No. 486031.

4.5 Acceptance tests.

4.5.1 The Contractor shall conduct acceptance tests in the presence of the Government inspector, as specified in 4.3.1 to assure

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:40Z
Check the source to verify that this is the currentversion before use.

at the transformer assembly is in compliance with the requirements 3.2, 3.4, 3.6, and 3.7.

4.5.2 Test conditions. - Unless otherwise specified the test procedure of 4.5.4 shall be accomplished under the following conditions:

4.5.2.1 Temperature: Room ambient 65 degrees F to 95 degrees F (18 degrees C to 35 degrees C).

4.5.2.2 *Altitude: Normal ground.*

4.5.2.3 Vibration: None.

4.5.2.4 Humidity: Room ambient to 95 percent relative maximum.

4.5.3 Visual inspection. - The transformer assembly and its component parts shall be inspected to verify that the materials, design, construction, physical dimensions, soldering, and workmanship are in accordance with this specification and the drawings.

4.5.4 Test procedures.

4.5.4.1 Circuit resistance test. - With the resistance bridge (item 4.4.2.1) or Test Set BUORD LD No. 486045, measure the resistance between the terminals listed and the resistance shall be as indicated.

TERMINALS Of Transformer	RESISTANCE In Ohms
S1 to T1	.45 ± .11
S2 to T2	.45 ± .11
S3 to T3	.45 ± .11
S4 to T4	.45 ± .11
S5 to T5	.90 ± .22
S6 to B1	.45 ± .11
S7 to B2	.45 ± .11
S8 to B3	.45 ± .11
S9 to B4	.45 ± .11
S10 to B5	.90 ± .22
G (nearest to 30) to 30	2.15 ± .15
G (nearest to 31) to 31	2.15 ± .15

Source: https://assist.dla.mil -- Downloaded: 20261O-19T12:40Z
Check the source to verify that this is the current version before use.

4.5.4.2 Insulation resistance test. - With the megohmmeter (item 4.4.2.2) or Test Set BUORD LD No. 486045, measure the insulation resistance between each of points listed below and all of the other points listed below tied together in turn.

All S terminals
Terminal 30
Terminal 31
Transformer assembly case.

The resistance shall be greater than 100 megohms at 500 volts d.c. in each case. Acceptance can be made at any temperature and humidity in excess of 75 degrees F and 70 percent relative respectively. Rejection can be made only after the transformer assembly has been conditioned for a period of 24 hours at a temperature of 77 degrees ± 2 degrees F and humidity of 75 ± 5 percent relative. Conditioning Chamber BUORD LD No. 486031 may be used for conditioning.

4.5.4.3 Radiograph test (potting). - The transformer assembly shall be radiographed perpendicular to, and through, the side shown in the left hand view BUORD Dwg. 1520489 in accordance with MIL-I-6865 as applicable. American Standards Association publication Z54.1-1946 should be referred to for applicable safety precautions. The negative shall be inspected for voids in the potting material and to assure that the transformer meets the requirements of 3.4.3.

4.5.4.4 Operability test. - Test Set BUORD LD No. 486045 may be used to perform the operability test or the method following may be used.

4.5.4.4.1 Calibration. - Set up the test circuit of figure 1. Connect the electronic counter (item 4.4.2.4) to the output terminals as shown in figure 1. Adjust the counter so that a positive pulse of 50 volts will start the counter and a negative pulse of 50 volts will stop the counter.

4.5.4.4.1.1 Connect the R-C circuit of figure 2 to the input of figure 1, connecting corresponding letters. Charge the capacitor C11 to 5.5 ± 0.05 volts as measured on the VTVM (item 4.4.2.6). Apply B+ and filament power to the circuit of figure 1. Turn counter on and allow system 15 minutes to warm up.

4.5.4.4.1.2 Close S2 of figure 2. The elapsed time recorded on the counter shall be 1.80 ± .05 milliseconds.

4.5.4.4.1.3 If the time recorded does not fall within the limits of

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:40Z
Check the source to verify that this is the current version before use.


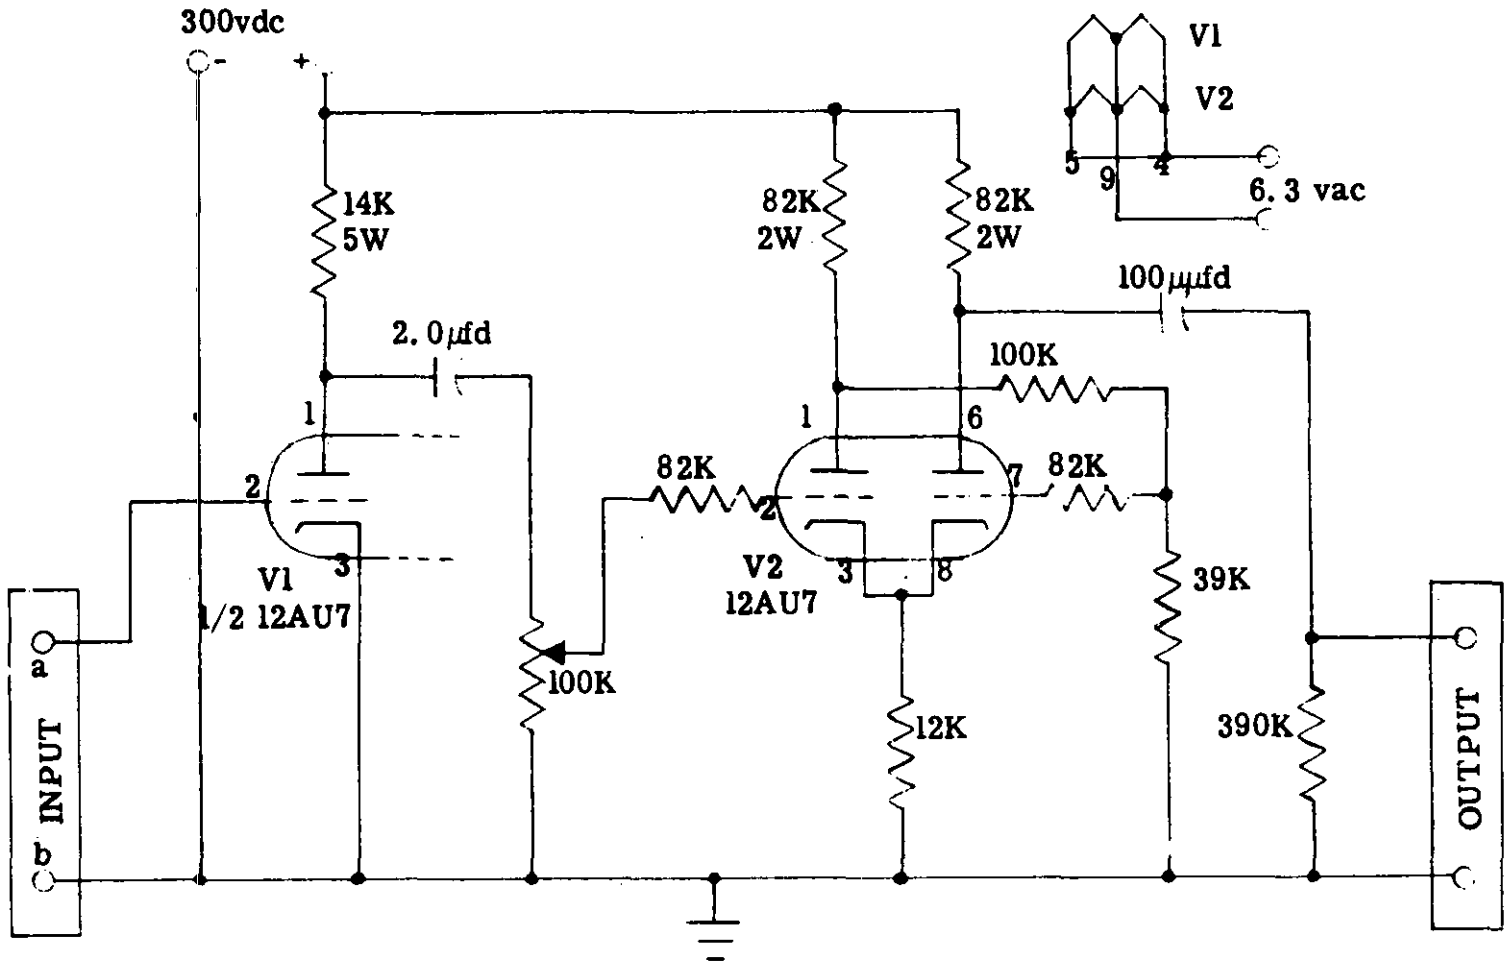


Figure 1. Counter Trigger Circuit

MIL-T-22477(Wep)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:40Z
Check the source to verify that this is the current version before use.

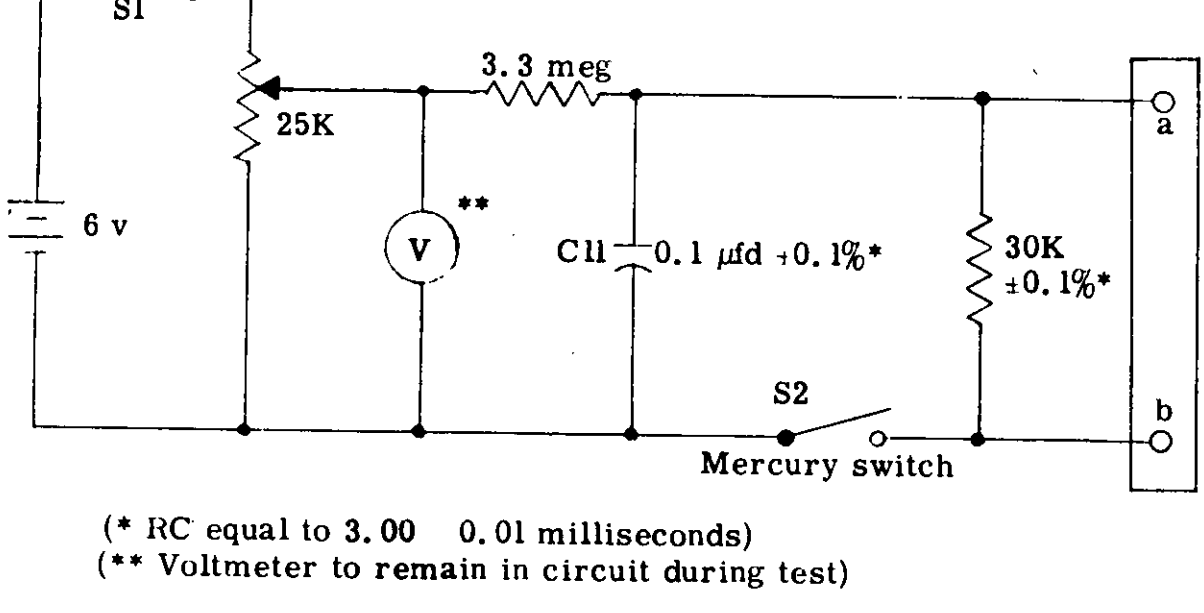

(* RC equal to 3.00 0.01 milliseconds)
(** Voltmeter to remain in circuit during test)

Figure 2. Calibration Circuit for Counter Trigger Circuit of Figure 1

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:40Z
Check the source to verify that this is the current version before use.

4.5.4.4.1.2 adjust the 100-K ohm potentiometer of figure 1 and repeat procedures 4.5.4.4.1.1 and 4.5.4.4.1.2 until the proper setting can be found. Remove the circuit of figure 2.

4.5.4.4.2 Transformer loading. - Secondaries 1 through 4 of each transformer shall be loaded with 1.2 ohms. Secondary 5 of each transformer shall be loaded with 4 ohms as shown in figure 4.

4.5.4.4.3 Transformer connection. - To the input terminals of figure 1 connect the output terminals of figure 4. Between pins 31 and G of the transformer connect the test circuit of figure 3, adjusted to deliver voltage for 10 ± 2 milliseconds, with 31 positive and G negative. The secondaries T (1) - S (1) through T (5) - S (5) shall be connected as shown in figure 4. Switch SI of figure 4 shall be placed to position 1.

4.5.4.4.4 Test. - With the circuit of figure 1 turned on and calibrated and the counter turned on, apply the 28 ± .5 volts 10 millisecond square wave pulse (figure 3) to the transformer connected as in 4.5.4.4.2 and 4.5.4.4.3. The time recorded on the counter shall be greater than 1.9 milliseconds.

4.5.4.4.4.1 Repeat the test of 4.5.4.4.4 for each secondary by moving switch SI of figure 4 to positions 2, 3, 4, and 5 in turn and in each case the time recorded on the counter shall be greater than 1.9 milliseconds.

4.5.4.4.4.2 Remove the test circuit of figure 3 from between 31 and G and connect it between 30 and the G closest to 30 with 30 positive and G negative. Remove the connections from the secondaries of the transformers from the input of the circuit of figure 4 and connect the secondaries B (1) - S (6) through B (5) - S (10) as shown in figure 4 and switch SI of figure 4 to position 1. Apply the 28 ± 0.5 volts 10 milliseconds square wave pulse to the transformer. The time recorded on the counter shall be greater than 1.9 milliseconds.

4.5.4.4.4.3 Repeat the test of 4.5.4.4.4.2 for each secondary when switch SI of figure 4 is moved to positions 2, 3, 4, and 5 in turn and in each case the time recorded on the counter shall be greater than 1.9 milliseconds. Turn the equipment off and remove all equipment.

4.6 Preproduction and periodic production tests.

4.6.1 Preproduction tests. - The 6 samples of the transformer assembly which have been selected for preproduction testing purposes shall be subjected to the test procedures of 4.5.4. After having successfully

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:40Z
Check the source to verify that this is the current version before use.

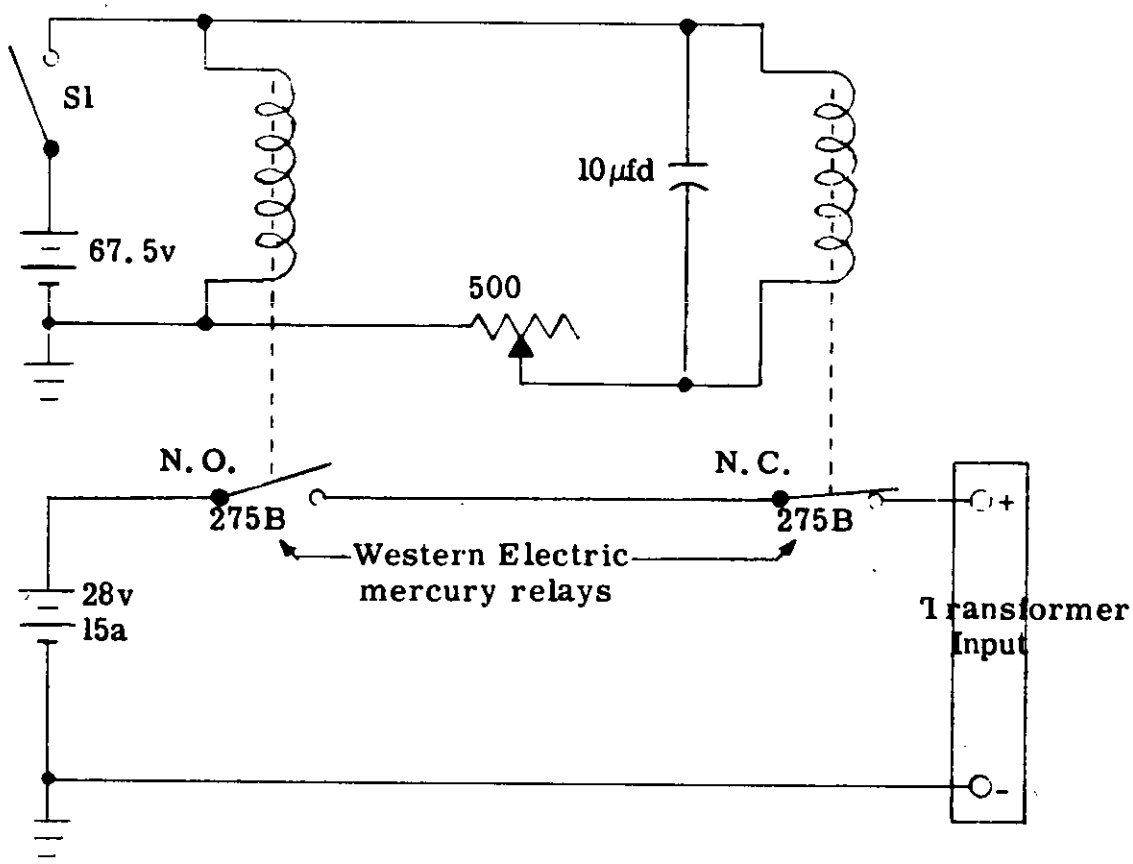


Figure 3. Transformer Input Circuit (Square wave)

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:40Z
Check the source to verify that this is the current version before use.

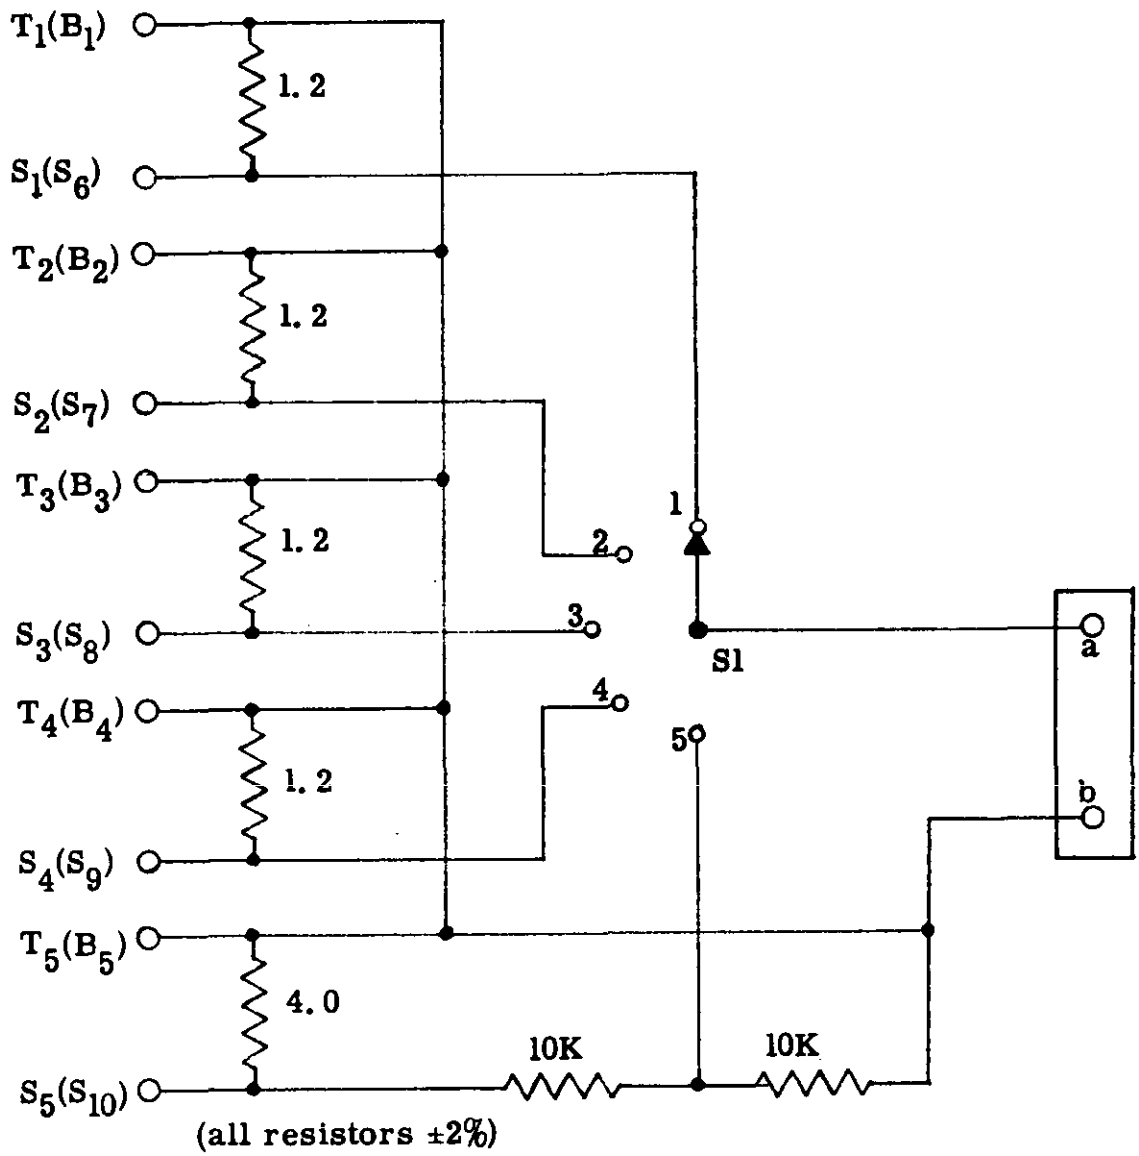


Figure 4. Transformer Load Circuit

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:40Z
Check the source to verify that this is the current version before use.

met the above tests, 2 units shall be withdrawn from the sample lot and subjected to the temperature and humidity cycling test of 4.6.1.1 and thereafter all 6 samples shall be subjected to the vibration test 4.6.1.2 and the operational shock test 4.6.1.3 in that order.

4.6.1.1 Storage life test. - For this test, the transformer assembly shall be conditioned for a period of 2 hours at 75 ± 5 degrees F and 75 ± 5 percent relative humidity. Conditioning Chamber BUORD LD 486031 may be used for conditioning. The transformer assembly shall then be enclosed in a plastic bag or other suitable sheath which will maintain a water and moisture-proof seal. The transformer assembly shall then be subjected to two 14-day temperature and humidity cycling tests as specified in MIL-STD-354, and shall then meet the requirements of 3.4.1, 3.4.2, and all other requirements of this specification.

4.6.1.2 Vibration. - The transformer assembly shall be mounted on the vibration table by means of the test fixture shown in figure 5a and 5b. The unit shall be mounted so that the transformer assembly terminals are facing up. Acceleration of vibration shall be maintained at 10g single peak while the vibration is varied in one continuous sweep from 50 to 500 cps. The time of duration of vibration shall be 180 minutes. After the test the transformer assembly shall meet the requirements of 3.4.1, 3.4.2 and all other requirements of this specification.

4.6.1.3 Shock, operational, test. - The transformer assembly at room temperature, shall be mounted in an air gun by means of the test mounting fixture figure 5. The unit shall be mounted so that the inertia force will be exerted in the direction that would tend to force the terminal board and the terminals into the transformer assembly. The transformer assembly shall then be subjected to a continuous two phase air gun shock test as follows:

a. The first (impact) phase consists of a velocity change of 22-24 feet per second taking place in from 0.2 to 0.4 milliseconds.

b. During the second (drag) phase the transformer assembly is accelerated for a minimum of 15 milliseconds in such a manner that during this time the minimum average acceleration is 350 gravity units. The peak acceleration is between 500 and 550 gravity units. Peak acceleration shall be built up in from 1.0 to 2.0 milliseconds. After the transformer assembly has been subjected to the shock schedule described above, it shall be removed from the test fixture and visually inspected for indications of failure or damage. Transformer assemblies shall show no displacement of the terminal panel, loosening of the terminals, cracks, or other visual indications of damage. The transformer assembly shall then meet the requirements of 3.4.1, 3.4.2 and all other requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:40Z
Check the source to verify that this is the current version before use.

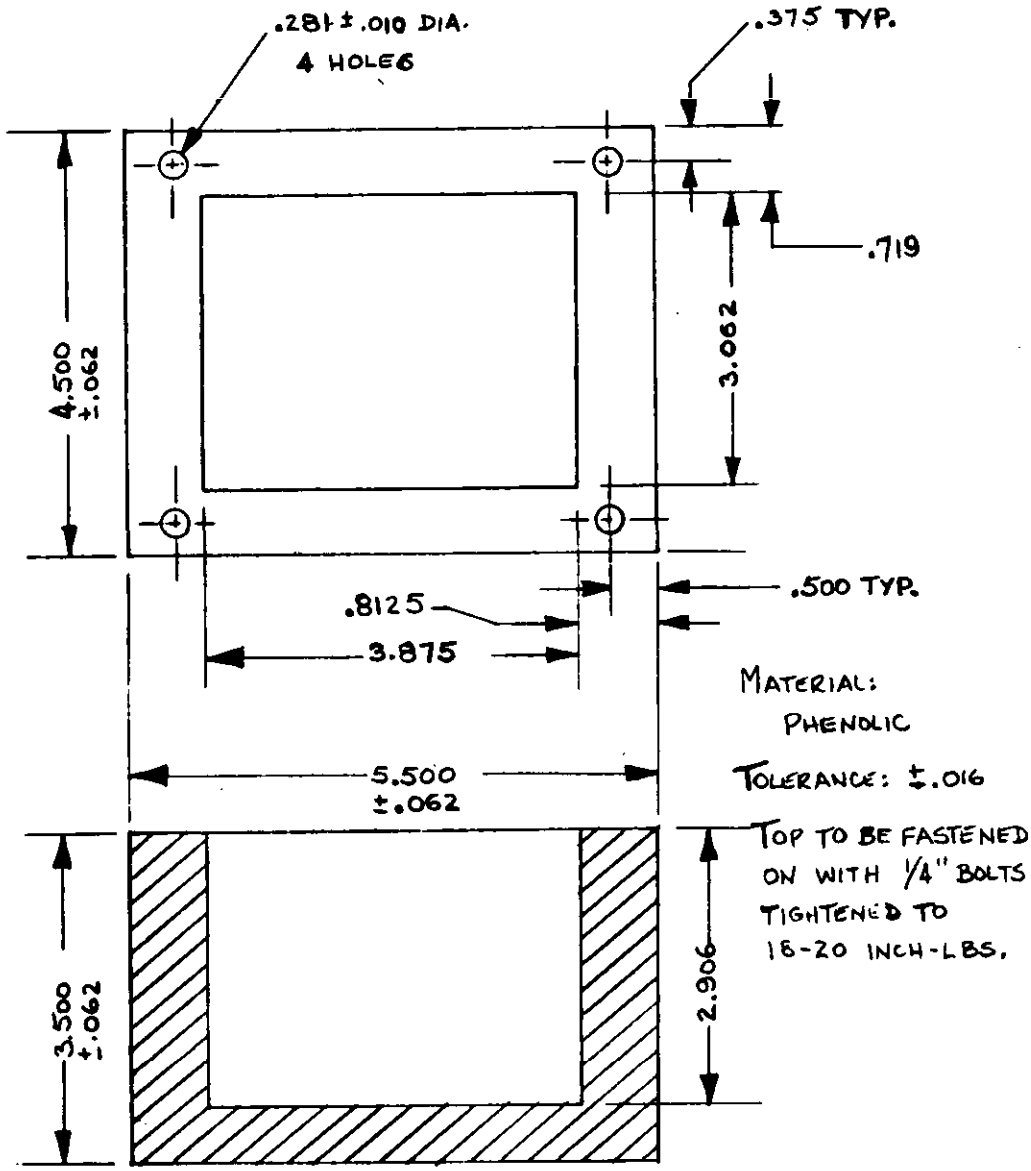


Figure 5A. Shock Test Fixture

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:40Z
Check the source to verify that this is the current version before use.

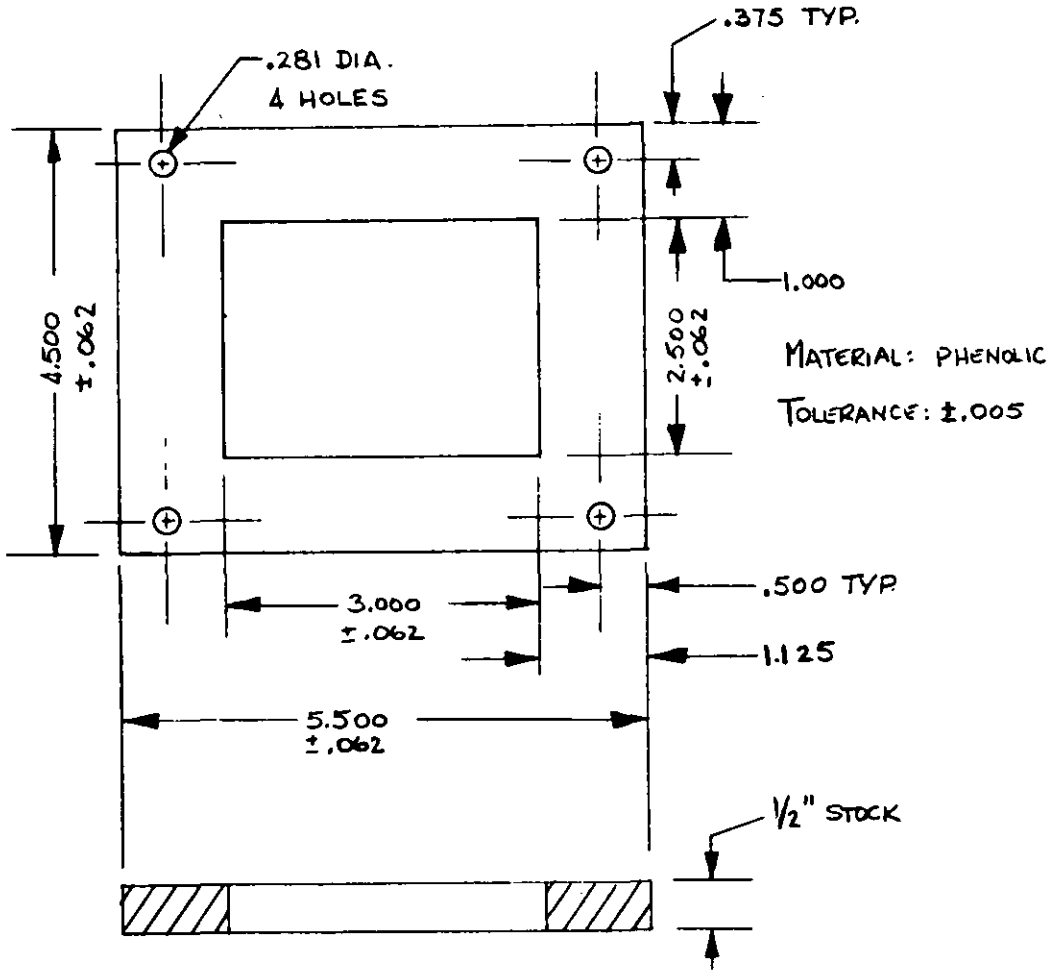


Figure 5B. Test Fixture Top

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:40Z
Check the source to verify that this is the current version before use.

4.6.2 Periodic production tests. - The samples selected for periodic production testing shall be subjected to the test procedures of 4.6.1.2 and 4.6.1.3 in that order.

4.7 Acceptance criteria. - Sample units which fail to comply with any of the test or inspection requirements shall be classified as defective. If the number of defective units exceeds the number of defectives permitted by the associated acceptance criteria the lot represented will be rejected. The inspector shall ascertain that the packaging, packing and marking of accepted items are in accordance with the requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and Packaging.

5.1.1. Level A.

5.1.1.1 Cleaning. - Cleaning shall be in accordance with Method C-1 of Specification MIL-P-116.

5.1.1.2 Preservative application. - Not applicable.

5.1.1.3 Unit packaging. - Unit packaging of the Transformer Assembly shall be in accordance with Method IIb of Specification MIL-P-116. The unit package shall contain one Transformer Assembly.

5.1.2 Level B. (Not applicable)

5.1.3 Level C.

5.1.3.1 Cleaning. - Cleaning shall be in accordance with 5.1.1.1.

5.1.3.2 Preservative application. (Not applicable)

5.1.3.3 Unit packaging. - Unit packaging of the Transformer Assembly shall be in accordance with Method III of Specification MIL-P-116.

5.2 Packing.

5.2.1 Level A. - A maximum of ten transformers (five assemblies) packaged as specified in 5.1 shall be packed in wood boxes or fiber boxes conforming to Class 2, Style 2 or 4 of Specification PPP-B-621 Class 3 of Specification PPP-B-636, respectively.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:40Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. - A maximum of ten transformers (five assemblies) packaged as specified in 5.1 shall be packed in wood boxes or fiber boxes conforming to Class 1, Style 2 or 4 of Specification PPP-B-621 or Class 2 of Specification PPP-B-636, respectively.

5.2.3 Level C. - Transformer Assemblies packaged in accordance with 5.1 shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Containers shall comply with the common carrier rules and regulations applicable to the mode of transportation.

5.3 Marking. - In addition to any special markings required by the contract or order, all marking shall be in accordance with Military Standard MIL-STD-129.

6. NOTES

6.1 Intended use. - The transformer assembly is intended for use in the Battery Power Supply Mark 107 Mod 0.

6.2 Ordering data. - Procurement documents should specify the title, number, and exceptions to this specification, and the applicable drawings and other documents.

6.3 Applicability of environmental requirements. - The environmental requirements of this document are applicable for use of the transformer assembly in the Battery Power Supply Mark 107 Mod 0. If the transformer assembly is intended for other use the environmental requirements should be reconsidered.

6.4 Criteria for use of proper level of preservation, packaging and packing shall be as follows:

For Level A. - This level shall be used for those items which are to be shipped to indeterminate conditions for redistribution anywh ere.

For Level B. - This level shall be used only when it is definitely known that the item will be held in covered storage in overseas locations for 6 months or less in domestic locations for an indefinite period.

For Level C. - This level shall be used only when it is definitely known that the packaged item is to be shipped to domestic installations for immediate use at the first receiving activity.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:40Z
Check the source to verify that this is the currentversion before use.

Notice. - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:40Z
Check the source to verify that this is the current version before use.