MILITARY SPECIFICATION

CABLES, TELEPHONE; SHIELDED
(INSIDE WIRING)

1. SCOPE

1.1 Scope. This specification covers plastic insulated, plastic jacketed and shielded multi-pair cables consisting of No. 22 AWG conductors in pairs ranging from 3 pairs to 101 pairs, for use in inside telephone wiring systems. (See 1.2.)

1.2 Classification. The following telephone cables are covered by this specification.

No. of pairs	Total number of conductors	Outside diameter of finished cables (max. average)
		Inches
3	6	0.43
6	12	.45
11	22	.53
16	32	.60
21	42	.66
26	52	.74
32	64	.77
51	102	.98
76	152	1.14
101	202	1.33

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

QQ-W-343	Wire, Electrical (Uninsulated).

MILITARY

MIL-I-3930	Insulating and Jacketing Compounds, Electrical (For Cable, Cord, and Wire).
MIL-C-12000	Cable, Cord and Wire, Electric; Packaging and Packing For.
MIL-C-45662	Calibration System Requirements.

STANDARDS

FEDERAL

FED-STD-228	Federal Test Method Standard; Cable and Wire, Insulated; Method of Testing.

MILITARY

MIL-STD-104	Limits for Electrical Insulation Color.
MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Construction. The cables covered by this specification are composed of No. 22 AWG solid copper wire, each conductor individually insulated with an extruded polyvinyl chloride (PVC) covering. The insulated conductors are twisted in pairs. The insulation is color coded for convenient identification of the pairs. The core is made up of the number of pairs as required, and cabled either concentrically in layers or in unit construction, depending on its size. The individual units of unit constructed cables are bound with color-coded spaced servings of nylon yarn or polyethylene tape binders. The core, consisting of all the pairs cabled together, is covered with an overlapped spiral winding of polyester tape, then a semi-conducting tape. A helically wound copper shield in applied over the semi-conducting tape, over which is extruded a PVC separator. A helically wound steel shield is applied over the separator, with an overall covering of a grey extruded PVC jacket.

3.1.1 Pair twist. Each of the pairs making up the cable shall be twisted, with the maximum length of pair twist not to exceed 6 inches. To minimize cross-talk, each pair in a concentric type cable and each pair in a unit of unit construction shall have a twist with a length of lay different from that of any other pair in the cable or unit respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

3.2 Materials. The materials for the cables covered by this specification shall be as specified herein. When a definite material is not designated, the best material commercially available for the purpose shall be used.

3.3 Conductors. Each conductor of the cables shall be No. 22 AWG solid, soft or drawn and annealed copper wire in accordance with QQ-W-343, Type S.

3.4 Insulation. Each conductor of the cables shall be insulated with an extruded layer of PVC. The PVC compound shall be in accordance with MIL-I-3930, Type IP, except that the compound shall have a tensile strength of 2200 psi, minimum, and an elongation of 150 percent, minimum.

3.4.1 Insulation thickness. The nominal thickness of the insulation shall be such that a diameter of 0.048-0.051 inches over the insulated conductor will be met. The eccentricity of the insulation (maximum wall minus minimum wall) shall not exceed 0.003 inches at any cross-section.

3.5 Color code for pairs. The insulated conductors shall be color coded so as to readily identify the pairs. The color code for these pairs shall be in accordance with Table I, and the colors shall be within the limits specified in MIL-STD-104, Class 1.

Table I. Color code for pairs.

Pair No.	Color		Pair No.	Color	
	Tip	Ring		Tip	Ring
1	White	Blue	14	Black	Brown
2	White	Orange	15	Black	Slate
3	White	Green	16	Yellow	Blue
4	White	Brown	17	Yellow	Orange
5	White	Slate	18	Yellow	Green
6	Red	Blue	19	Yellow	Brown
7	Red	Orange	20	Yellow	Slate
8	Red	Green	21	Violet	Blue
9	Red	Brown	22	Violet	Orange
10	Red	Slate	23	Violet	Green
11	Black	Blue	24	Violet	Brown
12	Black	Orange	25	Violet	Slate
13	Black	Green	26	White	Red

3.6 Cabling. The required number of pairs shall be cabled in layers as a concentric-type construction, or in units as a unit-type construction.

3.6.1 Layer-type construction. In cables having 26 pairs and less, the twisted pairs shall be assembled in a layer-type construction, to form an approximate cylindrical core.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

3.6.2 Unit-type construction. In cables having more than 26 pairs, the pairs shall be arranged in units as shown in Figure 1. The first unit shall consist of 26 pairs, and the subsequent units shall be arranged in units of 25 pairs each, or as many pairs as required. Units may also be divided into sub-units as shown in Figure 1.

3.6.3 Binders. Each individual unit or sub-unit of unit constructed cables shall be spirally bound with a color coded binder of nylon yarn servings or polyethylene tape. The color code of the binders shall conform to Table II and the applicable cable configuration of Figure 1. The binder lay shall not exceed 4 inches.

Table II. Binder color code.

Unit No.	Color	Abbreviation
1	Blue-White	BL-W
2	Orange-White	OW
3	Green-White	GW
4	Brown-White	BR-W

3.6.4 Core wrapping. The core shall be wrapped with an overlapping spirally applied polyester tape having a nominal thickness of 0.005 inches. Over the polyester tape, a semi-conducting tape shall be spirally applied with an overlap. The semi-conducting tape shall have a nominal thickness of 0.006 inches, and a surface resistivity not to exceed 5,000 ohms/square unit.

3.7 Identification marker. Each length of cable shall include a marker tape showing name of manufacturer, plant location, year of manufacture and serial number stamped or printed at intervals of one foot. The marker tape shall be located over the polyester tape.

3.8 Inner copper shield. A copper shield consisting of a serving of closely spaced flat tinned copper wires shall be applied helically without overlap over the semi-conducting tape. The thickness of the flat tinned copper wires shall be 0.010 inch nominal, with a minimum thickness of 0.009 inch. The shield requirements shall conform to Table III, and shall provide a minimum coverage of 85 percent.

3.8.1 Shield splices. Splices in the individual shield wires are permissable if the joints are made by welding or soldering. Joints in individual strips shall be a minimum of one foot apart.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

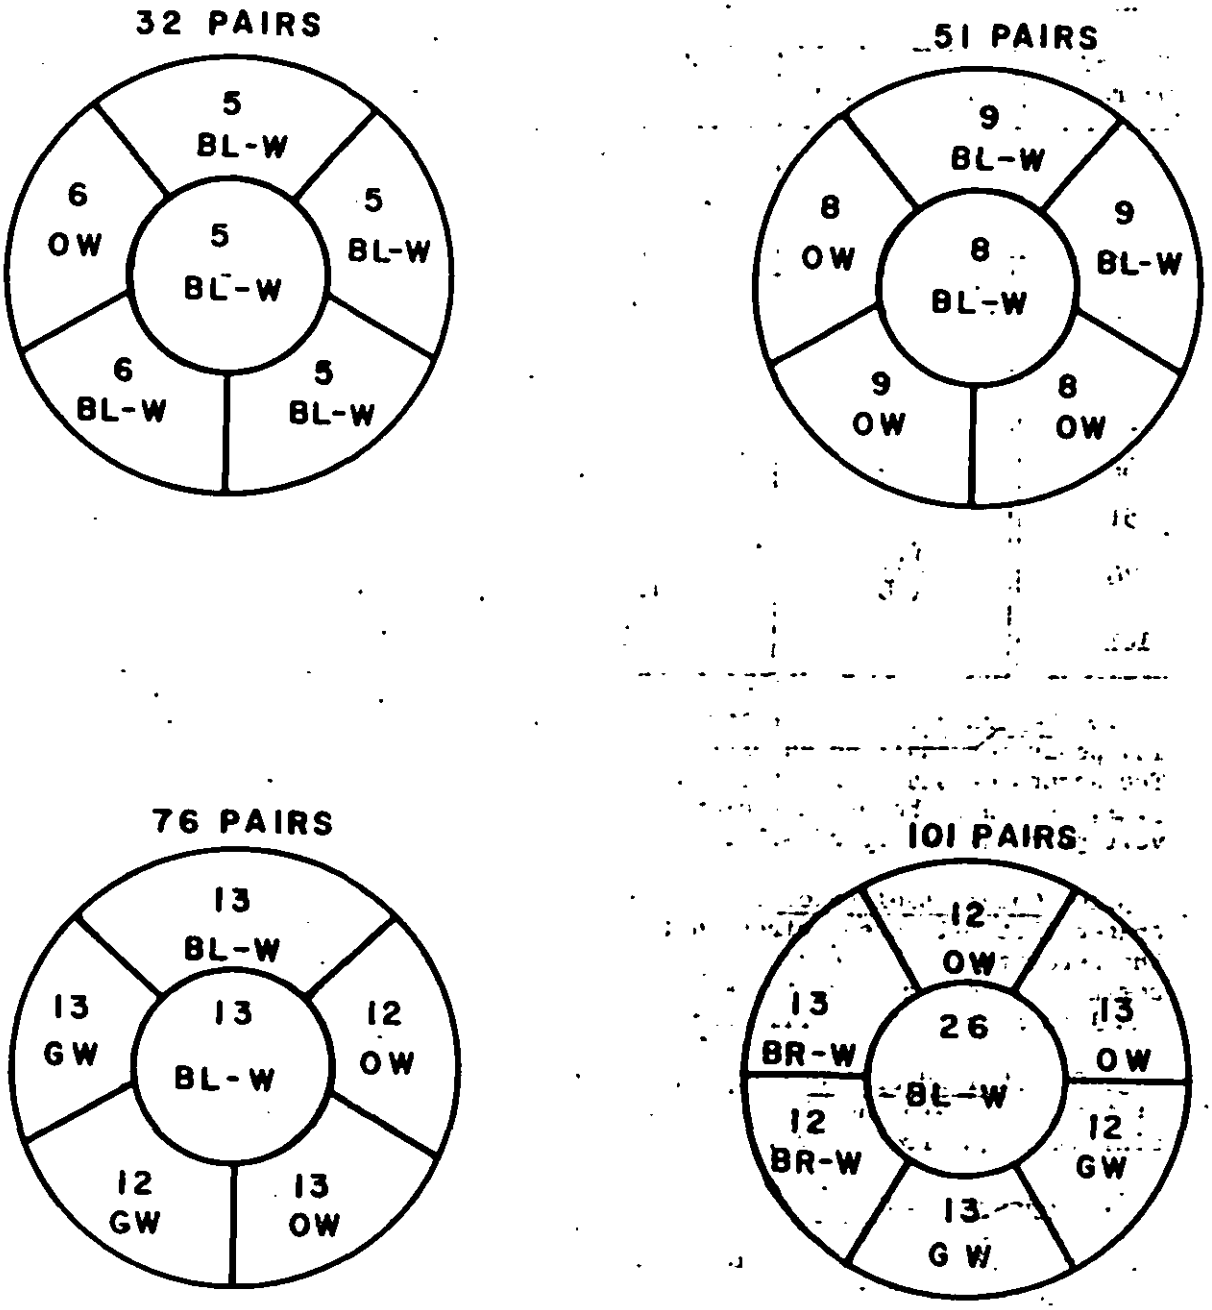


FIGURE 1. CABLE CONFIGURATION. UNIT-TYPE CONSTRUCTION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

Table III. Shielding.

No. of pairs	Copper shield (inner)		Steel shield (outer)	
	No. of ends	Width, nom. (±5%)	No. of ends	Width, nom. (±5%)
3	14	0.035	18	0.040
6	14	.045	18	.060
11	18	.045	14	.075
16	14	.075	12 6	.075 .040
21	18	.075	18	.075
26	18	.075	18	.075
32	18	.075	18	.075
51	14	.125	14	.125
76	12 6	.125 .075	18	.125
101	18	.125	18	.125

3.9 Separator. A separator shall be applied over the inner copper shield. The separator shall be an extruded layer of PVC conforming to MIL-I-3930, Type JP. The separator shall meet the tensile strength and elongation requirements of 3.11, and shall be of sufficient thickness to meet the dielectric withstanding voltage requirements of 3.13.3.

3.10 Outer steel shield. A steel shield consisting of a serving of closely spaced flat mild steel wires shall be applied helically without overlap over the separator. The thickness of the flat steel wires shall be 0.010 inch nominal, with a minimum thickness of 0.009 inch. The shield requirements shall conform to Table III, and shall provide a minimum coverage of 80 percent.

3.10.1 Shield splices. Splices in the individual steel wires are permissable if the joints are made by welding. Joints in the individual strips shall be a minimum of one foot apart.

3.11 Jacket. The cable outer covering shall be a jacket of grey colored extruded PVC compound in accordance with MIL-I-3930, Type JP, except that the compound shall have a tensile strength of 2000 psi, minimum, and an elongation of 200 percent minimum. The jacket thickness shall be as follows:

No. of pairs	Jacket thickness (inch)
3 to 32	0.040
51 and 76	.050
101	.060

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

The average thickness of the jacket shall be not less than 90 percent of the specified thickness, with the minimum spot thickness not less than 75 percent.

3.12 Diameter of finished cables. The outside diameter of the finished cables shall be in accordance with 1.2.

3.13 Electrical requirements.

3.13.1 Continuity. All conductors and shields in each finished cable shall be electrically continuous, when tested as specified in 4.5.2.1.

3.13.2 Short circuits. Each insulated conductor shall be free of any electrical contact with any other insulated conductor, when tested as specified in 4.5.2.2.

3.13.3 Dielectric withstanding voltage. When tested as specified in 4.5.2.3, the following shall apply:

a. The insulation between conductors shall withstand 2,000 volts dc for three seconds. Group testing may be used.

b. The insulation between conductors and inner shield shall withstand 5,000 volts dc for three seconds.

c. The separator between the inner and outer shield shall withstand 2,000 volts dc for three seconds.

3.13.4 Insulation resistance. In any length of cable, each conductor, when measured against all other conductors and the shields connected to ground, shall have an insulation resistance of not less than 4,000 megohms-1,000 feet, after an electrification of not more than one minute, when tested as specified in 4.5.2.4.

3.13.5 Conductor resistance. The dc resistance of each conductor shall not exceed 92 ohms per mile at 68°F, when tested as specified in 4.5.2.5. The difference in dc resistance between the two conductors of a pair, per 1,000 feet of cable, shall not exceed 0.4 ohms average for any cable, and 1.6 ohms maximum for any individual pair.

3.13.6 Mutual capacitance. The average mutual capacitance between conductors of a pair shall not exceed 0.21 microfarads per mile, when tested as specified in 4.5.2.6. In every length of cable, the pair-to-pair capacitance unbalance shall not exceed 300 picofarads, and the average shall not exceed 75 picofarads, for any length of 1,000 feet or less. For other cable lengths, the values shall not exceed the value obtained by multiplying the value for 1,000 feet by the square root of the ratio of the length of cable being tested to 1,000 feet. The unbalances to be considered are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

a. Between pairs adjacent in a layer;

b. Between pairs in centers of four pairs or less; and,

c. Between pairs in adjacent layers when the number of pairs in the inner (smaller) layer is six or less. In this case, the center is counted as a layer.

3.13.7 Shield resistance. (See 4.5.2.7.)

3.13.7.1 Inner shield. The dc resistance of the inner shield shall not exceed 0.56 ohms per 1,000 feet at 68°F for a cable having a diameter of 1.0 inch under the shield, or less.

3.13.7.2 Outer shield. The dc resistance of the outer shield shall not exceed 5.0 ohms per 1,000 feet at 68°F for a cable having a diameter of 1.0 inch under the shield, or less.

3.14 Physical requirements.

3.14.1 Shrinkage. The conductor insulation shrinkback from a finished cable shall not exceed 1/8 inch, when tested as specified in 4.5.3.1.

3.14.2 Cold bend. The conductor insulation and the jacket of the finished cable shall exhibit no evidence of cracks, flaws, or other damage, when tested as specified in 4.5.3.2.

3.14.3 Flammability. The conductor insulation and the jacket of the finished cable shall not continue to burn but shall be self-extinguishing within 5 seconds, when tested as specified in 4.5.3.3.

3.14.4 Heat distortion. The distortion of the conductor insulation from a finished cable shall not exceed 50 percent, when tested as specified in 4.5.3.4.

3.15 Workmanship. Cables shall be constructed and finished in a thoroughly workmanlike manner in accordance with accepted high grade production techniques. The cables shall be a uniform and consistent product and shall be free from any defects which will adversely affect the serviceability of the product, such as lumps, kinks, splits, abrasions, scrapes, corroded surfaces, skin impurities and faulty extruded surfaces.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

4.1.1 Inspection equipment and facilities. Inspection equipment and facilities shall be established and maintained in accordance with MIL-C-45662.

4.2 Classification of inspections. The examinations and tests of cables are classified as follows:

(a) Materials inspection. (See 4.3.)

(b) Quality conformance inspection. (See 4.4.)

1. Inspection of product for delivery. (See 4.4.1.)
2. Inspection of preparation for delivery. (See 4.6.)

4.3 Materials inspection. Materials inspection shall consist of certification supported by verifying data that the materials listed in table IV, used in fabricating the designated cable types (see 1.2), are in accordance with the applicable referenced specification or requirements prior to such fabrication.

Table IV. Materials inspection.

Materials	Requirement paragraph	Applicable specification	AQL
Conductors	3.3	QQ-W-343	Per applicable specification unless specified herein.
Insulation	3.4	MIL-I-3930	
Separator	3.9	MIL-I-3930	
Jacket	3.11	MIL-I-3930	

4.4 Quality conformance inspection.

4.4.1 Inspection of product for delivery. Inspection of product for delivery shall consist of groups A and B inspection.

4.4.1.1 Inspection lot. An inspection lot shall consist of all cables of the same type (see 1.2) produced under essentially the same conditions and submitted for inspection at the one time.

4.4.1.2 Unit of product. Unless otherwise specified in the contract or order, the unit of product for purposes of sampling shall be each continuous length of cable contained on a reel, spool or coil.

4.4.1.3 Sample. The sample shall consist of that number of randomly selected units of product required by the applicable sampling plan for the presented lot.

4.4.1.4 Sample units. A sample unit is a unit of product which forms part of the sample from which specimens are taken for inspection.

4.4.1.5 Specimen. A specimen may be the entire sample unit or any portion of the sample unit which is to be subjected to inspection.

4.4.2 Group A inspection. Group A inspection shall include the examinations and tests of Table V, sub-groups I and II. Major and minor defects shall be as defined in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

Table V. Group A inspection.

Examination or test	Requirement paragraph	Test method paragraph	AQL (percent defective) Major	AQL (percent defective) Minor
Sub-group I Visual and dimensional				
Construction	3.1	4.5.1	1.0% for the group combined	4.0% for the group combined
Pair twist	3.1.1			
Materials	3.2			
Conductor size	3.3			
Insulation thickness	3.4.1			
Color code for pairs	3.5			
Cabling	3.6			
Binders	3.6.3			
Core wrapping	3.6.4			
Identification marker	3.7			
Inner copper shield and splices	3.8, 3.8.1			
Outer steel shield and splices	3.10,3.10.1			
Jacket thickness	3.11			
Diameter of finished cables	3.12			
Workmanship	3.15			
Sub-group II Electrical				
Continuity	3.13.1	4.5.2.1	See 4.4.2.2	
Short circuits	3.13.2	4.5.2.2		
Dielectric withstanding voltage	3.13.3	4.5.2.3		
Insulation resistance	3.13.4	4.5.2.4		
Conductor resistance	3.13.5	4.5.2.5		
Mutual capacitance	3.13.6	4.5.2.6		
Shield resistance	3.13.7	4.5.2.7		

4.4.2.1 Sub-group I. For sub-group I, the acceptable quality level (AQL) shall be as specified in Table V and the inspection level shall be level II in accordance with MIL-STD-105. Sub-group I tests may be performed in any order.

4.4.2.2 Sub-group II. For sub-group II, the sample shall be 100 percent of the cable in the inspection lot and every length of cable shall be subjected to the tests. Sub-group II tests shall be performed in the order shown in Table V. The entire lot shall be rejected if more than 3 defects per 1000 feet in a lot are found. All electrical defects are considered major.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

4.4.2.3 Rejected lots. If an inspection lot is rejected, the supplier may withdraw the lot from further inspection. The supplier may also rework a rejected lot to correct the defects or screen out the defective units and reinspect the lot using tightened inspection. Rejected lots shall be kept separate from new lots and shall not lose their identity.

4.4.3 Group B inspection. This inspection shall consist of the tests specified in Table VI and shall be performed periodically on each different cable type (see 1.2), as indicated in 4.4.3.1. Samples shall be selected from lots that have passed group A inspection.

4.4.3.1 Sampling for inspection. One sample unit shall be selected per each 5,000 feet of cable or fraction thereof, not to exceed a total of five sample units per order. Sample units shall be selected periodically through the life of the contract to assure representative results.

Table VI. Group B inspection.

Examination or test	Requirement paragraph	Test method paragraph
Shrinkage	3.14.1	4.5.3.1
Cold bend	3.14.2	4.5.3.2
Flammability	3.14.3	4.5.3.3
Heat Distortion	3.14.4	4.5.3.4

4.4.3.2 Noncompliance. No failures shall be allowed in group B inspection. If a sample unit fails to pass group B inspection, the supplier shall take corrective action on the material or process or both, as warranted, and on all units of product which can be corrected and which were manufactured under essentially the same conditions, with essentially the same materials, processes, etc., and which are considered subject to the same failure. Acceptance of the product shall be discontinued until corrective action, acceptable to the government, has been taken. After the corrective action has been taken, group B inspection shall be repeated on additional sample units (all inspections or the inspection that the original sample failed, at the option of the government). Group A inspection may be reinstituted; however, final acceptance shall be withheld until the group B reinspection has shown that the corrective action was successful. In the event of failure after reinspection, information concerning the failure and the corrective action taken shall be furnished to the cognizant inspection activity and the qualifying activity.

4.5 Test methods.

4.5.1 Visual and dimensional inspection. The finished cables shall be given a visual and dimensional inspection for conformance with the applicable requirements of 3.1 through 3.12, and 3.15. Visual and dimensional defects shall be classified as major or minor in accordance with definitions of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

4.5.2 Electrical tests.

4.5.2.1 Continuity. Test all conductors and shields with a low dc voltage and an appropriate indicating meter to determine conformance with 3.13.1.

4.5.2.2 Short circuits. Test each conductor individually to determine compliance with 3.13.2. Each conductor shall be free of any contact with any of the other conductors which may be bunched together to expedite testing. Use a test voltage of 100 volts dc, minimum.

4.5.2.3 Dielectric withstanding voltage. (See 3.13.3) The finished cables shall be tested as specified in FED-STD-228, Method 6111, except for the following:

(a) The test shall be performed on finished cables only.

(b) The immersion period shall be not less than 9 hours.

(c) One terminal shall be each conductor in turn, and the other terminal shall be all the remaining conductors tied together in electrical contact with the shields (if present) and the water. The terminals shall also be the shields and the ground when specified.

4.5.2.4 Insulation resistance. (See 3.13.4) The insulation resistance of the finished cables shall be determined as specified in FED-STD-228, Method 6031 except for the following:

(a) The test shall be performed on finished cables only.

(b) The immersion period shall be not less than 9 hours.

(c) The test voltage shall be not less than 100 volts nor more than 500 volts dc.

(d) The polarity of the conductor shall be maintained negative with respect to the water. One terminal shall be each conductor in turn, and the other terminal shall be all the remaining conductors tied together in electrical contact with one another and the shields (if present), and the water. Group testing may be used.

(e) If the measurement is made at a temperature lower than 15.6°C, the supplier shall correct the measured value of insulation resistance to the resistance at 15.6°C.

4.5.2.5 Conductor resistance. The dc resistance of each conductor in the finished cables shall be determined in accordance with FED-STD-228, Method 6021, and shall meet the requirements of 3.13.5.

4.5.2.6 Mutual capacitance. (See 3.13.6) The mutual capacitance between conductors of each pair in the finished cables shall be measured in turn, at a frequency of 1,000 ±100 Hz, with the remainder of the conductors being connected to the shields which shall be grounded. The measurements shall be made with an ac balanced bridge method accurate to within 1/4 of 1 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

The capacitance shall be measured at a temperature not lower than 60°F. If a cable, when measured at a temperature higher than 60°F, fails to meet the requirements, no correction factor may be applied. In such cases, the cable may be retested at a temperature not less than 60°F.

4.5.2.7 Shield resistance. The dc resistance of the shields in the finished cables shall be determined in accordance with FED-STD-228, Method 6021, and shall meet the requirements of 3.13.7.

4.5.3 Physical tests.

4.5.3.1 Shrinkage. The insulated conductors in the finished cables shall be tested in accordance with FED-STD-228, Method 8231, and shall meet the requirements of 3.14.1.

4.5.3.2 Cold bend. The conductor insulation and the jacket from the finished cables shall be tested in accordance with FED-STD-228, method 2011, including the requirements specified below, and shall meet the requirements of 3.14.2.

(a) The specimens shall be subjected to a temperature of -40°C.

(b) After the specimens and mandrels have been subjected to -40°C for 20 hours in a cold chamber, and while still in the chamber, the specimens shall be bent around a mandrel at the rate of 15 ±3 turns per minute.

(c) The insulation and jacket on all specimens shall be examined with a magnifying glass of at least 3-diameter magnification to determine compliance with 3.14.2.

4.5.3.3 Flammability. The conductor insulation and the jacket of the finished cables shall be tested in accordance with FED-STD-228, Method 5221, and shall meet the requirements of 3.14.3.

4.5.3.4 Heat distortion. The conductor insulation of the finished cables shall be tested in accordance with FED-STD-228, Method 5021, and shall meet the requirements of 3.14.4.

4.6 Inspection of preparation for delivery. Sample packages or packs and the inspection of the preservation, packaging, packing and marking for shipment and storage shall be in accordance with the requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking shall be in accordance with MIL-C-12000. (See 6.2.)

6. NOTES

6.1 Intended use. The cables covered by this specification are intended for use in inside telephone wiring systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Type of cable required. (See 1.2.)

(c) Length of finished cables to be delivered.

(d) Level of packaging and level of packing required. (See 5.1.)

6.2.1 Indirect shipments. The preservation, packaging, packing and marking specified in section 5 apply only to direct purchases by or direct shipments to the government, and are not intended to apply to contracts or orders between the supplier and prime contractor.

Custodians:
Army - EL

Preparing Activity:
Army - EL

Project No. 6145-A021

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL- PP-ED
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-C-55021(EL) CABLES, TELEPHONE: SHIELDED (INSIDE WIRING)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 64 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-PM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:15Z
Check the source to verify that this is the current version before use.