INCH-POUND

MIL-A-52767D
8 February 1989
SUPERSEDING
MIL-A-52767C
24 April 1986

MILITARY SPECIFICATION

AIR CONDITIONERS: VERTICAL AND HORIZONTAL, COMPACT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers compact, self-contained, vertical, and horizontal air conditioners.

1.2 Classification. The air conditioners shall be of the following types, sizes, and classes, as specified (see 6.2 and 6.10):

Type I - Vertical

Size	Class	
A = 6,000 Btu/hr	1	- 115 volt (V), single-phase, 50/60 Hertz (Hz).
	2	- 208 V, 3-phase, 400 Hz.
B - 9,000 Btu/hr	1	- 115 V, single-phase, 50/60 Hz.
	2	- 230 V, single-phase, 50/60 Hz.
	3	- 208 V, 3-phase, 50/60 Hz.
	4	- 208 V, 3-phase, 400 Hz.
C - 18,000 Btu/hr	1	- 208 V, 3-phase, 50/60 Hz.
	2	- 208 V, 3-phase, 400 Hz.
D - 36,000 Btu/hr	1	- 208 V, 3-phase, 50/60 Hz.
	2	- 208 V, 3-phase, 400 Hz.
E - 60,000 Btu/hr	1	- 208 V, 3-phase, 50/60 Hz.
	2	- 208 V, 3-phase, 400 Hz.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4120

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

Type II - Horizontal

Size	Class	
A - 9,000 Btu/hr	1	- 115 V, single-phase, 50/60 Hz.
	2	- 230 V, single-phase, 50/60 Hz.
	3	- 208 V, 3-phase, 50/60 Hz.
	4	- 208 V, 3-phase, 400 Hz.
B - 18,000 Btu/hr	1	- 230 V, single-phase, 50/60 Hz.
	2	- 208 V, 3-phase, 50/60 Hz.
	3	- 208 V, 3-phase, 400 Hz.
C - 36,000 Btu/hr	1	- 208 V, 3-phase, 50/60 Hz.
	2	- 208 V, 3-phase, 400 Hz.
D - 60,000 Btu/hr	1	- 208 V, 3-phase, 50/60 Hz.
	2	- 208 V, 3-phase, 400 Hz.

1.3 Definitive specification part number. The specification part number of air conditioners covered by this specification shall be designated in the following form (see 6.2):

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

BB-F-1421	- Fluorocarbon Refrigerants.
FF-N-105	- Nails, Brads, Staples, and Spikes: Wire, Cut and Wrought.
NN-P-71	- Pallets, Material Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial).
QQ-S-781	- Strapping, Steel, and Seals.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-C-843	- Cushioning Material, Cellulosic.
PPP-C-1752	- Cushioning Material, Packaging, Unicellular Polyethylene Foam, Flexible.
PPP-S-30	- Sacks, Shipping, Paper (Cushioned).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-V-173	- Varnish, Moisture and Fungus Resistant (for Treatment of Communications, Electronic, and Associated Equipment).
MIL-T-704	- Treatment and Painting of Materiel.
MIL-C-46168	- Coating, Aliphatic Polyurethane, Chemical Agent Resistant.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-461	- Electromagnetic Interference Characteristics, Requirements for Equipment.
MIL-STD-462	- Electromagnetic Interference Characteristics, Measurement of.
MIL-STD-781	- Reliability Testing for Engineering Development, Qualifications, and Production.
MIL-STD-781	- Reliability Tests: Exponential Distribution.
MIL-STD-810	- Environmental Test Methods and Engineering Guidelines.
MIL-STD-882	- System Safety Program for Systems and Associated Subsystems and Equipment, Requirements for.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1190	- Minimum Guidelines for Level C Preservation, Packing and Marking.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.
MIL-STD-1474	- Noise Limits for Army Materiel.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DEPARTMENT OF COMMERCE

PS-1 - Construction and Industrial Plywood.

(Application for copies should be addressed to the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

DRAWINGS

ME

TA13216E6510 - Air Conditioner, Horizontal, Compact, 60,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz.
TA13216E6520 - Air Conditioner, Horizontal, Compact, 60,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz.
TA13217E6897 - Air Conditioner, Vertical, Compact, 60,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz.
TA13217E6898 - Air Conditioner, Vertical, Compact, 60,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz.
TA13218E9880 - Air Conditioner, Vertical, Compact, 6,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz.
TA13218E9890 - Air Conditioner, Vertical, Compact, 6,000 Btu/hr, 115 Volt, Single-Phase, 50/60 Hertz.
TA13218E9900 - Air Conditioner, Vertical, Compact, 9,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz.
TA13218E9905 - Air Conditioner, Vertical, Compact, 9,000 Btu/hr, 115 Volt, Single-Phase, 50/60 Hertz.
TA13218E9910 - Air Conditioner, Vertical, Compact, 9,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz.
TA13218E9915 - Air Conditioner, Vertical, Compact, 9,000 Btu/hr, 230 Volt, Single-Phase, 50/60 Hertz.
TA13222E9150 - Air Conditioner, Horizontal, Compact, 18,000 Btu/hr, 230 Volt, Single-Phase, 50/60 Hertz.
TA13222E9160 - Air Conditioner, Horizontal, Compact, 18,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz.
TA13222E9170 - Air Conditioner, Horizontal, Compact, 18,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz.
TA13225E8000 - Air Conditioner, Vertical, Compact, 18,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz.
TA13225E8010 - Air Conditioner, Vertical, Compact, 18,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz.
TA13225E8200 - Air Conditioner, Vertical, Compact, 36,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz.
TA13225E8210 - Air Conditioner, Vertical, Compact, 36,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz.
TA13225E8445 - Air Conditioner, Horizontal, Compact, 9,000 Btu/hr, 230 Volt, Single-Phase, 50/60 Hertz.
TA13225E8450 - Air Conditioner, Horizontal, Compact, 9,000 Btu/hr, 115 Volt, Single-Phase, 50/60 Hertz.
TA13225E8455 - Air Conditioner, Horizontal, Compact, 9,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz.
TA13225E8460 - Air Conditioner, Horizontal, Compact, 9,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz.
TA13225E9500 - Air Conditioner, Horizontal, Compact, 36,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz.
TA13225E9600 - Air Conditioner, Horizontal, Compact, 36,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

(Copies of drawings required by contractors in connection with specific acquisition functions should be obtained from the USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-FES, Fort Belvoir, VA 22060-5606.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

ACOUSTICAL SOCIETY OF AMERICA (ASA)

ASA - 53 - Preferred Frequencies, Frequency Levels, and Band Numbers for Acoustical Measurements.

(Applications for copies should be addressed to the Acoustical Society of America, 335 East 45th Street, New York, N.Y. 10017.)

AIR MOVING AND CONDITIONING ASSOCIATION (AMCA)

AMCA STD 210 - Laboratory Methods of Testing Fans for Ratings.

(Application for copies should be addressed to the Air Moving and Conditioning Association, 205 West Touhy Avenue, Park Ridge, IL 60068.)

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI S1.1 - Acoustical Terminology (Including Mechanical Shock and Vibration).

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY OF HEATING, REFRIGERATING, AND AIR CONDITIONING ENGINEERS, INC. (ASHRAE)

ASHRAE STD 16 - Methods of Testing for Rating Room Air Conditioners and Packaged Terminal Air Conditioners.
ASHRAE STD 37 - Methods of Testing for Rating Unitary Air Conditioning and Heat Pump Equipment.
ASHRAE STD 51 - Laboratory Methods of Testing Fans for Rating.

(Application for copies should be addressed to the American Society of Heating, Refrigerating, and Air Conditioning Engineers, 1791 Tullie Circle, N.E., Atlanta, GA 30329.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

AMERICAN WELDING SOCIETY

AWS D1.1 - Structural Welding Code, Steel.
AWS D1.2 - Structural Welding Code, Aluminum.

(Application for copies should be addressed to the American Welding Society, 550 N.W. LeJeune Road, P.O. Box 351040, Miami, FL 33135.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE J429 - Mechanical and Material Requirements for Externally Threaded Fasteners.
SAE J492 - Rivets and Riveting.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

SOUTH COAST AIR QUALITY MANAGEMENT CONTROL DISTRICT (SCAQMCD)

Rule 442 - Usage of Solvents.

(Application for copies should be addressed to the South Coast Air Quality Management Control District, 9150 East Flair Drive, El Monte, CA 91731.)

(Non-Government standards and other publications are normally available from the organizations that prepare or that distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The air conditioners shall be in accordance with the following top assemblies and as specified herein:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

Type I

Size	Class		Size	Class	
A	1	- TA13218E9890	B	1	- TA13218E9905
	2	- TA13218E9880		2	- TA13218E9915
				3	- TA13218E9910
				4	- TA13218E9900
C	1	- TA13225E8000	D	1	- TA13225E8200
	2	- TA13225E8010		2	- TA13225E8210
E	1	- TA13217E6897			
	2	- TA13217E6898			

Type II

Size	Class		Size	Class	
A	1	- TA13225E8450	B	1	- TA13222E9150
	2	- TA13225E8445		2	- TA13222E9160
	3	- TA13225E8455		3	- TA13222E9170
	4	- TA13225E8460			
C	1	- TA13225E9500	D	1	- TA13216E6510
	2	- TA13225E9600		2	- TA13216E6520

A control box shall be mounted integrally with the air conditioner. When specified (see 6.2), a block-off assembly shall be furnished. When specified (see 6.2), air conditioners shall be furnished with external sound attenuators as shown on the drawings. When specified (see 6.2 and 6.8), a control adapter assembly, power adapter, blast damper assembly, fresh-air cover, and a special air conditioner cover shall be provided. When specified (see 6.2), air conditioners shall be furnished with nuclear hardened assembly. The weight of each air conditioner, including the control box, resilient mounts, and a full charge of refrigerant and oil (but not including the sound attenuator and block-off assembly, if furnished) shall be not more than as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE I. Maximum weight

Air conditioner	Maximum weight (lb)
Type I	
Size A, Class 1	180
Class 2	175
Size B, Class 1	200
Class 2	200
Class 3	190
Class 4	190
Size C, Class 1	280
Class 2	280
Size D, Class 1	460
Class 2	460
Size E, Class 1	620
Class 2	620
Type II	
Size A, Class 1	200
Class 2	200
Class 3	200
Class 4	200
Size B, Class 1	290
Class 2	290
Class 3	290
Size C, Class 1	435
Class 2	435
Size D, Class 1	600
Class 2	600

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to ensure correct fit, assembly, and operation of the air conditioners. Any data (for example, shop drawings, layouts, flow sheets, and processing procedures) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.3 Materials. Materials shall be as specified herein and as shown on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration prevention and control. The air conditioner shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the air conditioner may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.3.2 Recovered materials. For the purpose of this requirement, recovered materials are those materials that have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the air conditioner may be newly fabricated from recovered materials to the maximum extent practicable, provided the air conditioner produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the air conditioner.

3.4 Performance characteristics.

3.4.1 Capacity. When operating at the specified conditions, the cooling capacity of the air conditioner shall be not less than as shown in table II.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the currentversion before use.

TABLE II. Cooling capacities.

Unit	Condition	Ambient temperature (dry bulb)	Evaporator inlet temperature		Minimum net sensible cooling capacity	Minimum net total cooling capacity
			dry bulb	wet bulb		
		°F	°F	°F	Btu/hr	Btu/hr
Type I						
Size A	A	120	90	75	3,780	6,300
	B	95	80	67	4,095	6,300
Size B	A	120	90	75	5,600	9,350
	B	95	80	67	6,000	9,350
Size C	A	120	90	75	12,100	18,500
	B	95	80	67	14,000	21,500
Size D	A	120	90	75	22,680	37,800
	B	95	80	67	24,570	37,800
Size E	A	120	90	75	36,000	60,000
	B	95	80	67	39,000	60,000
Type II						
Size A	A	120	90	75	8,000	10,000
	B	95	80	67	8,000	10,500
Size B	A	120	90	75	14,000	18,500
	B	95	80	67	14,700	19,500
Size C	A	120	90	75	30,000	41,000
	B	95	80	67	32,000	40,000
Size D	A	120	90	75	44,000	62,000
	B	95	80	67	48,000	63,000

Note: Data shown for 0-inch water gage (wg) (free air) external static pressure on the evaporator for all units except type II, size B (type II, size B data are shown for 0.25-wg external static pressure on the evaporator).

3.4.2 Operating temperatures. The air conditioners shall start and operate on cooling mode at not less than 120 °F ambient temperature with air at not less than 120 °F entering the evaporator and condenser.

3.4.3 Evaporator airflow. With the mode selector switch positioned on "ventilate" and with the fan at high speed, the evaporator airflow in standard cubic feet per minute (scfm) shall be not less than as specified in table III. The airflow shall be obtained with the external static pressure resistance in inch-wg as specified in the note to table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE III. Evaporator airflow.

Size	Class	Airflow minimum (scfm)
Type I		
A	1	280
	2	300
B	1	335
	2	335
	3	335
	4	335
C	1	585
	2	615
D	1	1250
	2	1360
E	1	1900
	2	2020
Type II		
A	1	370
	2	370
	3	370
	4	370
B	1	590
	2	590
	3	640
C	1	1380
	2	1520
D	1	1800
	2	2000

3.4.4 Power consumption. When the air conditioners are operating at the conditions shown in table II, the total power consumption shall be not more than specified in table IV at a power factor not less than specified in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Power consumption and power factor.

Size	Class	Power consumption (maximum) (kW)	Power factor (minimum)
Type I			
A	1	2.20	0.90
	2	2.60	0.50
B	1	3.60	0.95
	2	3.40	0.95
	3	3.40	0.84
	4	3.60	0.55
C	1	5.00	0.90
	2	5.70	0.61
D	1	9.60	0.83
	2	11.00	0.60
E	1	15.50	0.78
	2	18.60	0.63
Type II			
A	1	3.22	0.85
	2	3.22	0.90
	3	3.00	0.71
	4	3.10	0.45
B	1	5.00	0.95
	2	4.60	0.80
	3	5.00	0.55
C	1	13.50	0.83
	2	13.50	0.64
D	1	14.00	0.85
	2	18.00	0.67

3.4.5 Heating. With all heaters operating on high heat in an ambient temperature of 75 to 80 °F and the dual-speed motor switch, when applicable, positioned on "high", the heating capacity shall be not less than as specified in table V. Electrical potential from the air-conditioner casing to the ground shall be not more than 1 volt (V). Power consumption shall be not more than as specified in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE V. Heating capacity.

Size	Class	Heating capacity minimum (Btu/hr)
Type I		
A	1	4,500
	2	4,500
B	1	6,000
	2	6,000
	3	6,000
	4	6,000
C	1	12,000
	2	12,000
D	1	28,600
	2	28,600
E	1	47,000
	2	47,000
Type II		
A	1	7,000
	2	7,000
	3	7,000
	4	7,000
B	1	13,400
	2	13,400
	3	13,400
C	1	31,200
	2	34,700
D	1	45,000
	2	47,000

3.4.6 Operating pressures. When the air conditioners are operating as specified in 3.4.1 or 3.4.2, the condensing and suction pressures shall be as specified in table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE VI. Condensing and suction pressure.

Size	Class	Pressures (psig)			
		Operating conditions (paragraph 3.4.1)		Operating conditions (paragraph 3.4.2)	
		Condensing pressure (max)	Suction pressure (min)	Condensing pressure (max) (min)	Suction pressure (min)
Type I					
A	1	405	65	470 N/A	50
	2	405	65	470 N/A	50
B	1	405	65	470 N/A	50
	2	405	65	470 N/A	50
	3	405	65	470 N/A	50
	4	405	65	470 N/A	50
C	1	440	65	470 N/A	50
	2	440	65	470 N/A	50
D	1	430	65	470 105	50
	2	430	65	470 105	50
E	1	420	65	470 105	50
	2	420	65	470 105	50
Type II					
A	1	425	50	470 160	50
	2	425	50	470 160	50
	3	425	50	470 160	50
	4	425	50	470 160	50
B	1	425	50	470 160	50
	2	425	50	470 160	50
	3	425	50	470 160	50
C	1	430	50	470 160	50
	2	430	50	470 160	50
D	1	430	50	470 160	50
	2	430	50	470 160	50

3.5 Reliability. The mean-time-between-failures (MTBF) shall be as follows when tested as specified in 4.5.2.14:

Upper Test MTBF (θ_0) = 960 hrs
Lower Test MTBF (θ_1) = 480 hrs

3.6 Salt fog. When subjected to the tests specified in 4.5.2.11, no part of the air conditioner shall show evidence of deterioration, corrosion, or change in tolerance limits that could prevent the unit from meeting operational requirements. The unit shall show no evidence of peeling of paint, malfunctioning, refrigerant leaks, rough operation, electrical shorts, erratic pressure, or other irregular operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.7 Rain. When subjected to the tests specified in 4.5.2.10, the air conditioners shall operate without functional damage or impairment of operation. There shall be no penetration of water from the evaporator section to the dry side of the enclosure or into or on any electrical component; in particular, the motor, electrical connector, terminal switch, or control that could result in an electrical short, cause damage from rust or corrosion, or become a hazard to personnel.

3.8 Vibration. When subjected to the test specified in 4.5.2.12, the air conditioners shall show no evidence of structural damage, misalignment or malfunction of components, leaks, fractures, abnormal vibration, or any other irregular operation.

3.9 Refrigeration system.

3.9.1 Refrigeration system type. The refrigeration system shall be of vapor-cycle type employing refrigerant conforming to BB-F-1421, type 22, and shall be furnished with a full charge in the system.

3.9.2 Moisture content. The moisture content in the system shall be not more than 25 parts per million (ppm) by weight in the liquid phase.

3.9.3 Function. Refrigerant flow to the evaporator shall be controlled by the solenoid-liquid-shutoff valve and the evaporator thermal expansion valve. When the predetermined temperature is attained within the conditioned space, the thermostat shall close the solenoid-liquid-shutoff valve and stop the flow of refrigerant to the evaporator. The fluid-pressure regulator valve in the bypass system shall open and bypass the refrigerant gas to the compressor suction and maintain a compressor inlet pressure of not less than 35 psig. An additional expansion valve in the bypass system shall permit a flow of liquid refrigerant to enter the compressor suction line to prevent excessive temperatures in the compressor motor windings.

3.9.4 Refrigerant system leak. The entire refrigerant system shall withstand pressures up to 425 psig without deformation of any components or any detectable leaks.

3.10 Electrical controls. Electrical controls shall provide automatic operation of the air conditioner. The controls shall function as specified in 3.10.1 through 3.10.7.

3.10.1 Mode selector switch. The mode selector switch shall control operation of the air conditioner as follows: When the switch is in the "off" position and with power connected to the air conditioner, the compressor crankcase heater shall be energized, and the fan motor(s), heaters, and compressor shall be de-energized and inoperative. When the switch is in the "ventilate" position, the evaporator fan motor shall start and operate. When the switch is in the "cool" position, the evaporator fan motor shall continue to operate and the condenser fan motor (if a separate motor exists) shall start and operate. After a time delay, the compressor motor shall start and operate. Both banks of electrical

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

heaters shall be de-energized when the air conditioner is operating in either the ventilating or cooling mode. When the switch is in "low heat" position, the evaporator fan motor shall start and operate, and when heat is required, one bank of electrical heaters shall be energized. When the switch is in the "high heat" position, the evaporator fan motor shall continue to operate, and when more heat is required than one bank of heaters can provide, both banks of electrical heaters shall be energized. The compressor and condenser fan motor(s) shall not operate when the air conditioner is operating on heating cycle.

3.10.2 Dual-speed evaporator motor switch. The dual-speed motor switch, when applicable, shall control the speed of the evaporator or evaporator-condenser fan motor. With the switch in the "high" position, the motor shall operate at high speed; with the switch in the "low" position, the motor shall operate at low speed.

3.10.3 Pressure control switch. The pressure control switch, when applicable, shall automatically control the speed of the evaporator-condenser fan motor when the dual-speed motor switch is in the "low" position. When the condenser pressure reaches the fan high-speed cut-in pressure specified in table VII, the pressure control switch shall override the "low" position of the dual-speed motor switch and automatically switch the evaporator condenser fan motor to high speed; when the condenser pressure reaches the fan low-speed cut-in pressure specified in table VII, the pressure control switch shall automatically switch the evaporator-condenser fan motor back to low speed.

3.10.4 Conditioned-air thermostat. The conditioned-air thermostat shall control the cooling and heating temperatures automatically by regulating the action of the solenoid-liquid-shutoff valve and one bank of electrical heaters.

3.10.5 High-pressure cutout switch. The high-pressure cutout switch shall be set to stop the compressor when the condenser pressure reaches the pressure specified in table VII.

3.10.6 Low-pressure cutout switch. The low-pressure cutout switch shall be set to stop the compressor when the suction pressure decreases to the pressure specified in table VII.

3.10.7 Heater high-limit cutout switch. The heater high-limit cutout switch shall de-energize the electrical heating elements to prevent overheating or damage to the air conditioner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE VII. High and low cutout pressures and fan speed cut-in pressure.

	Compressor high-pressure cutout (±10 psig)	Compressor low-pressure cutout (±5 psig)	Fan high-speed cut-in (psig)	Fan low-speed cut-in (psig)
Type I				
Size				
A	480	25	391 ±31	285 ±17
B	480	25	391 ±31	285 ±17
C	480	7	-	-
D	480	7	-	-
E	480	7	-	-
Type II				
Size				
A	480	15	-	-
B	480	15	-	-
C	480	15	-	-
D	480	15	-	-

3.11 Wiring. Wiring shall be secured in compact harnesses and attached to frame members with insulated clamps at close intervals to ensure a neat and orderly cable run. Cables and wires shall not be spliced at any point throughout the length of their runs. Wiring shall not be attached to panels or other components that require removal during maintenance, except for actual electrical connections to components. Electrical isolators shall be used between all wiring and metal components to prevent abrasive action to wire insulation.

3.12 Evaporator compartment air leakage. The air leakage of the evaporator compartment shall be not more than 20 scfm when the evaporator compartment is subjected to an internal pressure of 1.0-inch wg with the evaporator air discharge, return air, and condensate drains closed, and with a duct attached to the chemical-biological-radiological (CBR) opening for supply air, when applicable. The fresh-air damper shall be closed if both a CBR opening and a fresh-air opening are present. If only a fresh-air opening is present, it shall remain open and the duct shall be attached to it.

3.13 Electromagnetic interference. When tested as specified in 4.5.2.15, the electromagnetic interference emission characteristics of the air conditioner shall not exceed the following:

a. The values given on figures 6 and 7 for steady state conditions.
b. Transients above the curves given on figures 6 and 7 in excess of 1-second duration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.14 Fungus- and moisture-resistance. The electrical circuitry, including all components and connections, except as specified below, shall be protected from the effects of fungus growth and moisture by an overall treatment with a varnish conforming to MIL-V-173, composition as specified in 3.14.1, with 1-percent copper 8-quinolinolate (by weight) based on the nonvolatile content of the varnish:

a. Components or circuit elements that are inherently fungus- and moisture-resistant or which are hermetically sealed need not be treated.
b. Components or circuit elements whose functions will be adversely affected by the varnish coating shall not be treated.

When used, the varnish shall be applied by spray, brush, or a combination of both to give a dry-film thickness of not less than 1 mil to component or element surfaces previously cleaned and prepared, so that the surfaces are free from all foreign matter that would interfere with adherence or function of the varnish.

3.14.1 Composition. Composition I shall be used unless Composition II must be used to comply with local air-pollution regulations in the application of the varnish. When Composition II is used, the contractor shall provide evidence to the Government that the use of Composition II is required, and shall certify that the Composition II material complies with South Coast Air Quality Management Control District Rule 442 - Usage of Solvents. The certification shall be made available for review by the contracting officer.

3.15 Treatment and painting. All parts shall be cleaned, treated, and painted in accordance with MIL-T-704, type F or G, as applicable, with the following exceptions:

a. Internal components previously painted by the manufacturer need not be repainted when they conform to the salt/fog requirements.
b. Coils, refrigerant tubing, electrical components, or other components whose operation will be impaired by painting shall not be painted.
c. Unless otherwise specified (see 6.2), the top coat shall be camouflage green 383 in accordance with MIL-C-46168.

3.16 Mobility. The air conditioners shall be capable of being transported without damage by military van or truck on cross-country roads at variable speeds up to 20 mph when mounted as follows:

a. Type I, size A, B, and C air conditioners: The air conditioners shall be mounted by bolts using the mounting receptacles provided in the bottom of and above the condenser-fan discharge grille with mounting fixtures as shown on figure 8.
b. Type I, size D and E air conditioners: The air conditioners shall be mounted by bolts using the mounting receptacles provided in the bottom of the air conditioner, and by the upper restraining channel and bars shown on figure 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

c. Type II, size A, B, and C air conditioners: The air conditioners with the resilient mounts specified in the drawings shall be mounted by bolts using the mounting receptacles provided in the bottom of the air conditioner.
d. Type II, size D air conditioners: The air conditioners shall be mounted by bolts using the mounting receptacles provided in the bottom of the air conditioner.

3.17 Maintenance.

3.17.1 Maintenance ratio. The air conditioners shall have a maintenance ratio of not more than 0.03. The maintenance ratio is defined as the ratio of the total active maintenance manhours required (scheduled and unscheduled) to the total operating time. Manhours for repair of replaced components and scheduled before-and-after operation checks are excluded. A maintenance schedule shall be furnished prior to the start of any testing. Not more than 25 percent of repairs shall require maintenance at the general support level.

3.17.2 Scheduled maintenance. The air conditioners shall not require scheduled maintenance more often than every 250 hrs of operation. Scheduled maintenance shall not be required at any level higher than organizational maintenance.

3.18 Safety. All rotating or reciprocating parts and other parts subject to high operational temperatures that are of such a nature or are so located as to be a hazard to operating personnel shall be guarded or insulated to the extent necessary to eliminate the hazard. Electrical equipment shall be effectively guarded and grounded to protect all persons and objects from electrical shock hazard.

3.19 Blast damper. When specified (see 6.2 and 6.8), the blast damper shall permit full fresh-air flow when in the open position and shall not close with external-over pressure of 3 inches $\pm$0.5 inches with pressure exceeding this value from above, either side, or from the back (condenser face). The damper shall close and remain closed until manually reset. The damper shall withstand a pressure of not less than 3.4 psig for a duration of not less than 0.6 seconds (sec). The damper shall not leak, rupture, or be permanently deformed as a result of the 3.4-psig blast.

3.20 Noise.

3.20.1 Type I, size A, B, D and E, type II, size D. The noise level in a conditioned area of a properly engineered installation shall conform to:

a. Evaporator side:

(1) MIL-STD-1474, table 2, category E for type I, sizes A and B air conditioners.
(2) MIL-STD-1474, table 2, category D for type I, sizes D and E, and type II, size D air conditioners.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

b. Condenser side:

(1) MIL-STD-1474, table 2, category D for type I, sizes A and B and type II, size D air conditioners.
(2) MIL-STD-1474, table 2, category C + 5 db for type I, sizes D and E air conditioners.

3.20.2 Type I, size C and type II, sizes A, B, and C. WIth microphones positioned as stated in 4.5.2.19 and with the air conditioners operating on the cooling cycle, the noise levels of the air conditioners when tested in an anechoic chamber (free field), shall not exceed the values shown in table VIII at the flat weighing network scale defined in ANSI S1.1. Octave band center frequencies shall be in accordance with ASA-53. Reference should pressure shall be 0.0002 microbar. In addition MIL-STD-1474, 5.1.2.5.1.2 and 5.1.3 shall apply.

3.20.3 Noise hazard caution sign. A noise hazard caution sign shall be posted on air conditioners that exceeds 85db(A) at a distance of 48 inches or greater from the evaporator or condenser side when tested per 4.5.2.19. The sign will be per MIL-STD-1474, but modified to indicate the maximum distance from the air conditioner that a noise level of 85db(A) is obtained. For example, if the noise level of 85db(A) is obtained at a maximum distance of 9 feet from the condenser side of the air conditioner, the sign, per MIL-STD-1474, will be modified to read, "CAUTION, HIGH INTENSITY NOISE, HEARING PROTECTION REQUIRED WITHIN 9 FEET", and will be posted on the condenser side of the air conditioner.

Table VIII. Corrected sound pressure levels in decibels.

Octave band center Frequencies - CPS	Ecaporator side (db max)	Condenser side (db max)
Type I	Size C	
63	65	60
125	76	73
250	75	74
500	77	71
1000	69	71
2000	66	70
4000	62	69
8000	56	69

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

Table VIII. Corrected sound pressure levels in decibels. (cont'd)

Octave band center Frequencies - CPS	Ecaporator side (db max)	Condenser side (db max)
Type II		
	Size A	
63	55	70
125	76	76
250	64	63
500	65	64
1000	65	63
2000	60	60
4000	53	57
8000	48	49
	Size B	
63	60	60
125	66	64
250	69	63
500	68	65
1000	65	66
2000	60	66
4000	54	64
8000	65	55
	Size C	
63	71	69
125	70	68
250	70	72
500	69	73
1000	76	70
2000	64	65
4000	63	63
8000	53	51

3.21 Workmanship.

3.21.1 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square and true. All bends shall be made by controlled means to ensure uniformity of size and shape. Precaution shall be taken to avoid overheating. Heated steel shall be allowed to cool slowly. External surfaces shall be free of burrs, sharp edges and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.21.2 Bolted connections. Boltholes shall be accurately formed and shall have the burrs removed. Washers or lockwashers shall be provided where necessary. Matching thread areas securing bolts conforming to SAE J429 or capscrews shall be of sufficient strength to withstand the tensile strength of the bolt. All fasteners shall be correctly torqued and shall have full thread engagement.

3.21.3 Riveted connections. Rivets shall fill the holes completely. The upset rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member, and shall be in accordance with SAE J492.

3.21.4 Welders or welding operators and welding.

3.21.4.1 Welders or welding operators. Before assigning any welder or welding operators to welding work covered by this specification, the contractor shall obtain certification that the welder or welding operator has passed qualification tests, as prescribed by the applicable material welding codes listed below for the type of welding operations to be performed, and that such qualification is effective as defined by the relevant code:

AWS D1.1, Structural Welding Code, Section 5, Qualification.
AWS D1.2 Structural Welding Code, Aluminum, Section 5, Qualification.
ASME Boiler and Pressure Vessel Code, Section IX, Welding and Brazing Qualifications.

Certification shall be furnished to the contracting officer or the designated representative for approval. Contractors who only make horizontal welds need not qualify welders for "all-position welding".

3.21.4.2 Welding. The surfaces of parts to be welded shall be free from oxide, scale, paint, grease, oil or any other foreign matter. Immediately before welding, oxide shall be removed by an abrading or a chemical process. Grease and oil shall be removed by wiping with a solvent such as acetone. All surfaces shall be dried after cleaning. Welds shall transmit stress without permanent deformation or failure when the parts connected by welds are subjected to proof and service loadings. Compete and uniform penetration and fusion of the metals shall be obtained on all welds. All welded parts shall be free from cracks and other imperfections that may reduce the effectiveness of the part. Work shall be positioned for flat welding whenever possible.

3.21.5 Brazing. During the brazing operation a small amount of nonoxidizing gas shall be continuously bled through the refrigerant lines to prevent internal oxide scaling. During the brazing operation, care shall be taken to protect all components from deformation and damage. The quantity of brazing alloy and flux used shall be no more than that required to make the joint. Flux shall not be present in the refrigerant system and heavy beads and fillets of braze material shall be avoided. Brazing shall be in accordance with ASME Boiler & Pressure Vessel Code, Section IX, Welding and Brazing Qualificaitons.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.21.6 Jigs and fixtures. Shop-fabricated components shall be assembled in steel jigs or frames and joined while held in position. Jigs and frames shall minimize distortion.

3.21.7 Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable. Interchangeable parts are defined as two or more parts possessing such functional and physical characteristics as to be equivalent in performance and durability and capable of being exchanged one for the other without alteration of the parts themselves or of adjoining parts, except for adjustment, and without selection for fit or performance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Disassembly inspection. Failure of any test or examination of the first article shall be cause for disassembly of the first article, in the presence of a Government representative, to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and drawings referenced with regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected.

4.1.3 Parts and components. Parts and components detailed on the drawings shall be inspected in accordance with the quality assurance provisions (QAP) shown on the drawings. The drawings specify the characteristics requiring QAP inspection, the sampling plan, and the basis for acceptance and rejection (see 6.4 and 6.5).

4.2 Classification of inspections. The inspection requirements are classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 First article examination. The first article air conditioners shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection and cause for performing the inspection specified in 4.1.2 as applicable.

4.3.2 First article tests. The first article air conditioners shall be subjected to the test marked "X" in columns 2 through 6 of table IX in the sequence listed. Failure of any test shall be cause for rejection and performing the inspection specified in 4.1.2.

4.4 Quality conformance inspection.

4.4.1 Examination. Each air conditioner shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Each air conditioner shall be subjected to the tests marked "X" in column 7 of table IX in the sequence listed. Failure of any test shall be cause for rejection.

4.5 Examination procedure.

4.5.1 Examination. The air conditioner shall be examined for the following defects:

Major

101. Weight of air conditioners not as specified (see 3.1).
102. Parts or components missing (see 3.1).
103. Parts (or components) not in accordance with QAP requirements as shown in the drawings (see 3.1).
104. Washers or lockwashers missing (see 3.1).
105. Nonconformance to the drawings (see 3.1.1).
106. Materials not as specified (see 3.3).
107. Materials not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration for the applicable storage and operating environments (see 3.3.1).
108. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other (see 3.3.1.1).
109. Contractor does not have documentation available for identification of material, material finishes, or treatment (see 3.3.1.2).
110. Used, rebuilt or remanufactured components, pieces or parts incorporated in the air conditioner (see 3.3.2).
111. Air conditioners not fully charged with the type of refrigerant specified (see 3.9.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

112. Installation of wiring not as specified (see 3.11).
113. Electromagnetic interference suppression components and network not identical to approved model (see 3.13).
114. Electrical circuitry not protected from the effects of moisture and fungus growth (see 3.14).
115. Treatment and painting not as specified or painting defects such as blisters, thin spots, lumps, scratches, runs or sags (see 3.15).
116. Color not as specified (see 3.15).
117. Metal fabrication not as specified (see 3.21.1).
118. Bolted connections not as specified (see 3.21.2).
119. Riveted connections not as specified (see 3.21.3).
120. Welders not certified as specified (see 3.21.4.1).
121. Welding not as specified (see 3.21.4.2).
122. Brazing not as specified (see 3.21.5).
123. Jigs and fixtures not as specified (see 3.21.6).
124. Interchangeability not as specified (see 3.21.7).

4.5.2 Tests.

4.5.2.1 Test schedule.

TABLE IX. Test schedule. 1/

Test req	Type of Test: First article #1	#2	#3	#4	#5	Qual conf	Test	Test para	Req para
1	2	3	4	5	6	7	8	9	10
1	X	X	X	X	X	X	Refrigeration system pressure.	4.5.2.3.1	3.9.4
2	X	X	X	X	X	X	Examination	4.5.1	3.1, 3.3, 3.9.1, 3.11, 3.14, 3.15, 3.18, 3.21,
3	X	X	X	X	X	X	Controls.	4.5.2.4	3.9.3, 3.10
4	X	-		-		-	Refrigerant moisture content.	4.5.2.5	3.9.2
5	X	-		-		-	Electromagnetic interference.	4.5.2.15	3.13
6	X	X	X	X	X	X	Evaporator compartment air leakage.	4.5.2.7	3.12
7	X	-	-			-	Capacity and airflow.	4.5.2.2, 4.5.2.6	3.4.1, 3.4.3 3.4.4, 3.4.6
8	X	-	-			-	Heating.	4.5.2.8	3.4.4, 3.4.5
9	-	X	-			-	High temperature operation.	4.5.2.9	3.4.2, 3.4.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE IX. Test schedule. (cont'd) 1/

Test req	Type of Test: First article #1	#2	#3	#4	#5	Qual conf	Test	Test para	Req para
1	2	3	4	5	6	7	8	9	10
10	-	X	-			-	Rain.	4.5.2.10	3.7
11	-	X	-			-	Salt fog.	4.5.2.11	3.6
12	-	X	-			-	Vibration.	4.5.2.12	3.8
13	X	X	-			X	Run-in.	4.5.2.13	3.4
14	X	X	-			X	Refrigeration system leak.	4.5.2.3.2	3.9.4
15	-	-	X	X	X	-	Reliability.	4.5.2.14	3.5
16	-	-	X	X	X	-	Maintenance evaluation.	4.5.2.16	3.17
17	X	X	-			-	Safety.	4.5.2.17	3.18
18 2/	X	-	-			-	Blast damper.	4.5.2.18	3.19
19	X	-	-			-	Noise.	4.5.2.19	3.20

1/ Perform inspection marked "X".
2/ Only when blast damper is specified.

4.5.2.2 Conditions. Unless otherwise specified herein, tests shall be conducted at rated voltage and employ 60-Hz or 400-Hz electrical power, as applicable. The frequency tolerance for all test shall be ±1 percent. Unless otherwise specified herein, no braces, sealing materials, tiedown devices, or other items that are not inherently a part of the operating air conditioner shall be employed. Unless otherwise specified herein, no alignment of components, addition of refrigerant, or other servicing shall be performed on the production model or production air conditioners after testing of the air conditioner has begun. Components subject to atmospheric corrosion shall not be treated with any treatment such as grease or oil to meet test requirements. The external sound attenuator shall not be installed during tests. Unless otherwise specified herein, all tests shall be conducted with the fans operating at high speed.

4.5.2.3 Refrigerant system pressure and leakage.

4.5.2.3.1 Refrigerant system pressure. Charge the refrigerant system to 425 psig, ±5 psig with dry nitrogen containing refrigerant gas detectable with a halogen-sensitive electronic leak detector (General Electric type H-2 or equal). Reduce the pressure to 300 psig, ±5 psig. Calibrate the leak detector for the type of gas and percentage of mixture employed and set the detector to indicate a leakage rate of 0.1 ounce per year corrected to the percentage of the mixture. Check the entire refrigerant system for leaks. One or more of the following shall constitute failure of this test:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

a. Permanent deformation of any component in the refrigerant system.
b. Any detectable refrigerant leak.

4.5.2.3.2 Refrigerant system leakage. Test for leakage at room ambient temperature (70 °F or above) with a halogen-sensitive electronic leak detector (General Electric Type H-2 or equal). Calibrate the leak detector for the type of gas and set the detector to indicate a leakage rate of 0.1 ounce per year. Check the entire refrigerant system for leaks. A detectable leak shall constitute failure of this test.

4.5.2.4 Controls. Electrical controls shall be tested as specified herein. With power connected to the air conditioner, position the mode selector switch and thermostat in the following position:

a. "Off" position. Determine that the air conditioner components have been de-energized as specified in 3.10.1.
b. "Ventilate" position. Determine that the evaporator fan motor is energized and operating, and that the compressor motor, condenser fan motor (if a separate condenser fan motor is furnished), and the heaters are off.
c. "Cool" position-thermostat coolest position. Immerse the conditioned-air thermostat bulb in water or air having a temperature of 70 +15 or -5 °F. Determine that the evaporator and condenser fan motor(s) is energized and operating and the heaters are off. After a time delay, determine that the compressor motor has started and is operating. Determine that there is refrigerant flow through the solenoid liquid shutoff valve to the expansion valve and not through the fluid pressure regulating valve.
d. "Cool" position-thermostat warmest position. Immerse the conditioned-air thermostat bulb in water or air having a temperature not exceeding 80 °F. Determine that the compressor motor and evaporator and condenser fan motor(s) are energized and operating. Determine that there is no refrigerant flow through the solenoid liquid shutoff valve to the expansion valve and that the fluid pressure regulating valve maintains suction pressures of not less than 35 psig.
e. "High heat" position-thermostat warmest position. Immerse the conditioned-air thermostat bulb in water or air having a temperature of 70 -5 or +15 °F. Determine that the evaporator fan motor is energized and operating and the compressor motor and condenser fan motor (if furnished) are off. Determine that both banks of heaters are energized and operating.
f. "High heat" position-thermostat coolest position. Determine that one bank of heaters is off and the other bank of heaters is energized and operating.
g. "Low heat" position-thermostat warmest position. With the conditioned-air thermostat bulb still immersed in water or air at a temperature of 70 -5 or +15 °F determine that one bank of heaters is energized and operating and the other bank of heaters is off.
h. "Low heat" position-thermostat coolest position. Determine that both banks of heaters are off.

Nonconformance to 3.9.3, 3.10.1, or 3.10.4 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.5.2.4.1 Dual-speed evaporator motor switch. Turn the selector switch to the "cool" position and the dual-speed motor switch to the "high" position. Determine that the evaporator fan motor is operating at high speed. With the selector switch still in the "cool" position, turn the dual-speed motor switch to the "low" position. Determine that the evaporator fan motor is operating at low speed. Nonconformance to 3.10.2 shall constitute failure of this test.

4.5.2.4.2 Pressure control switch. For type I, size A, and B units only, operate the air conditioners in the cooling mode with the conditioned-air thermostat set for minimum temperature and with the dual-speed motor switch in the "low" position. Cover the condenser coil-intake air to cause the head pressures to increase to the fan high-speed cut-in pressure in table VII. Determine that the dual-speed motor switches to high speed. Remove the condenser coil air inlet cover and determine that the dual-speed motor returns to low speed at the fan low-speed cut-in pressure in table VII. Nonconformance to 3.10.3 shall constitute failure of this test.

4.5.2.4.3 Heater high-limit cut-out switch. Operate the air conditioner on high heating mode. After 15 minutes of operation, de-energize the power to the evaporator fan, thus causing an increase in temperature within the evaporator compartment. Nonconformance to 3.10.7 shall constitute failure of this test.

4.5.2.4.4 High-pressure cutout switch. The high pressure cutout switch shall be tested as follows:

a. First article. With the air conditioner operating in the cooling mode, gradually block off the condenser airflow until the compressor is stopped by action of the high-pressure cutout switch. Record the pressure at which the compressor is stopped. Cutout pressure not within those specified in table VII shall constitute failure of this test.
b. Quality conformance.

(1) Prior to installation in the air conditioner, bench test the high-pressure cutout switch. Using dry nitrogen, increase the pressure to the switch until it opens (cuts out). Record the pressure at which the switch opens. Repeat this test procedure two more times. Cutout pressures not within those specified in table VII shall constitute failure of this test.
(2) After completion of the bench test, the high-pressure cutout switch shall be tested in the air conditioner with the air conditioner operating in the cooling mode. With the compressor operating, press the high pressure switch reset button. The compressor shall cease to operate. Failure of the compressor to cease operating at the time the reset button is pressed shall constitute failure of this test.

4.5.2.4.5 Low-pressure cutout switch. The low-pressure cutout switch shall be tested as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

a. First article. Electrically connect a continuity meter to the pins of the low pressure switch connector, or to the terminals or across the appropriate terminals in the junction box which are equivalent to the low pressure switch terminals. The meter shall show a closed circuit. Connect a low pressure gauge to the suction service valve. Bleed the gas from the unit while constantly monitoring the suction pressure and continuity meter. The continuity meter shall show an open circuit when the suction pressure reduces to the low pressure specified in table VII. Cutout pressures not in accordance with those specified in table VII shall constitute failure of this test.
b. Quality conformance.

(1) Prior to installation in the air conditioner, bench test the low-pressure cutout switch. Using dry nitrogen, increase the pressure to the switch until it opens (cuts in). Reduce the pressure until it opens (cuts out). Record the pressure at which the switch opens. Repeat this test procedure two more times. Cutout pressures not in accordance with those specified in table VII shall constitute failure of this test.
(2) After completion of the bench test, the low-pressure cutout switch shall be tested in the air conditioner with the air conditioner operating in the cooling mode. With the compressor operating, press the low-pressure switch reset button. The compressor shall cease to operate. Failure of the compressor to cease operating at the time the reset button is pressed shall constitute failure of this test.

4.5.2.5 Refrigerant moisture content. After not less than 1 hour of continuous operation, the cooling cycle in an ambient temperature of not less than 95 °F, shut down the air conditioner. After an additional period of 1 hour, withdraw a sample of approximately 1 pound of refrigerant from the low-pressure side and determine the moisture content by one of the methods specified in BB-F-1421 or by the titrimetic method using the Karl Fischer reagent. A moisture content of more than 25 ppm shall constitute failure of this test.

4.5.2.6 Cooling capacity and airflow. Test the air conditioner for cooling capacity at the capacity rating conditions specified in 3.4.1. Test the evaporator fan for airflow at the conditions specified in 3.4.3. Insulating or sealing material that is not inherently a part of the air conditioner shall not be employed.

4.5.2.6.1 Cooling capacity. Capacity tests shall be conducted using the instruments, apparatus, and procedures specified in ASHRAE Standards, as specified in table X and as specified herein. Tests conducted in accordance with Standard 37 shall use air enthalpy method for condenser confirmatory test. Capacity tests shall be conducted with type I air conditioners located with the front face (evaporator side) flush with the inside room surface of the wall between the inside and outside room. Type II air conditioners shall be located, with respect to the inside and outside room for the capacity tests, as shown on figure 1. Prior to the capacity tests, thermocouples shall be installed at the

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

thermal expansion valve bulb, quench valve bulb, quench valve discharge line, bypass valve discharge line, liquid line at the expansion valve inlet, and hot gas compressor discharge line. After installation, the thermocouples shall be completely insulated to prevent ambient temperatures from affecting the temperatures obtained from them. In addition to the data required by the applicable ASHRAE standards, temperatures obtained from the above thermocouples shall be recorded at the same times that the ASHRAE data are recorded. These temperatures shall be used, in the event of capacity test failures, to troubleshoot the refrigeration system.

TABLE X. Applicable ASHRAE standards.

	Standard 16	Standard 37
Type I Size		
A	yes	no
B	yes	no
C	no	yes
D	no	yes
E	no	yes
Type II Size		
A	yes	no
B	yes	no
C	no	yes
D	no	yes

4.5.2.6.2 Airflow. Airflow tests shall be conducted using the instruments, apparatus, and procedures specified in ASHRAE Standard 37 or ASHRAE Standard 51 (nozzles only for air flow measurement). If desired, AMCA Standard 210 may be used for the airflow tests.

4.5.2.6.3 Basis of failure. Nonconformance to 3.4.1, 3.4.3, 3.4.4, 3.4.6, or 4.5.2.2 shall constitute failure of this test.

4.5.2.7 Evaporator compartment air leakage. Close the fresh-air damper if necessary (see 3.12). Box the entire front face (evaporator side) of the air conditioner so that the evaporator is at least 2 inches from the box surface facing it and air is free to circulate over the entire evaporator side (from the top of the evaporator discharge opening to the base of the air conditioner). Seal the box to the air conditioner so that air conditioner and the box does not leak between the air conditioner and the box. Attach a duct equipped with an air-circulating and measuring device to the CBR or fresh-air opening (see 3.12) in the air conditioner. Seal the connection between the air conditioner and duct

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

to prevent external air leakage. Seal condensate drains. Other sealing that is not a part of the air conditioners shall not be permitted except as required for instrumentation lines. By means of the air-circulating device, subject the evaporator compartment to static pressure of 1.0-inch wg and maintain the pressure for not less than 5 min while measuring the airflow leakage. Airflow leakage shall be measured using the instruments, apparatus, and procedures specified in the ASHRAE Standard 37 or 51 (nozzles only). AMCA Standard 210 may be used. Nonconformance to 3.12 shall constitute failure of this test.

4.5.2.8 Heating. The test shall be conducted in an ambient temperature of 75 +5 -0 °F. Prior to recording any data, operate the air conditioner for a period of not less than 2 hours with the mode selector switch turned to the "high heat" position and the conditioned-air thermostat set for maximum temperature. Calculate the heating capacity using the following equation:

$$QH = 3.414 \times W$$

where QH = Heating capacity (Btu/hr)
W = Power input (Watts)

Measure the power input (W) to the air conditioner and the electrical leakage (V) from the air-conditioner casing to ground. Nonconformance to 3.4.4 or 3.4.5 shall constitute failure of this test.

4.5.2.8.1 Heating (50-Hz electrical power). After completion of the above test, and when 50/60-Hz air conditioners are specified (see 1.2), repeat the heating test using 50-Hz electrical power. Any evidence of heater malfunction when operating at 50-Hz electrical power shall constitute failure of this test.

4.5.2.9 High-temperature operation. Subject the air conditioner to a temperature of 120 +3 -0 °F for a period of 4 hours. After completion of the exposure period, operate the air conditioner in the cooling mode for a period of not less than 1 hr in an ambient temperature of 120 +3 -0 °F entering the evaporator and condenser. When 50/60-Hz air conditioners are specified (see 1.2), repeat the entire test at 50-Hz electrical power. Inability of the air conditioner to start and operate or nonconformance to 3.4.2 or 3.4.6 shall constitute failure of this test.

4.5.2.10 Rain. The air conditioner shall be installed on an enclosure to simulate a shelter application. The type I air conditioner evaporator section shall be flush with the outside opening of the enclosure. Type II, size A, C, and D air conditioner evaporator sections shall protrude through the opening of the enclosure with the outside opening over the center cover. Type II, size B air conditioner evaporator section shall protrude through the opening 4 inches. Seal the opening to prevent any water from entering the enclosure. The condenser covers shall be rolled up and the fresh air doors closed. The test facility, equipment and instrumentation shall be in accordance with MIL-STD-810 method 506, rain. The depth of rainfall shall be measured near the surface of the test unit by a U.S. Weather Bureau type gage. Water supply shall contain fluorescent type

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

dye for ease in determining the location and extent of leakage. Do not operate air conditioner during test. After each rain test, remove all panels and access doors from the air conditioner to examine for water penetration. After the examination, operate the air conditioner for 15 minutes in the cooling mode and 15 minutes in the heating mode.

4.5.2.10.1 Free rain. Subject each of the three exposed sides tilted at a 45^{0} angle, sides up, to a simulated rain fall of 4 inches per hour ±1 inch for 30 minutes. The total test duration shall be 2 hours.

4.5.2.10.2 Blowing rain. With the air conditioners operating in the cooling mode, subject each of the three exposed sides to a simulated rainfall of 1 inch per hour ±0.50 inch combined with a horizontal wind of 40 mph ±5 mph for a period of 1 hour. Total test duration shall be not less than 3 hours.

4.5.2.10.3 Basis of failure. One or more of the following shall constitute failure of the rain test:

a. Evidence of water leaking into the enclosure.
b. Malfunctioning of components or an electrical short during operation.
c. Nonconformance to 3.7.

4.5.2.11 Salt fog. Subject the air conditioner to MIL-STD-810, method 509, procedure I. Do not operate the air conditioner during exposure. Prior to this test and after the exposure period, operate the air conditioner in accordance with 4.5.2.4 to determine function of the controls. Nonconformance to 3.6 shall constitute failure of this test.

4.5.2.12 Vibration. Conduct the vibration test as specified in MIL-STD-810, method 514.2, category F, procedure VIII, table 514.2-VI, figure 514.2-6, curve V. The test time shall be 60 minutes total per plane. The air conditioners shall not be operated during this test and shall be mounted as follows:

a. Type I, size A, B, and C, air conditioners: The air conditioners shall be mounted by bolts using the mounting receptacles provided in the bottom and above the condenser-fan discharge grille.
b. Type I, sizes D and E air conditioners: The air conditioner shall be mounted using a test fixture as shown on figure 8.
c. Type II air conditioners: The air conditioners shall be mounted by bolts using the mounting plates provided in the bottom.
d. Auxiliary braces, straps, or other tiedown devices, other than those specified herein, shall not be employed to secure the air conditioners to the test apparatus. No blocking or tiedown of internal components other than those that are part of the air conditioner shall be employed. Removable panels and access doors shall be in place during all testing. With the air conditioner mounted, there shall be no resonance inherent in the test apparatus at the frequencies and acceleration levels specified for this test. During the tests, the base of the air conditioner shall remain in a horizontal plane. With

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

the exception of type I, size D and E air conditioners, mount accelerometers on the test apparatus immediately adjacent to the four corners of the base of the air conditioner. For type I, size D and E air conditioners, four accelerometers shall be mounted on the test fixture as shown on figure 8. The four accelerometers shall be connected into an electric or electronic network which will average the accelerometers' output signals into a single indicated g level of the magnitude specified for this test. After completion of each test axis, conduct the controls test specified in 4.5.2.4 and the refrigeration system leak test specified in 4.5.2.3.2. Nonconformance to 3.8, 4.5.2.3.2, or 4.5.2.4 shall constitute failure of this test.

4.5.2.13 Run-in.

4.5.2.13.1 Run-in performance. Install ducts on the evaporator-return-air openings, evaporator-air-discharge opening, and condenser air inlet opening of each air conditioner. Each duct shall be not less than 12 inches long and of the same cross-sectional dimensions as the respective openings. Equip each duct with a thermocouple grid to measure average entering and leaving air temperatures to the evaporator and entering air to the condenser. Measure the entering evaporator-air wet-bulb temperature by psychrometer device located in the test chamber. Operate the air conditioners for not less than 1 hour in the cooling mode while maintaining the supply voltage to the air conditioner within ±5 percent. The air temperature entering the evaporator return and condenser inlet shall be as specified in table XI. After stabilization, three sets of the data specified in table XII shall be recorded and averaged during the last 30 minutes of operation (every 10 minutes). After completion of the above, operate the air conditioner in an ambient temperature between 100 and 120 °F for a total period of 48 hours in the cooling mode, in cyclic operation of 55 minutes "on" and 5 min "off". After completion of the 48-hour operation, continue operating the air conditioner in the cooling mode for not less than an additional hour while maintaining the supply voltage to the air conditioner within ±5 percent and temperature of the air entering the evaporator return and condenser inlet as specified in table XI. After stabilization, three sets of the data specified in table XII shall be recorded and averaged during the last 30 minutes of operation (every 10 minutes). With the air conditioner at room ambient temperature, operate the air conditioner on high heat mode for 30 minutes. During the last 10 minutes of operation, record the power input (W) to the air conditioner. After completion of the 30-minutes operating period, conduct the refrigerant system leak test as specified in 4.5.2.3.2.

TABLE XI. Temperature conditions for run-in performance.

	Location	Temperature
a.	Evaporator return.	Dry bulb - 90 ±3 °F.
b.	Evaporator return.	Wet bulb - dry-coil condition.
c.	Condenser inlet.	Dry bulb - 110 ±3 °F.
d.	Condenser inlet.	Wet bulb - dry-coil condition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE XII. Data required for run-in performance curves.

a. Dry-bulb temperature of air entering the evaporator, °F.
b. Wet-bulb temperature of air entering the evaporator, °F.
c. Dry-bulb temperature of air leaving the evaporator, °F.
d. Dry-bulb temperature of air entering the condenser, °F.
e. Discharge pressure, psig.
f. Suction pressure, psig.
g. Power consumption of the air conditioner, W.

4.5.2.13.2 Run-in performance curves. Not less than 25 units shall be used to establish acceptance curves (see 6.6). When less than 25 units are produced, all units will be used to establish acceptance curves. Data obtained in accordance with 4.5.2.13.1 shall be used by the contractor to select one high and one low unit that then shall be capacity-tested at condition "A" of 3.4.1. If any high- or low-limit air conditioner fails to meet minimum requirements of 3.4.1, it shall be replaced by the next low or high unit and that unit tested. Operate the acceptable high and low air conditioner continuously in the cooling mode for not less than 1 hour under each of the conditions specified in table XII. After stabilization, four sets of data specified in table XI shall be recorded and averaged for each of the conditions in table XIII during the last 30 minutes (every 10 minutes). Establish high and low limits of acceptance for production units by plotting the following curves from data specified in table XII:

a. Average evaporator-entering dry-bulb temperature versus average temperature differential between evaporator inlet and outlet air temperatures for each of the condenser-entering temperatures recorded.
b. Average evaporator-entering dry-bulb temperature versus power input for each of the condenser-entering temperatures.
c. Average evaporator-entering dry-bulb temperature versus suction pressure for each of the condenser-entering temperatures.
d. Average evaporator-entering dry-bulb temperature versus discharge pressure for each of the condenser-entering temperatures.

TABLE XIII. Temperature conditions for run-in performance curves.

	Temperature			
Location	Condition I	Condition II	Condition III	Condition IV
Evaporator return	87 °F ±0.5	93 °F ±0.5	87 °F ±0.5	93 °F ±0.5
Condenser inlet	107 °F ±0.5	113 °F ±0.5	113 °F ±0.5	107 °F ±0.5
Evaporator return and condenser inlet: Dry coil for all conditions.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.5.2.13.3 Failure criteria. One or more of the following shall constitute failure of this test:

a. Temperature differential between the average air dry-bulb temperature entering the evaporator return and the average air dry-bulb temperature leaving the evaporator before and after the 48-hour test phase in 4.5.2.13.1 not within the curves developed as specified in 4.5.2.13.2.
b. Average condensing pressure recorded before and after the 48-hour test phase in 4.5.2.13.1 not within the curves developed as specified in 4.5.2.13.2.
c. Average suction pressure recorded before and after the 48-hour test phase in 4.5.2.13.1 not within the curves developed as specified in 4.5.2.13.2.
d. Average power consumption on cooling recorded before and after the 48-hour test phase in 4.5.2.13.1 not within the curves developed as specified in 4.5.2.13.2.
e. Total power consumption (W) on heating (high-heat) in excess of that specified in 3.4.5.
f. Failure of any component or fracture or breakdown of any material.
g. Evidence of any detectable refrigerant leak.
h. Need for any servicing of the air conditioner during operation.

4.5.2.14 Reliability. Using the upper and lower test MTBFs specified in 3.5, the air conditioners shall be tested as specified herein with "accept" and "reject" criteria in accordance with MIL-STD-781, test plan VIIIC. Each air conditioner tested must accumulate at least one-third of the total test hours.

4.5.2.14.1 Test facility. Install the air conditioners in a test chamber consisting of two rooms. One room shall function as an indoor room and shall maintain the evaporator return-air temperature within ±5 °F, as specified on figure 2. The second room shall function as an outdoor room and shall maintain the condenser return air temperature as specified on figure 2 within ±5 °F. These temperatures shall be maintained on a 24-hour cyclic basis throughout the reliability test, as shown on figure 2.

4.5.2.14.2 Operation. All air conditioner controls (rotary switch, toggle switch, and thermostat) shall be operated manually or automatically. If automatic means are used, they shall not interrupt the control circuit but shall physically operate the air conditioner control components. The controls shall be positioned as shown in table XIV.

TABLE XIV. Control positions for reliability test.

Mode	Time	Control	Control Position
Heating	0030 to 0130	Mode switch	High heat
Heating	0030 to 0130	Thermostat	Warmest
Heating	0100 to 0130	Thermostat	Coolest
Bypass	0130 to 0400	Mode switch	Cool
Bypass	0130 to 0400	Thermostat	Warmest

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE XV. Control positions for reliability test. (cont'd)

Mode	Time	Control	Control Position
Cooling	0400 to 2100	Mode switch	Cool
Cooling	0400 to 2100	Thermostat	Coolest
Bypass	2100 to 2330	Mode switch	Cool
Bypass	2100 to 2330	Thermostat	Warmest
Off	2330 to 0030	Mode switch	Off

4.5.2.14.3 Data. The following shall be monitored and recorded throughout the test as required to determine that normal air conditioner operation is being maintained and to identify problems in event of failure or malfunction:

a. Voltage.
b. Current.
c. Frequency.
d. Refrigerant pressures.

    (1) Suction.
    (2) Discharge.

e. Refrigerant temperatures.

    (1) Compressor discharge.
    (2) Liquid line.
    (3) Suction line (at compressor).

f. Air temperatures.

    (1) Evaporator return (dry bulb).
    (2) Evaporator discharge (dry bulb).
    (3) Condenser return (dry bulb).

g. Abnormal operation (visual and audio observation).
h. Sight-glass observation (clear or bubbles).
i. Identification of unit.
j. Initials of technician.
k. All failures.
l. Time of day of failure.
m. Action taken if failure occurs.

4.5.2.14.4 Failure criteria. A failure is defined as any malfunction for which corrective action cannot be deferred until the next scheduled routine preventive maintenance check provided corrective maintenance action can be performed at the organizational level with available tools or that cannot be corrected by the operator crew with available tools within 30 minutes. Corrective action is not deferrable if the malfunction; causes or may cause inability to commence operation of the unit, ceases operation of the unit, or

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

degrades performance capability of the unit below the levels required to accomplish its function. Malfunctions will not be considered "failures" for reliability purposes if detected and corrected during initial inspection or if they may be deferred to final inspection (except for those that cause test termination). Malfunctions that result from operational or maintenance errors will not be counted. A malfunction shall be considered to have occurred if the following happens:

a. Temperature difference across the evaporator coil is lower than specified in table XV when the air conditioner is in the cooling mode.

TABLE XV. Minimum temperature drop and maximum current draw(see note).

Size	Class	Temperature difference °F (minimum)	Current draw Amps (max)
Type I			
A	1	13.5	21.3
	2	12.6	14.5
B	1	17.1	33.0
	2	17.1	15.6
	3	17.1	11.3
	4	17.1	18.2
C	1	20.0	15.5
	2	20.0	26.0
D	1	18.2	32.2
	2	16.7	50.9
E	1	19.0	55.2
	2	17.9	82.0
Type II			
A	1	18.0	33.0
	2	18.0	15.6
	4	18.0	21.6
B	1	20.0	29.8
	2	20.0	22.6
	3	20.0	32.9
C	1	20.0	45.2
	2	19.5	58.6
D	1	22.0	45.8
	2	22.0	74.6

Note: For all 3-phase air conditioners, amperage reading shall be the average of the three phases.

b. Current draw is greater than specified in table XV when the air conditioner is in the cooling mode.

c. Current draw is greater than specified in table XV when the air conditioner is in the heating mode with the thermostat in the extreme clockwise position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

d. Current draw does not decrease when the air conditioner is in the heating mode and the thermostat is changed from the extreme clockwise position to the extreme counter-clockwise position.
e. Temperature at the evaporator discharge does not increase when the air conditioner is turned to the heating mode.
f. The sight-glass is not clear when the air conditioner is in the cooling mode.
g. The discharge pressure is greater than specified in table VI (condensing pressure column under 3.4.1) when the air conditioner is in the cooling mode.
h. The suction pressure is lower than specified in table VI (suction pressure column under 3.4.1) when the air conditioner is in the cooling mode.
i. The suction pressure is lower than 35 psig when the air conditioner is in the bypass mode.
j. The evaporator discharge temperature does not increase when the air conditioner is changed from the cooling mode to the bypass mode.
k. The sight-glass does not empty at the time the air conditioner (type I units only) is changed from the cooling mode to the bypass mode.
l. Any abnormal operation occurs as determined by looking at or listening to the unit.

4.5.2.15 Electromagnetic interference. Using the test plan specified in MIL-STD-462, the air conditioner shall be tested in accordance with MIL-STD-461 using test methods RE-02 (0.15 MH_2 to 1,000 MH_2) and CE-03 (1.5 MH_2 to 65 MH_2) as follows:

a. Steady-state conditions. Controls of the air conditioner shall be set for the following modes of operation at steady-state conditions:

STEADY-STATE TEST MODES

Rotary switch setting	Thermostat setting
Cool	Coolest
Cool	Warmest
High-heat	Warmest (2 heater banks)
High-heat	Coolest (1 heater bank)

b. Transient conditions. Transient durations shall be measured when the air conditioner controls are switched between the following modes:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

examinations, approval of first article test results, and the conditions of first

TRANSIENT TEST MODES

Mode	Rotary switch setting	Thermostat position
Cool to bypass	Cool	Coolest to warmest
Bypass to cool	Cool	Warmest to coolest
Maximum heat to minimum heat (Two heater banks to one heater bank)	High heat	Warmest to coolest
Minimum heat to maximum heat (One heater bank to two heater banks)	High heat	Coolest to warmest

4.5.2.15.1 Basis of failure. One or more of the following shall constitute failure of the electromagnetic interference test:

a. Steady-state emissions in excess of those shown on figures 6 and 7.
b. Transient emissions above the limits specified on figures 6 an 7 in excess of 1-sec duration.

4.5.2.16 Maintenance evaluation. The maintenance ratio shall be computed as specified in 3.17 for all maintenance actions required during or as a result of first article testing. Nonconformance to 3.17 shall constitute failure of this test.

4.5.2.17 Safety. Evaluation shall be accomplished throughout testing to determine conformance to MIL-STD-882. Nonconformance to 3.18 shall constitute failure of this test.

4.5.2.18 Blast damper. The blast dampers shall be tested on an operating air conditioner with the evaporator side connected to a space that is to remain essentially at normal atmospheric pressure. The three sides and the top of the air conditioner shall then be subjected to three series of blast pressures. Each series shall consist of a sufficient quantity of blast pressures to ascertain that the dampers remain open at 2.5 inches water gage (wg), close at 3.6 wg, and can withstand a minimum of 3.4 psig.

4.5.2.18.1 Basis of failure. One or more of the following shall constitute failure of the blast damper test:

a. Failure to remain open at 2.5 inches wg.
b. Failure to close at 3.6 inches wg.
c. Evidence of permanent deformation, rupture, or leakage.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the current version before use.

4.5.2.19 Noise level test. To determine the noise level of the air conditioner at the evaporator and condenser sections, place a microphone on an arc 48 inches from the center of each section in the same horizontal plane for all types and sizes of air conditioners with the exception of type I, size C and type II, sizes A, B, and C. For type I, size C, and type II, sizes A, B, and C place a microphone on an arc 36 inches from the center of the evaporator side and 60 inches from the center of the condenser side in the same horizontal plane. Record the noise level while the air conditioner is in normal operation with the compressor running. In each section, readings shall be taken directly in line with the geometric center of the evaporator section, 30 degrees to the left and 30 degrees to the right of the center. At the condenser section, the spread of the microphone shall be 45 degrees vice 30 degrees. Nonconformance to 3.20 shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 First article pack inspection. The first article pack shall be examined for the defects specified in 4.6.3. Presence of one or more defect shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a complete pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.3. Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. Acceptable quality level (AQL) shall be 1.0 percent defective.

125.	Preservation methods not as specified for level A and C.
126.	Louvers not closed and canvas covers, if supplied, not snapped in place as specified for level A or C.
127.	Technical publications not preserved and placed with the air conditioner as specified for level A or C.
128.	Accessories not cushioned, placed in bag or box, and positioned as specified for level A or C.
129.	Sound attenuators, when included, not prepared as specified for level A or C.
130.	Air conditioners not protected with a shroud as specified for level C.
131.	Cushioning not of the type, size, or positioned as specified for level A or B.
132.	Sound attenuator, when included, not packed inside shipping container with air conditioner, as specified for level A or B.
133.	Strapping not as specified for level A or B.
134.	Clearance between air conditioner and inner faces of box not as specified for level A or B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

135. Air conditioners requiring bolting to the base of the box not bolted as specified for level A or B.
136. Wood spacers, when required, not padded as required for level A or B.
137. Air conditioners not packed in accordance with the reference document for level C.
138. Palletization, when appropriate, not as specified for all levels of packaging.
139. Marking missing, illegible, incorrect, or incomplete for level A, B, or C.

5. PACKAGING

5.1 First article pack. The contractor shall furnish a first article pack for examination within the timeframe specified (see 6.2) to prove, prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examinations shall be those specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.7). The first article pack may be accomplished using either the first article model air conditioner or a production air conditioner. If the first article model air conditioner is used, any preservation and packing shall be removed by the contractor, when requested by the Government at no expense to the Government to facilitate comparison between the first-article-model air conditioner and production air conditioners.

5.2 Preservation. Preservation shall be level A or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 General.

5.2.1.1.1 Canvas covers and louvers. Prior to applying the method II barrier material around the air conditioner, as required in 5.2.1.2 or 5.2.1.3, all louvers shall be placed in the closed position. Louver control chains, if so equipped, shall be secured in place. Canvas covers, if supplied, shall be snapped in place.

5.2.1.1.2 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, method IC-1 or IC-3 and placed with the air conditioner within the method II barrier specified in 5.2.1.2 or 5.2.1.3.

5.2.1.1.3 Accessories.

a. Block-off assemblies and cable connectors shall be placed together in a sack conforming to PPP-S-30, type II, which shall be secured shut with staples. For the type II air conditioners, parts of the vibration mounts shall be placed with the above accessories. Cable connectors shall be wrapped with cushioning material conforming to PPP-C-843 prior to placement in the sack with other accessories. The consolidated accessories shall be secured with tape to the air conditioner in a location that will not interfere with any cushioning or blocking;

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

however, on type I, size C air conditioners, the accessories shall be placed behind the junction box in the condenser compartment.

b. Control adapter assemblies, power adapters, blast damper assemblies, and fresh air covers, if provided, shall be individually packed in boxes conforming to PPP-B-636, type CF, class domestic, variety SW, weight appropriate for the weight of contents. Prior to placement in the boxes, each accessory shall be wrapped with cushioning material conforming to PPP-C-843. Special air conditioning covers, if provided, shall be placed in a polyethylene bag having a film thickness of not less than 2.5 mils. The bag shall be secured shut with staples or by heat sealing.

5.2.1.1.4 Sound attenuators. When sound attenuators are included, they shall be placed in boxes conforming to PPP-B-636, type CF, class weather resistant, variety SW, grade appropriate for the weight of the attenuator.

5.2.1.2 Type I, sizes A and B; and type II, size D air conditioners. Air conditioners shall be preserved in accordance with MIL-P-116, method IIe. The housing of the air conditioner shall serve as the inner container of the preservation method.

5.2.1.3 Type I, sizes C and D and E; and type II, size A, B, and C. Air conditioners shall be preserved in accordance with MIL-P-116, method IIa. Air conditioners shall be secured to the bottom of boxes specified in 5.3.1.3 with four bolts which pass through the barrier material.

5.2.2 Level C.

5.2.2.1 General. All louvers shall be closed, and canvas covers (when supplied) shall be snapped in place. Technical publications and accessory items (block-off assemblies, cable connectors, vibration mounts, etc.) shall be preserved and secured to the air conditioner as specified for level A. Sound attenuators shall be packed as specified in 5.2.1.1.4, except that boxes shall be domestic class and of a grade appropriate with the weight and size of the attenuator.

5.2.2.2 Air conditioners. Air conditioners shall be covered with a polyethylene film shroud of not less than 3 mils in thickness. The shroud shall be secured to the air conditioner with tape.

5.3 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.3.1 Level A.

5.3.1.1 Type I, sizes A and B. Air conditioners, preserved as specified in 5.2, shall be packed in a box conforming to PPP-B-601, overseas type, style I. The box shall be of a size into which the air conditioner with sound attenuator, included accessories, and any necessary blocking will fit snugly. Fiberboard corner pads of the accordion-folded or multiple-layer type conforming to MIL-STD-1186 shall be used on all top and bottom edges of the air conditioners.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

Fiberboard corner pads shall not be less than 1 inch thick and 4 inches wide. When a sound attenuator is included, it shall be placed alongside the air conditioner. Blocking or cushioning conforming to MIL-STD-1186 shall be used to prevent movement of the packed attenuator. The box shall be closed and reinforced in accordance with the box specification. Strapping shall conform to QQ-S-781, class 1, type I or IV, finish B, size as applicable.

5.3.1.2 Type II, size D. Air conditioners with all included accessories, preserved as specified in 5.2, shall be packed in a container consisting of a plywood base and a wood-cleated plywood cover, as shown on figure 3. The air conditioner shall be cushioned with expanded polyethylene as shown on figure 4. The cushioning material shall conform to PPP-C-1752 with nominal density of 2.2 pounds per cubic foot. Strapping shall conform to QQ-S-781, class 1, type I or IV, finish B.

5.3.1.3 Type I, sizes C, D and E; type II, sizes A, B and C. Air conditioners with all included accessories preserved as specified in 5.2, shall be packed in a box conforming to PPP-B-601, overseas type. The box size shall be such that not less than 1-inch clearance shall exist between faces of the air conditioner and the inner walls of the box. The air conditioner shall be secured to the bottom of the box with four bolts, using the boltholes provided in the bottom of the air conditioner. The box shall be modified with skids in accordance with the box specification except that the skids shall be located so that the bolts securing the air conditioner pass through the skids. Boltheads shall be countersunk into the bottom of the skids. Strapping shall be as specified in 5.3.1.1. When a sound attenuator is included with a type I air conditioner, it shall be placed alongside the air conditioner. Movement of the attenuator shall be prevented by the use of blocking or cushioning that meets the requirements of MIL-STD-1186. On type I, size D and E air conditioners, wood or weather-resistant fiberboard spacers, the full width and depth of the unit, shall be placed on all sides of the unit at the top edges to provide support between the unit and box walls. All wood spacers shall be padded with water-resistant cushioning material conforming to PPP-C-843 to prevent abrasion of the barrier material.

5.3.2 Level B.

5.3.2.1 Type I, sizes A, B, C, D, and E; and type II, sizes A, B, and C. Air conditioners and all accessories preserved as specified in 5.2 shall be packed as specified in 5.3.1.1 and 5.3.1.3 except the boxes shall be packed domestic type and required strapping shall be finish A or the air conditioners shall be packed in a container as shown on figure 5. Corner pads and any required blocking or cushioning for the sound attenuator (when included) shall be as specified in 5.3.1.1. The box shall be closed and sealed with tape in accordance with the appendix to the box specification.

5.3.2.2 Type II, size D. Air conditioner and all accessories preserved as specified in 5.2, shall be packed and cushioned as specified in 5.3.1.2 and figures 3 and 4. Box closure and strapping shall be in accordance with the appendix to the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

5.3.3 Level C. Air conditioners, preserved as specified in 5.2, shall be packed in containers in accordance with MIL-STD-1190.

5.4 Palletization. When a multiple quantity of air conditioners is being shipped to the same destination, packed units for all levels shall be palletized. Only those air conditioners whose packed size will permit two, three, or four units on a 40 x 48 inch pallet will be palletized. Pallets shall conform to NN-P-71, 40 X 48 inches, type optional. Air conditioners shall be secured to the pallet with strapping conforming to QQ-S-781, class 1, type I or IV, 0.75 x 0.028 inches minimum. For level A palletized loads strapping shall be finish B. Strapping shall be arranged so that each air conditioner on the pallet is restrained in all directions.

5.5 Marking. Marking shall be in accordance with MIL-STD-129 and the special marking specified in 5.5.1.

5.5.1 Special marking. Each shipping container shall be marked to indicate that the air conditioners shall remain in the operating position during shipment and storage. Special markings shall consist of arrows and the words "THIS END UP." Special marking shall be placed within the upper third of each side of the shipping container in black letters not less than 3 inches high.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The air conditioners covered by this specification are intended for use in cooling, dehumidifying, heating, filtering, and circulating air for portable shelters or vans in accordance with electronic and personnel requirements.
The air conditioner may be installed indoors or directly exposed to the weather.

6.2 Acquisition requirements. Acquisition documents shall specify the following:

a. Title, number, and date of the specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. Type, size, class and part or identifying number of air conditioner required (see 1.2 and 6.10).
d. When a block-off assembly is required for type I (see 3.1).
e. When external sound attenuators are required for type I (see 3.1).
f. When a control adapter assembly and power adapter are required (see 3.1).
g. When a nuclear hardening assembly is required for type II, size B (see 3.1).
h. When a blast damper assembly, fresh-air cover, and special air conditioner cover for use with blast damper assembly are required (see 3.1).
i. When a first article sample is not required (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

j. Timeframe required for submission of first article and number of units required (see 3.2 and 6.3).
k. When the Government will conduct any or all of the first article model examination and tests. When the Government will conduct some but not all of the first article examination and tests, the contracting officer should specify which examination and tests will be conducted by the Government and which examination and tests shall be conducted by the contractor (see 3.2).
l. Color required (see 3.15) when other than camouflage green.
m. Timeframe required for submission of the first article pack (see 5.1).
n. Level of preservation and packing required (see 5.2 and 5.3).

6.3 First article. When a first article inspection is required, the item(s) should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Quality assurance provisions (QAP). The contracting officer should require the contractor to maintain records of all QAP inspections. A suggested paragraph is as follows:

"The contractor shall maintain complete records of all examinations and test performed to verify the requirements of classified QAP characteristics. The records shall include as a minimum, lot size, sample size, drawing requirement, actual measurement, number and type of deficiencies found, quantity approved, quantity rejected, and corrective action taken when applicable."

6.5 Definitions.

6.5.1 Quality assurance provisions (QAP). A QAP is a contractual requirement that supplements section 4 of the specification. QAP indicates the minimum requirements that must be inspected on the product drawings to verify the design objectives of the product and assure interchangeability of repair parts.

6.6 Data requirements. The contracting officer should include requirements for such data as technical publications, instructional materials, illustrated parts lists, and contractor's maintenance and operational manual to be furnished with each air conditioner. In addition, the contracting officer should require that copies of the performance curves specified in the run-in test be furnished to the engineering agency within 30 days after development.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

6.7 First article pack. Any changes or deviations of production packs from the approved first article pack will be subject to the approval of the contracting officer. Approval of the first article pack will not relieve the contractor of his obligation to preserve, pack, and mark the air conditioners in accordance with the specification.


6.8 Accessory uses.

a. A control adapter assembly (see 3.1) shall be required when type I, size D air conditioners are furnished for use with control panels produced as part of air conditioner model number A/E32C-24 and A/E32C-25.
b. A power adapter (see 3.1) shall be required when type I, size D air conditioners are furnished for use with power cables previously fabricated to provide power to air conditioner model numbers A/E32C-24 and A/E32C-25.
c. Blast damper assemblies, fresh-air covers, and special air conditioner covers shall be required when type I, size C, class 1 air conditioners are produced for Pershing II systems.
d. Nuclear hardened assembly shall be required when type II, size B, class 2 air conditioners are produced for systems with nuclear hardening requirements.

6.9 Vibration.

a. These air conditioners have been previously qualified to MIL-STD-810, revision C, under criteria specified in sections 3 and 4 of this specification. Subsequent notices or revisions should not be made applicable to a procurement contract.
b. The contracting officer should include the following in procurement documents: "Revisions other than those listed below are not applicable. MIL-STD-810, Revision C."

6.10 Part or Identifying number (PIN). The PIN to be used for air conditioners acquired to this specification are created as follows (see 1.2):

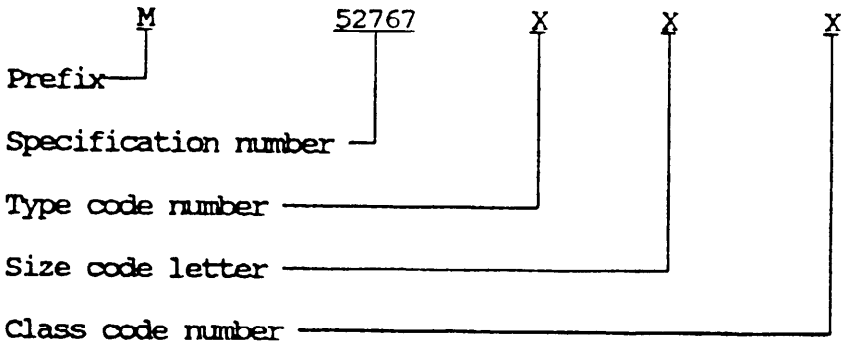

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

6.11 Subject term (key word) listing.

Air conditioner
Environmental control unit

6.12 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - ME
Air Force - 99


Review activity:
Air Force - 82

User activity:
Navy - MC

Preparing activity:
Army - ME

Project 4120-0297

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

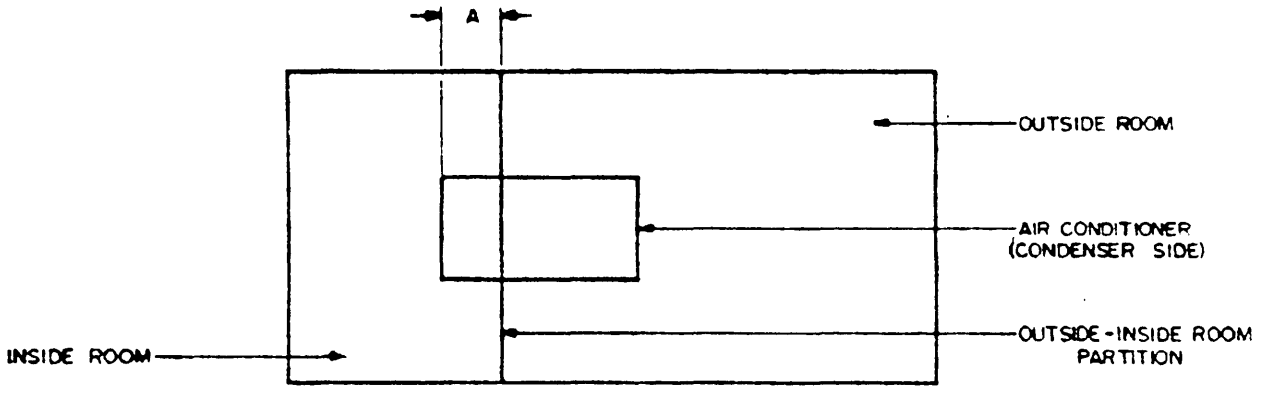


AIR CONDITIONER		"A" DIMENSION
TYPE	SIZE	INCHES
II	A	10.25 ± 0.5
II	B	11.50 ± 0.5
II	C	14.75 ± 0.5
II	D	15.75 ± 0.5

X-2440A

FIGURE 1. Type II air conditioner locations for capacity test.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

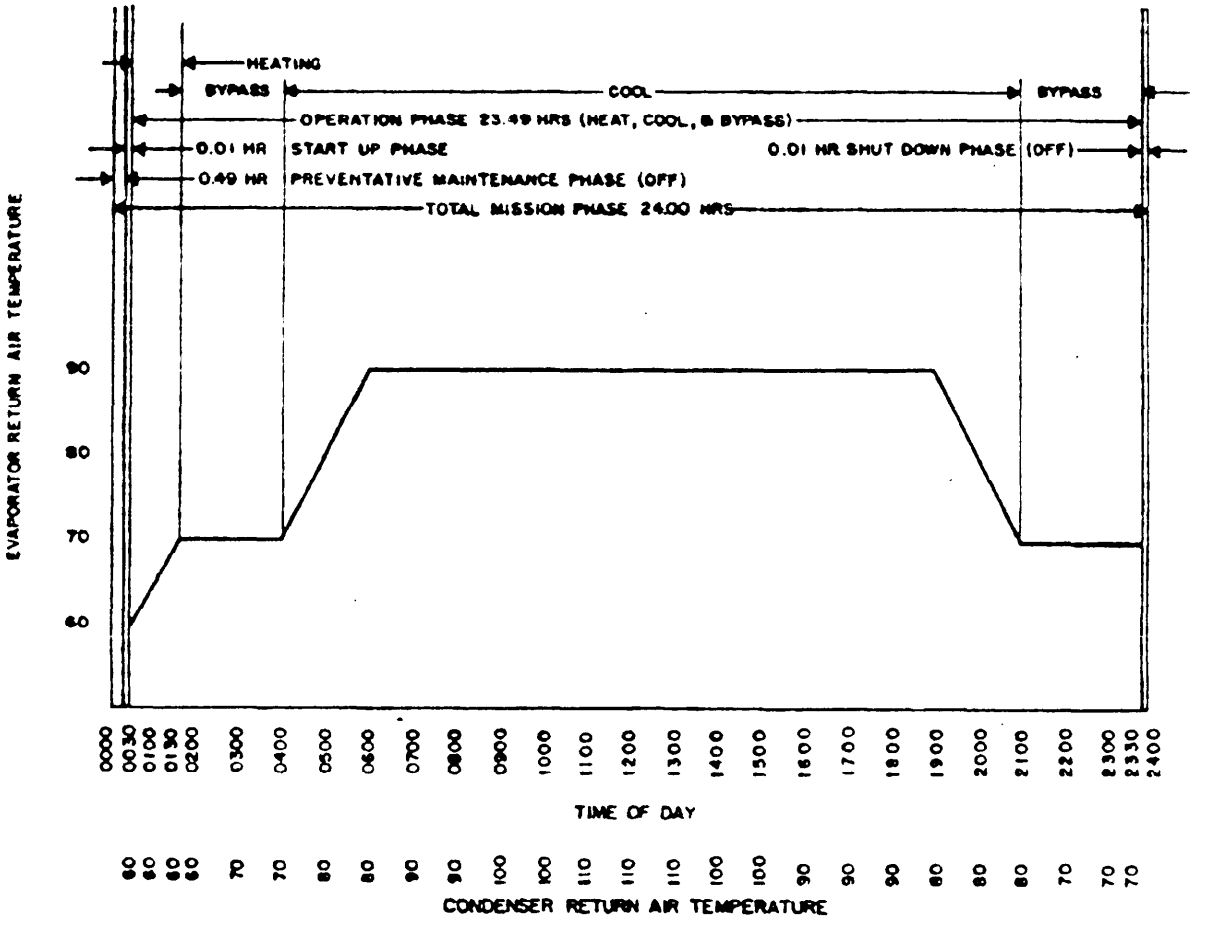

X-2441

FIGURE 2. Standardized test profile.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

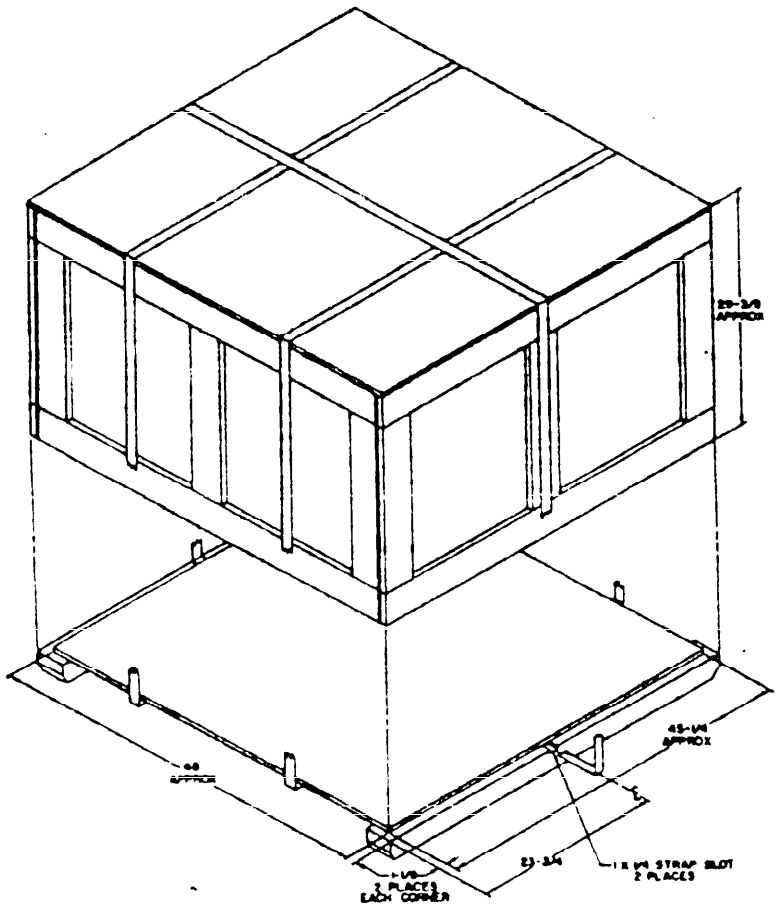


NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. PLYWOOD SHALL CONFORM TO PS 1, GRADE C-D INTERIOR WITH EXTERIOR GLUE; OR TO ANSI/HPMA HP 1983, GRADE 3-4, TYPE 1. & SHALL BE OF THE FOLLOWING MINIMUM THICKNESSES: BASE-1/2; COVER-3/8.
3. NAILS SECURING PLYWOOD FLOOR TO SKIDS SHALL CONFORM TO FF-N-105, TYPE II, STYLE 18, 2-1/2 INCHES LONG, SPACED FOUR INCHES APART AND STAGGERED
4. CLEATS SHALL CONFORM TO THE REQUIREMENTS OF PPP-B-601
5. TOP SHALL BE A SINGLE PIECE OF PLYWOOD, WITHOUT CLEATS.
6. THE EXACT SIZE OF THE BASE AND COVER SHALL BE DETERMINED BY ACHIEVING A SNUG FIT OVER THE CUSHIONING AROUND THE AIR CONDITIONER.
7. ASSEMBLY NAILING OF COVER SHALL BE IN ACCORDANCE WITH PPP-B-601.

X-2324B

FIGURE 3. Shipping container levels A and B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

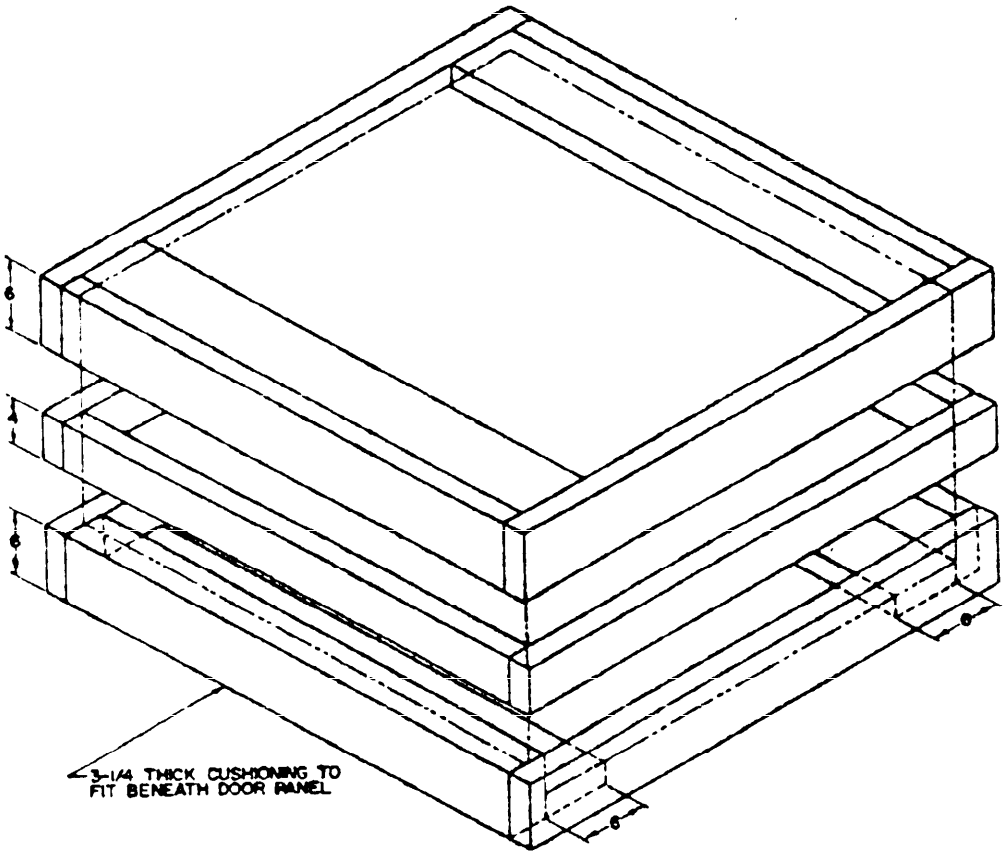


NOTES:
1. ALL DIMENSIONS ARE IN INCHES.
2. CUSHIONING MATERIAL SHALL BE TWO INCHES THICK WITH THE EXCEPTION SHOWN.
3. SECURE CUSHIONING TO UNIT WITH TAPE TO PREVENT MOVEMENT WHILE INSTALLING BOX COVER.

X-2325

FIGURE 4. Cushioning design levels A and B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

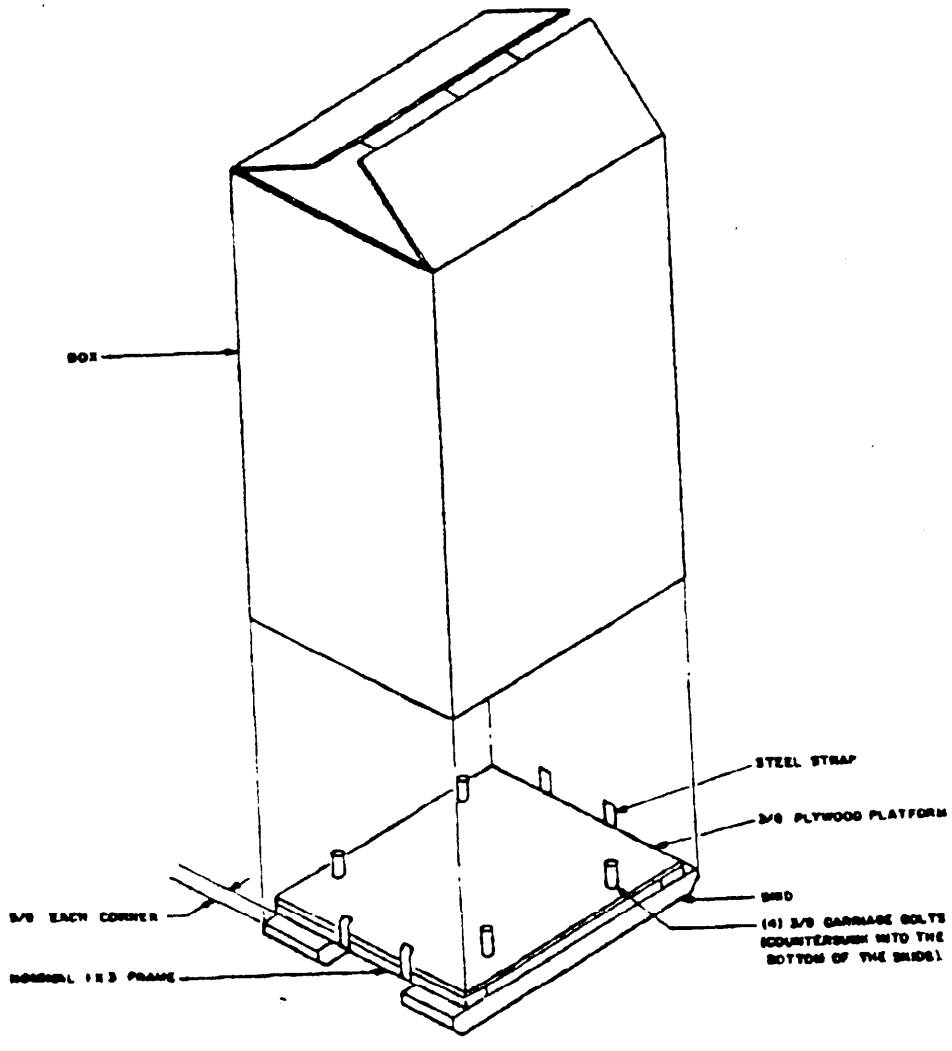

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. BOX MATERIAL SHALL BE WEATHER RESISTANT, TRIPLE-WALL CORRUGATED FIBERBOARD IN ACCORDANCE WITH PPP-B-640.
3. THE EXACT SIZE OF THE BASE AND COVER SHALL BE DETERMINED BY ACHIEVING A SNUG FIT OVER THE CUSHIONING AROUND THE AIR CONDITIONER AND NOISE ATTENUATOR.
4. STRAPPING SHALL BE IN ACCORDANCE WITH QQ-S-781, CLASS 1, TYPE I OR IV, 3/4 X 0.015 OR EQUIVALENT.
5. ATTACH COVER TO BASE USING NAILS OR STAPLES.
6. TOP SEAMS SHALL BE SEALED WITH WATERPROOF TAPE.
7. PLYWOOD SHALL CONFORM TO PS 1, GRADE C-D INTERIOR WITH EXTERIOR GLUE; OR TO ANSI/HPMA HP 1983, GRADE 3-4, TYPE I.
8. SKIDS SHALL BE IN ACCORDANCE WITH PPP-B-601.

X-3597A

FIGURE 5. Shipping container level B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

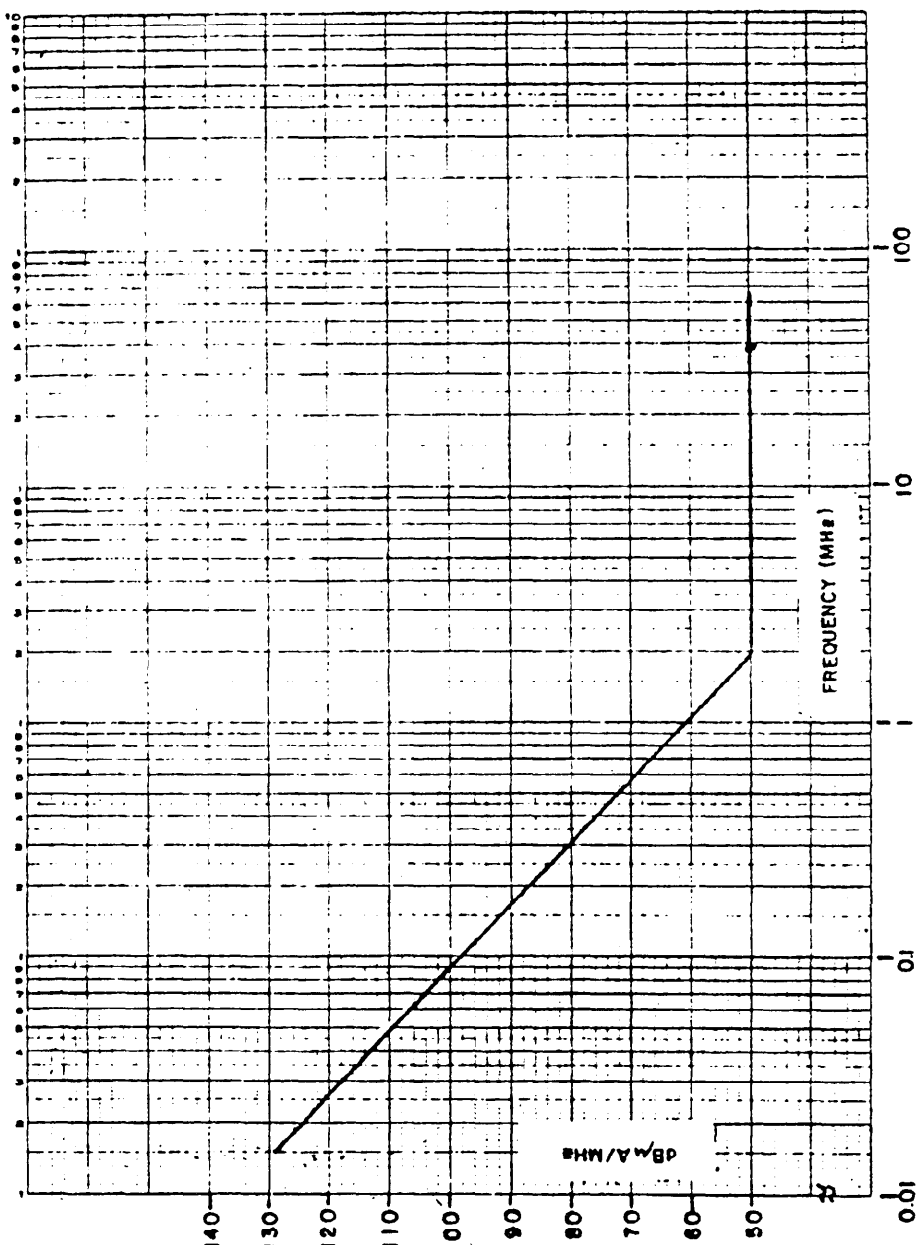


FIGURE 6. Limit for CE03 broadband emissions DC and interconnecting leads and AC leads. X-3747A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

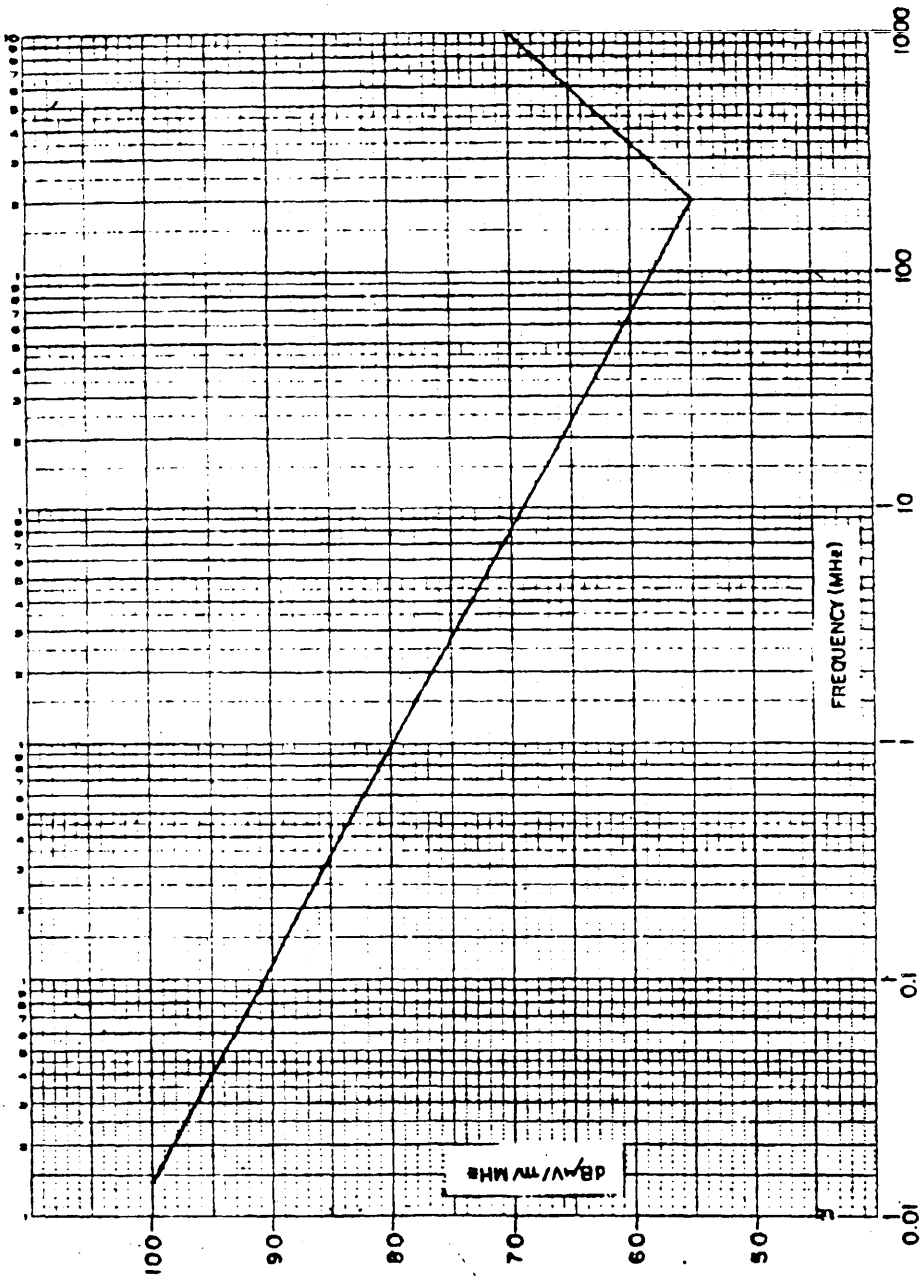


FIGURE 7. Limit for REO2 broadband emissions.

X-3748

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the correct version before use.

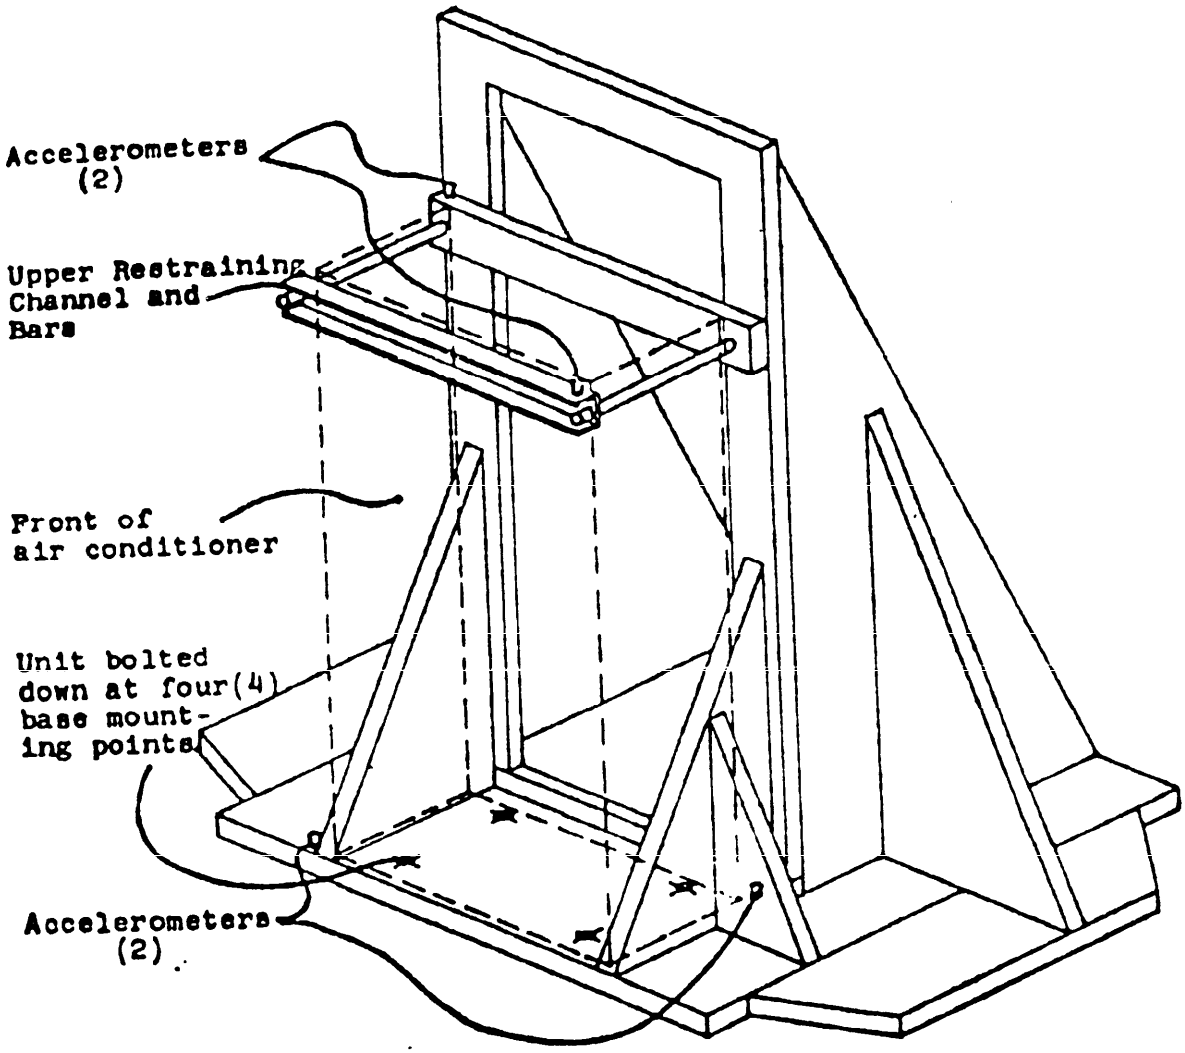


FIGURE 8. Mounting test fixture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Belvoir RDE Center
ATTN: STRBE-TSE
Ft. Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-A-52767D	Air Conditioners; Vertical and Horizontal, Compact

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

(TO DETACH THIS FORM, TEAR ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.