MIL-D-52842A(ME)
12 May 1981
SUPERSEDING
MIL-D-52842(ME)
15 January 1975

MILITARY SPECIFICATION

DRIER, X-RAY, FILM: FORCED AIR, WALL-MOUNTED

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a wall-mounted X-ray film drier for drying strips of 70 millimeter (mm) radiographic film up to 26 inches long.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

W-C-596	= Connector, Electrical, Power.
CC-M-1807	- Motors, Alternating Current, Fractional and Integral Horsepower (500 HP and Smaller).
QQ-A-250/11	- Aluminum Alloy 6061, Plate and Sheet.
QQ-S-766	- Steel Plates, Sheets, and Strip - Corrosion Resisting.

FSC 6635

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-V-173	- Varnish, Moisture-and-Fungus-Resistant (for Treatment of Communications, Electronic, and Associated Equipment).
MIL-T-704	- Treatment and Painting of Materiel.
MIL-P-15024/6	- Plates, Identification, Equipment.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-810	- Environmental Test Methods.
MIL-STD-882	- System Safety Program Requirements.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MIL-STD-1472	- Human Engineering Design Criteria for Military Systems, Equipment and Facilities.
MIL-STD-1474	- Noise Limits for Army Materiel.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

SOUTHERN CALIFORNIA AIR POLLUTION CONTROL DISTRICT

Rule 102 - Photochemically Reactive Solvents.

(Application for copies should be addressed to Southern California Air Pollution Control District, 434 South San Pedro Street, Los Angeles, CA 90013.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The drier shall be the vertical type, and the maximum dimensions shall be as shown on Figures 1, 2, and 3 (see 6.4), and as specified herein.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.3).

3.3 Initial production. When specified (see 6.2), the contractor shall furnish to the Government one or more driers for inspection as specified in 4.4.

3.4 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.7).

3.5 Environmental conditions.

3.5.1 Operating. The drier shall operate as specified herein in any ambient temperature from plus 40° F to plus 100° F.

3.5.2 Storage. The drier shall not be damaged by storage under the following environmental conditions:

Air temperature
(a) High - Plus 160° F, 4 hours daily for 3 days.
(b) Low - Minus 30° F, 12 hours. No solar radiation.

3.6 Cabinet. The cabinet, except for the film drying bin, shall be aluminum conforming to QQ-A-250/11, Temper T4. Panels shall be provided as necessary for access to the fans, motor, and heating elements. Panels shall be removable with simple handtools and shall provide ample room for any repair or replacement which may be required. Panels shall be fastened with quick-disconnect fasteners or machine screws; sheet metal screws shall not be used. The cabinet shall be equipped with upper and lower flanges for wall mounting. A separate bracket to accept the lower flange shall be provided. The mounting flanges and bracket shall be as shown on Figure 1, 2, or 3.

3.6.1 Film drying bin. The inside dimensions of the drying bin shall be not less than 15-3/4 inches x 4 inches, measured at the top, x 21-1/2 inches deep. The drying bin, including the lid, shall be of corrosion-resistant steel conforming to QQ-S-766, Class 316, Condition A, Finish 2B.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

The lid shall be hinged at the rear of the bin with a continuous hinge. The hinge shall permit the lid to open and close without binding. When in the open position, the lid shall provide unobstructed access to the bin for loading and unloading the film hangers. The lid shall be provided with a lifting handle or knob. The bottom of the bin shall be sloped to provide a low point near the center. A nipple of the same material as the bin shall be welded to the low point to completely drain all water from the bin. The nipple shall be not less than 1 inch long x 1/2 inch inside diameter (ID).

3.7 Heating. The drier shall be equipped with a heater comprised of one or more blowers and heating elements for circulating warm air around the wet film and shall dry a full load of wet film in not more than 15 minutes.

3.7.1 Blower. One or more blowers shall be provided to move not less than 120 cubic feet of air per minute. The blowers shall be driven by an electric motor conforming to CC-M-1807, Type II, Class 3, Style E. The motor shall have a rating of not more than 0.10 horsepower. The motor and blower assembly shall be mounted on shock-absorbing pads to minimize noise and vibration.

3.7.1.1 Noise limits. The noise level of the blower shall not exceed the limits specified in MIL-STD-1474, Category D. The precautions of MIL-STD-1474 (see 6.8) shall be provided if the sound level exceeds 85 dB(A) when tested in accordance with 4.6.2.8.

3.7.2 Heating elements. The heating elements shall be of the electric-resistant type and shall be rated between 350 and 400 watts. The heating elements shall be spaced so that the air temperature will be uniform across the air opening at the bottom of the film drying bin. The heater shall be thermostatically controlled to maintain an air temperature of between 106° F and 120° F at the air intake of the drying bin.

3.8 Electrical controls. Electrical controls shall consist of switches to control the blowers and the heater. The switches shall be wired so that the blowers may be operated without operating the heater, but so that it is impossible to operate the heater without operating the blowers. Each electrical control shall be marked or labeled as to its proper function as specified in 3.13.

3.9 Electrical system. The blower motor and the heating elements shall operate on 115-volt, 60-Hz, single-phase current. Wiring shall be a two-pole, three-wire, grounded system. Maximum power requirements shall not exceed 4.5 amperes with the blower and heater operating. The drier shall be provided with a three-conductor cable not less than 6 feet long with a connector conforming to W-C-596, Style D, thermosetting plastic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.10 Fungus and moisture resistance. The electrical circuitry, including all components and connections, except as specified below, shall be protected from the effects of fungus growth and moisture by an overall treatment with a varnish conforming to MIL-V-173, Composition I or II, as applicable (see 3.10.1), with 1 percent copper 8-quinolinolate (by weight) based on the nonvolatile content of the varnish:

(a) Components or circuit elements that are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.
(b) Components or circuit elements whose functions will be adversely affected by the varnish coating shall not be treated.

When used, the varnish shall be applied by spray, brush, or a combination of both to give a dry-film thickness of not less than 1 mil to component or element surfaces previously cleaned and prepared so that the surfaces are free from all foreign matter which would interfere with the adherence or function of the varnish.

3.10.1 Composition. Composition II shall be used only in the case when local air pollution regulations governing the application of varnish preclude the use of Composition I. When Composition II is used, the contractor shall provide evidence to the Government that the use of Composition II is required, and shall certify that the Composition II material complies with Rule 102, Southern California Air Pollution Control District.

3.11 Vibration and shock. The drier shall not be damaged by the vibration and shock tests specified in 4.6.2.3 and 4.6.2.4.

3.12 Treatment and painting. Portions of the drier normally painted shall be treated and painted in accordance with MIL-T-704, Type A, Color forest green. Nonpermissible galvanic couples (dissimilar metals) as defined in MIL-T-704 shall be insulated as specified in MIL-T-704.

3.13 Identification marking. The drier shall be identified in accordance with MIL-STD-130. The marking shall be applied to the drier on plates conforming to MIL-P-15024/6. The identification marking plate shall be positioned as shown on Figure 3.

3.14 Human factors. The drier shall conform to the applicable human factors engineering criteria as specified in MIL-STD-1472.

3.15 Safety. The drier shall conform to the safety requirements of MIL-STD-882.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

3.16 Workmanship. The quality of workmanship shall be such as to provide driers that are in accordance with the requirements of this specification and to insure proper functioning of all parts of the drier. Metal surfaces shall be free from burrs, slivers and sharp edges which may prove injurious to operating personnel.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Initial production inspection (see 4.4).
(c) Quality conformance inspection (see 4.5).
(d) Inspection comparison (see 4.7).
(e) Inspection of packaging (see 4.8).

4.3 First article inspection.

4.3.1 Examination. The first article drier shall be examined as specified in 4.6.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The first article drier shall be tested as specified in 4.6.2.1 through 4.6.2.8. Failure of any test shall be cause for rejection.

4.4 Initial production inspection. When specified (see 3.3), one or more initial production driers will be selected at random by the Government from the driers being produced by production tooling and will be examined as specified in 4.6.1 and tested as specified in 4.6.2 through 4.6.2.8 to determine conformance to the requirements of this specification. The inspection will be performed by the Government at a site selected by the Government. Acceptance of an initial production drier shall not exclude the remaining driers from the quality conformance inspection and acceptance provisions specified in Section 4. In addition to any test specified as part of the initial production test, the Government reserves the right to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

conduct any or all other tests contained in this specification as part of the initial production test, and failure of such additional tests shall have the same effect as failure of those tests specified as initial production tests.

4.4.1 Inspection failure. Failure of an initial production drier to meet any requirement specified herein during and as a result of the examination and tests specified in 4.4 shall be cause for rejection of the initial production drier and shall be cause for refusal by the Government to continue acceptance of production driers until evidence has been provided to the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on driers previously accepted and produced under the contract. Any deficiencies found as a result of the initial production inspection will be considered prima facie evidence that all driers accepted prior to the completion of initial production inspection are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.5 Quality conformance inspection.

4.5.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105.

4.5.2 Examination. Samples selected in accordance with 4.5.1 shall be examined as specified in 4.6.1. AQL shall be 1.0 percent defective for major defects and 4.0 percent defective for minor defects.

4.5.3 Tests. Samples selected in accordance with 4.5.1 shall be tested as specified in 4.6.2.1 and 4.6.2.2. AQL shall be 1.0 percent defective.

4.6 Inspection procedure.

4.6.1 Examination. The driers shall be examined as specified herein for the following defects:

Major

101. Dimensions not within the limits specified.
102. Components missing or not as specified.
103. Material not as specified.
104. Air intake and discharge not as shown on the figures.
105. Access panels not adequate or not attached with quick-disconnect fasteners.
106. Sheet metal screws used in the cabinet.
107. Electric cord and plug not as specified.
108. Workmanship not as specified.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the currentversion before use.

Minor

201. Water drain not as specified.
202. Treatment, painting or color not as specified.
203. Identification plates missing, not as specified, or not located as shown on the figures.

4.6.2 Tests. Unless otherwise specified herein, the following tests shall be conducted at a nominal room temperature of between 70° F and 75° F and a relative humidity of 50 percent.

4.6.2.1 Operation. The drier shall be connected to a 115-volt, 60-Hz power source with the cable and plug provided. All controls shall be operated to determine that they operate properly. With both the blower and heater operating, the volume of air shall be measured and the temperature at the bottom of the film drying bin measured. The drier shall be operated long enough to determine that the thermostat will turn the heater on and off. Any one or more of the following conditions shall constitute failure of this test:

(a) The switches are improperly labeled.
(b) The blower motor will not run with the heater turned off.
(c) The heater can operate when the blower is not running.
(d) The thermostat will not maintain a temperature between 106° F and 120° F at the bottom of the film bin.
(e) The volume of air is less than 120 cubic feet per minute.

4.6.2.2 Drying. After passing the operational test specified in 4.6.2.1, the film bin shall be loaded with twelve 70 mm film strips. Each strip shall be 26 inches, plus or minus 0.128 inch long; shall be wet; and shall be suspended by film hangers. The time required to dry the film shall be determined. A drying time of more than 15 minutes or failure of the excess water to drain through the drain provided shall constitute failure of this test.

4.6.2.3 Vibration. The vibration test shall be conducted at room temperature on a drier that has successfully passed the operational test specified in 4.6.2.1. The vibration test shall be conducted in accordance with MIL-STD-810, Method 514.2, Procedure VIII, Curve W. After each phase of the vibration test, the drier shall be inspected and tested for proper operation. Any one or more of the following shall constitute failure of this test:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

(a) Any component loose, broken or damaged.
(b) The blower motor does not operate.
(c) The heater does not function.
(d) Loose wiring or switches.

NOTE: Cycling time shall be at least 1 hour in each of three mutually perpendicular axes.

4.6.2.4 Shock. The shock test shall be conducted in accordance with MIL-STD-810, Method 516.2, Procedure I. The sawtooth shock pulse of Figure 516.2-1 (for ground equipment) shall be used. Any evidence of damage or failure of the drier to operate as specified herein shall constitute failure of this test.

4.6.2.5 Environmental tests.

4.6.2.5.1 High temperature. The drier shall be subjected to a temperature not less than 160° F for 4 hours per day for three days. At the end of this test, the temperature in the test chamber shall be reduced to 110° F, plus or minus 2° F, and allowed to stabilize. The drier shall then be connected to a power source and operated as specified in 4.6.2.1. Failure to operate as specified in 4.6.2.1 or any evidence of damage caused by the test shall constitute failure of this test.

4.6.2.5.2 Low temperature. The drier shall be subjected to a temperature minus 30° F for 12 hours with no solar radiation. At the end of this test, the temperature in the test chamber shall be raised to plus 40° F, plus or minus 2° F, and allowed to stabilize. The drier shall then be connected to a power source and operated as specified in 4.6.2.1. Failure to operate as specified in 4.6.2.1 or any damage caused by the test shall constitute failure of this test.

4.6.2.5.3 Fungus. The fungus test shall be conducted in accordance with MIL-STD-810, Method 508.2. Following the test, the drier shall be inspected for fungal growth. Nonconformance to 3.10 shall constitute failure of this test.

4.6.2.6 Human factors. The human factors requirement shall be evaluated during testing. Nonconformance to 3.14 shall constitute failure of this test.

4.6.2.7 Safety. The drier shall be evaluated for safety requirements throughout testing as specified in 4.6.2. Nonconformance to 3.15 shall constitute failure of this test.

4.6.2.8 Noise level measurement. Measure the noise level of the operator's position while operating the blower at the maximum noise condition for this position. Should the noise level exceed 85 dB(A) at this position, failure to provide the precautions specified in 3.7.1.1 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.7 Inspection comparison. The Government may select driers at any time during the contract production period and subject these driers to the examination specified in 4.6.1 and the tests specified in 4.6.2 to determine conformance to the requirements of this specification. The inspection will be performed by the Government, at a site selected by the Government, on driers selected at random from those which have been accepted by the Government and will not include the previously inspected first article drier and initial production driers. In addition to any test specified as part of the inspection comparison, the Government reserves the right to conduct any and all other tests contained in this specification as part of the inspection comparison, and failure of such additional tests shall have the same effect as failure of those tests specified as inspection comparison.

4.7.1 Inspection failure. Failure of an inspection comparison drier to meet any requirement specified herein during and as a result of the examination and tests specified in 4.7 shall be cause for rejection of the inspection comparison drier and shall be cause for refusal by the Government to continue acceptance of production driers until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on driers previously accepted and produced under the contract. Any deficiencies found as a result of the inspection comparison will be considered prima facie evidence that all driers accepted prior to the completion of inspection comparison are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.8 Inspection of packaging.

4.8.1 Quality conformance inspection of pack.

4.8.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.8.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.8.1.3 Examination. Samples selected in accordance with 4.8.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective:

109.	Materials, methods, and containers not as specified for Level A or Level B. Each incorrect material, method, or container shall be considered one defect.
110.	Components not cushioned and secured within box as specified for Level A or Level B.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

111. Box closure and sealing not as specified for Level A or Level B.
112. Quantities packed together exceed the weight or size limitations of the box as specified for Level A or Level B.
113. Preservation and packing not in accordance with the referenced document as specified for Commercial.
114. Marking missing, illegible, incorrect, or incomplete for Level A, Level B, or Commercial.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A, Level B, or Commercial as specified (see 6.2).

5.1.1 Level A. The drier with any repair parts, maintenance tools or technical publications provided shall be preserved together in accordance with MIL-P-116, Method IIb, using the contractor's carton or a close-fitting box conforming to PPP-B-636, Class Domestic, as the inner container. The components shall be cushioned and secured within the box to prevent movement or damage. The outer container shall conform to PPP-B-636, W6c or W5c, style optional. Box closure and sealing shall be as specified for Method V in the appendix to the box specification.

5.1.2 Level B. Preservation shall be as specified in 5.1.1 for Level A except the method of preservation shall be Method IC-1.

5.1.3 Commercial. Each complete drier shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be Level A, Level B, or Commercial as specified (see 6.2).

5.2.1 Level A. Driers, preserved as specified in 5.1, shall be packed together in a close-fitting box conforming to PPP-B-601, Overseas Type, style optional, in quantities not to exceed the weight limitations of the box. Box closure and strapping shall be in accordance with the appendix to the box specification.

5.2.2 Level B. Driers, preserved as specified in 5.1, shall be packed together in a close-fitting box conforming to PPP-B-636, V3c or V3s, style optional or in a close-fitting box conforming to PPP-B-640, Class 2, style optional. The contents shall not exceed the weight or size limitations of the applicable box specification. Closure shall be in accordance with the appendix to the applicable box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial. Driers, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Military. Marking for military levels of protection, Level A or Level B, shall be in accordance with MIL-STD-129.

5.3.2 Commercial. Marking for Commercial packaging shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The drier is intended for use in drying X-ray film of pipe welds. The drier is a component of the Pipeline Weld Radiographic Inspection Equipment Set.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When first article is required for inspection and approval (see 3.2, 4.3, and 6.3).
(c) When initial production inspection is required and number of driers to be furnished (see 3.3).
(d) Degree of preservation and degree of packing required (see 5.1 and 5.2).

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of 7-104.55 of the Defense Acquisition Regulation (DAR). The first article should be a first produced drier. The first article should consist of one or more units. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examinations, test and approval of the first article.

6.4 Information figures. Figures 1, 2 and 3 show a type of drier which has been found acceptable; however, the figures are included for illustration only and, except for the maximum dimensions, are not intended to preclude the furnishing of other driers which conform to this specification.

6.5 Data requirements. The contracting officer should include requirements for such data as technical publications, instructional materials, illustrated parts lists, and contractor's maintenance and operation manual to be furnished with each drier.

6.6 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instructions regarding shipment of driers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

6.7 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.4).

6.8 Noise limits. When the noise level of the blower exceeds 85 dB(A), the appropriate discussion of the noise hazard in accordance with MIL-STD-1474 (MANUALS Paragraph) shall include the requirement for hearing protection, the noise level of the blower, the distance from the blower at which 85 dB(A) will always be met, and what operational situation or system configuration will reduce the level to 85 dB(A).


Custodian:
Army - ME

Review activity:
DLA - GS

Preparing activity:
Army - ME

Project 6635-A107

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

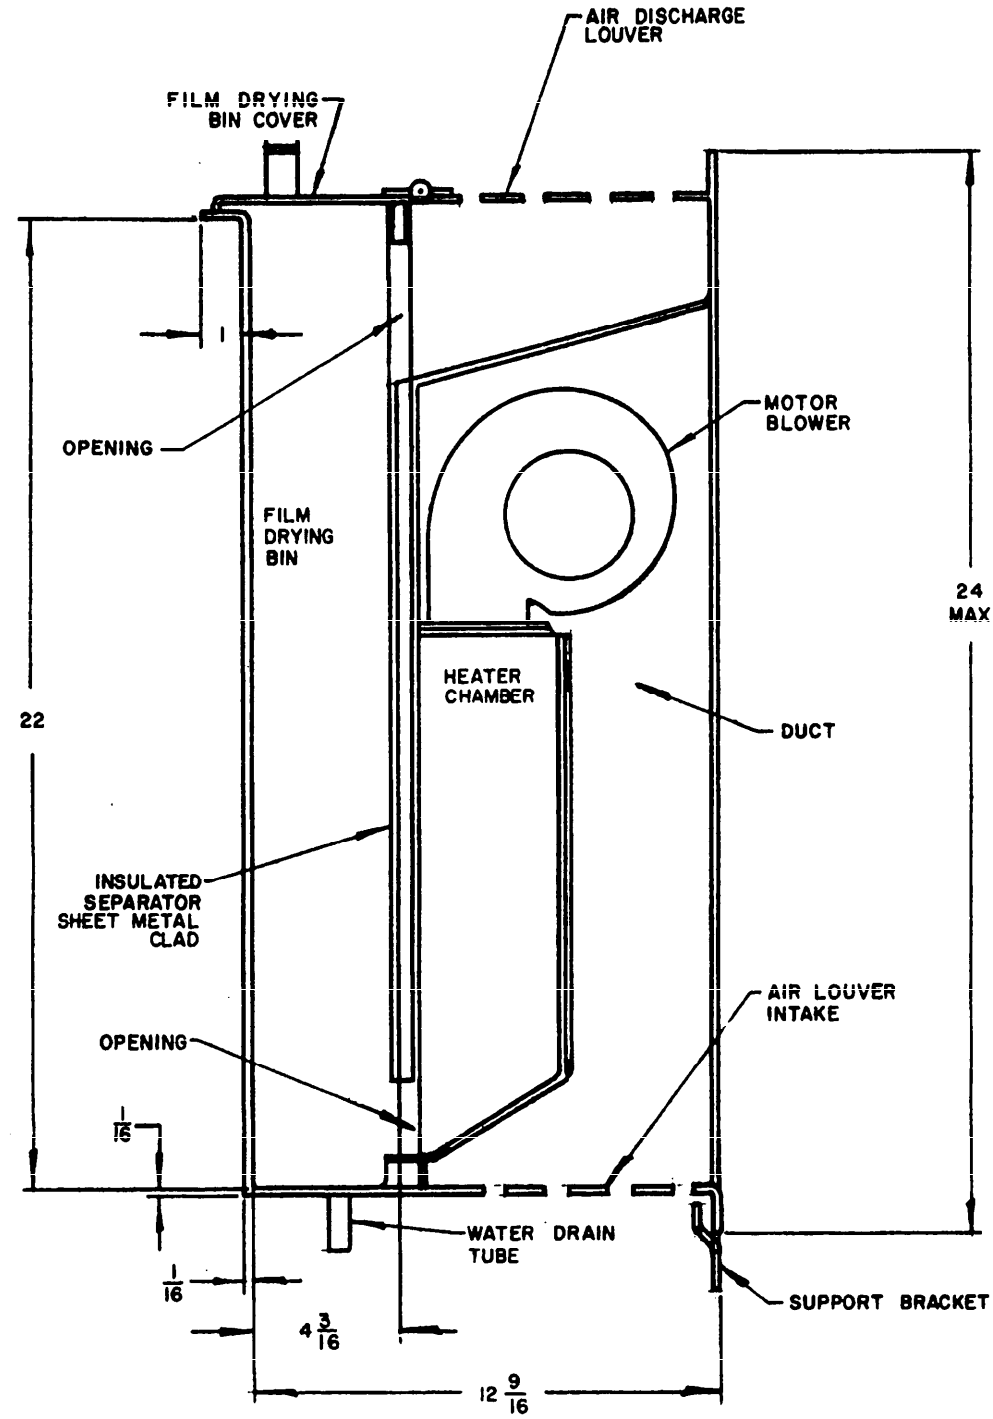


NOTE:
ALL DIMENSIONS IN INCHES

FIGURE 1. Drier, typical section.

X-2719

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

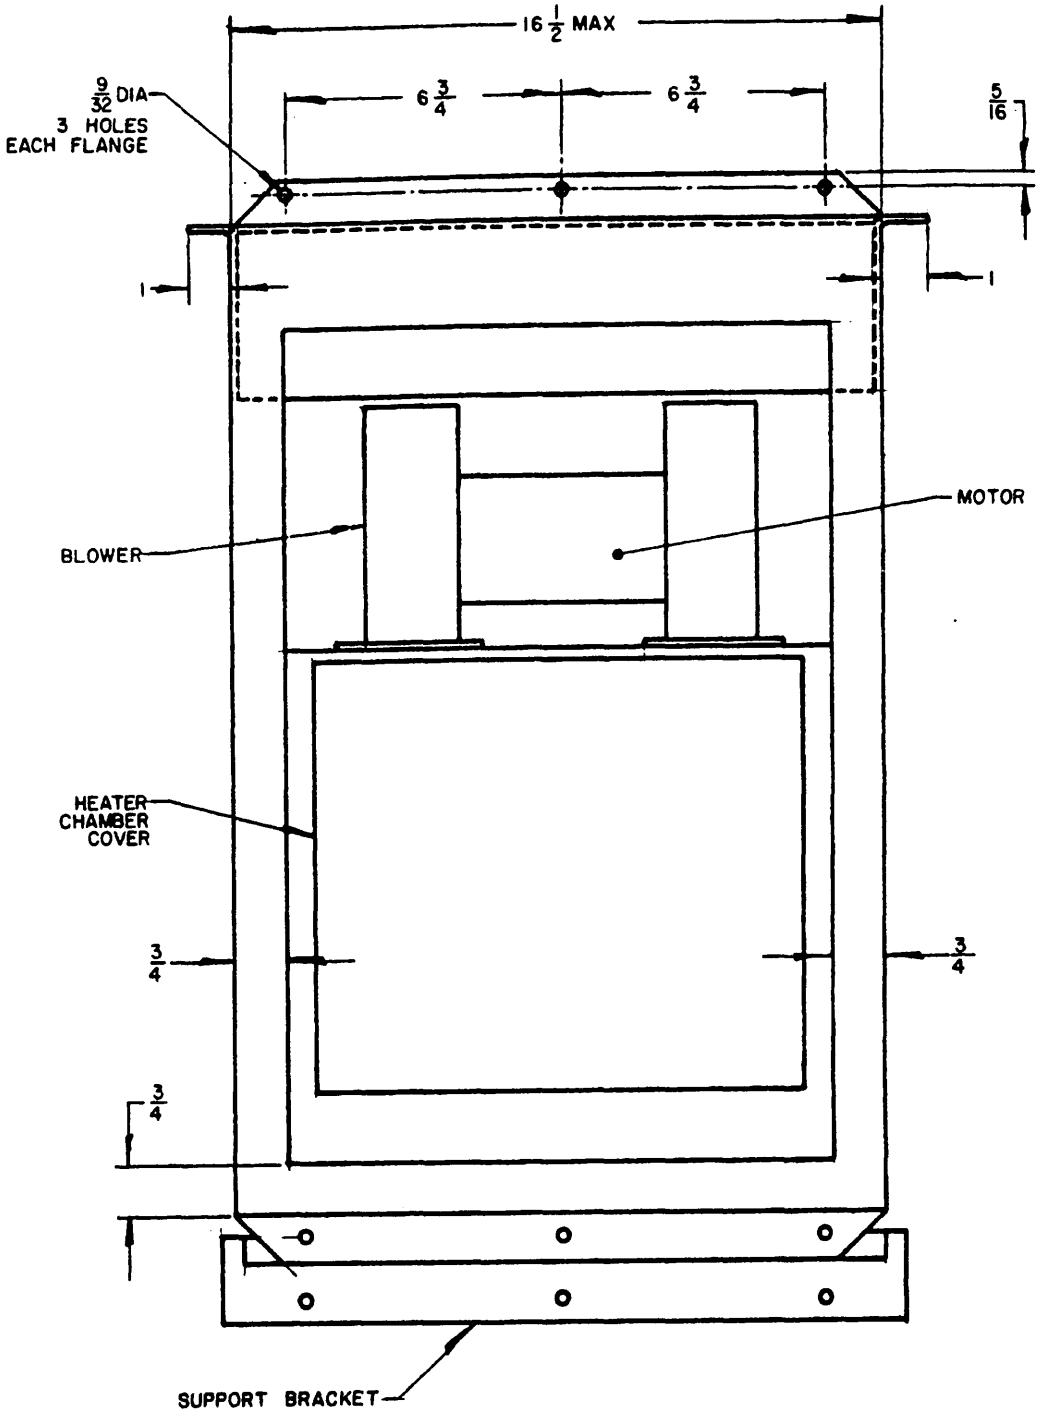


NOTE:
ALL DIMENSIONS IN INCHES.

FIGURE 2. Drier, rear view.

X-2720

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

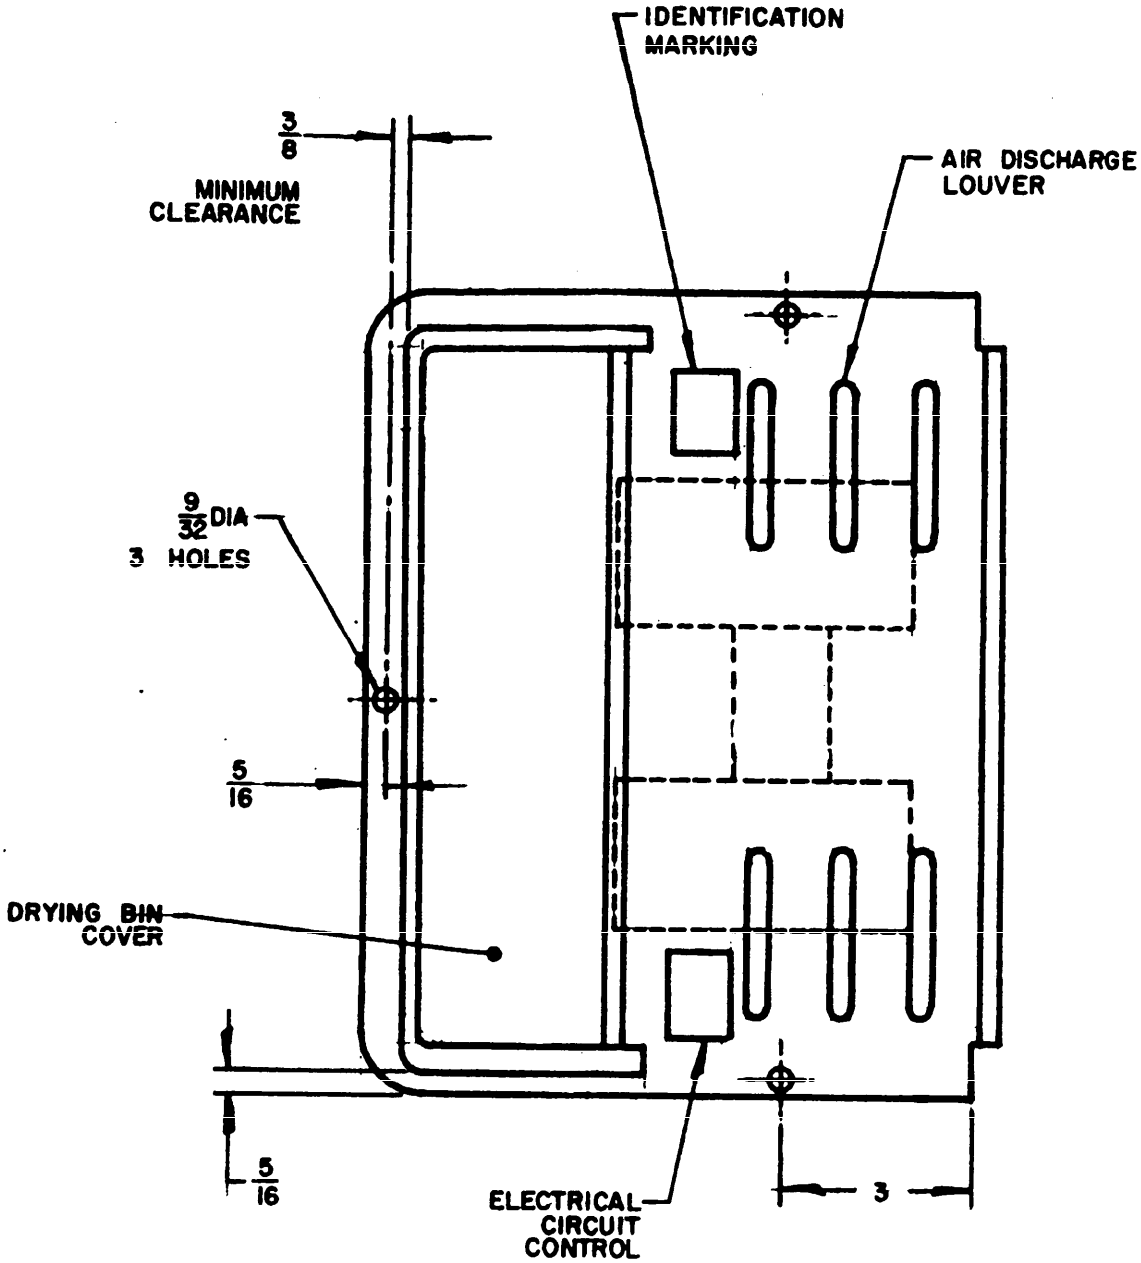

NOTE:
ALL DIMENSIONS IN INCHES.

FIGURE 3. Drier, top view.

X-2721

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-D-52842A(ME) Drier, X-Ray, Film: Forced Air, Wall-Mounted

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the currentversion before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Mobility Equipment R&D Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.