MIL-G-52537C(ME)
27 March 1980
SUPERSEDING
MIL-G-52537B(ME)
17 August 1973

MILITARY SPECIFICATION

GENERATOR SET, GASOLINE ENGINE, TRAILER MOUNTED

10 KW, 400 HERTZ, PU-375B/G

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Department and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a trailer-mounted generator set (hereinafter referred to as a power unit) designated PU-375B/G. The power unit consists of a military-design, gasoline-engine, 10-kW, 400-Hertz generator set, various auxiliary equipment, brackets, and hardware mounted on a cargo trailer.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-378 - Plastic Sheet and Strip, Thin Gauge, Polyolefin.

FSC 6115

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

FF-N-105	- Nails, Brads, Staples and Spikes: Wire, Cut and Wrought.
QQ-S-781	- Strapping, Steel and Seals.
QQ-W-461	- Wire, Steel, Carbon (Round, Bare and Coated).
UU-T-81	- Tags, Shipping and Stock.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-F-320	- Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-P-40	- Packaging and Packing of Hand Tools.
PPP-T-60	- Tape: Packaging, Waterproof.
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-T-10579	- Trailer, Cargo: General Purpose, 2 Wheel, 1/4 Ton to 1-1/2 Ton.
MIL-G-12803	- Gasket Material, Non-Metallic.
MIL-L-21260	- Lubricating Oil, Internal Combustion Engine, Preservative and Break-In.
MIL-G-28554	- Generator Sets, Mobile Electric Power; Packaging of.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-281	- Automobiles Trucks, Truck-Tractors, Trailers and Trailer Dollies; Preservation and Packaging of.
MIL-STD-642	- Identification Marking of Combat and Tactical Transport Vehicles.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS16992	- Bolt (Screw), Lag, Hex Head, Gimlet Point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

MS27183 - Washer, Flat-Round, Steel, Cadmium Plated, General Purposes (In/MM).

DRAWINGS

ME

TA13214E1490 - Generator Sets, Trailer Mounted, PU-375B/G.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Description. The PU-375B/G power unit shall be in accordance with Top Assembly TA13214E1490 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Any data (e.g. shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.1.1.1 Vehicle marking. Registration numbers and other marking of the trailers shall be in accordance with MIL-STD-642 (see 6.7).

3.2 First article (preproduction model). The contractor shall furnish one power unit for examination within the time frame specified (see 6.2) to prove prior to starting production that his production method will produce power units that comply with the requirements of this specification. Examinations shall be as specified in section 4 and unless otherwise specified herein, all examinations shall be conducted by the contractor subject to surveillance and approval by the Government (see 6.3). When specified (see 6.2), the Government will conduct any or all of the preproduction examinations as specified (see 6.2).

3.3 Material. Material shall be as specified herein and on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.8).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.4 Government-furnished property. The following property in the quantities indicated will be furnished by the Government (see 6.4):

Item	Description	Identification	Quantity for each PU-375B/G
1	Trailer, cargo, 3/4-ton, 2 wheel, model M101A1	MIL-T-10579	1
2	Generator set, gasoline-engine-driven, 10.0 KW, 400 HZ	NSN-6115-00-926-0843	1

3.5 Workmanship. Workmanship shall be of a quality to assure that the power units are free from defects resulting from defective material, incorrect manufacturing or assembly practices, incorrect treatment and painting, incomplete welds, rust, cracks, and other defects that could impair its operation or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Governement reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Disassembly inspection. Failure of the examination by the pre-production model shall be cause for disassembly, in the presence of a Government representative, of the preproduction model to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected. Reassembly with accepted parts and reexamination shall be the responsibility of the contractor. Government furnished property shall be excluded from the requirements of this paragraph.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

4.1.2 Component and material inspection. The contractor is responsible for insuring the components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.1.3 Acceptability criteria. Power units which conform to all requirements in sections 3 and 5 of this specification and pass all applicable examinations in section 4 of this specification will be considered acceptable by the Government.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction power unit shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Examination. Each power unit shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The power units shall be examined for the following defects:

101. Treatment and painting not as specified.
102. Dimensions not as shown on drawings.
103. Components missing or not as specified.
104. Assembly not as shown on the drawings.
105. Workmanship not as specified.

4.6 Inspection of packaging.

4.6.1 Preproduction pack inspection. The preproduction pack shall be examined for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

106.	Materials, containers or procedures not as specified. Each incorrect material, container or procedure shall constitute one defect.
107.	Generator set not preserved as specified.
108.	Canvas covers not installed as specified, when furnished.
109.	Fire extinguisher not removed and preserved as specified.
110.	Ground cables not disconnected and secured as specified, and the cable and terminals not matchmarked as specified.
111.	Repair parts and maintenance tools not preserved as specified.
112.	Trailer chassis components not preserved as specified.
113.	Packing not in accordance with the applicable figures for the level required.
114.	Depreservation guides not prepared and attached to the power unit as specified.
115.	Technical publications not preserved and secured as specified.
116.	Marking illegible, incomplete, incorrect or missing.
117.	Fuel tanks not coated with preservative and the excess preservative not drained for level A or B.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination within the time frame specified to prove prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examination shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.5). The preproduction pack may be accomplished utilizing either the preproduction model power unit or a production power unit. If the preproduction model power unit is utilized, any preservation, and packing shall be removed by the contractor at no expense to the Government, when requested by the Government to facilitate comparison between the preproduction model power unit and production power units.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

5.2 Preservation. Preservation shall be level A, level B, or commercial as specified (see 6.2). Preservation and consolidation of power unit components shall be in accordance with table I, figures 1, 2, and 3, and as specified herein.

5.2.1 Level A.

5.2.1.1 Generator set. The generator set shall be preserved in accordance with MIL-G-28554, level A. The generator set shall be secured directly through the barrier material to the trailer, using the required bolts, in lieu of the wood base specified in the packaging requirements of MIL-G-28554. The humidity indicator and inspection port shall be installed on an end or side in a location convenient for inspection of the humidity indicator. Before sealing the barrier, the fiberboard cap specified in table I and figure 2 herein shall be installed on the generator set.

5.2.1.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and preserved in a box conforming to PPP-B-636, type CF variety SW, grade 125, style optional.

5.2.1.3 Ground cable. The disconnected ground cable and terminals on the power unit shall be matchmarked with cloth tags conforming to UU-T-81, type A to facilitate reinstallation of the cables.

5.2.1.4 Repair parts. The preservative application criteria and applicable sub-methods of MIL-P-116 shall be used to preserve the repair parts.

5.2.1.5 Maintenance tools. Maintenance tools shall be preserved in accordance with PPP-P-40, level A.

5.2.1.6 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, method IC-1 and shall be secured to the generator set outside the method II barrier.

5.2.1.7 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, level A as specified for mobile vehicles.

5.2.1.8 Fuel tank. The interior of the fuel tank shall be fogged with preservative lubricating oil conforming to MIL-L-21260, type 1, grade 30. The excess preservative shall be drained. Openings into the tank shall be covered and sealed with tape conforming to PPP-T-60, type IV.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

5.2.2 Level B.

5.2.2.1 Generator set. The generator set shall be preserved in accordance with MIL-G-28554, level B.

5.2.2.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and preserved as specified for level A.

5.2.2.3 Ground cable. Matchmarking information shall be as specified for level A.

5.2.2.4 Repair parts, maintenance tools and technical publications. The repair parts, maintenance tools and technical publications shall be preserved as specified for level A.

5.2.2.5 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, level B as specified for mobile vehicles.

5.2.2.6 Fuel tank. The fuel tank shall be preserved as specified for level A.

5.2.3 Commercial. The components of each complete power unit shall be preserved in accordance with MIL-STD-1188.

5.3 Packing. Packing shall be level A, level B or commercial as specified (see 6.2).

5.3.1 Level A or B. Packing shall be in accordance with table I and figures 1, 2 and 3 for level A or B as specified.

5.3.2 Commercial. The components of each complete power unit shall be packed in accordance with MIL-STD-1188.

5.4 Marking.

5.4.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

5.4.2 Commercial packaging. Marking shall be in accordance with MIL-STD-1188.

5.5 Depreservation guides. Two copies of depreservation guides shall be prepared and and placed in waterproof envelopes marked "Depreservation Guide". One copy shall be secured on the generator set and a second copy shall be secured in a conspicuous location on the power unit. Unless otherwise specified (see 6.2), DA Form 2258 "Depreservation Guide for Vehicles and Equipment" shall be used (see 6.6).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

5.6 Preparation of Government-furnished property. Government-furnished property shall be preserved, and packed as specified herein, regardless of the preservation, and packing provided at the time of receipt by the contractor.

6. NOTES

6.1 Intended use. The power unit is intended for use by the Armed Services to supply electrical power for military operations.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of the preproduction model (see 3.2).
(c) When the Government will conduct any or all of the preproduction model examinations. When the Government will conduct some but not all of the preproduction examinations, the contracting officer should specify which examinations will be conducted by the Government and which examinations shall be conducted by the contractor (see 3.2).
(d) Time frame required for submission of the preproduction pack (see 5.1).
(e) Degree of preservation and degree of packing required (see 5.2 and 5.3).
(f) When other than DA Form 2258 is to be used (see 5.5).

6.3 Preproduction model. Any changes or deviations of production power units from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish power units conforming to this specification.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.4.

6.5 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to preserve, pack, and mark the power units in accordance with this specification.

6.6 Depreservation guide. The contracting officer should arrange to furnish the necessary copies of DA Form 2258, when requested by the contractor (see 5.5).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

6.7 Registration numbers. The contracting officer should arrange to furnish a list of registration numbers to be applied to the trailer (see 3.1.1.1).

6.8 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

Custodian:
Army - ME

Preparing activity:
Army - ME

Review activity:
DLA - GS

Project 6115-A444

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

TABLE I. Packaging material.


FIND NO.	IDENTIFICATION	DESCRIPTION	A	B
1	PPP-B-601, OVERSEAS TYPE, STYLE I, MODIFIFIED (NOTES 1 AND 4)	BOX, PLYWOOD, $\frac{1}{4}$ THICK	1	1
2	MIL-B-131, CLASS I	BARRIER MATERIAL	AR	
3	PPP-F-320, TYPE SF, GRADE V3S	FIBERBOARD, $\frac{1}{2}$ THICK MINIMUM	AR	
4	MIL-G-12803, TYPE I, RUBBER BINDER, $1\frac{1}{2} \times 1\frac{1}{2} \times \frac{1}{8}$	GASKET, $\frac{11}{16}$ DIA HOLE IN CENTER	4	
5	WEDGE	LUMBER, SOFTWOOD	2	2
6	MS27183-11, .312 ID X .734 OD X .065 THK	WASHER, PLAIN, CS, CAD PL.	6	6
7	MS16992-505, $\frac{1}{4}$-10, 2 LG	BOLT, LAG, HEX HD. GIMLET PT, STL, GALV	6	6
8	FF-N-105, TYPE II, STYLE 4	NAIL, 10d	AR	AR
9	PPP-B-601, OVERSEAS TYPE, STYLE I, TYPE I LOAD	BOX, PLYWOOD	1	
9	PPP-B-601, DOMESTIC TYPE, STYLE I, TYPE I LOAD	BOX, PLYWOOD		1
10	L-P-378, TYPE I, CLASS I, GRADE A, 4-8 MIL	PLASTIC FILM, POLYETHYLENE	AR	AR
11	BLOCKING	LUMBER, SOFTWOOD, 1 X 4 NOMINAL	1	1
12	BLOCKING	LUMBER, SOFTWOOD, 2 X 4 NOMINAL	2	2
13	PPP-T-60, TYPE IX, CLASS 1	TAPE, PRESSURE SENSITIVE	AR	AR
14	PPP-T-97, TYPE IX	TAPE, PRESSURE SENSITIVE, $\frac{3}{4}$ W	AR	AR
15	QQ-S-781, TYPE I OR IX, FINISH B	STEEL STRAPPING, FLAT, .020 X $\frac{3}{4}$	AR	
15	QQ-S-781, TYPE I OR IX, FINISH A	STEEL STRAPPING, FLAT, .020 X $\frac{3}{4}$		AR
16	QQ-W-461, FINISH 5, CLASS 1	WIRE, LIGHT, SOFT TEMP, .080 DIA, ZINC CTD.	AR	AR
17	BLOCKING	LUMBER, SOFTWOOD, 1 X 3 NOMINAL	2	2
21	FF-N-105, TYPE II, STYLE 4	NAIL, 6d	AR	AR
22	PPP-F-320, TYPE SF, GRADE V3S	CAP, FIBERBOARD	1	

NOTES:

1. NO CONTENT WEIGHT WITHOUT BOTTOM.
2. TOP TO BE WITHOUT CLEATS, 1/2 THICKNESS AND SHALL COMPLETELY COVER ALL EDGES.
3. ALL DIMENSIONS ARE IN INCHES.

X-1278C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

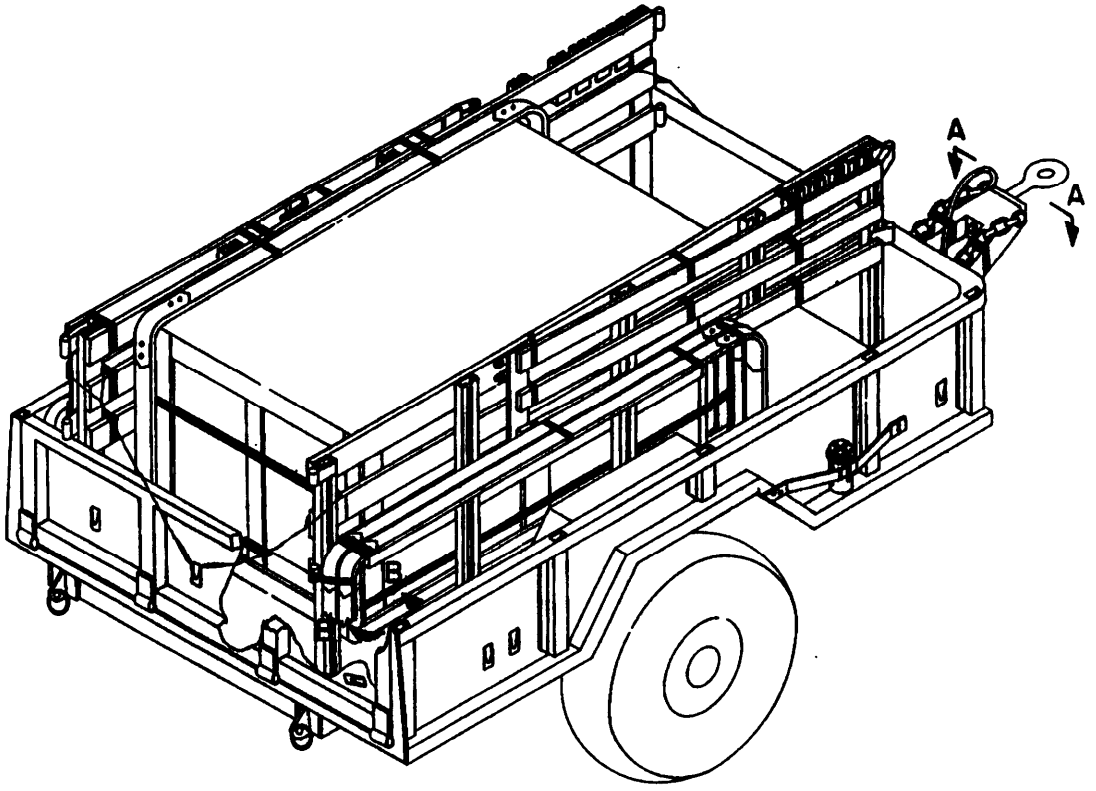


NOTES:

1. SEE TABLE I FOR LIST OF MATERIAL.
2. HAMMER, FIRE EXTINGUISHER, GROUND RODS, GROUND WIRES, OIL DRAIN, EXHAUST PIPE, AND ATTACHING HARDWARE SHALL BE SECURED TO THE GENERATOR SET, USING TAPE, FIND NO. 14.
3. GAS TANK FILLER CAP SHALL BE SECURED IN POSITION USING TAPE, FIND NO.13.
4. BOWS AND LATTICES SHALL BE SECURED IN POSITION USING TAPE, FIND NO.14 AS SHOWN.
5. TARPAULIN SHALL BE WRAPPED IN FIND NO.10 AND SECURED WITHIN THE CONFINES OF BOX, FIND NO.9.
6. SEE FIGURE 3 FOR VIEWS.

FIGURE I. Packaging arrangement and detail (assembled).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

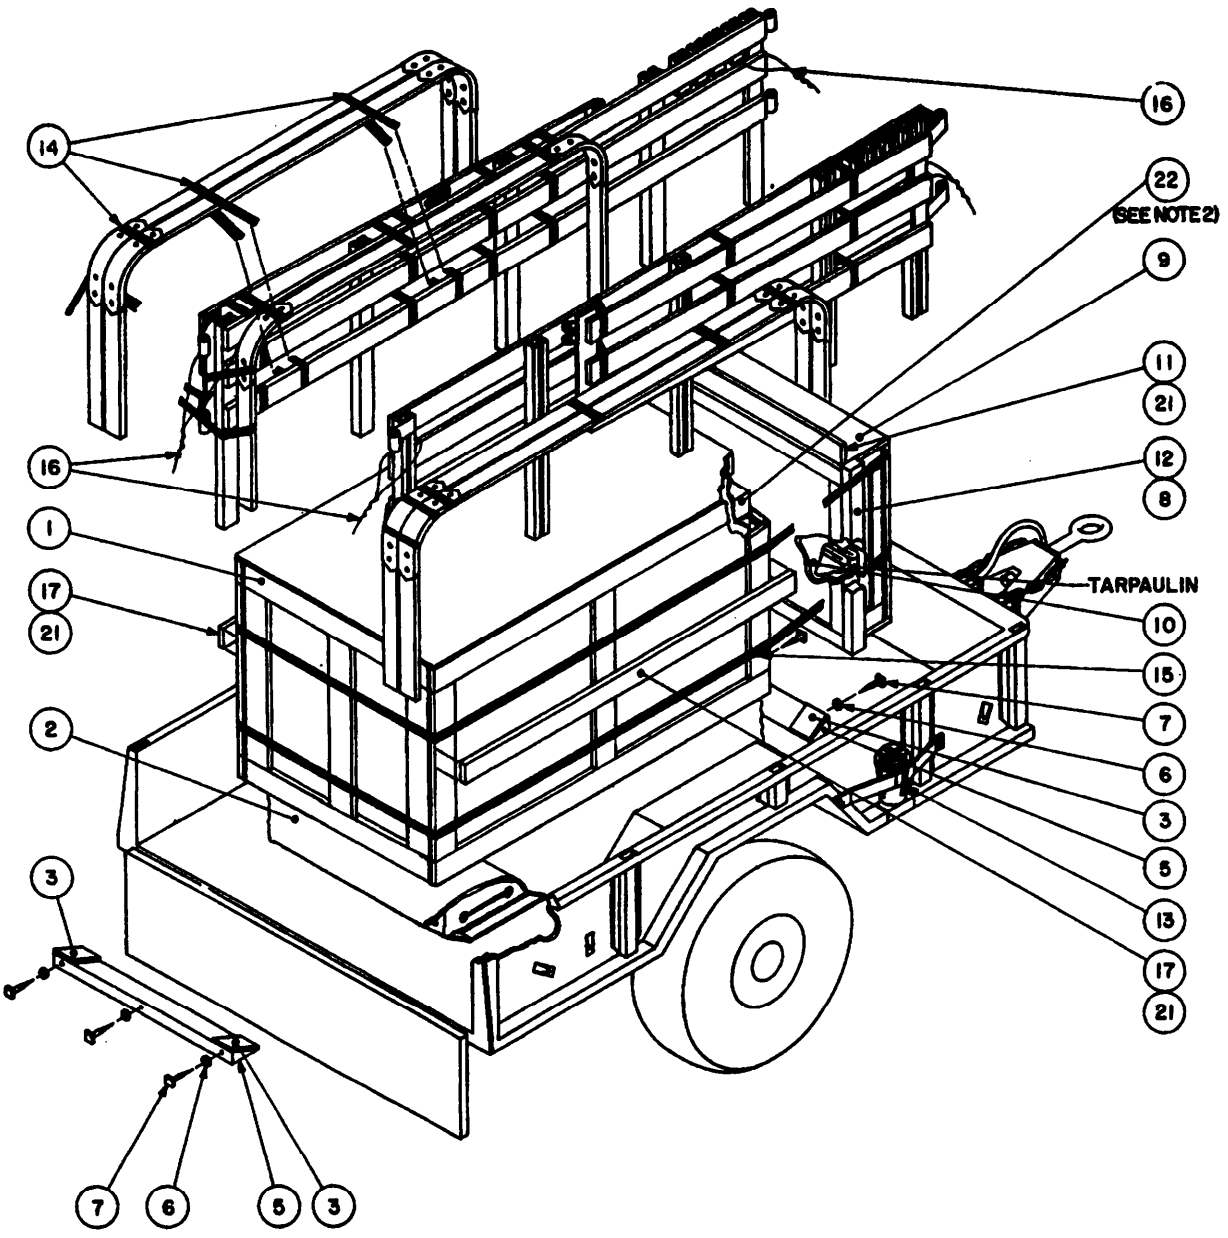


NOTES:
1. SEE TABLE I FOR LIST OF MATERIAL.
2. CAP TO EXTEND DOWN ON SIDES AND ENDS 4 INCHES.


FIGURE 2. Packaging arrangement and detail (exploded).

X-1279C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

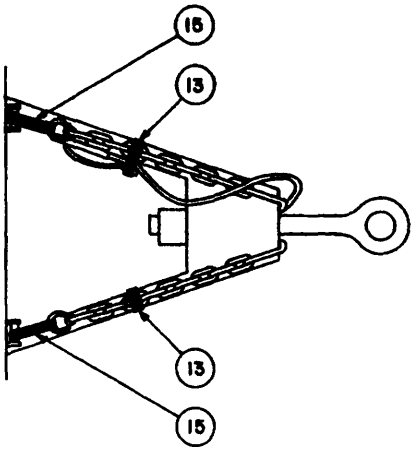

VIEW A-A

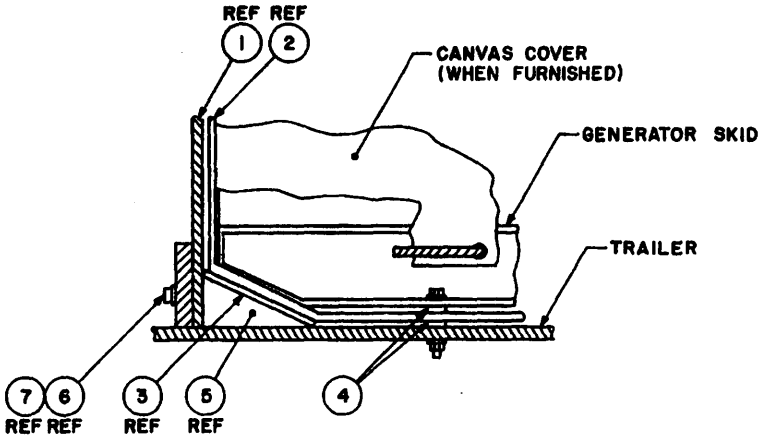

VIEW B-B

NOTES
1. SEE TABLE I FOR LIST OF MATERIAL.
2. SEE FIGURE 1 FOR VIEW CALLOUTS.
3. BOX, FIND NO. 1, SHALL BE A TIGHT FIT OVER THE WEDGES, FIND NO. 5.

FIGURE 3. Packaging arrangement and detail (views).

X-1281B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-G-52537C(ME) Generator Set, Gasoline Engine, Trailer Mounted 10 KW, 400 Hertz, PU-375B/G

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Command
ATTN: DRDME-DE/DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.