MIL-G-52552B(ME)
25 March 1981
SUPERSEDING
MIL-G-52552A(ME)
25 February 1972

MILITARY SPECIFICATION

GENERATOR SETS, GASOLINE ENGINE, TRAILER MOUNTED,

10 KW, 400 HERTZ, PU-656/G

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers trailer-mounted generator sets (hereinafter referred to as a power unit) designated PU-656/G. The power unit consists of two Department of Defense standard, gasoline-engine-driven, 10-kW 400 Hertz generator sets, various auxiliary equipment, brackets, and hardware mounted on a modified trailer chassis.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-378	- Plastic Sheet and Strip, Thin Gage, Polyolefin.
FF-N-105	- Nails, Brads, Staples and Spikes: Wire, Cut and Wrought.
QQ-S-781	- Strapping, Steel and Seals.
UU-T-81	- Tags, Shipping and Stock.

FSC 6115

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-F-320	- Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-P-40	- Packaging and Packing of Hand Tools.
PPP-T-60	- Tape: Packaging, Waterproof.
PPP-T-97	- Tape, Pressure-Senstitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-G-12803	- Gasket Material, Non-Metallic.
MIL-L-21260	- Lubricating Oil, Internal Combustion Engine, Preservative and Break-In.
MIL-G-28554	- Generator Sets, Mobile Electric Power; Packaging Of.
MIL-C-45150	- Chassis, Trailer, 2-Wheel, Cart Type, 1/4 to 3-1/2 Ton.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-281	- Automobiles, Trucks, and Truck-Tractors, Trailers, and Trailer Dollies; Preservation and Packaging of.
MIL-STD-642	- Identification Marking of Combat and Tactical Transport Vehicles.
MIL-STD-705	- Generator Sets, Engine-Driven, Methods of Tests and Instructions.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS16992	- Bolt (Screw), Lag, Hex Head, Gimlet Point.
MS27183	- Washer, Flat-Round, Steel, Cadmium Plated, General Purpose (In/MM).

DRAWINGS

ME

TA 13205E4915	- Generator Sets, Trailer Mounted, PU-656/G.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Description. The power unit PU-656/G shall be in accordance with Top Assembly TA 13205E4915 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Any data (e.g shop drawings, layouts, flow sheet, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available upon request, for inspection by the contracting officer or his designated representative.

3.1.1.1 Vehicle marking. Registration numbers and other marking of the trailer shall be in accordance with MIL-STD-642 (see 6.7).

3.2 First article (preproduction model). The contractor shall furnish one power unit for examination and testing within the time frame specified (see 6.2), to prove prior to starting production that his production methods will produce power units that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4 and unless otherwise specified herein, all examination and tests shall be conducted by the contractor subject to surveillance and approval by the Government (see 6.3). When specified (see 6.2), the Government will conduct any or all of the preproduction examination and tests.

3.3 Material. Material shall be as specified herein and on the applicable drawings. Material not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.8).

3.4 Government-furnished property. The following property in the quantities indicated will be furnished by the Government (see 6.4):

Item No.	Description	Identification	Quantity for each PU-656/G
1	Chassis, Trailer, M103A3, 1-1/2 Ton, 2-Wheel.	MIL-C-45150	1
2	Generator set, gasoline-engine-driven, 10.0 kW, 400 Hertz.	NSN 6115-00-926-0843	2

3.5 Workmanship. Workmanship shall be of a quality to assure that the power units are free from defects resulting from defective material, incorrect manufacturing or assembly practices, incorrect treatment and painting, incomplete welds, rust, cracks, or other defects that could impair its operation or serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Disassembly inspection. Failure of a test by the preproduction model shall be cause for disassembly in the presence of a Government representative of the preproduction model to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected. Reassembly with accepted parts and retesting shall be the responsibility of the contractor. Government-furnished property shall be excluded from the requirements of this paragraph.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.1.3 Acceptability criteria. Power units which conform to all requirements in Section 3 and 5 of this specification and pass all applicable examinations and tests in Section 4 of this specification will be considered acceptable by the Government.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction power unit shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. Preproduction power unit components shall be tested as specified in 4.5.2. Failure of the test shall be cause for performing the inspection specified in 4.1.1.

4.4 Quality conformance inspection.

4.4.1 Examination. Each power unit shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:09Z
Check the source to verify that this is the currentversion before use.

4.4.2 Tests. Power unit components shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The power units shall be examined for the following defects:

101. Treatment and painting not as specified.
102. Dimensions shown on drawings not as specified.
103. Components missing or not as specified.
104. Assembly not as shown on the drawing.
105. Identification or special marking missing or illegible.
106. Workmanship not as specified.

4.5.2 Tests.

4.5.2.1 Test conditions. The following preparations shall be made prior to testing the distribution box assembly:

(a) Cables running between the distribution box assembly and the generator sets shall be installed to the distribution box assembly rotary switch.
(b) The free ends of the cables shall be attached to a commercial power source as follows:

(1) Cable wire marked L_1 shall be attached to phase A.
(2) Cable wire marked L_2 shall be attached to phase B.
(3) Cable wire marked L_3 shall be attached to phase C.
(4) Cable wire marked L_0 shall be attached to neutral.

4.5.2.2 Test procedures. Tests shall be conducted in accordance with MIL-STD-705 and as specified herein. Test instruments shall be of the laboratory type and shall have been calibrated within 30 days prior to the start of testing and at intervals not more than 6 months thereafter.

4.5.2.3 Operation. The rotary switch of the distribution box shall be placed in the generator No. 1 position. Commercial power, equivalent to the rated load of the generator set, shall be supplied through the rotary switch for not less than 5 minutes. During this period, phase sequence (rotation) shall be tested in accordance with MIL-STD-705, method 507.1. Phase rotation shall be L_1, L_2, and L_3. This test shall be performed at the load terminals of the distribution box. Phase rotation not as specified shall constitute failure of this test. At the conclusion of the generator No. 1 position test, the rotary switch shall be placed in the generator No. 2 position. Repeat the test. Inability of the distribution box assembly to maintain or transfer a rated load shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 Preproduction pack examination. The preproduction pack shall be examined for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:09Z
Check the source to verify that this is the current version before use.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

107.	Materials, containers, or procedures not as specified. Each incorrect material, container, or procedure shall constitute one defect.
108.	Generator sets not preserved as specified.
109.	Canvas covers not installed as specified, when furnished.
110.	Power and ground cables not disconnected and secured as specified. Cables and terminals not matchmarked as specified.
111.	Fuel cans not coated with preservative and the excess preservative not drained for level A or B.
112.	Fire extinguisher not removed and preserved as specified.
113.	Repair parts and maintenance tools not preserved as specified.
114.	Trailer chassis components not preserved as specified.
115.	Packing not in accordance with the applicable figures for level required.
116.	Marking illegible, incomplete, incorrect, or missing.
117.	Depreservation guides not prepared and attached to the power unit as specified.
118.	Technical publications not preserved as specified.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination within the time frame specified (see 6.2), to prove prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examination shall be specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.5). The preproduction pack may be accomplished utilizing either the preproduction model power unit or a production power unit. If the preproduction model power unit is utilized, any preservation, and packing shall be removed by the contractor at no expense to the Government, when requested by the Government to facilitate comparison between the preproduction model power unit and production power units. Government-furnished property (GFP) shall be preserved and packed as specified herein, regardless of the preservation and packing provided at time of receipt by the manufacturer.

5.2 Preservation. Preservation shall be level A, level B, or commercial as specified (see 6.2). Preservation and consolidation of power unit components shall be in accordance with Table I, Figures 1, 2, and 3, and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

5.2.1 Level A.

5.2.1.1 Generator sets. Each generator set shall be preserved in accordance with MIL-G-28554, level A. The generator sets shall be secured directly through the barrier material to the trailer using the required bolts in lieu of the wood base specified in the packaging requirements of MIL-G-28554. The humidity indicators and inspection ports shall be installed on an end or side in a location convenient for inspection of the humidity indicators. Before sealing the barrier, the fiberboard cap specified in table I and figure 2 herein shall be installed on the generator sets.

5.2.1.2 Fire extinguisher. Each fire extinguisher shall be removed from the bracket and preserved in a box conforming to PPP-B-636, type CF, variety SW, grade 125, style optional.

5.2.1.3 Cables. Power and ground cables shall be disconnected from the generator sets. Each disconnected cable and terminal on the generator sets shall be matchmarked with cloth tags conforming to UU-T-81, type A, to facilitate reinstallation of the cables.

5.2.1.4 Repair parts. The preservation application criteria and applicable submethods of MIL-P-116 shall be used to preserve the repair parts.

5.2.1.5 Maintenance tools. Maintenance tools shall be preserved in accordance with PPP-P-40, level A.

5.2.1.6 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, method IC-1 and shall be secured to one of the generator sets outside the method II barrier.

5.2.1.7 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, level A, as specified for mobile vehicles.

5.2.1.8 Fuel cans. The interior of fuel cans shall be fogged with preservative lubricating oil conforming to MIL-L-21260, type I, grade 30. The excess preservative shall be drained.

5.2.2 Level B.

5.2.2.1 Generator sets. The generator sets shall be preserved in accordance with MIL-G-28554, level B.

5.2.2.2 Fire extinguishers. Each fire extinguisher shall be removed from the bracket and preserved as specified for level A.

5.2.2.3 Cables. Power and ground cables shall be disconnected from generator sets. Each disconnected cable and terminal on the generator sets shall be matchmarked as specified for level A.

5.2.2.4 Repair parts, maintenance tools, and technical publications. The repair parts, maintenance tools and technical publications shall be preserved as specified for level A.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

5.2.2.5 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, level B, as specified for mobile vehicles.

5.2.2.6 Fuel cans. Fuel cans shall be preserved as specified for level A.

5.2.3 Commercial. Commercial preservation shall be in accordance with MIL-STD-1188.

5.3 Packing. Packing shall be level A, level B, or commercial as specified (see 6.2).

5.3.1 Military levels. For level A or B, packing shall be in accordance with table I and figures 1, 2, and 3.

5.3.2 Commercial. Commercial packing shall be in accordance with MIL-STD-1188.

5.4 Marking. For military levels of protection, marking shall be in accordance with MIL-STD-129. Commercial marking shall be in accordance with MIL-STD-1188.

5.5 Depreservation guides. Two copies of depreservation guides shall be prepared and placed in waterproof envelopes marked "Depreservation Guide". One copy shall be secured on the generator set and a second copy shall be secured in a conspicuous location on the power unit. Unless otherwise specified (see 6.2), DA Form 2258 "Depreservation Guide for Vehicles and Equipment" shall be used (see 6.6).

5.6 Preparation of Government-furnished property. Government-furnished property shall be preserved, and packed as specified herein, regardless of the preservation, and packing provided at the time of receipt by the contractor.

6. NOTES

6.1 Intended use. The power unit is intended for use by the Armed Services to supply electrical power for military operations.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of preproduction model (see 3.2).
(c) When the Government will conduct any or all of the preproduction model examination and tests. When the Government will conduct some but not all of the preproduction examination and tests, the contracting officer should specify which examination and tests will be conducted by the Government and which examination and tests shall be conducted by the contractor (see 3.2).
(d) Time frame required for submission of the preproduction pack (see 5.1).
(e) Degree of preservation and degree of packing required (see 5.2 and 5.3).
(f) When other than DA Form 2258 is to be used (see 5.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

6.3 Preproduction model. Any changes or deviations of production power units from the approved preproduction model during production will be subject to approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish power units conforming to this specification.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.4.

6.5 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to preserve, pack, and mark the power units in accordance with this specification.

6.6 Depreservation guide. The contracting officer should arrange to furnish the necessary copies of DA Form 2258, when requested by the contractor (see 5.5).

6.7 Registration numbers. The contracting officer should arrange to furnish a list of registration numbers to be applied to the trailer (see 3.1.1.1).

6.8 Recycled material. The contractor is encouraged to use recylced material when practical as long as it meets the requirements of the specification (see 3.3).

Custodian:
Army - ME

Preparing activity:
Army - ME

Review activity:
DLA - GS

Project 6115-A461

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

TABLE I. Packaging material.


FIND NO.	IDENTIFICATION	DESCRIPTION	LEVEL	
			A	B
1	PPP-B-601, OVERSEAS TYPE, STYLE I, MODIFIED (NOTES 1 AND 6)	BOX, PLYWOOD 1/4 THK	1	1
2	MIL-B-131, CLASS I	BARRIER MATERIAL	AR	
3	MIL-G-12803, TYPE I, RUBBER BINDER, 1-1/2 X 1-1/2 X 1/8	GASKET, 11/16 DIA HOLE IN CENTER	16	
4	WEDGE	LUMBER, SOFTWOOD	2	2
5	PPP-F-320, TYPE SF, GRADE V3S	FIBERBOARD 1/2 THK MINIMUM	AR	
6	MS27183-11 .312 ID X .734 OD X .065 THK SIZE	WASHER, PLAIN CS, CAD PLATED	4	4
7	MS16992-505, 1/4-10X 2 LG	BOLT,LAG,HEXHD,GIMLET PT STL,GALV	4	4
8	BLOCKING	LUMBER, SOFTWOOD 1 X 1 NOMINAL	2	2
9	BLOCKING	LUMBER, SOFTWOOD 1 X 1 NOMINAL	9	9
10	BLOCKING	LUMBER, SOFTWOOD 1 X 1 NOMINAL	2	2
11	BLOCKING	LUMBER, SOFTWOOD 1 X 1 NOMINAL	1	1
12	QQ-S-781, TYPE I OR II, FINISH B	STEEL STRAPPING, FLAT, .020 X 3/4	AR	
12	QQ-S-781, TYPE I OR II, FINISH A	STEEL STRAPPING, FLAT, .020 X 3/4		AR
13	FRAMING	LUMBER, SOFTWOOD 1 X 2 NOMINAL	AR	AR
14	BLOCKING	LUMBER, SOFTWOOD 1 X 2 NOMINAL	AR	AR
15	FF-N-105, TYPE II, STYLE 4	NAIL 6d	AR	AR
16	FRAMING (NOTES 3 AND 4)	CRATE, LUMBER, SOFT-WOOD 1 X 4 NOMINAL	AR	AR
17	SUPPORT	LUMBER, SOFTWOOD 1 X 2 NOMINAL	AR	AR
18	L-P-378, TYPE I, CLASS 1, GRADE A, 4-8 MIL	PLASTIC FILM POLYETHYLENE	AR	AR
19	PPP-B-601, OVERSEAS TYPE, STYLE I, TYPE I LOAD (NOTE 5)	BOX, PLYWOOD	1	
19	PPP-B-601, DOMESTIC TYPE, STYLE I, TYPE I LOAD (NOTE 5)	BOX, PLYWOOD		1
20	BLOCKING	LUMBER, SOFTWOOD 1 X 2 NOMINAL	AR	AR
21	PPP-B-601, OVERSEAS TYPE, STYLE A MODIFIED (NOTES 1 AND 2)	BOX, PLYWOOD 1/4 THK	1	
21	PPP-B-601, DOMESTIC TYPE, STYLE A, MODIFIED (NOTES 1 AND 2)	BOX, PLYWOOD 1/4 THK		1
22	BLOCKING	LUMBER, SOFTWOOD 1 X 3 NOMINAL	1	1
23	BLOCKING	LUMBER, SOFTWOOD 1 X 3 NOMINAL	3	3
24	BLOCKING	LUMBER, SOFTWOOD 1 X 2 NOMINAL	2	2
25	PPP-T-97, TYPE II	TAPE, PRESSURE SENSITIVE 3/4 WIDE	AR	AR
26	PPP-T-60, TYPE II, CLASS 1	TAPE, PRESSURE SENSITIVE	AR	AR
27	PPP-F-320, TYPE SF, GRADE V3S	CAP, FIBERBOARD	2	

NOTES:

1. NO CONTENT WEIGHT, WITHOUT BOTTOM.
2. TOP TO BE INVERTED.
3. CRATE SHALL BE CONSTRUCTED AS SHOWN ON FIGURE 2.
4. GASOLINE CANS SHALL BE BLOCKED WITHIN FRAMING TO ENSURE A SNUG FIT.
5. SIDES TO BE INVERTED TO POSITION CLEATS TO THE INSIDE (SEE FIND NO.19, FIGURE 2).
6. TOP TO BE ONE PIECE, 1/2 INCH THICKNESS, AND SHALL COMPLETELY COVER ALL EDGES.
7. ALL DIMENSIONS ARE IN INCHES.

X-1293C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

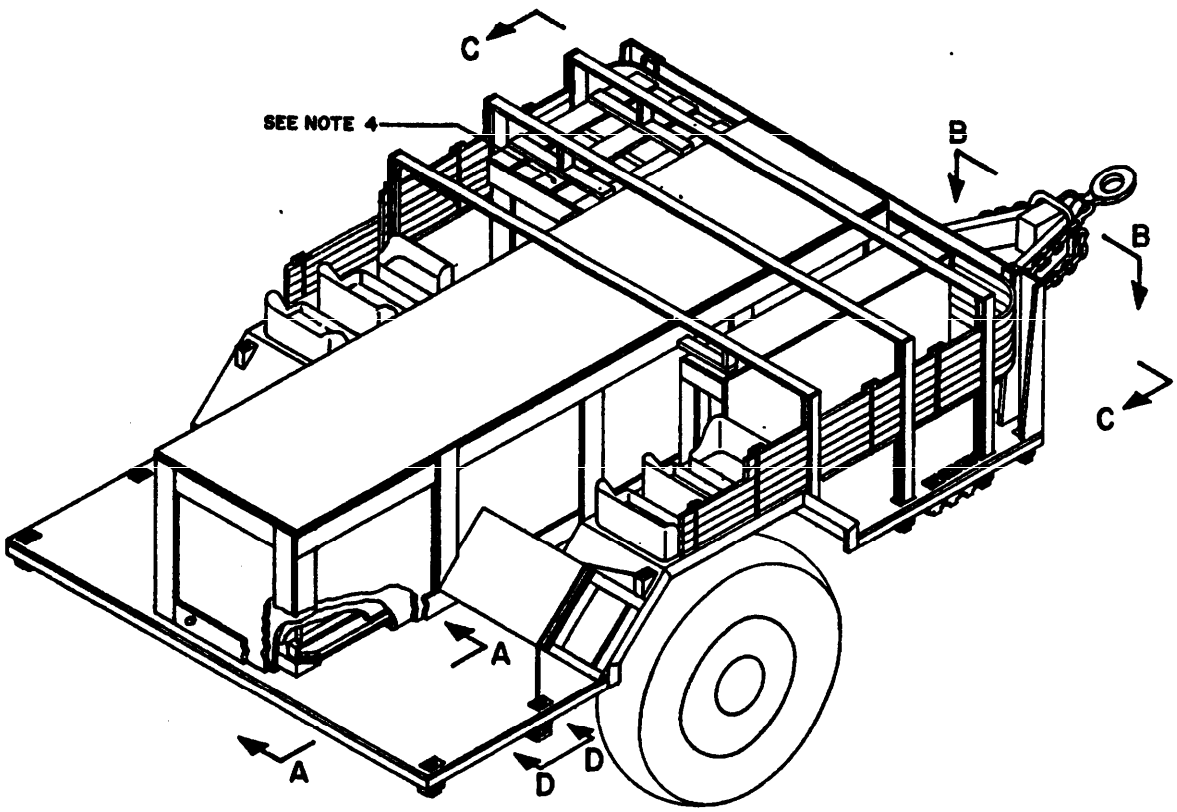

NOTES:

1. SEE TABLE I FOR LIST OF MATERIAL.
2. OIL DRAINS, GROUND RODS, WIRES AND CLAMPS, HAMMER, FIRE EXTINGUISHERS, EXHAUST PIPES AND CLAMPS, FUEL DRUM ADAPTERS AND EXTENSION AND GAS CAN STRAPS TO BE SECURED TO THE GENERATOR SETS USING TAPE FIND NO. 25.
3. SEE FIGURE 3 FOR SECTION AND VIEWS.
4. GAS CAN CRATE TO BE SECURELY BLOCKED.

FIGURE 1. Packaging arrangement and detail (assembled).

X-1295B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.


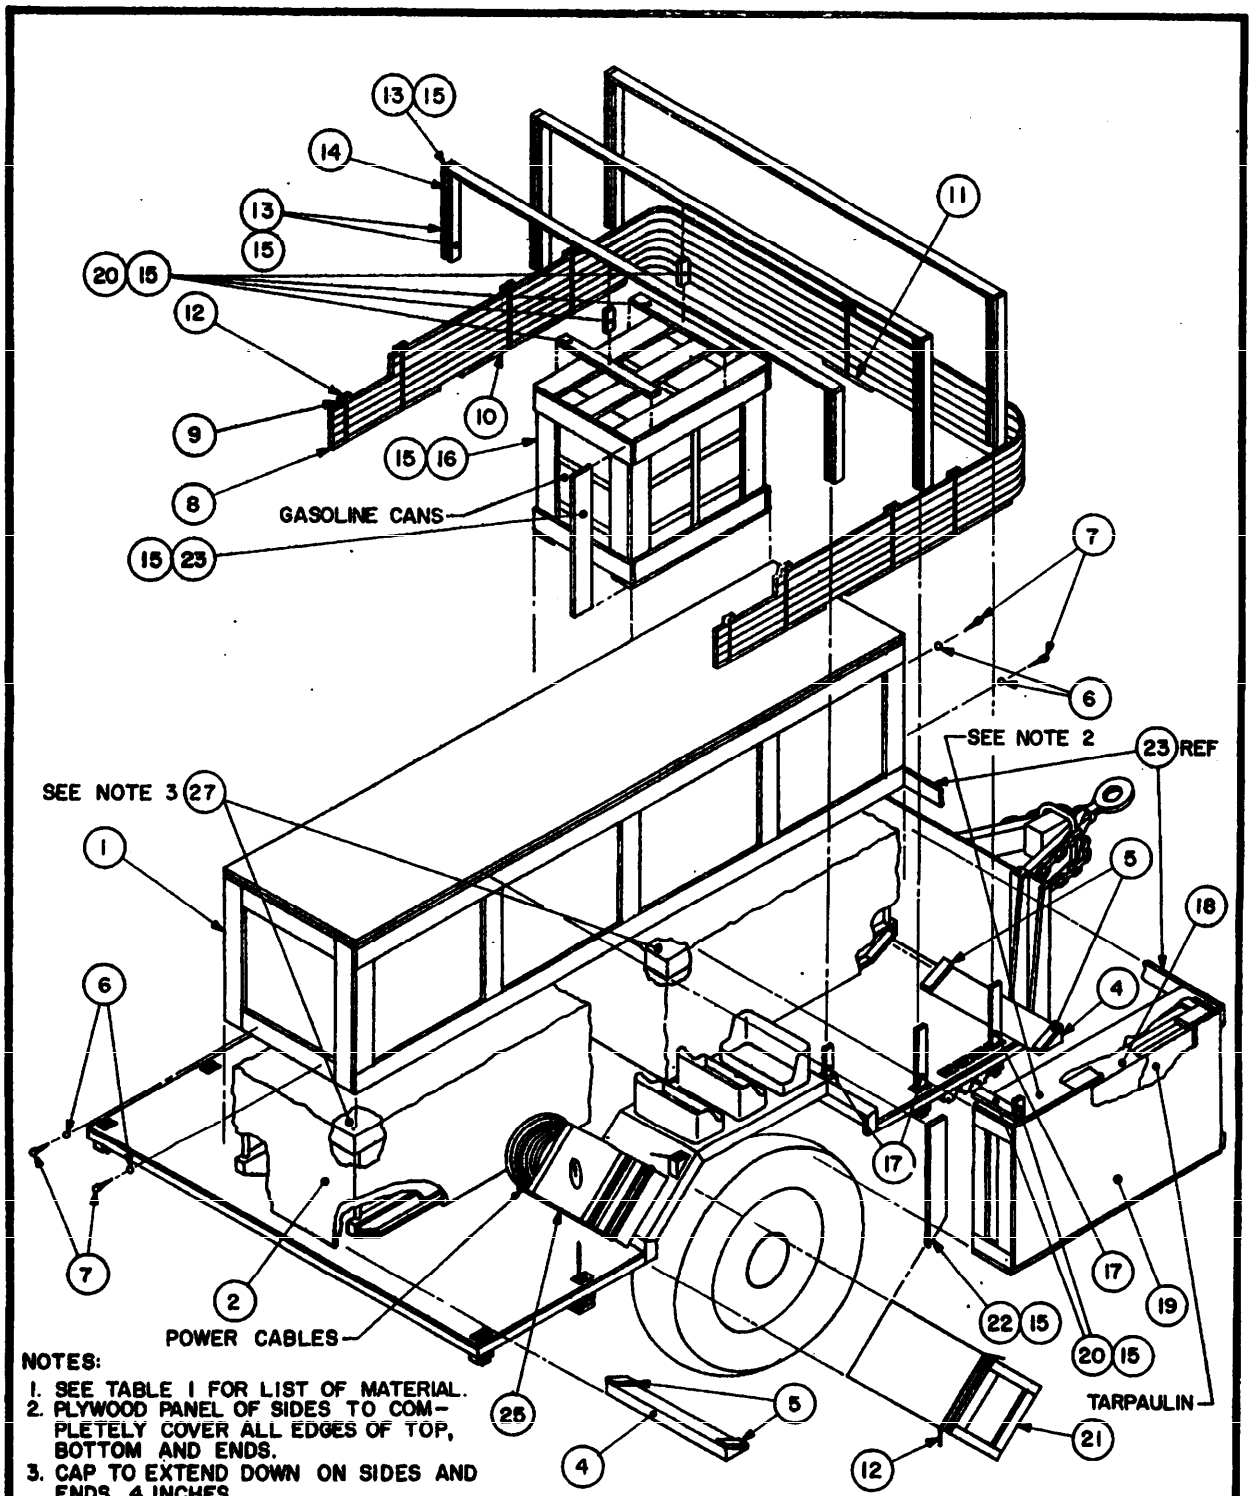


FIGURE 2. Packaging arrangement and detail (exploded).

X-1294B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

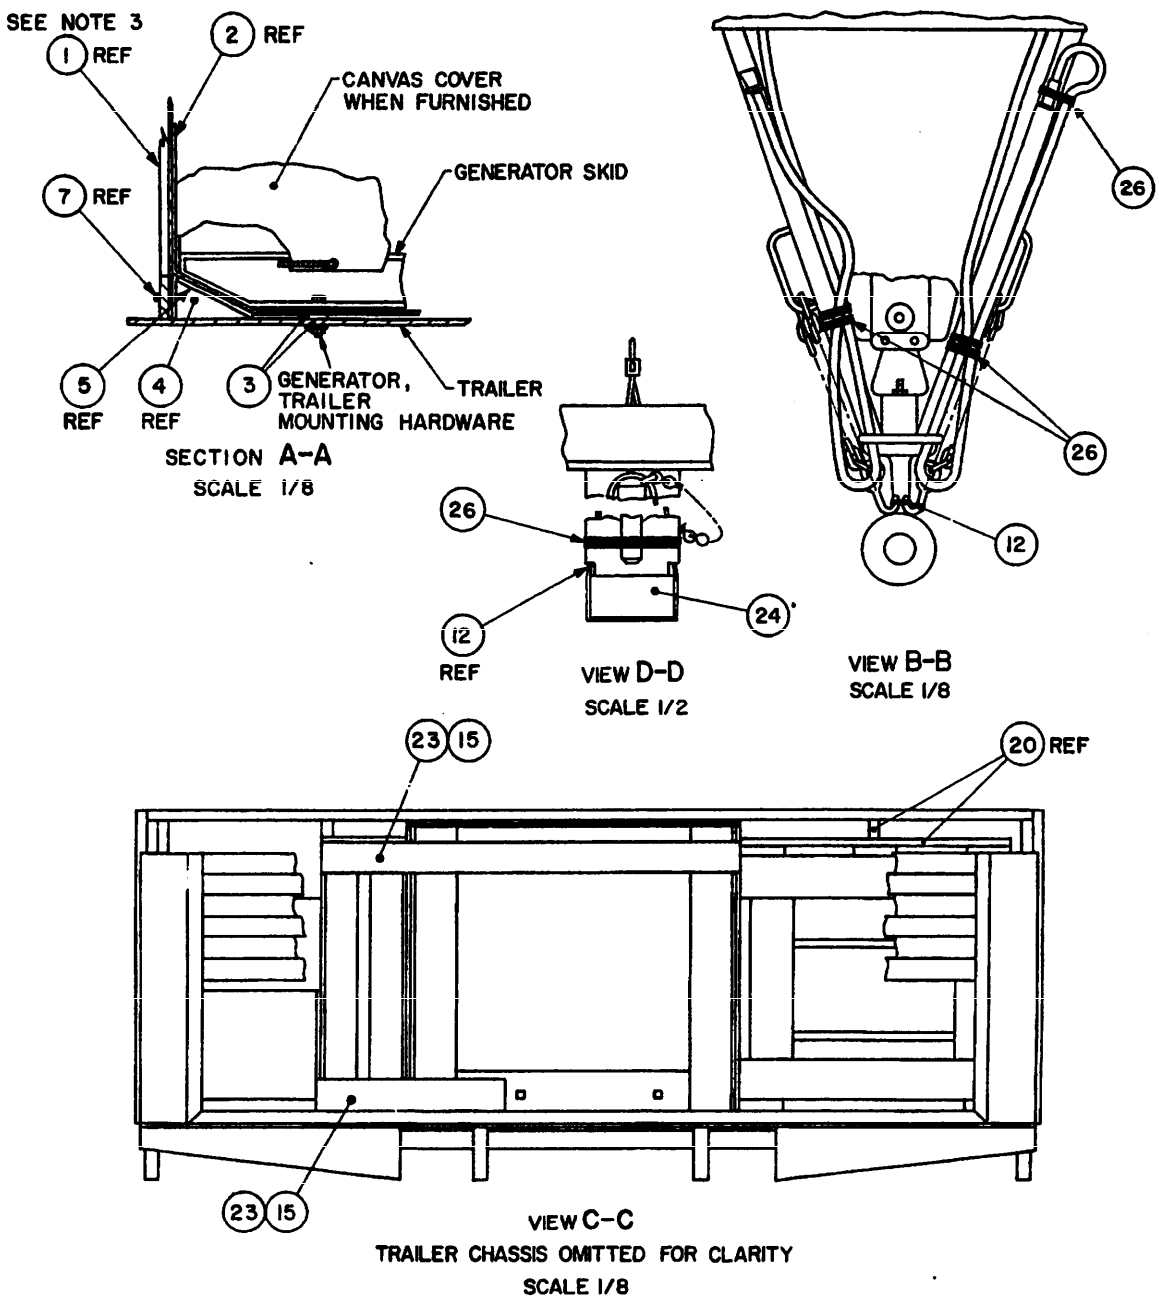

NOTES:

1. SEE FIGURE 1 FOR VIEWING PLANE LOCATION.
2. SEE TABLE I FOR LIST OF MATERIAL.
3. BOX FIND NO.1 SHALL BE A TIGHT FIT OVER THE WEDGES FIND NO. 4.

FIGURE 3. Packaging arrangement and detail (section and views). X-1296B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-G-52552B(ME) Generator Sets, Gasoline Engine, Trailer Mounted 10 KW, 400 Hertz, PU-656/G

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Mobility Equipment R&D Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.