MIL-G-52636B(ME)
24 April 1978
SUPERSEDING
MIL-G-52636A(ME)
27 April 1971

MILITARY SPECIFICATION

GENERATOR SET, GASOLINE ENGINE, TRAILER MOUNTED

3 KW, 60 HERTZ, PU-625/G

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers trailer mounted generator sets (hereinafter referred to as power unit) designated PU-625/G. The power unit consists of two military design, gasoline-driven, 3 KW, 60 Hertz generator sets, various auxiliary equipment, brackets, and hardware mounted on a modified cargo trailer.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

FSC 6115

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

FF-N-105	- Nails, Wire, Brads, and Staples.
NN-P-530	- Plywood, Flat Panel.
QQ-S-781	- Strapping, Steel, and Seals.
UU-T-81	- Tags, Shipping and Stock.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-C-843	- Cushioning Material, Cellulosic.
PPP-F-320	- Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-P-40	- Packaging and Packing of Hand Tools.
PPP-T-60	- Tape, Packaging, Waterproof.
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-G-12803	- Gasket Material, Non-Metallic.
MIL-G-28554	- Generator Sets, Mobile Electric Power; Packaging of.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-281	- Automobiles, Trucks, Truck-Tractors, Trailers and Trailer Dollies; Preservation and Packaging of.
MIL-STD-642	- Identification Marking of Combat and Tactical Transport Vehicles.
MIL-STD-705	- Generator Sets, Engine-Driven, Methods of Test and Instructions.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS27183	- Washer, Flat-Round, Steel, Cadmium Plated, General Purpose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

MS35338	- Washer, Lock-Spring, Helical Regular (Medium) Series.
MS35649	- Nut, Plain - Hexagon, Machine Screw, UNC-2B.
MS90725	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Steel, Grade 5, Cadmium Plated, UNC-2A.

DRAWINGS

ME

TA13205E5150	- Generator Set, Tlr Mtd, PU-625/G.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

U.S. DEPARTMENT OF COMMERCE

Product Standard PS 51 - Hardwood and Decorative Plywood.
Product Standard PS 1 - Softwood, Plywood; Construction and Industrial.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

3. REQUIREMENTS

3.1 Description. The PU-625/G power unit shall be in accordance with Top Assembly TA13205E5150 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Any data (e.g. shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.1.1.1 Vehicle marking. Registration numbers and other marking of the trailer shall be in accordance with MIL-STD-642 (see 6.9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.2 First article (preproduction model). The contractor shall furnish a power unit for examination and testing within the time frame specified, to prove prior to starting production, that his production methods will produce power units that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified on the applicable drawings (see 6.10).

3.4 Government-furnished property. The following property in the quantities indicated will be furnished by the Government (see 6.4):

Item No.	Description	Identification	Quantity for each PU-625/G
1	Trailer, cargo, M101A1, 3/4 ton 2-wheel	MIL-T-10579	1
2	Generator set, gasoline-engine-driven, 3.0 KW, 60 Hz	FSN 6115-017-8237	2

3.5 Workmanship. Workmanship shall be of a quality to assure that the power units are free from defects resulting from defective material, incorrect manufacturing or assembly practices, incorrect treatment and painting, incomplete welds, rust, cracks, and other defects that could impair its operation or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Parts and components. Parts and components detailed on the drawings shall be inspected in accordance with the Supplementary Quality Assurance Provisions (SQAP) shown on the drawings. The drawings specify the characteristics requiring SQAP inspection, the sampling plan, and the basis for acceptance and rejection (see 6.5 and 6.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

4.1.2 Disassembly inspection. Failure of the test by the preproduction model shall be cause for disassembly, in the presence of a Government representative, of the preproduction model to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected. Reassembly with accepted parts and retesting shall be the responsibility of the contractor. Government-furnished property shall be excluded from the requirements of the paragraph.

4.1.3 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The power unit shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. Power unit components shall be tested as specified in 4.5.2. Failure of the test shall be cause for performing the inspection specified in 4.1.2.

4.4 Quality conformance inspection.

4.4.1 Examination. Each power unit shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Power unit components shall be tested as specified in 4.5.2. Failure of the test shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

4.5 Inspection procedure.

4.5.1 Examination. The power unit shall be examined for the following defects:

101. Any part or component not in accordance with the SQAP requirements as shown on the drawings.
102. Any dimension other than those identified on the SQAP requirements shown on the drawings not as specified.
103. Components missing or not as specified.
104. Assembly not as shown on the drawings.
105. Treatment and painting not as specified.
106. Workmanship not as specified.

4.5.2 Tests.

4.5.2.1 Test conditions. The following preparations shall be made prior to testing the distribution box assembly:

(a) Cables running between the distribution box assembly and the generator sets shall be installed to the distribution box assembly rotary switch.
(b) The free ends of the cables shall be attached to a commercial power source as follows:

(1) Cable wire marked L1 shall be attached to phase A.
(2) Cable wire marked L2 shall be attached to phase B.
(3) Cable wire marked L3 shall be attached to phase C.
(4) Cable wire marked LO shall be attached to neutral.

4.5.2.2 Test procedures. Tests shall be conducted in accordance with MIL-STD-705 and as specified herein. Test instruments shall be of the laboratory type and shall have been calibrated within 30 days prior to the start of testing and at intervals not greater than 6 months thereafter.

4.5.2.3 Operation. The rotary switch of the distribution box shall be placed in the generator No. 1 position. Commercial power, equivalent to the rated load of the generator set, shall be supplied through the rotary switch for a minimum of 5 minutes. During this period, phase sequence (rotation) shall be tested in accordance with MIL-STD-705, Method 507.1. Phase rotation shall be L1, L2, and L3. This test shall be performed at the load terminals of the distribution box. At the conclusion of the generator No. 1 position test, the rotary switch shall be placed in the generator No. 2 position. Repeat the test. Inability of the distribution box assembly to maintain or transfer a rated load shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

4.6 Inspection of packaging.

4.6.1 Preproduction pack examination. The preproduction pack shall be examined for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

107.	Materials, containers, or procedures not as specified. Each incorrect material, container, or procedure shall constitute one defect.
108.	Generator sets not preserved as specified.
109.	Canvas covers, if furnished, not installed as specified.
110.	Fire extinguisher not removed and preserved as specified.
111.	Power cables and ground wires not disconnected and secured and the cables and terminals not matchmarked as specified.
112.	Repair parts and maintenance tools not preserved as specified.
113.	Trailer chassis components not preserved as specified.
114.	Packing not in accordance with the applicable figures for the level required.
115.	Marking illegible, incomplete, incorrect, or missing.
116.	Depreservation guides not prepared and attached to the power units as specified.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination within the time frame specified to prove prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examination shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.7). The preproduction pack may be accomplished utilizing either the preproduction model power unit or a production power unit. If the preproduction model power unit is utilized, any preservation, and packing shall be removed by the contractor

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

at no expense to the Government, when requested by the Government to facilitate comparison between the preproduction model power unit and production power units.

5.2 Preservation. Preservation shall be Level A, Level B, or Commercial as specified (see 6.2). Preservation and consolidation of power unit components shall be in accordance with Table I, Figures 1, 2, and 3, and as specified herein.

5.2.1 Level A.

5.2.1.1 Generator sets. Each generator set shall be preserved in accordance with MIL-G-28554, Level A. The generator sets shall be secured directly through the barrier material to the trailer using the required bolts in lieu of the wood base specified in the packaging requirement of MIL-G-28554. The humidity indicators and inspection ports shall be installed on an end or side in a location convenient for inspection of the humidity indicators. Before sealing the barrier, the fiberboard cap specified in Table I and Figure 2 herein shall be installed on the generator sets.

5.2.1.2 Fire extinguishers. Each fire extinguisher shall be removed from the bracket and preserved in a box conforming to PPP-B-636, Type CF, Variety SW, Grade 125, style optional.

5.2.1.3 Cables. Power and ground cables shall be disconnected from generator sets. Each cable and terminal on the generator sets shall be match-marked with cloth tags conforming to UU-T-81, Size A, to facilitate reinstallation of the cables.

5.2.1.4 Repair parts. The preservation application criteria and applicable submethods of MIL-P-116 shall be used to preserve the repair parts.

5.2.1.5 Maintenance tools. Maintenance tools shall be preserved in accordance with PPP-P-40, Level A.

5.2.1.6 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, Level A, as specified for mobile vehicles.

5.2.1.7 Technical publications. Technical publications when applicable shall be preserved in accordance with MIL-P-116, Method IC-1 and shall be secured to one of the generator sets outside the Method II barrier.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

5.2.2 Level B.

5.2.2.1 Generator sets. The generator sets shall be preserved in accordance with MIL-G-28554, Level B.

5.2.2.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and preserved as specified for Level A.

5.2.2.3 Repair parts and maintenance tools. The repair parts and maintenance tools shall be preserved as specified for Level A.

5.2.2.4 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, Level B, as specified for mobile vehicles.

5.2.2.5 Cables. Cables shall be disconnected and matchmarked as specified for Level A.

5.2.2.6 Technical publications. Technical publications when applicable shall be preserved as specified for Level A.

5.2.3 Commercial. The components of each complete power unit shall be preserved in accordance with MIL-STD-1188.

5.3 Packing. Packing shall be Level A, Level B, or Commercial as specified (see 6.2).

5.3.1 Level A or B. Packing shall be in accordance with Table I and Figures 1, 2, and 3 for Level A or B as specified.

5.3.2 Commercial. The components of each complete power unit shall be packed in accordance with MIL-STD-1188.

5.4 Marking.

5.4.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

5.4.2 Commercial packaging. Marking shall be in accordance with MIL-STD-1188.

5.5 Depreservation guides. Two depreservation guides shall be prepared and placed in waterproof envelopes marked "Depreservation Guide". One copy shall be secured to one of the generator sets outside the Method II barrier,

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:09Z
Check the source to verify that this is the currentversion before use.

and a second copy shall be secured in a conspicuous location on the power unit. Unless otherwise specified (see 6.2), DA Form 2258 "Depreservation Guide for Vehicles and Equipment" shall be used (see 6.8).

6. NOTES

6.1 Intended use. The power unit is intended for use by the Armed Services and for supplying electrical power to military operations.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and the date of this specification.
(b) Time frame required for submission of preproduction model (see 3.2).
(c) Time frame required for submission of the preproduction pack (see 5.1).
(d) Degree of preservation and degree of packing required (see 5.2 and 5.3).
(e) When other than DA Form 2258 is to be used (see 5.5).

6.3 Preproduction model. Any changes or deviations from the preproduction model during production shall be subject to the approval of the contracting officer. Approval of the preproduction model by the activity concerned shall not relieve the contractor of his obligation to furnish power units conforming to this specification.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.4.

6.5 Supplementary Quality Assurance Provisions (SQAP). The contracting officer should require the contractor to maintain records of all SQAP inspections. A suggested paragraph is as follows:

"The contractor shall maintain complete records of all examinations and tests performed to verify the requirements of classified SQAP characteristics. The records shall include as a minimum, lot size, sample size, drawing requirement, actual measurement, number and type of deficiencies found, quantity approved, quantity rejected, corrected action taken when applicable."

6.6 Definitions.

6.6.1 Supplementary Quality Assurance Provisions (SQAP). A SQAP is a contractual requirement that supplements Section 4 of the specification. The SQAP indicates the minimum requirements which must be inspected on the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

roduct drawings to verify the design objectives of the product and assure nterchangeability of repair parts.

6.7 Preproduction pack. Any changes or deviations of production packs rom the approved preproduction pack will be subject to the approval of the ontracting officer. Approval of the preproduction pack will not relieve he contractor of his obligation to preserve, pack, and mark the power units n accordance with this specification.

6.8 Depreservation guide. The contracting officer should arrange to urnish the necessary copies of DA Form 2258, when requested by the con- ractor (see 5.5).

6.9 Registration numbers. The contracting officer should arrange to urnish a list of registration numbers to be applied to the trailer (see .1.1.1).

6.10 Recycled material. It is encouraged that recycled material be used hen practical as long as it meets the requirements of the specification see 3.3).

ustodian:
Army - ME

eview activity:
DLA - GS

Preparing activity:
Army - ME

Project 6115-A416

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.


TABLE I. Packaging material.

FIND NO.	IDENTIFICATION	DESCRIPTION	LEVEL A	LEVEL B
1	MIL-B-131, CLASS I	BARRIER MATERIAL	AR	
2	[illegible]803, TYPE I, RUBBER BINDER, $1\frac{1}{2} \times 1\frac{1}{2} \times \frac{1}{8}$	GASKET, $\frac{11}{16}$ DIA HOLE IN CENTER	16	
3	[illegible]RADE V3s	CAP, FIBERBOARD	1	
4		CUSHIONING MATERIAL	AR	
[illegible]		TAPE, PRESSURE SENSITIVE, $\frac{3}{4}$ WIDE	AR	AR
		LUMBER, SOFTWOOD, 1 X 3 NOMINAL	2	2
		STEEL STRAPPING, FLAT, .020 X $\frac{3}{4}$	AR	
	[illegible]	STEEL STRAPPING, FLAT, .020 X $\frac{3}{4}$		AR
	SIDES AND TOP	PLYWOOD, $\frac{1}{4}$ THICK	AR	AR
	[illegible]ND INTERMEDIATE	LUMBER, SOFTWOOD, 1 X 4 NOMINAL	AR	AR
	[illegible]3	STAPLES, 1 X 16 GAUGE STEEL, GALV	AR	AR
		LUMBER, SOFTWOOD, 2 X 4 NOMINAL	5	5
	[illegible]4	NAIL, 8d	AR	AR
	[illegible] 4	NAIL, 6d	AR	AR
		LUMBER, SOFTWOOD, 1 X 4 NOMINAL	5	5
	[illegible]UNC-2A X 5 LONG	SCREW-CAP, HEX HD, CS, CAD PLATED	5	5
	[illegible] X .812 OD X .065 THK	WASHER, FLAT, RD, STL, CAD PLATED, GEN PURPOSE	10	10
	[illegible]OM SIZE	WASHER, LOCK, SPRING, REG SERIES, CAD PLATED	5	5
	$\frac{5}{8}$-16 UNC-2B	NUT, PLAIN HEX, MACH SCREW, CAD PLATED	5	5
	II, FINISH B	STEEL STRAPPING, FLAT, NAIL ON, .028 X $\frac{3}{4}$	AR	
	[illegible] II, FINISH C	STEEL STRAPPING, FLAT, NAIL ON, .028 X $\frac{3}{4}$		AR
	PE II, STYLE 20	NAIL, $\frac{7}{8}$ LONG	AR	AR
	TYPE IV, CLASS 1	TAPE, PRESSURE SENSITIVE	AR	AR
	[illegible], OVERSEAS TYPE, STYLE I, TYPE I LOAD	BOX, PLYWOOD, CLEATED	AR	AR

[illegible]A, CONFORMING TO PS 5[illegible], TYPE I, GRADE 3-4
[illegible]OUP B, CONFORMING TO PS-1, GRADE C-D INTERIOR WITH EXTERIOR GLUE.

X-1350B

Source: https://assist.dla.mil -- Downloaded: 2026[illegible]-26T04:09Z
Check the source to verify that this is the current[illegible]version before use.

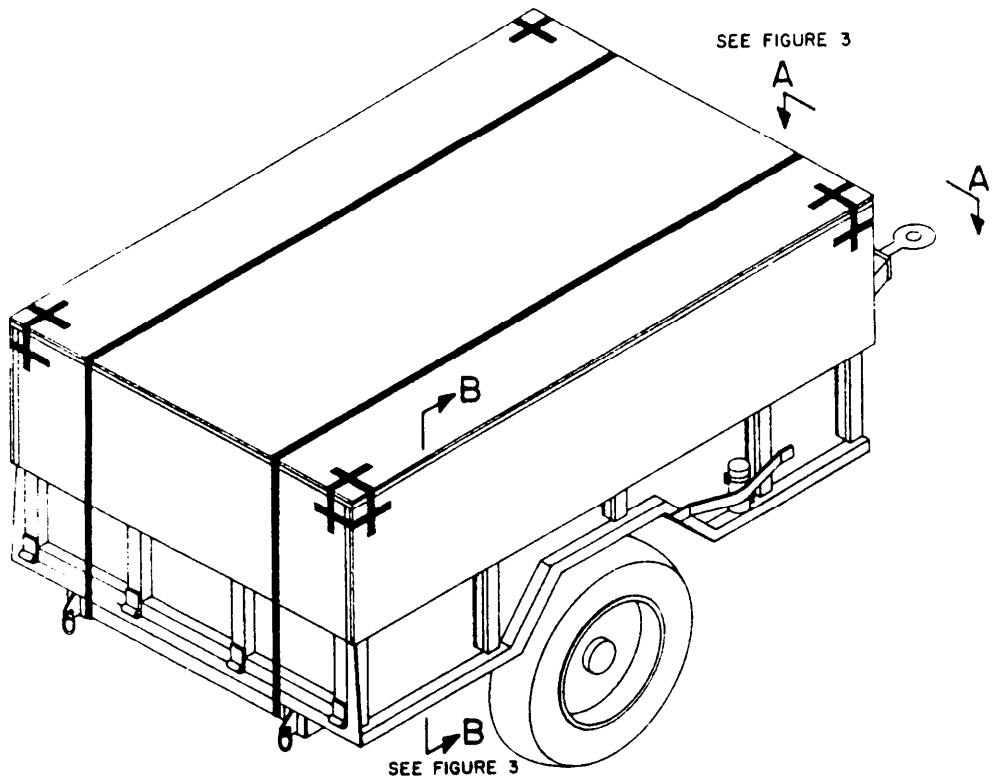

NOTES:
1. SEE TABLE I FOR LIST OF MATERIAL.
2. REMOVE ACCESSORY BOX AND ROADSIDE RACK FOR EASE OF BARRIER MATERIAL INSTALLATION TO GENERATORS. BOX AND RACK TO BE REINSTALLED.
3. LUBE OIL, OIL CAN AND OIL CAN SPOUT TO BE STORED IN ACCESSORY BOX.
4. FIRE EXTINGUISHER, FUEL LINES, TARPAULIN, GENERATOR COVERS, (WHEN FURNISHED) (SEE NOTE 7) OIL DRAIN LINES, CABLES, GROUND STRAPS, GASOLINE CAN SPOUT, STARTER ROPES AND EXTERIOR MOUNTED GROUND RODS SHALL BE STOWED IN BOX, FIND NO. 23.
5. RACK MOUNTED GROUND RODS AND HAMMER SHALL REMAIN IN BRACKETS.
6. REELS SHALL BE SECURED TO RACKS, USING TAPE, FIND NO. 5.
7. GENERATOR COVERS (WHEN FURNISHED) TO BE INSTALLED ON GENERATORS FOR LEVEL B.
8. WHERE BUTT JOINTS ARE REQUIRED IN THE PLYWOOD PANELS, THE JOINTS SHALL CONFORM TO THE REQUIREMENTS OF PPP-B-601 AND IN ADDITION THE JOINTS SHALL BE FILLED WITH WATERPROOF ADHESIVE.
9. SEE FIGURE 3 FOR SECTION AND VIEWS.

FIGURE 1. Packaging arrangement and detail (assembled).

X-1351B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.



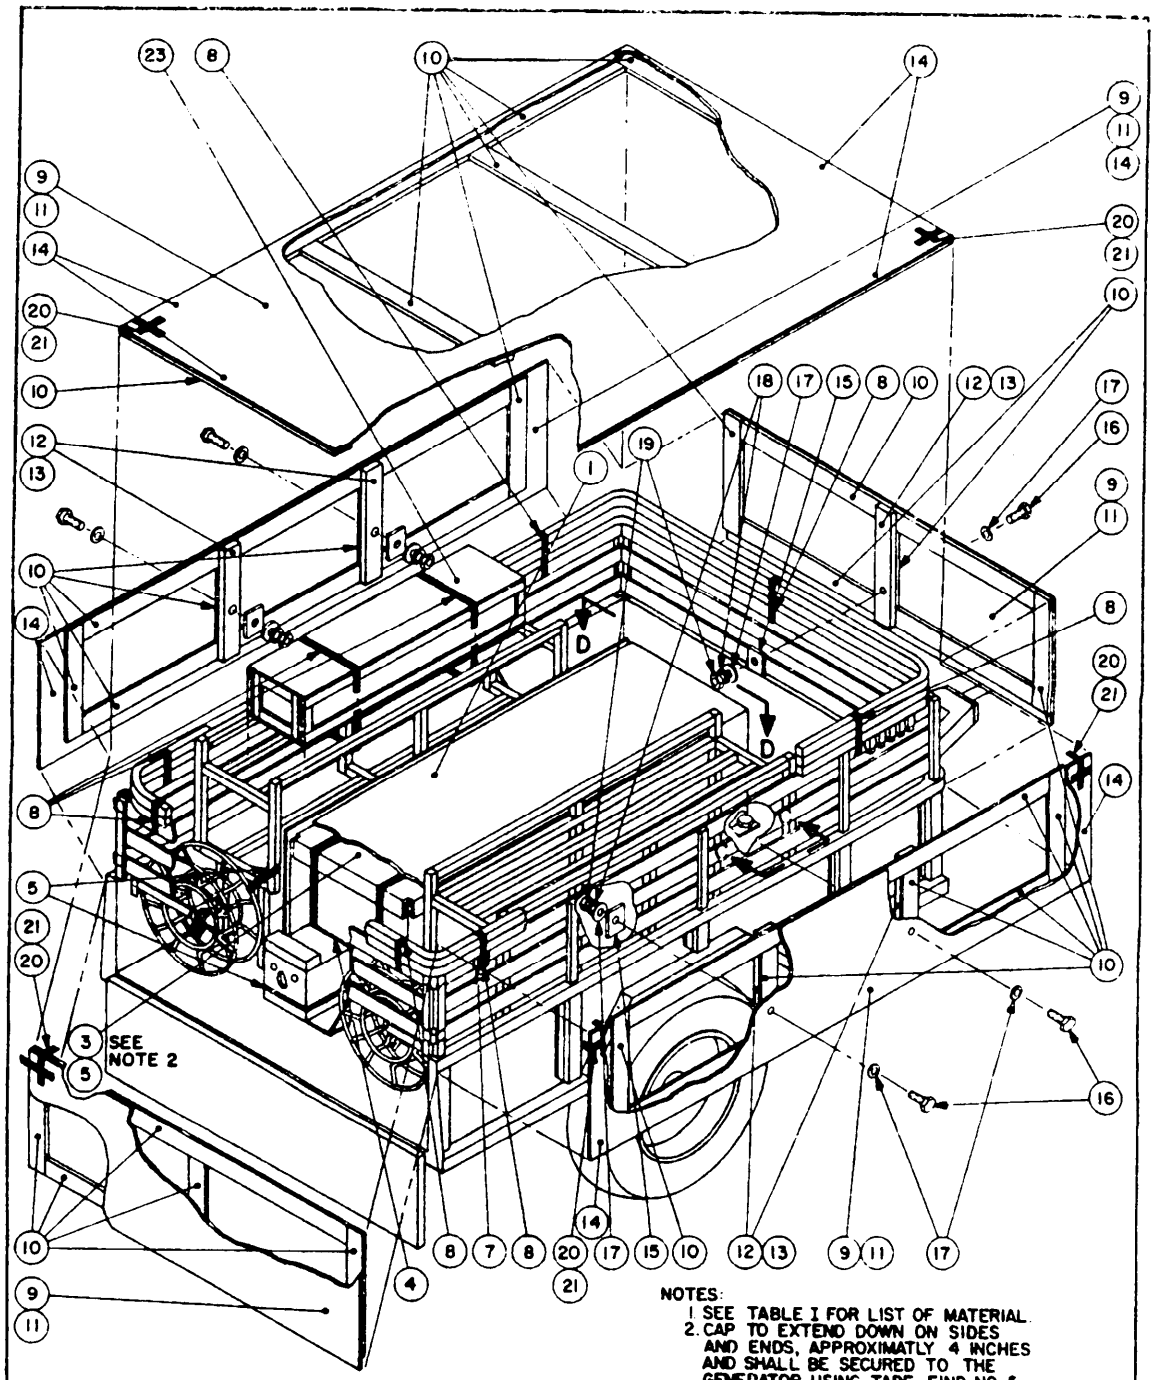


FIGURE 2. Packaging arrangement and detail (exploded).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

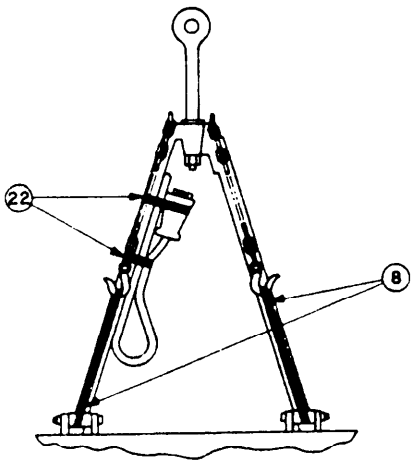


VIEW A-A
SEE FIGURE 1

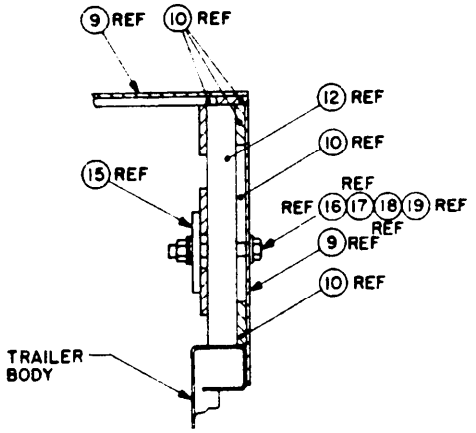

SECTION B-B
SEE FIGURE 1

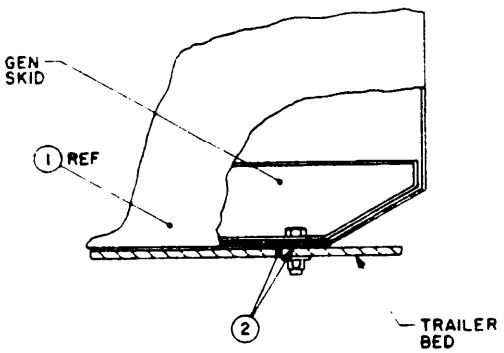

VIEW C-C
SEE FIGURE 2

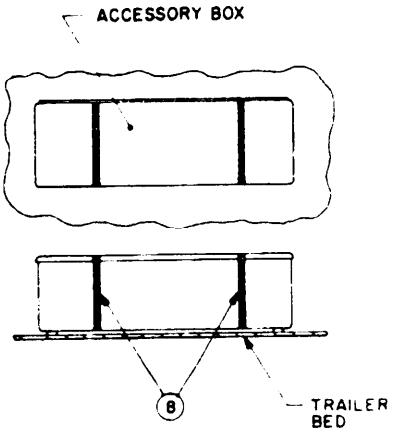

VIEW D-D
SEE FIGURE 2

NOTE
1. SEE TABLE I FOR LIST OF MATERIAL.

FIGURE 3. Packaging arrangement and detail (section & views).

X-1353B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE: MIL-G-52636B(ME) Generator Set, Gasoline Engine, Trailer Mounted 3 KW, 60 Hertz, PU-625/G

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.