MILITARY SPECIFICATION

GENERATOR SET, DIESEL ENGINE, TRAILER-MOUNTED,

60 KW, 400 HERTZ, PU-707/M

1. SCOPE

1.1 This specification covers a trailer mounted generator set designated PU-707/M. The PU-707/M consists of a military design diesel engine, 60 KW, 400 Hertz (Hz) generator set, various auxiliary equipment, brackets, and hardware mounted on a trailer.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

FF-N-105	- Nails, Wire, Brads, and Staples.
NN-P-530	- Plywood, Flat Panel.
QQ-S-781	- Steel, Strapping, Flat.
UU-T-81	- Tags, Shipping and Stock.
PPP-B-591	- Boxes, Fiberboard, Wood-Cleated.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Box, Fiberboard.
PPP-F-320	- Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-T-60	- Tape: Pressure-Sensitive Adhesive, Waterproof, for Packaging.
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

Military

MIL-P-116	- Preservation, Methods of.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-S-207	- Sulfuric Acid, Electrolyte: Packaging, Packing, and Marking for Shipment and Storage of.
MIL-E-10062	- Engines: Preparation for Shipment and Storage of.
MIL-G-12803	- Gasket Material, Non-Metallic.
MIL-H-15424	- Hand Tools; Packaging of.
MIL-E-16298	- Electric Machines Having Rotating Parts and Associated Repair Parts: Packaging of.

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-281	- Automobiles, Trucks, Truck-Tractors, Trailers and Trailer Dollies; Preservation and Packaging of.
MS16992	- Bolt, (Screw), Lag, Hex Head, Gimlet Point.
MS27183	- Washer, Flat-Round, Steel, Cadmium Plated, General Purpose.
MS35355	- Bolt, Machine, Square Head (Regular), Steel, Cadmium or Zinc Plated, UNC-2A.
MS51922	- Nut, Self-Locking, Hexagon-Prevailing Torque, General Purpose, 250° F., UNC-2B and UNF-2B.

DRAWINGS

ME

DL13216E7580	- Power Unit, PU-707/M.

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

DEPARTMENT OF COMMERCE

Commercial Standard
CS35 - Hardwood Plywood.
Products Standard
PS1 - Softwood, Plywood; Construction and Industrial.

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

3. REQUIREMENTS

3.1 Description. The PU-707/M shall be in accordance with Data List DL13216E7580 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are engineering design drawings. The supplier is responsible for preparing his own shop drawings. Where tolerances prescribed could cumulatively result in incorrect fits, the supplier shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the PU-707/M. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer.

3.2 Preproduction model. The supplier shall furnish a PU-707/M within the time frame specified to prove, prior to starting production, that his production methods will produce PU-707/Ms that comply with the requirements of this specification (see 6.3). Examination shall be that specified herein.

3.3 Material. Material shall be as specified on the applicable drawings.

3.4 Government-furnished property. The following property in the quantities indicated will be furnished by the Government (see 6.4):

Item	Description	Identification	Quantity for each PU-707/M
1	Chassis, trailer, 2-1/2 ton, 2 wheel Model M200A1	MIL-C-45150	1
2	Generator set, diesel-engine-driven 60 kw, 400 Hertz	FSN 6115-752-2092	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.4.1 Optional Government-furnished property. When specified, the following property in the quantities indicated will be furnished by the Government:

Item	Description	Identification	Quantity for each PU-707/M
1	Extinguisher, fire, type I, size 5 std chg.	O-E-910	1
2	Rod, ground, type II, style 2 (w/attachments)	MIL-R-11461	2
3	Hammer, hand, type X, class I, forged steel head, 8 lb.	GGG-H-86	1

3.5 Workmanship. Workmanship shall be of a quality to assure that the PU-707/M is free from defects resulting from defective material, improper manufacturing or assembly practices, incorrect treatment and painting, incomplete welds, rust, cracks, and other defects that could impair its operation or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Parts and component inspection. When required, parts and components shall be inspected in accordance with the Supplementary Quality Assurance Provisions (SQAPs) shown on the drawings.

4.1.2 Component and material inspection. The supplier is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction examination (see 4.3).
(b) Quality conformance examination (see 4.4).
(c) Examination of preparation for delivery (see 4.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

4.3 Preproduction examination. The PU-707/M shall be examined as specified in 4.5. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance examination. Each PU-707/M shall be examined for the defects specified in 4.5. Presence of one or more defects shall be cause for rejection.

4.5 Examination procedure. The PU-707/M shall be examined for the following defects:

101. Treatment and painting not as specified.
102. Nonconformance to dimensions shown on drawings.
103. Components missing or not as specified.
104. Assembly not as shown on the drawings.
105. Workmanship not as specified.

4.6 Examination of preparation for delivery.

4.6.1 Preproduction pack examination. The preproduction pack shall be examined for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.2 Quality conformance examination of pack.

4.6.2.1 Unit of product. For the purpose of examination, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

106. Materials, containers, or procedures not as specified. Each incorrect material, container, or procedure shall constitute one defect.
107. Generator set not preserved in accordance with the referenced document for level A or B.
108. Engine components not preserved as specified for level A or B.
109. Crankcase not drained after engine preservation for level A or B.
110. Battery cables not disconnected and secured to the battery box with tape as specified for level A or B.
111. Fire extinguisher not removed and packaged.
112. Ground cable not disconnected and stowed as specified, and the cable and terminals not matchmarked as specified for level A or B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

113. Repair parts and maintenance tools not preserved as specified.
114. Trailer chassis components not preserved in accordance with the referenced document for level A or B.
115. Trailer brakes not coated with primer for level A.
116. Consolidated packaging not as shown on the figures.
117. Packing not in accordance with applicable table I and figures for the level required.
118. Marking illegible, incomplete, incorrect or missing.
119. Depreservation guides not prepared and attached to the power unit as specified.

5. PREPARATION FOR DELIVERY

5.1 Preproduction pack. The supplier shall furnish a preproduction pack for examination within the time frame specified to prove, prior to starting production packaging, that the applied preservation, packaging, packing, and marking comply with the preparation for delivery requirements of this specification (see 6.5). Examination shall be as specified herein.

5.2 Preservation and packaging. Preservation and packaging shall be level A, B, or C as specified. Packaging of PU-707/Ms and components and consolidated packaging shall be in accordance with table I, figures 1 and 2 and as specified herein.

5.2.1 Level A.

5.2.1.1 Generator set. The generator set shall be preserved in accordance with MIL-E-16298, level A, method IIa. The generator set shall be secured directly through the barrier material to the trailer using the trailer mounting bolts. Before the generator set is inclosed in the method IIa barrier, the following shall be accomplished.

5.2.1.1.1 Engine. The engine fuel system, lubricating system, combustion chambers, and valves shall be preserved in accordance with MIL-E-10062, level A as specified for type I engine, method II and as follows. The cooling system shall be preserved and drained in accordance with MIL-E-10062. Upon completion of engine preservation, the crankcase shall be drained. The battery cables shall be disconnected and secured to the battery box with tape conforming to PPP-T-60, type IV. Electrolyte shall be packaged in accordance with MIL-S-207, type IV. Unless otherwise specified, the electrolyte shall be overpacked in a wood box and secured to the power unit as shown on the figures. When specified for air shipment, the packaged electrolyte units shall be cushioned on all sides in the outside wood container with incombustible absorbent material in sufficient quantity to completely absorb

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

liquid contents in event of breakage. The wood box shall be of sufficient size to accommodate the required cushioning. The box shall be secured to the power unit in any available space that will not tend to increase overall cube of the power unit (see 6.6).

5.2.1.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and packaged in a box conforming to PPP-B-636, type CF, variety SW, grade 125, style optional.

5.2.1.3 Ground cable. The ground cable shall be disconnected from the generator set and trailer. Terminals shall be matchmarked with cloth tags conforming to UU-T-81, size A, to facilitate reinstallation of the cable. The cable shall be stowed within the confines of the generator set.

5.2.1.4 Repair parts. The preservation application criteria and applicable sub-methods of MIL-P-116 shall be used to preserve and package the repair parts.

5.2.1.5 Maintenance tools. Maintenance tools shall be preserved in accordance with MIL-H-15424, level A.

5.2.1.6 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, level A as specified for mobile vehicles. Brake components shall be coated with primer as specified therein.

5.2.1.7 Technical publications. Technical publications shall be placed in a waterproof envelope. The envelope shall be placed and secured inside the generator set housing.

5.2.2 Level B.

5.2.2.1 Generator set. The generator set shall be preserved in accordance with MIL-E-16298, level A, using the alternate method specified for assembled machines, and the following.

5.2.2.1.1 Engine. The engine fuel system, lubricating system, combustion chambers, and valves shall be preserved in accordance with MIL-E-10062, level A as specified for type I engine, method II and as follows. The cooling system shall be preserved and drained in accordance with MIL-E-10062. Upon completion of engine preservation, the crankcase shall be drained. The battery cables shall be disconnected and secured to the battery box with tape conforming to PPP-T-60, type IV. Electrolyte shall be packaged in accordance with MIL-S-207, type IV. Unless otherwise specified, the electrolyte shall be overpacked in a wood box and secured to the power unit as shown on the figures. For air shipment, the electrolyte shall be packaged as specified for level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

5.2.2.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and packaged as specified for level A.

5.2.2.3 Ground cable. Matchmarking information shall be as specified for level A.

5.2.2.4 Repair parts and maintenance tools. The repair parts and maintenance tools shall be preserved and packaged as specified for level A.

5.2.2.5 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, level B, as specified for mobile vehicles.

5.2.2.6 Technical publications. Technical publications shall be preserved and packaged as specified for level A.

5.2.3 Level C. The repair parts and maintenance tools shall be preserved as specified for level A. Ground cable shall not be disconnected from the generator. The fire extinguisher shall be removed from the bracket and packaged as specified for level A. All other components shall be preserved and packaged to provide protection against deterioration and damage from the supplier to the initial destination.

5.3 Packing. Packing shall be in accordance with table I and figures 1 and 2 for level A, B, or C as specified.

5.4 Marking. Marking of packages, intermediate containers, and the PU-707/M shall be in accordance with MIL-STD-129.

5.5 Depreservation guides. Two depreservation guides shall be prepared and placed in waterproof envelopes marked "Depreservation Guide". One copy shall be placed on the generator set, and a second copy shall be secured in a conspicuous location on the PU-707/M. Unless otherwise specified, (see 6.7), DA Form 2258 "Depreservation Guide for Vehicles and Equipment" shall be used.

6. NOTES

6.1 Intended use. The PU-707/M is intended for use by the armed services to supply electrical power for military operations.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of the preproduction model (see 3.2).
(c) When optional Government-furnished property is required (see 3.4.1 and 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

(d) Time frame required for submission of the preproduction pack (see 5.1).
(e) Level of preservation and packaging and level of packing required (see 5.2 and 5.3). Level B preservation and packaging is intended to provide economical but limited protection and should be specified only when it has been determined the PU-707/M will be held in covered storage for an indefinite period or when the anticipated shipment and storage time will exceed 30 days.
(f) When air shipment packaging for electrolyte is required (see 5.2.1.1.1, 5.2.2.1.1 and 6.6).
(g) When other than DA Form 2258 is to be used (see 5.5).

6.3 Preproduction model. Any changes or deviations of production PU-707/Ms from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the supplier of his obligation to furnish PU-707/Ms conforming to this specification.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.4 and 3.4.1. Optional Government-furnished property was included in this specification to permit the contracting officer to expedite delivery of PU-707/Ms, i.e., when small quantities are being procured and the supplier might be handicapped in obtaining, on a timely basis, these items listed.

6.5 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the supplier of his obligation to preserve, package, pack, and mark the PU-707/Ms in accordance with this specification.

6.6 Air shipment. Detailed requirements for packaging of electrolyte for air shipment are contained in TM 38-250 - "Packaging and Handling of Dangerous Materials for Transportation by Military Aircraft".

6.7 Depreservation guide. The contracting officer should arrange to furnish the necessary copies of DA Form 2258, when requested by the supplier (see 5.5).

Custodian:

Army - ME

Preparing activity:

Army - ME

Project No. 6115-A244

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.


TABLE I. PRESERVATION, PACKAGING AND PACKING MATERIAL

FIND NO.	IDENTIFICATION	DESCRIPTION	LEVEL		
			A	B	C
1	PPP-B-601, OVERSEAS TYPE, STYLE A, 1/4 THK (NOTES 1,2 AND 3)	BOX, CLEATED PLYWOOD	1		
1	PPP-B-591, CLASS II, STYLE A, (NOTES 1,2&4)	BOX, CLEATED FIBERBOARD		1	
2	MIL-B-131, CLASS I	BARRIER, MATERIAL	AR		
3	PPP-F-320, TYPE SF, GRADE PS 400	FIBERBOARD	AR		
4	MIL-G-12803, TYPE I $1\frac{1}{2} \times 1\frac{1}{2} \times \frac{1}{8}$	GASKET, 11/16 DIA HOLE IN CENTER	8		
5	WEDGE	LUMBER, SOFTWOOD	2	2	
6	SPACER	LUMBER, SOFTWOOD 1X8 NOMINAL	2		
7	MS 27183-11, .312 ID X .734 OD X .065 THK	WASHER, PLAIN, CS, CAD. PL	12	8	
8	MS 16992-7, $\frac{1}{4}$-10, 3 LG	BOLT, LAG, SQ HD, GIMLET PT, STL, GALV	8	8	
9	NN-P-530 (NOTE 5)	PLYWOOD	1		
10	MS 35355-8, $\frac{1}{4}$-20 UNC-2A, $3\frac{1}{2}$ LG	BOLT, SQ HD, STL, CAD. PL	4		
11	MS 51922-1, $\frac{1}{4}$-20 UNC-2B	NUT, SELF LOCKING	4		
12	BLOCKING	LUMBER, SOFTWOOD, 2X4 NOMINAL	AR		
13	FF-N-105, TYPE II, STYLE 4, TABLE Vb	NAIL, 6d	AR		
14	PPP-T-60, TYPE IV	TAPE, PRESSURE-SENSITIVE	AR	AR	AR
15	PPP-T-97, TYPE III	TAPE, PRESSURE-SENSITIVE, 3/4 W	AR	AR	
16	QQ-S-781, TYPE I, CLASS B	STEEL STRAPPING, FLAT, .035 X 3/4	AR		
16	QQ-S-781, TYPE I, CLASS A	STEEL STRAPPING, FLAT, .035 X 3/4		AR	AR
17	PPP-B-636, TYPE CF, CLASS DOMESTIC, VARIETY SW, GRADE 125	BOX, FIBERBOARD	1	1	1

NOTES:
1. NO CONTENT WEIGHT, WITHOUT BOTTOM.
2. TOP TO BE INVERTED.
3. BUTT JOINTS OF PLYWOOD CAPS SHALL BE IN ACCORDANCE WITH PPP-B-601, AND IN ADDITION THE SEAM OF BUTT JOINTS SHALL BE FILLED WITH WATER RESISTANT ADHESIVE.
4. DIMENSIONAL LIMITATIONS OF SPECIFICATION WAIVED.
5. GROUP A, CONFORMING TO CS35 TYPE I, GRADE 3-4 OR GROUP B CONFORMING TO PS 1, STANDARD WITH EXTERIOR GLUE; 3/8 THKNS.

DX-1354

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

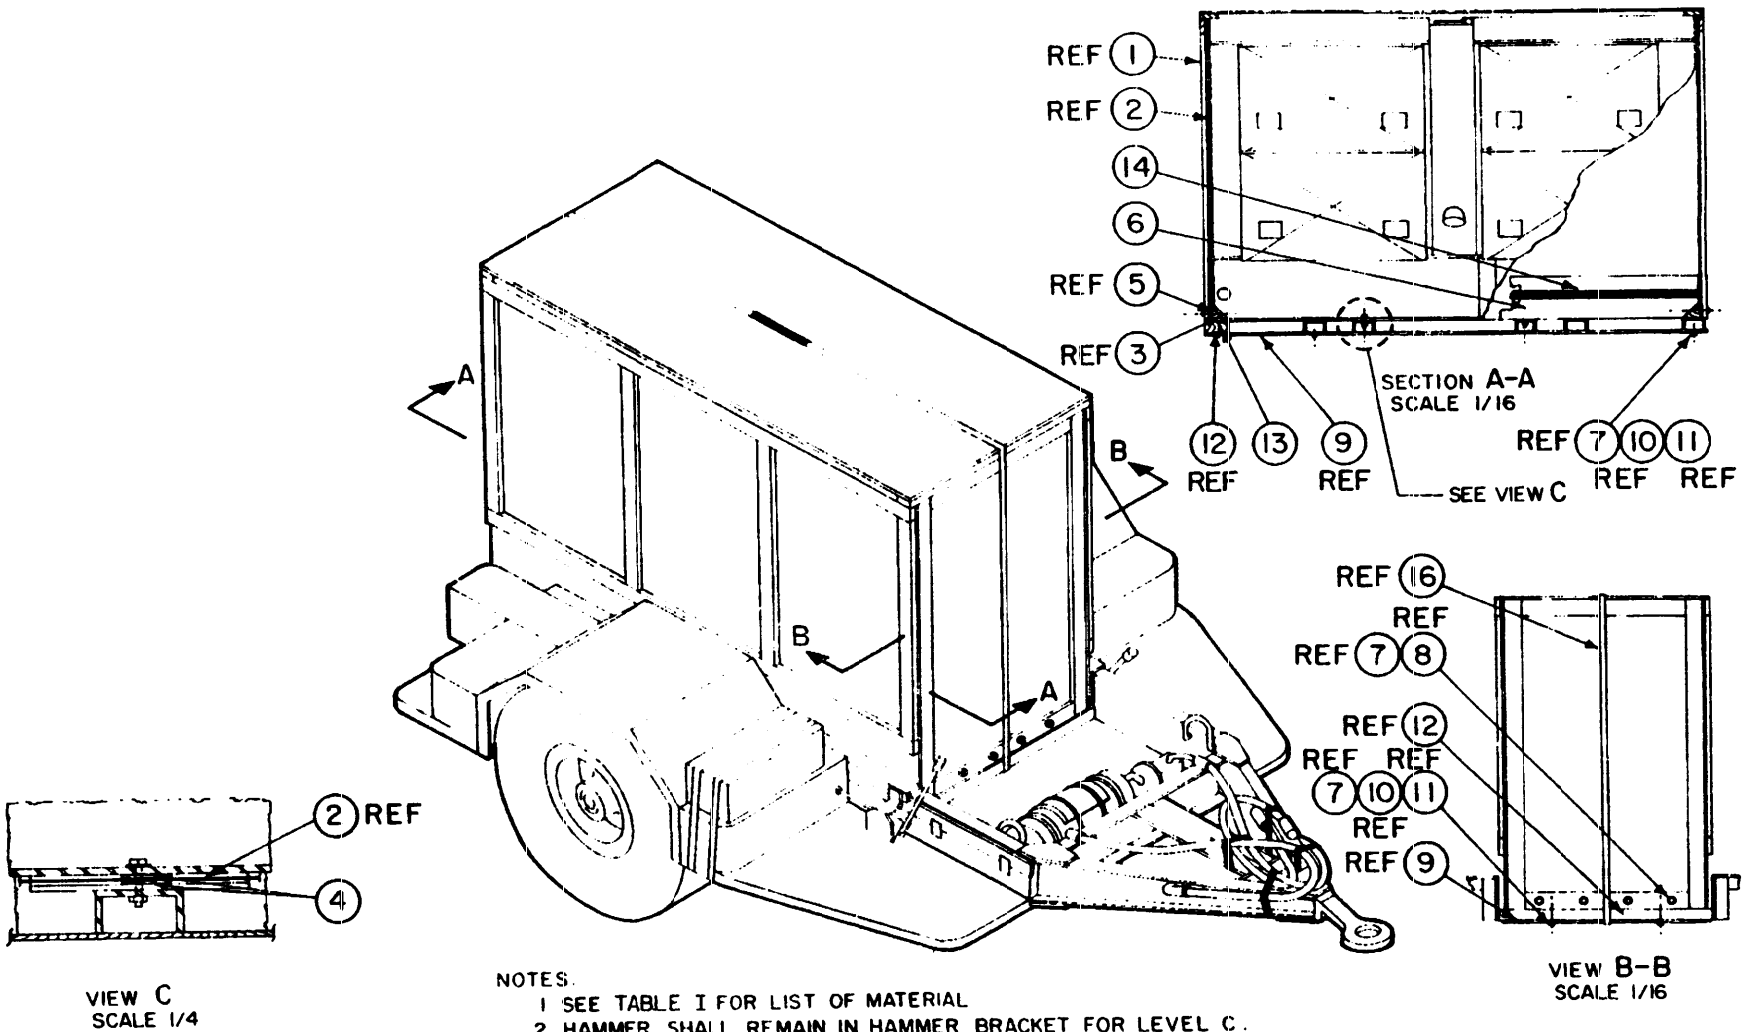

NOTES.

1. SEE TABLE I FOR LIST OF MATERIAL
2. HAMMER SHALL REMAIN IN HAMMER BRACKET FOR LEVEL C.
3. FOR LEVEL C, ELECTROLYTE IS TO BE PACKAGED AND PACKED AS SPECIFIED FOR LEVEL A AND B.

FIGURE 1.

PACKING ARRANGEMENT AND DETAILS

DX-1355

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T04:09Z
Check the source to verify that this is the current version before use.

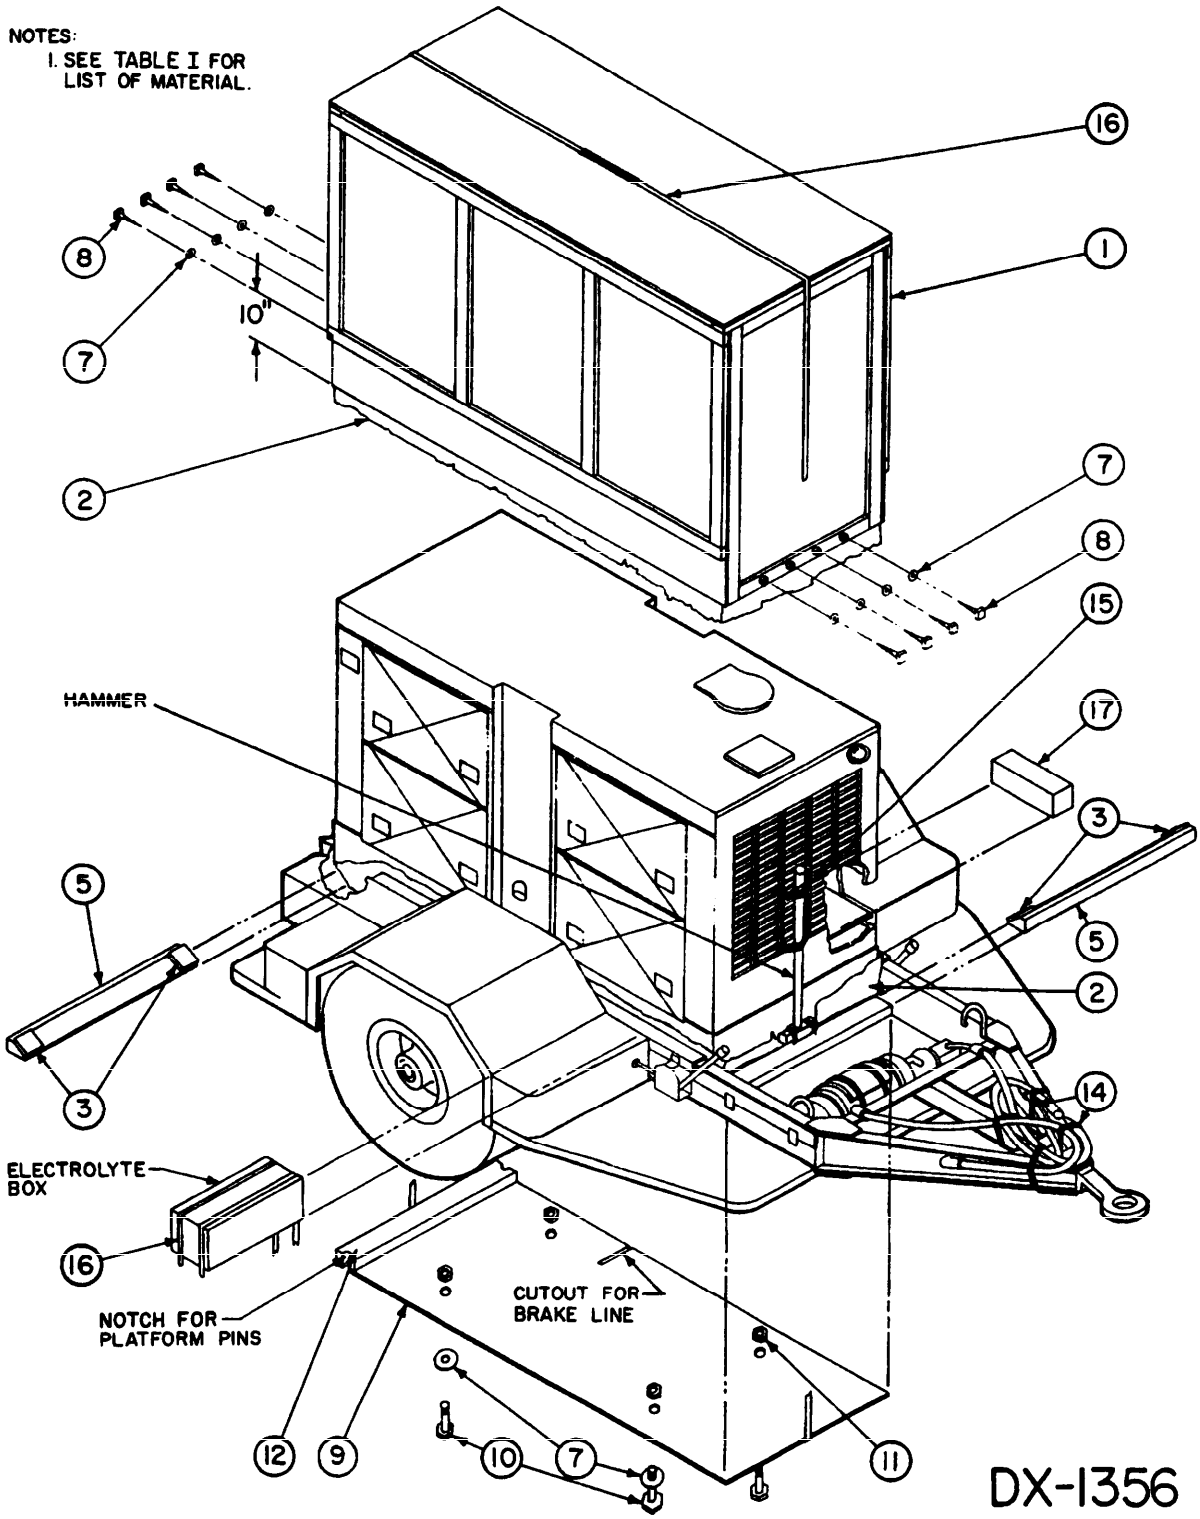


FIGURE 2. PACKAGING AND PACKING ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS. This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced documents, or serve to amend contractual requirements.

SPECIFICATION MIL-G-52647(ME) - Generator Set, Diesel Engine, Trailer-Mounted, 60 KW, 400 Hertz, PU-707/M

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A
DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
YES NO (If "Yes", in what way?)

4. REMARKS. Attach any pertinent data which may be of use in improving this specification. If there are additional papers attach to form and place both in an envelope addressed to preparing activity.

SUBMITTED BY (Printed or typed name and activity - optional) | DATE

DD FORM 1426

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. A. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: SMEFB-RDE-KX
FORT BELVOIR, VIRGINIA 22060

OFFICIAL BUSINESS

POSTAGE AND FEES PAID

DEPARTMENT OF THE ARMY
U. S. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: SMEFB-RDE-KX
FORT BELVOIR, VIRGINIA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.