MIL-G-52773A(ME)
27 September 1977
SUPERSEDING
MIL-G-52773(ME)
21 December 1973

MILITARY SPECIFICATION

GENERATOR SET, DIESEL ENGINE, TRAILER MOUNTED

60 KW, 50/60 HERTZ, PU-650B/G

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a trailer mounted generator set (hereinafter referred to as a power unit) designated PU-650B/G. The power unit consists of a Department of Defense design, diesel-engine-driven, 60 KW, 50/60 Hertz generator set, various auxiliary equipment, brackets, and hardware mounted on a modified Government-furnished trailer chassis.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

FF-N-105	- Nails, Brads, Staples and Spikes: Wire, Cut and Wrought.
NN-P-530	- Plywood, Flat Panel.
QQ-S-781	- Strapping, Steel, and Seals.
UU-T-81	- Tags, Shipping and Stock.

FSC 6115

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

PPP-B-591	- Boxes, Shipping Fiberboard, Wood-Cleated.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-F-320	- Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-P-40	- Packaging and Packing of Hand Tools.
PPP-T-60	- Tape: Packaging, Waterproof.
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-G-12803	- Gasket Material, Non-Metallic.
MIL-G-28554	- Generator Sets, Mobile Electric Power; Packaging of.
MIL-C-45150	- Chassis, Trailer, 2-Wheel, Cart Type, 1/4 to 3-1/2 Ton.
MIL-A-46153	- Antifreeze, Ethylene Glycol, Inhibited, Heavy Duty, Single Package.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-642	- Identification Marking of Combat and Tactical Transport Vehicles.
MS16992	- Bolt (Screw); Lag, Hex Head, Gimlet Point.
MS27183	- Washer, Flat - Round, Steel, Cadmium Plated, General Purpose (In./MM).
MS35355	- Bolt, Machine, Square Head, Steel, Cadmium or Zinc Plated, UNC-2A.
MS51922	- Nut, Self-Locking, Hexagon-Prevailing Torque, General Purpose, 250° F, UNC-2B and UNF-2B (In./MM).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

DRAWINGS

ME

TA13220E4454 - Generator Set, Diesel Engine, Trailer Mounted, PU-650B/G.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Traffic Department, 1616 P Street, NW, Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

U.S. DEPARTMENT OF COMMERCE

Product Standard

PS1 - Softwood Plywood; Construction and Industrial.
PS51 - Hardwood and Decorative Plywood.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The PU-650B/G shall be in accordance with Top Assembly TA13220E4454 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.1.1.1 Vehicle marking. Registration numbers and other marking of the trailer shall be in accordance with MIL-STD-642 (see 6.9).

3.2 First article (preproduction model). The contractor shall furnish a power unit for examination within the time frame specified (see 6.2), to prove prior to starting production that his production methods will produce power units that comply with the requirements of this specification. Examinations shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified herein and as shown on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.4 Government-furnished property. The following property in the quantities indicated will be furnished by the Government (see 6.4):

Item No.	Description	Identification	Quantity for each PU-650B/G
1	Chassis, trailer, 2-1/2 ton, 2 wheel, Model M200A1	MIL-C-45150	1
2	Generator Set, diesel-engine-driven 60 kw, 50/60 Hertz DOD Model MEP-006A	NSN 6115-00-118-1243	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.5 Workmanship. Workmanship shall be of a quality to assure that the power units are free from defects resulting from defective material, incorrect manufacturing or assembly practices, incorrect treatment and painting, incomplete welds, rust, cracks, and other defects that could impair its operation or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Parts and components. Parts and components detailed on the drawings shall be inspected in accordance with the Supplementary Quality Assurance Provisions (SQAP) shown on the drawings. The drawings specify the characteristics requiring SQAP inspection, the sampling plan, and the basis for acceptance and rejection (see 6.5 and 6.6).

4.1.2 Disassembly inspection. Failure of any test by the preproduction model shall be cause for disassembly, in the presence of a Government representative, of the preproduction model to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying wtih such requirements shall be rejected. Reassembly with accepted parts and retesting shall be the responsibility of the contractor. Government-furnished property shall be excluded from the requirements of this paragraph.

4.1.3 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.1.4 Acceptability criteria. Power units which conform to all requirements in Sections 3 and 5 of this specification and pass all applicable examinations in Section 4 of this specification will be considered acceptable by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction power unit shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection or shall be cause for performing the inspection specified in 4.1.2.

4.4 Quality conformance inspection.

4.4.1 Examination. Each power unit shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The power units shall be examined for the following defects:

101. Treatment and painting not as specified.
102. Dimensions not as shown on drawings.
103. Components missing or not as specified.
104. Assembly not as shown on the drawings.
105. Workmanship not as specified.

4.6 Inspection of packaging.

4.6.1 Preproduction pack inspection. The preproduction pack shall be examined for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

106.	Materials, containers or procedures not as specified. Each incorrect material, container or procedure shall constitute one defect.
107.	Generator set not preserved as specified.
108.	Fire extinguisher not removed and preserved as specified.
109.	Hammer not removed from the bracket and secured as specified.
110.	Ground rods and fuel drum adapter not placed in the accessory box as specified.
111.	Ground cable not disconnected and secured and the cable and terminals not matchmarked as specified.
112.	Repair parts and maintenance tools not preserved as specified.
113.	Trailer chassis components not preserved as specified.
114.	Lubricating oil and antifreeze not furnished as specified for commercially preserved power units.
115.	Repair parts and maintenance tools not packed as specified.
116.	Packing not in accordance with Table I and Figures 1 and 2 for the level required.
117.	Depreservation guides not prepared and attached to the power unit as specified.
118.	Technical publications not preserved and secured as specified.
119.	Marking illegible, incomplete, incorrect, or missing.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination within the time frame specified (see 6.2) to prove prior to starting production packaging and packing that the applied preservation, packaging, packing and marking comply with the preparation for delivery requirements of this specification. Examination shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.7). The preproduction pack may be accomplished utilizing either the preproduction model power unit or a production power unit. If the preproduction model power unit is utilized, any preservation, packaging and packing shall be removed by the contractor at no expense to the Government, when requested by the Government to facilitate comparison between the preproduction model power unit and production power units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

5.2 Preservation. Preservation shall be Level A, Level B, or Commercial as specified (see 6.2). Preservation and consolidation of power unit components shall be in accordance with Table I, Figures 1 and 2, and as specified herein.

5.2.1 Level A.

5.2.1.1 Generator set. The generator set shall be preserved in accordance with MIL-G-28554, Level A, Method IIa. The generator set shall be secured directly through the barrier material to the trailer chassis, using the required mounting bolts, in lieu of the shipping container specified in MIL-G-28554. The humidity indicators and inspection port shall be installed on an end or side in a location convenient for inspection of the humidity indicator. Before inclosing the generator in the Method IIa barrier, the following preservation shall be accomplished.

5.2.1.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and packaged in a box conforming to PPP-B-636, Type CF, Variety SW, Grade 125, style optional and shall be secured within the confines of the generator set.

5.2.1.3 Hammer. The hammer shall be removed from the brackets and secured to the generator set with tape conforming to PPP-T-97, Type IV.

5.2.1.4 Ground cable. The ground cable shall be disconnected from the generator set and trailer chassis. The cable and terminals on the power unit shall be matchmarked with cloth tags conforming to UU-T-81, Type A to facilitate reinstallation of the cable. The cable shall be stowed within the confines of the generator set.

5.2.1.5 Repair parts. The preservation application criteria and applicable sub-methods of MIL-P-116 shall be used to preserve the repair parts.

5.2.1.6 Maintenance tools. Maintenance tools shall be preserved in accordance with PPP-P-40, Level A.

5.2.1.7 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, Method IC-1 and shall be secured to the generator set outside the Method II barrier.

5.2.1.8 Ground rods and fuel drum adapter. The ground rods and fuel drum adapter shall be placed in the accessory box.

5.2.1.9 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-G-28554, Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

5.2.2 Level B.

5.2.2.1 Generator set. The generator set shall be preserved in accordance with MIL-G-28554, Level B.

5.2.2.2 Other components. All other components of the power unit shall be preserved as specified for Level A.

5.2.3 Commercial. Power units shall be preserved to afford protection against deterioration, damage and pilferage during shipment and handling from the contractor to the initial destination. Ground cables shall not be disconnected. In addition, the crankcase shall contain the required amount of lubricating oil and the cooling system shall be filled with a fresh clean solution of 50 percent water and 50 percent antifreeze conforming to MIL-A-46153.

5.3 Packing. Packing shall be Level A, Level B, or Commercial as specified (see 6.2).

5.3.1 Level A. Packing shall be in accordance with Table I and Figures 1 and 2 for Level A. Repair parts and maintenance tools for each power unit shall be placed in the accessory box as space permits. When space is not available the repair parts and maintenance tools shall be packed in a close-fitting box conforming to PPP-B-601, Overseas Type, and shall be secured to the power unit in a manner that will not increase the cube or interfere with lifting of the unit. Strapping for securing the box shall be as specified in Table I.

5.3.2 Level B. Packing shall be in accordance with Table I and Figures 1 and 2 for Level B. Repair parts and maintenance tools shall be packed as specified in 5.3.1 for Level A except that boxes shall be Domestic Type.

5.3.3 Commercial. Power units shall be packed in a manner to assure carrier acceptance and safe delivery to destination at the lowest ratings of the carrier in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.4 Marking.

5.4.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

5.4.2 Commercial packaging. Commercial packaging marking shall reflect as a minimum, the item name, National Stock Number and appropriate address markings. The marking shall be applied with a waterproof material, be legible and shall provide a definite contrast.

5.5 Depreservation guides. Two copies of depreservation guides shall be prepared and placed in waterproof envelopes marked "Depreservation Guide". One copy shall be secured on one of the generator sets and a second copy shall be secured in a conspicuous location on the power unit. Unless otherwise specified, DA Form 2258 "Depreservation Guide for Vehicles and Equipment" shall be used (see 6.8).

5.6 Preparation of Government-furnished property. Government-furnished property shall be preserved, packaged, and packed as specified herein, regardless of the preservation, packaging, and packing provided at the time of receipt by the contractor.

6. NOTES

6.1 Intended use. The power units are intended for use by the Armed Services for supplying electrical power to military operations.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of the preproduction model, and whether the Government or the contractor will conduct the inspection (see 3.2).
(c) Time frame required for submission of the preproduction pack (see 5.1).
(d) Degree of preservation and of packing required (see 5.2 and 5.3).
(e) When other than DA Form 2258 is to be used (see 5.5).

6.3 Preproduction model. Any changes or deviations of production power units from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish power units conforming to this specification.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.4.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

6.5 Supplementary Quality Assurance Provisions (SQAP). The contracting officer should require the contractor to maintain records of all SQAP inspections. A suggested paragraph is as follows:

> "The contractor shall maintain complete records of all examinations and tests performed to verify the requirements of classified SQAP characteristics. The records shall include as a minimum, lot size, sample size, drawing requirement, actual measurement, number and type of deficiencies found, quantity approved, quantity rejected, corrective action taken when applicable."

6.6 Definitions.

6.6.1 Supplementary Quality Assurance Provisions(SQAP). A SQAP is a contractual requirement that supplements Section 4 of the specification. The SQAP indicates the minimum requirements which must be inspected on the product drawings to verify the design objectives of the product and assure interchangeability of repair parts.

6.7 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to preserve, package, pack, and mark the power units in accordance with this specification.

6.8 Depreservation guide. The contracting officer should arrange to furnish the necessary copies of DA Form 2258, when requested by the contractor (see 5.5).

6.9 Registration numbers. The contracting officer should arrange to furnish a list of registration numbers to be applied to the trailer (see 3.1.1.1).

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 6115-A409

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE I. Packaging material.


FIND NO.	IDENTIFICATION	DESCRIPTION	LEVEL A	LEVEL B
1	PPP-B-601, OVERSEAS TYPE, STYLE I, (NOTES 1 AND 5)	BOX, PLYWOOD 1/4 THICK	1	
1	PPP-B-591, CLASS II, STYLE A, (NOTES 1, 2 & 3)	BOX, FIBERBOARD		1
2	MIL-B-131, CLASS I	BARRIER, MATERIAL	AR	
3	PPP-F-320, TYPE SF, GRADE V 3S	FIBERBOARD, 1/2 THICK MINIMUM	AR	
4	MIL-G-12803, TYPE I, RUBBER BINDER 1-1/2 X 1-1/2 X 1/8	GASKET, 11/16 DIA HOLE IN CENTER	16	
5	WEDGE	LUMBER, SOFTWOOD	2	2
6	SPACER	LUMBER, SOFTWOOD 1X8 NOMINAL	2	
7	MS 27183-11, .312 ID X .734 OD X .065 THK	WASHER, PLAIN, CS, CAD. PL	12	8
8	MS 16992-505, 1/4-10, 2 LG	BOLT, LAG, HEX HD, GIMLET PT, STL, GALV	8	8
9	NN-P-530 (NOTE 4)	PLYWOOD, 3/8 THICK	1	
10	MS 35355-8, 1/4-20 UNC-2A, 3-1/2 LG	BOLT, SQ HD, STL, CAD. PL	4	
11	MS 51922-1, 1/4-20 UNC-2B	NUT, SELF LOCKING	4	
12	BLOCKING	LUMBER, SOFTWOOD, 2X4 NOMINAL	AR	
13	FF-N-105, TYPE II, STYLE 4,	NAIL, 4 d	AR	
14	PPP-T-60, TYPE IV	TAPE, PRESSURE-SENSITIVE	AR	AR
15	PPP-T-97, TYPE IV	TAPE, PRESSURE-SENSITIVE, 3/4 W	AR	AR
16	QQ-S-781, TYPE I, OR IV, FINISH B	STEEL STRAPPING, FLAT, .020 X 3/4	AR	
16	QQ-S-781, TYPE I, OR IV, FINISH A	STEEL STRAPPING, FLAT, .020X 3/4		AR
17	PPP-B-636, TYPE CF, CLASS DOMESTIC, VARIETY SW, GRADE 125	BOX, FIBERBOARD	1	1

NOTES:
1. NO CONTENT WEIGHT, WITHOUT BOTTOM.
2. TOP TO BE INVERTED.
3. DIMENSIONAL LIMITATIONS OF SPECIFICATION WAIVED.
4. GROUP A, CONFORMING TO PS51 TYPE I, GRADE 3-4 OR GROUP B CONFORMING TO PS1, STANDARD SHEATHING WITH EXTERIOR GLUE.
5. TOP TO BE ONE PIECE, 1/2 INCH THICKNESS AND SHALL COMPLETELY COVER ALL EDGES.

X-1354B

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

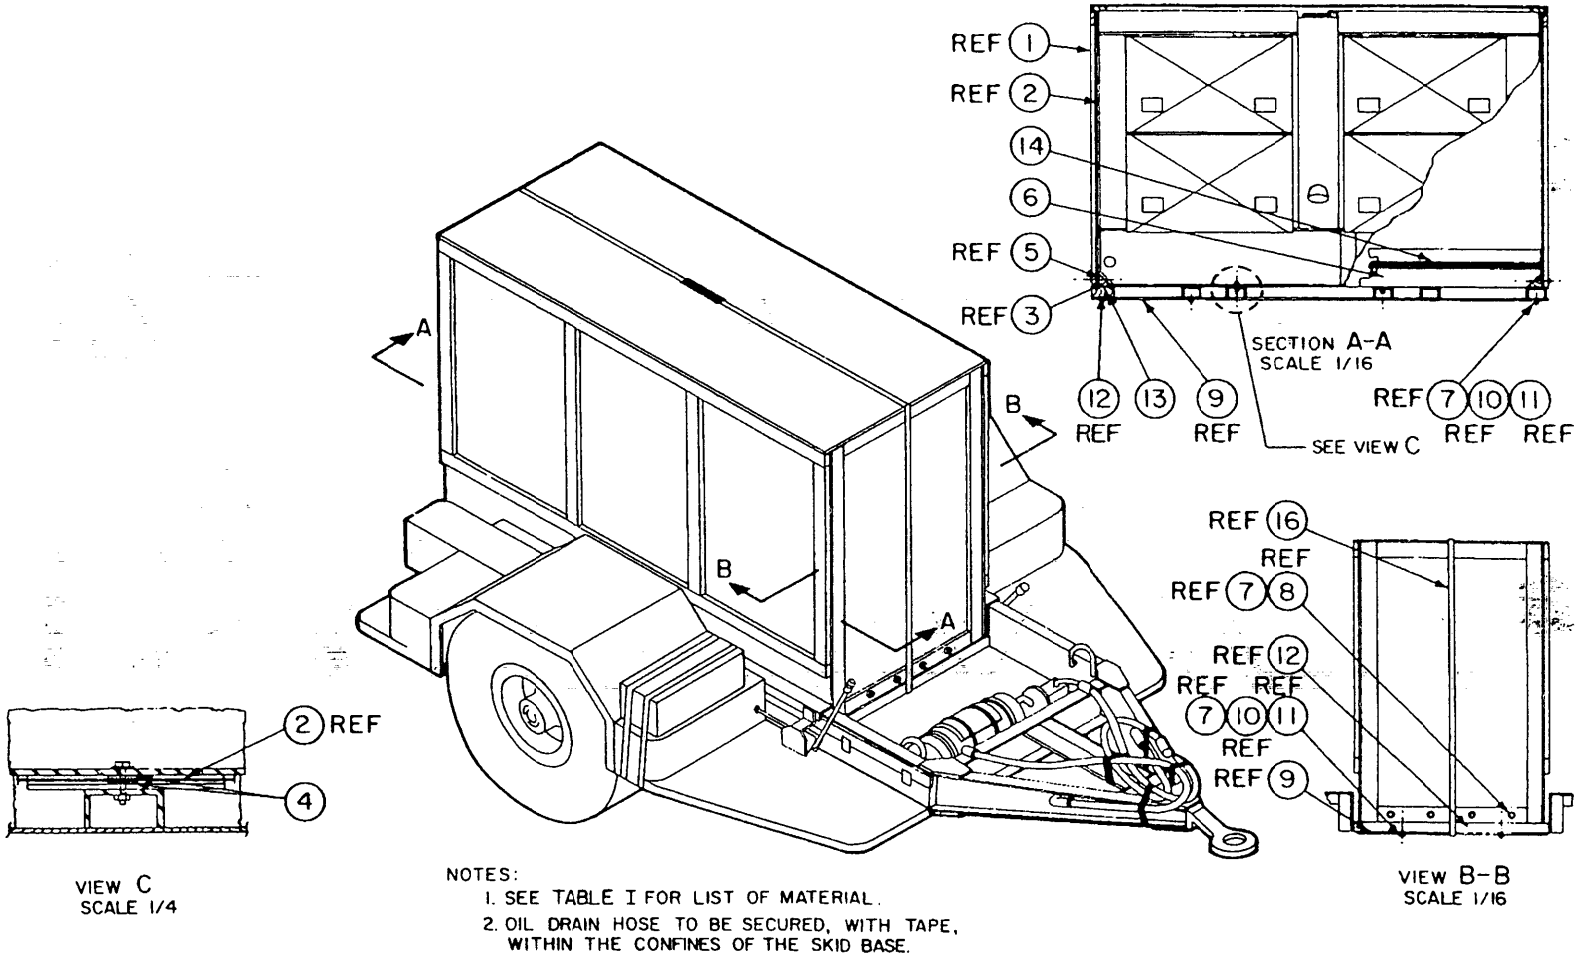

NOTES:
1. SEE TABLE I FOR LIST OF MATERIAL.
2. OIL DRAIN HOSE TO BE SECURED, WITH TAPE, WITHIN THE CONFINES OF THE SKID BASE.

FIGURE 1. Packaging arrangement, detail and views (assembled).

X-1355B

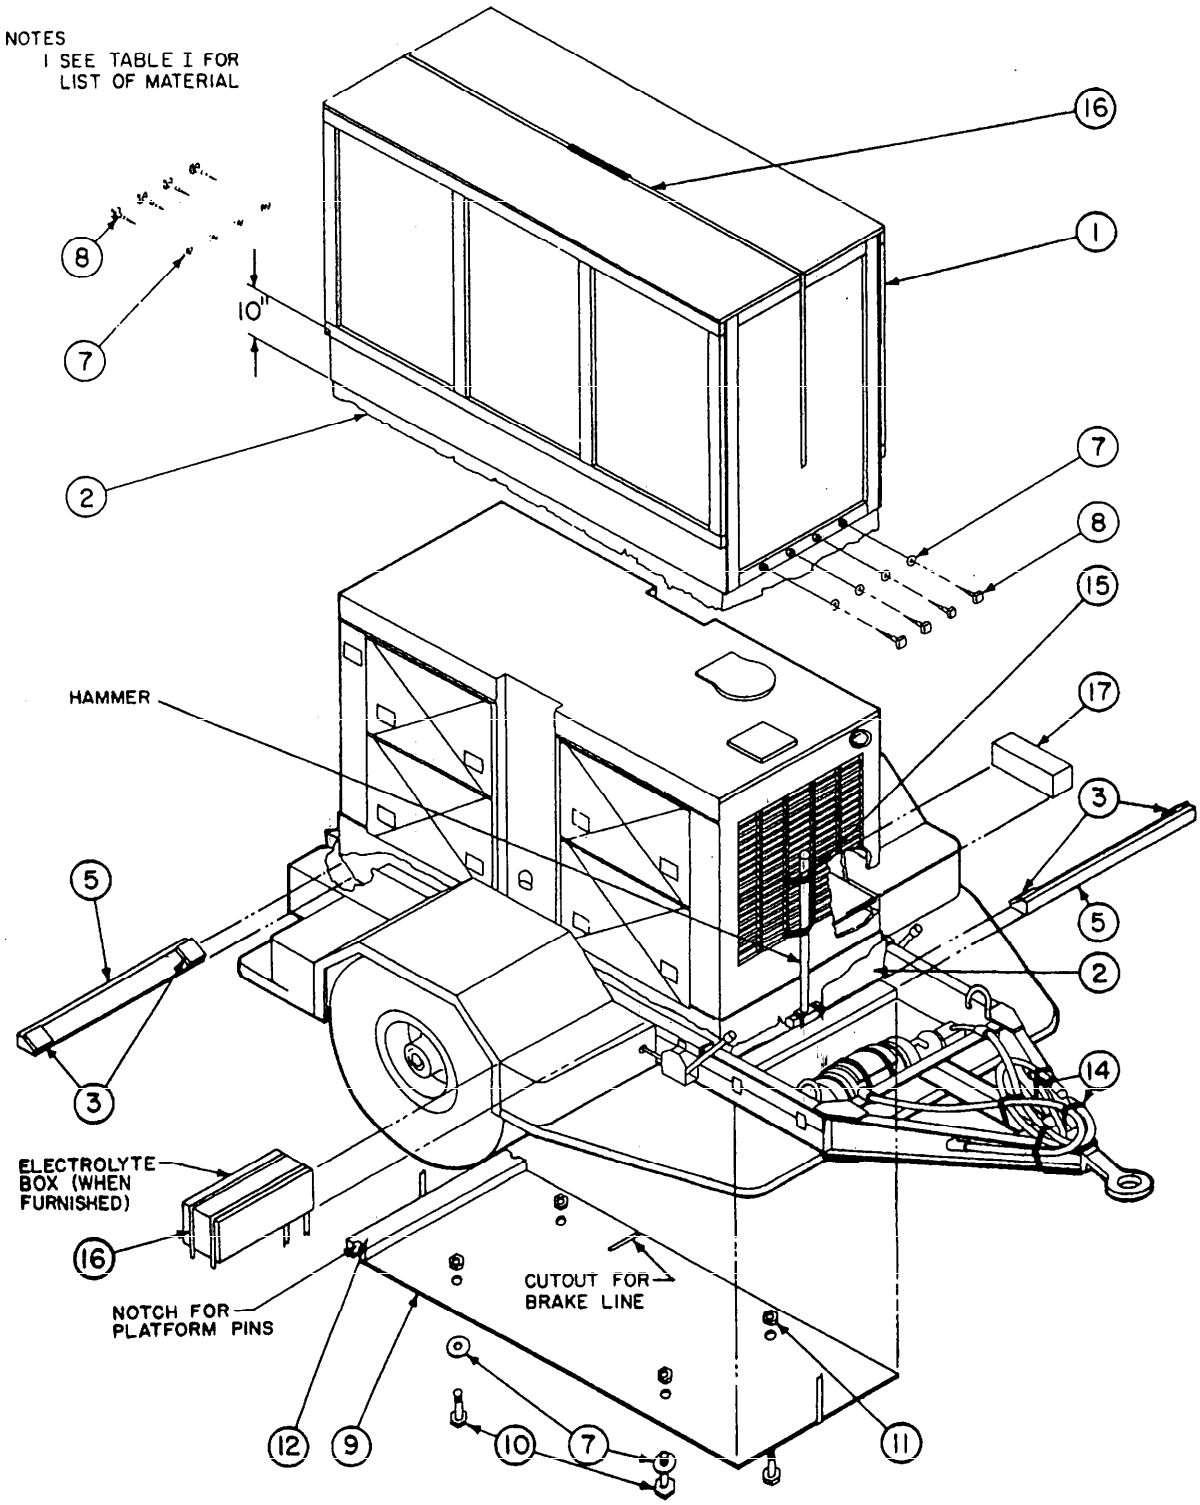


FIGURE 2. Packaging arrangement and detail (exploded). X-1356B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE: MIL-G-52773A(ME) Generator Set, Diesel Engine, Trailer Mounted 60 KW, 50/60 Hertz, PU-650B/G

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Command
ATTN: DRDME-DS
Fort Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.