MIL-G-52859A(ME)
26 April 1979
SUPSERSEDING
MIL-G-52859(ME)
21 May 1975

MILITARY SPECIFICATION

GENERATOR SET, DIESEL ENGINE, TRAILER MOUNTED

30 KW, 400 HERTZ, PU-760/M

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a trailer mounted generator set (hereinafter referred to as a power unit) designated PU-760/M. The power unit consists of a Department of Defense design, diesel-engine-driven, 30 kW, 400 Hertz generator set, various auxiliary equipment, brackets, and hardware mounted on a modified Government-furnished trailer chassis.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

FSC 6115

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

FF-N-105	- Nails, Brads, Staples, and Spikes: Wire, Cut and Wrought.
NN-P-530	- Plywood, Flat Panel.
QQ-S-781	- Strapping, Steel, and Seals.
UU-T-81	- Tags, Shipping and Stock.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-F-320	- Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-P-40	- Packaging and Packing of Hand Tools.
PPP-T-60	- Tape: Packaging, Waterproof.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-G-12803	- Gasket Material, Non-Metallic.
MIL-G-28554	- Generator Sets, Mobile Electric Power; Packaging of.
MIL-C-45150	- Chassis, Trailer, 2-Wheel, Cart Type, 1/4 to 3-1/2 Ton.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inpsection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-281	- Automobiles Trucks, Truck-Tractors, Trailers and Trailer Dollies; Preservation and Packaging of.
MIL-STD-642	- Identification Marking of Combat and Tactical Transport Vehicles.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS16992	- Bolt (Screw), Lag, Hex Head, Gimlet Point.
MS27183	- Washer, Flat-Round, Steel, Cadmium Plated, General Purpose (In/MM).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

nnection or a hand pump to empty all accumulations of oil opening, and an accessible drain co

MS35355	- Bolt, Machine, Square Head, Steel, Cadmium or Zinc Plated, UNC-2A.
MS51922	- Nut, Self-Locking, Hexagon-Prevailing Torque, General Purpose, 250° F, UNC-2B and UNF-2B (In/MM).

DRAWINGS

ME

TA13220E6341	- Generator Set, Trailer Mounted, PU-760/M.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

U.S. DEPARTMENT OF COMMERCE

Product Standard.

PS1 - Softwood Plywood; Construction and Industrial.
PS51 - Hardwood and Decorative Plywood.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

3. REQUIREMENTS

3.1 Description. The PU-760/M shall be in accordance with Top Assembly TA13220E6341 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacturer of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.1.1.1 Vehicle marking. Registration numbers and other marking of the trailer shall be in accordance with MIL-STD-642 (see 6.7).

3.2 First article (preproduction model). The contractor shall furnish one power unit for examination within the time frame specified (see 6.2), to prove, prior to starting production, that his production methods will produce power units that comply with the requirements of this specification. Examinations shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified herein and on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.8).

3.4 Government-furnished property. The following property in the quantities indicated will be furnished by the Government (see 6.4):

Item No.	Description	Identification	Quantity for each PU-760/M
1	Chassis, trailer, 2-1/2 ton, 2 wheel, Model M200A1.	MIL-C-45150	1
2	Generator Set, diesel-engine-driven 30 kW, 400 Hertz DOD Model MEP-114A.	NSN 6115-00-118-1248	1

3.5 Workmanship. Workmanship shall be of a quality to assure that the power units are free from defects resulting from defective material, incorrect manufacturing or assembly practices, incorrect treatment and painting, incomplete welds, rust, cracks, and other defects that could impair its operation or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.1.1 Disassembly inspection. Failure of the examination by the preproduction model shall be cause for disassembly in the presence of a Government representative of the preproduction model to the extent necessary to determine the cause of failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected. Reassembly with accepted parts and testing shall be the responsibility of the contractor. Government-furnished property shall be excluded from the requirements of this paragraph.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards, and drawings, as applicable.

4.1.3 Acceptability criteria. Power units which conform to all requirements in Sections 3 and 5 of this specification and pass all applicable examinations in Section 4 of this specification will be considered acceptable by the Government.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction power unit shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection or shall be cause for performing the inspection specified in 4.1.1.

4.4 Quality conformance inspection.

4.4.1 Examination. Each power unit shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The power units shall be examined as specified herein for the following defects:

101. Treatment and painting not as specified.
102. Dimensions not as shown on drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

103. Components missing or not as specified.
104. Assembly not as shown on the drawings.
105. Workmanship not as specified.

4.6 Inspection of packaging.

4.6.1 Preproduction pack inspection. The preproduction pack shall be examined for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

106. Materials, containers, or procedures not as specified. Each incorrect material, container or procedure shall constitute one defect.
107. Generator set not preserved as specified.
108. Fire extinguisher not removed and preserved as specified.
109. Ground cable not disconnected and secured and the cable and terminals not matchmarked as specified.
110. Repair parts and maintenance tools not preserved as specified.
111. Trailer chassis components not preserved as specified.
112. Preservation of power units and components not as shown on figures or as specified herein.
113. Packing not in accordance with Table I and Figures 1 and 2 for the level required.
114. Depreservation guides not prepared and attached to the power unit as specified.
115. Technical publications not preserved and secured as specified.
116. Marking illegible, incomplete, incorrect, or missing.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination within the time frame specified to prove prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examination shall be as specified in Section 4 and shall be subject to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

surveillance and approval by the Government (see 6.5). The preproduction pack may be accomplished utilizing either the preproduction model power unit or a production power unit. If the preproduction model power unit is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government to facilitate comparison between the preproduction model power unit and production power units.

5.2 Preservation. Preservation shall be Level A, Level B, or Commercial as specified (see 6.2). Preservation and consolidation of power unit components shall be in accordance with Table I, Figures 1 and 2, and as specified herein.

5.2.1 Level A.

5.2.1.1 Generator set. The generator set shall be preserved in accordance with MIL-G-28554, Level A, Method IIa. The generator sets shall be secured directly through the barrier material to the trailer, using the required bolts, in lieu of the wood base specified in the packaging requirements of MIL-G-28554. The humidity indicator and inspection port shall be installed on an end or side in a location convenient for inspection of the humidity indicator.

5.2.1.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and preserved in a box conforming to PPP-B-636, Type CF, Variety W, Grade 125, style optional.

5.2.1.3 Ground cable. The ground cable shall be disconnected from the generator set. The disconnected ground cable and terminals on the power unit shall be matchmarked with cloth tags conforming to UU-T-81, Type A, to facilitate reinstallation of the cables.

5.2.1.4 Repair parts. The preservation application criteria and applicable sub-methods of MIL-P-116 shall be used to preserve the repair parts.

5.2.1.5 Maintenance tools. Maintenance tools shall be preserved in accordance with PPP-P-40, Level A.

5.2.1.6 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, Method IC-1 and shall be secured to the generator set outside the Method II barrier.

5.2.1.7 Ground rods, fuel drum adapter, and flexible spout. The ground rods, fuel drum adapter, and flexible spout shall be placed in the accessory box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

5.2.1.8 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, Level A as specified for mobile vehicles.

5.2.2 Level B.

5.2.2.1 Generator set. The generator set shall be preserved in accordance with MIL-G-28554, Level B.

5.2.2.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and preserved as specified ror Level A.

5.2.2.3 Ground cable. The ground cable shall be disconnected and match-marked as specified for Level A.

5.2.2.4 Repair parts, maintenance tools, and technical publications. The repair parts, maintenance tools, and technical publications shall be preserved as specified for Level A.

5.2.2.5 Ground rods, fuel drum adapter, and flexible spout. The ground rods, fuel drum adapter, and flexible spout shall be placed in the accessory box.

5.2.2.6 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, Level B as specified for mobile vehicles.

5.2.3 Commercial. The components of each complete PU-760/M power unit shall be preserved in accordance with MIL-STD-1188.

5.3 Packing. Packing shall be Level A, Level B, or Commercial as specified (see 6.2).

5.3.1 Level A or B. Packing shall be in accordance with Table I and Figures 1 and 2, and as specified herein.

5.3.2 Commercial. The components of each complete PU-760/M power unit shall be packed in accordance with MIL-STD-1188.

5.4 Marking.

5.4.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

5.4.2 Commercial packaging. Marking shall be in accordance with MIL-STD-1188.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

5.5 Depreservation guides. Two copies of depreservation guides shall e prepared and placed in waterproof envelopes marked "Depreservation Guide." ne copy shall be secured on the generator set and a second copy shall be ecured in a conspicuous location on the power unit. Unless otherwise pecified (see 6.2), DA Form 2258 "Depreservation Guide for Vehicles and quipment" shall be used (see 6.6).

5.6 Preparation of Government-furnished property. Government-furnished roperty shall be preserved and packed as specified herein, regardless of ne preservation and packing provided at the time of receipt by the contractor.

6. NOTES

6.1 Intended use. The power unit is intended for use by the Armed Services o supply electrical power for military operations.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of the preproduction model (see 3.2).
(c) Time frame required for submission of the preproduction pack (see 5.1).
(d) Degree of preservation and degree of packing required (see 5.2 and 5.3).
(e) When other than DA Form 2258 is to be used (see 5.5).

6.3 Preproduction model. Any changes or deviations of production power nits from the approved preproduction model during production will be ubject to the approval of the contracting officer. Approval of the pre- roduction model will not relieve the contractor of his obligation to fur- ish power units conforming to this specification.

6.4 Government-furnished property. The contracting officer should arrange o furnish the property specified in 3.4.

6.5 Preproduction pack. Any changes or deviations of production packs rom the approved preproduction pack will be subject to the approval of he contracting officer. Approval of the preproduction pack will not elieve the contractor of his obligation to preserve, pack, and mark the ower units in accordance with this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the currentversion before use.

6.6 Depreservation guide. The contracting officer should arrange to furnish the necessary copies of DA Form 2258, when requested by the contractor (see 5.5).

6.7 Registration numbers. The contracting officer should arrange to furnish a list of registration numbers to be applied to the trailer (see 3.1.1.1).

6.8 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

Custodian:
Army - ME

Preparing activity:
Army - ME

Review activity:

DLA-GS

Project 6115-A435

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE I. Packaging material.

FIND NO.	IDENTIFICATION	DESCRIPTION	LEVEL A	LEVEL B	
1	PPP-B-601, OVERSEAS TYPE, STYLE I. MODIFIED (NOTES 1 AND 3)	BOX, PLYWOOD 1/4 THK.	1	1	
2	MIL-B-131, CLASS I	BARRIER MATERIAL	AR		
3	PPP-F-320, TYPE SF, GRADE V3S	FIBERBOARD 1/2 THK. MINIMUM	AR		
4	MIL-G-12803, TYPE I RUBBER BINDER, 1-1/2 X 1-1/2 X 1/8	GASKET, 11/16 DIA HOLE IN CENTER	16		
5	WEDGE	LUMBER, SOFTWOOD	2	2	
6	SPACER	LUMBER, SOFTWOOD 1 X 8 NOMINAL	2		
7	MS 27183-11, .312 ID X .734 OD X .065 THK	WASHER, PLAIN, CS, CAD PL	12	8	
8	MS 16992-505, 1/4-10, 2 LG.	BOLT, LAG, HEX HD, GIMLET PT, STL, GALV	8	8	
9	NN-P-530 (NOTE 2)	PLYWOOD 3/8 THK	1		
10	MS 35355-8, $\frac{1}{4}$-20 UNC-2A, $3\frac{1}{2}$ LG	BOLT, SQ HD, STL, CAD. PL	4		
11	MS 51922-1, $\frac{1}{4}$-20 UNC-2B	NUT, SELF LOCKING	4		
12	BLOCKING	LUMBER, SOFTWOOD, 2 X 4 NOMINAL	AR		
13	FF-N-105, TYPE II, STYLE 4	NAIL, 4d	AR		
15	PPP-T-60, TYPE IV,	TAPE, PRESSURE-SENSITIVE	AR	AR	
16	QQ-S-781, TYPE I OR IV, FINISH B	STEEL STRAPPING, FLAT, .020 X 3/4	AR		
16	QQ-S-781, TYPE I OR IV, FINISH A	STEEL STRAPPING, FLAT, 020 X 3/4		AR	
17	PPP-B-636, TYPE CF, CLASS DOMESTIC. VARIETY SW, GRADE 125	BOX, FIBERBOARD	1	1	

NOTES:
1. NO CONTENT WEIGHT, WITHOUT BOTTOM
2. GROUP A, CONFORMING TO PS51 TYPE I, GRADE 3-4 OR GROUP B, CONFORMING TO PS1, GRADE C-D INTERIOR WITH EXTERIOR GLUE.
3. TOP TO BE ONE PIECE, 1/2 INCH THICKNESS, AND SHALL COMPLETELY COVER ALL EDGES.

X 1290C

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:10Z
Check the source to verify that this is the current version before use.

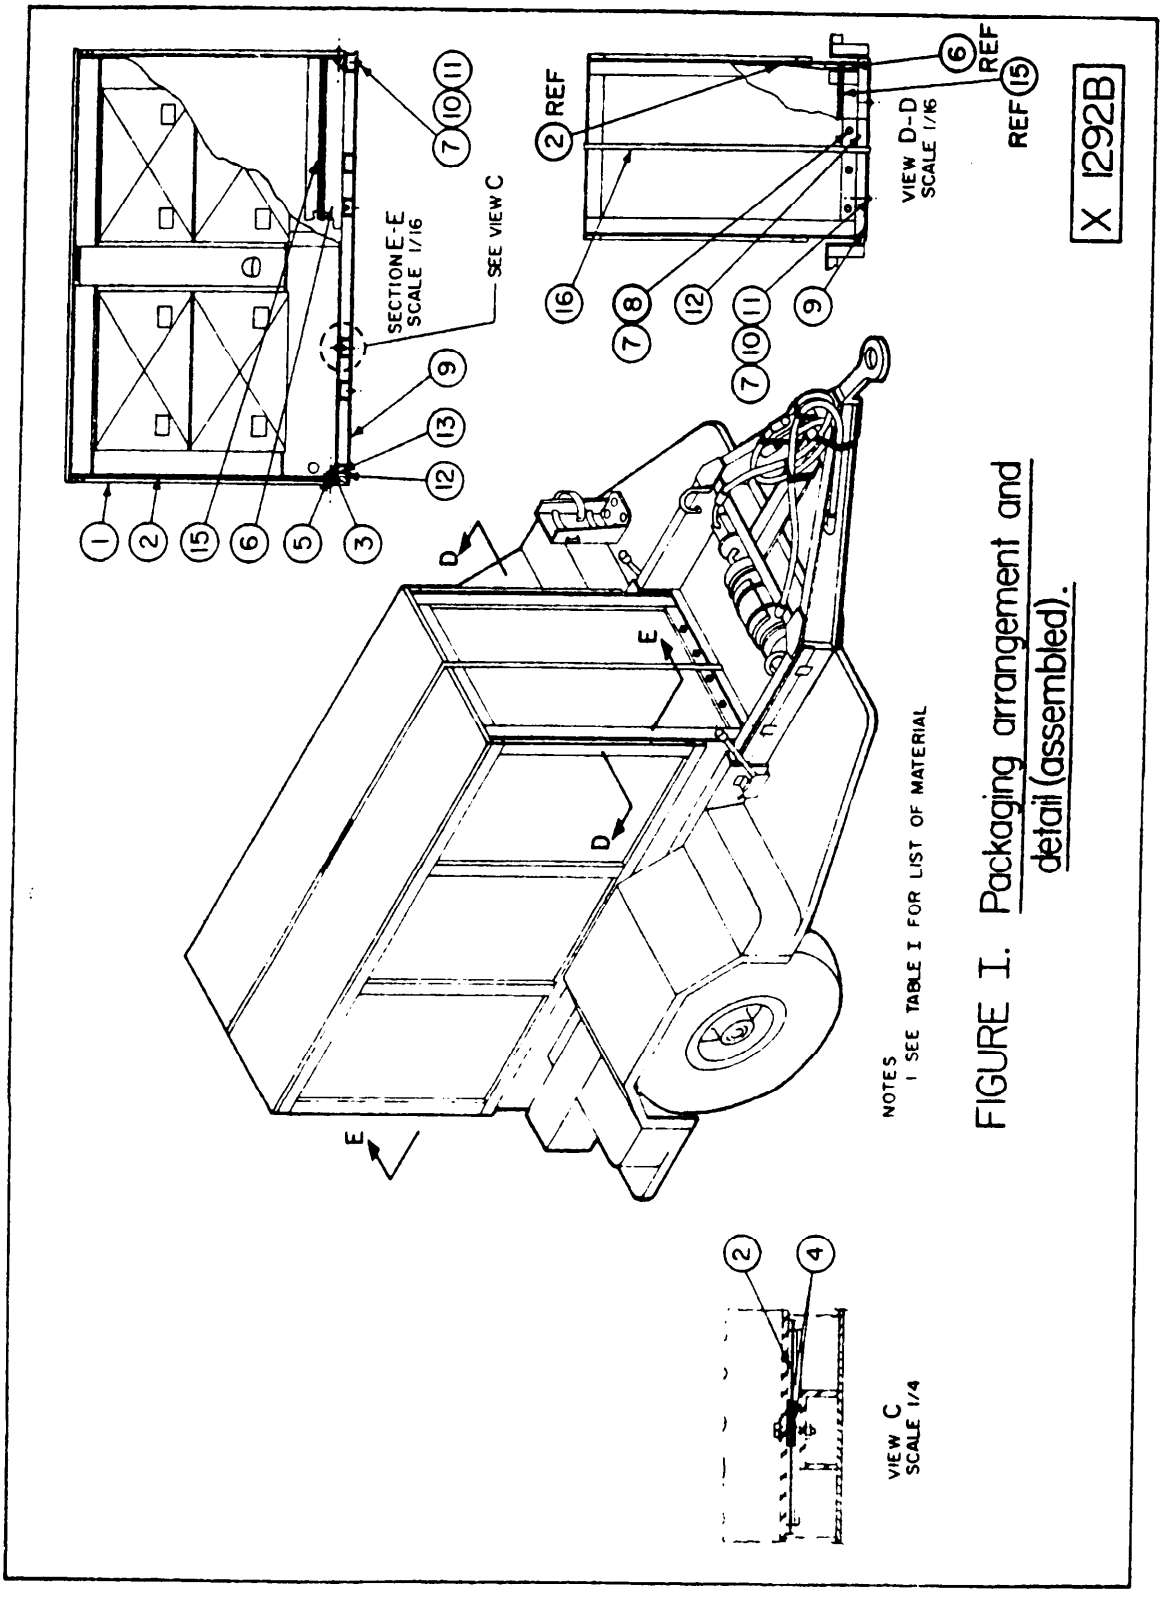


FIGURE I. Packaging arrangement and detail (assembled).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

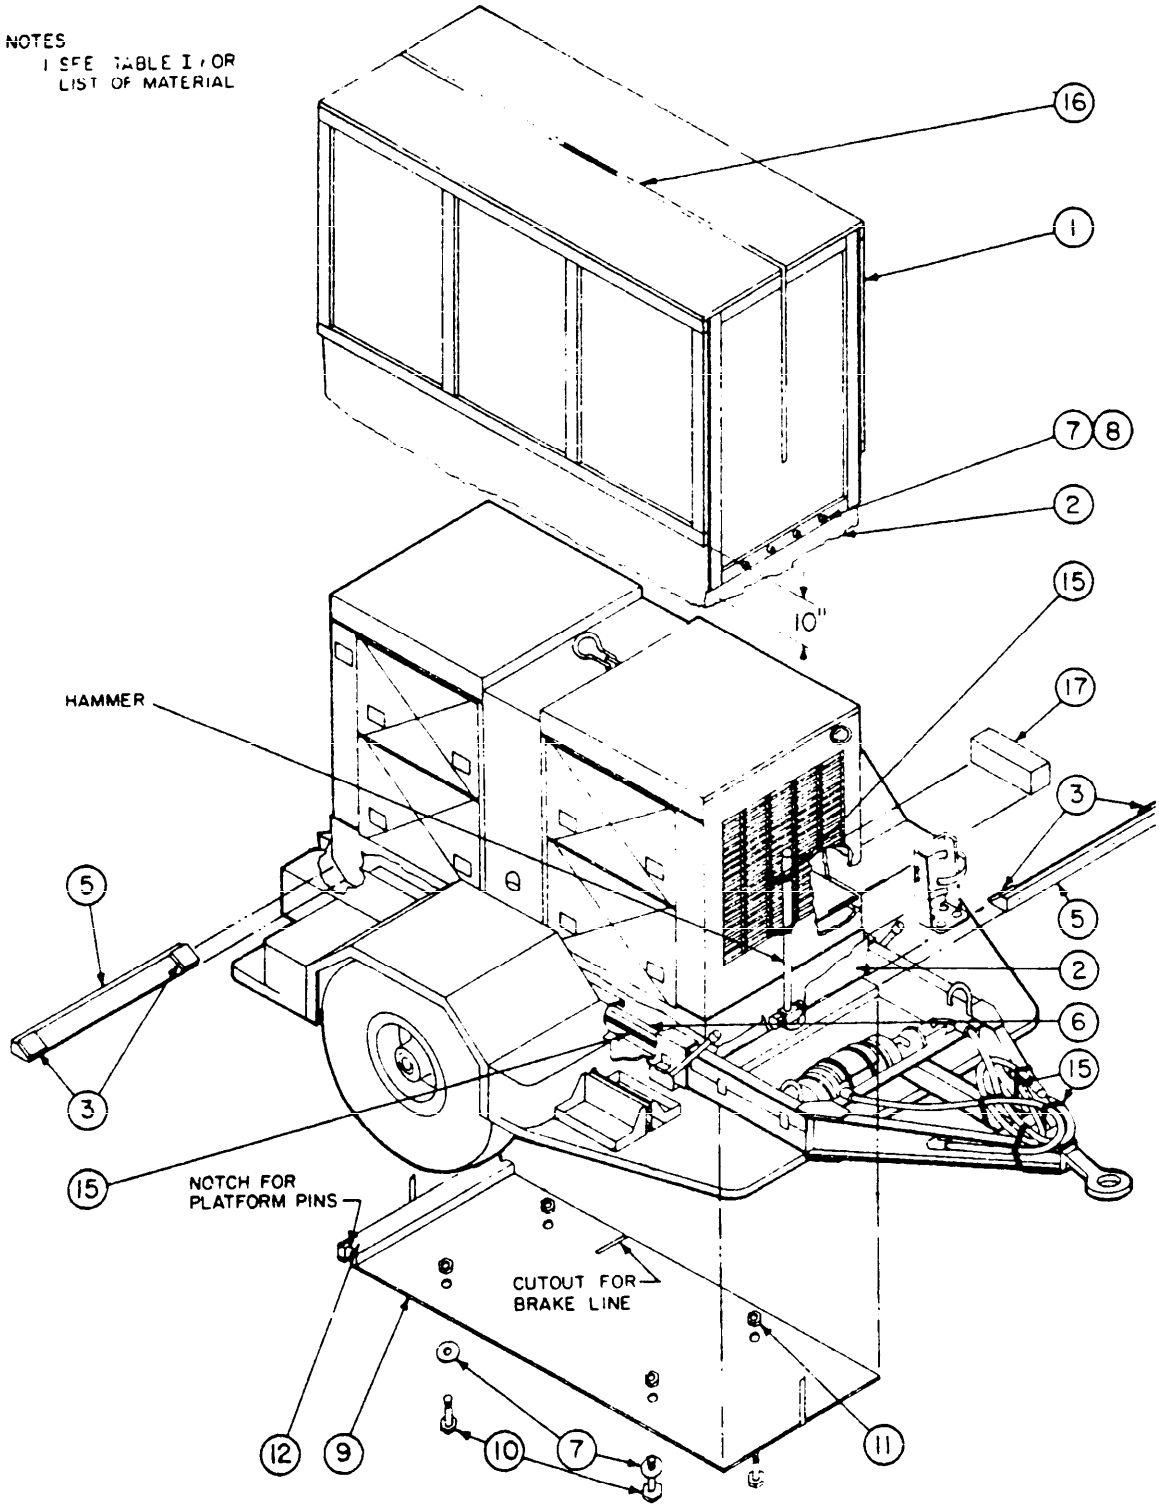


FIGURE 2. Packaging arrangement and detail (exploded). X-1291B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-G-52859A(ME) Generator Set, Diesel Engine, Trailer Mounted 30 KW, 400 Hertz, PU-760/M

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

FOLD

MERADCOM
DRDME-DS
Ft. Belvoir, VA 22060
OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

Commander
US Army Mobility Equipment Research and
Development Command
DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.