INCH-POUND

MIL-M-52738B
22 June 1992
SUPERSEDING
MIL-M-52738A
8 July 1981

MILITARY SPECIFICATION

MAT, LANDING; STEEL NON-PERFORATED (M8A1)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers three types of non-perforated steel landing mats.

1.2 Classification. The mats shall be of the following types as specified (see 6.2):

Type I - Full panel.
Type II - Female half panel.
Type III - Male half panel.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5680

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specification and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

MILITARY

MIL-T-704 - Treatment and Painting of Materiel.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of US Military Property.
MIL-STD-889 - Dissimilar Metals.

(Unless otherwise indicated, copies of military specifications and standards are available from the Standardization Document Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government drawings. The following other Government drawings form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those in effect on the date of the solicitation.

DRAWINGS

ME

TA13215E2384 - Mat, Landing; Half, Female, Steel, Non-Perforated (M8A1).
TA13215E2385 - Mat, Landing; Half, Male, Steel, Non-Perforated (M8A1).
TA13215E2386 - Mat, Landing; Full, Steel, Non-Perforated (M8A1).

(Copies of drawings required by contractors in connection with specific acquisition functions should be obtained from the USA Belvoir Research, Development, and Engineering Center. ATTN: STRBE-JBS, Fort Belvoir, VA 22060-5606.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN WELDING SOCIETY, INC. (AWS)

A3.0 - Standard Welding Terms and Definitions.
A5.1 - Covered Carbon Steel Arc Welding Electrodes.
A5.18 - Carbon Steel Filler Metals for Gas Shielded Arc Welding.
D1.1 - Structural Welding Code - Steel.

(Application for copies should be addressed to the American Welding Society, Inc., 555 NW 42nd Street, Miami, FL 33126.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Boiler and Pressure Vessel Code, Section IX, Qualification Standard for Welding and Brazing Procedures, Welders, Brazers, and Welding and Brazing Operators.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3953 - Strapping, Flat Steel and Seals.
D 4675 - Selection and Use of Flat Strapping Materials.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services).

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The landing mat shall be in accordance with TA13215E2384, TA13215E2385, TA13215E2386, and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to ensure correct fit, assembly, and operation of the mat. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or the designated representative.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3), in accordance with 4.3.

3.2.1 Weld joint specimens. In addition to the first article model, typical weld joint specimens shall be furnished and tested (see 6.2) by the contractor prior to the time the first article model is furnished. Specimens shall be prepared using production tooling.

3.3 Materials. Materials shall be as specified herein and on the drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration prevention and control. The mat shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the mat may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.3.2 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the mat may be newly fabricated from recovered materials to the maximum extent practicable, provided the mat produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the mat.

3.4 Welding electrodes. Welding electrodes shall be in accordance with AWS A5.1 or A5.18 as required by welding process.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

3.5 Assembly. When tested as specified in 4.5.2.1, mats shall be assembled with like mats, and locking lugs, sliding bolts, and retainer keys shall align and fully engage.

3.6 Identification marking. Each type of landing mat shall be identified in accordance with MIL-STD-130 and as shown on the applicable drawings.

3.6.1 Stenciling. Each bundle of landing mats shall be stenciled with Gothic capitals and numerals not less than 1-inch high. Stenciling shall be applied in accordance with MIL-T-704.

3.6.1.1 Bundles of individual mat. Bundles of landing mats, bundled as specified in 5.2.1.1 and 5.2.1.2, shall be stenciled with the following information:

National Stock Number
Nomenclature
Contract Number
Manufacturing Identification
US

3.6.1.2 Bundles of type I, II, and III mats. Bundles of type I, II and III landing mats, bundled as specified in 5.2.1.3, and as shown in figure 2, shall be stenciled as follows:

Mat Set Landing
Steel Non-perforated
NSN 5680-00-782-5577
268.8 Square Feet

3.7 Government-loaned property. Unless otherwise specified (see 6.2), the contracting officer should arrange to furnish the following property in the quantities indicated in table I (see 6.9).

TABLE I. Government-loaned property.

Item No.	Description	Quantity
1	Inspection Equipment for Mat, Landing; Steel Non-perforated (M8A1)	1
2	QA Pamphlet, Care Operation and Maintenance of Inspection Equipment for Mat, Landing; Steel, Non-perforated (M8A1)	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.8 Type I. Type I landing mats shall be as shown on TA13215E2386, and as specified herein.

3.9 Type II. Type II landing mats shall be as shown on TA13215E2384, and as specified herein.

3.10 Type III. Type III landing mats shall be as shown on TA13215E2385, and as specified herein.

3.11 Workmanship.

3.11.1 Metal fabrication. Steel used in the fabrication of the landing mats shall be free of kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the metal. Finished mats shall be free of kinks, twists and unspecified bends. Corners shall be square and true. Flame cutting may be employed instead of shearing or sawing. Burned surfaces of flame-cut material shall be ground or machined sufficiently to remove ash and cooling checks. All bends shall be made with metal dies or fixtures to ensure uniformity of size and shape. All burrs, sharp edges and sharp corners resulting from the cutting and punching operation shall be removed by grinding, filing, abrasive rolling or blasting. All cutting and punching operations shall be free from the top or wear surface of the mat.

3.11.2 Welders and welding operators. Before assigning any welder or welding operator to welding work covered by this specification, the contractor shall provide the contracting officer with certification that the welder or welding operator has passed qualification test as prescribed by either of the following listed codes for the materials joined and the type of welding operation to be performed and that such qualification is effective as defined by the particular code: AWS D1.1 - Structural Welding Code - Steel, ASME - Boiler and Pressure Vessel Code, Section IX. In the event of evidence of poor welds, the Government reserves the right to require retesting of any welder or welding operator. The test results shall be made available for review by the contracting officer or the contracting officer's representative.

3.11.3 Welding. Steel welding shall be done by the shielded metal or inert gas shielded metal arc method in accordance with ASME or AWS code. Projection welding may be used on the retainer key only. Defects shall be non-cumulative for each welding bead. Weld beads shall be regular and well formed.

3.11.3.1 Cleanliness. The surfaces of all parts to be welded shall be free from rust, scale, paint and other foreign matter. Before welding over previously deposited weld metal, all traces of slag shall be removed from the deposit by chipping and, if necessary, the deposit and adjoining base metal shall be wire brushed until clean at all points.

3.11.3.2 Cracks. There shall be no longitudinal, transverse or crater cracks (see 6.7.2). Craters shall be filled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.11.3.3 Weld size and length. Welds shall not be undersize nor more than .063-inch oversize for the size of weld specified. The cover plate bevel weld shall be continuous for the full length of the cover plate except that a blow back tolerance of .125-inch is acceptable. One .125-inch long unfused length of weld per bead is acceptable provided the defect is not within .750-inch of either end of the weld. A continuous fillet weld may be substituted in lieu of intermittent welds.

3.11.3.4 Undercutting and overlap. Undercutting and overlap shall not exceed .325-inch.

3.11.3.5 Porosity. A maximum of five each .063-inch diameter (maximum) pin holes or blow holes per cover plate is acceptable provided that none are closer than .500-inch and no more than three occur in any 1.500 inches of weld length. No burn through is acceptable.

3.11.3.6 Weld reinforcement. Weld reinforcement shall not exceed .125-inch.

3.11.3.7 Weld spatter. There shall be no sharp or pointed welds or weld spatter and traces of slag and weld spatter shall be removed prior to treatment, cleaning and painting.

3.11.4 Weld strength. When tested as specified in 4.5.2.2, the sliding bolt cover plate weld shall show no evidence of parting or fracture.

3.11.5 Sliding bolt tack weld. Sliding bolts shall be tack welded in the open position prior to final treatment and painting.

3.11.6 Connector hook edge. The leading edge of the panels adjacent to the connector hooks shall have all burrs, sharp corners and sharp edges removed. If panel is formed by shearing or stamping, this operation shall be performed from the top side.

3.11.7 Welding definitions. Welding definitions are as specified in AWS A3.0.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements; however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for ensuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.1.3 Parts and components. Parts and components detailed on drawings shall be inspected in accordance with the quality assurance provisions (QAP) shown on the drawings. The drawings specify the characteristics requiring inspection, the sampling plan, and the basis for acceptance and rejection (see 6.6 and 6.7.1).

4.2. Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. First article landing mats shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The first article landing mats shall be tested as specified in 4.5.2. Failure of any test shall be cause for examining first article panels in detail for compliance with this specification and reference drawings in regard to materials, dimensions, tolerances and workmanship. Landing mats not complying with such requirements shall be rejected.

4.4 Quality conformance inspection.

4.4.1 Unit of product. Individual type I, II or III landing mats shall be considered a unit of product.

Source: https://assist.dla.mil --·Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

4.4.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105. Sample size shall be determined by using MIL-STD-105, table I, and table IIa. A lot shall be accepted when 0 defects are found and rejected when 1 or more defects are found.

4.4.3 Examination. Samples selected in accordance with 4.4.2 shall be examined for defects in table II. Presence of one or more defects shall be cause for rejection.

TABLE II. Examination schedule.

Defect	Requirement Paragraph
101. Any part or component not in accordance with the QAP requirements as shown on the drawing.	3.1
102. Any drawing requirements, other than those identified by QAP data, not as specified.	3.1
103. Material not as specified.	3.3
104. Materials not resistant to corrosion and deterioration or treated to be resistant to corrosion and deterioration of the applicable storage and operating environments.	3.3.1
105. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.	3.3.1.1
106. Contractor does not have documentation available for identification of materials, material finishes, or treatment.	3.3.1.2
107. Used, rebuilt, or remanufactured components, pieces, or parts incorporated in the mat.	3.3.2
108. Welding electrodes not as specified.	3.4
109. Identification marking not as specified.	3.6
110. Bends not made with metal dies or fixtures.	3.11.1
111. Welders and welding operators not certified as specified.	3.11.2
112. Flame cut surface contains ash or cooling check.	3.11.1

Source: https://assist.dla.mil --.Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE I. Examination schedule. (Continued)

Defect	Requirement Paragraph
113. Weld or weld method not as specified.	3.11.3
114. All traces of slag of previously deposited weld not removed prior to additional welding.	3.11.3.1
115. Weld contains cracks, pits, porosity, blow hole, blister, overlap, or craters than allowed.	3.11.3.2 3.11.3.4 3.11.3.5
116. Weld size and length not as specified.	3.11.3.3
117. Sliding bolt not tack welded as specified.	3.11.5
118. All traces of burrs, sharp corners, or sharp edges on connector hook edge of panel not removed.	3.11.6
119. Weld slag or spatter not removed prior to cleaning or painting.	3.11.3.7

4.4.4 Tests. Samples selected in accordance with 4.4.2 shall be tested as specified in 4.5.2.1 and 4.5.2.2. Failure of any test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. Samples selected in accordance with 4.4.2 shall be examined in accordance with table II.

4.5.2 Tests.

4.5.2.1 First article inspection test. Type I, II, and III landing mats shall be assembled as shown in figure 1. Evidence of binding and misalignment, that prevents the locking lugs or sliding bolts from operating as specified, shall constitute failure of this test.

4.5.2.2 Weld strength test. With the panel in the faceup position, a straight bar of sufficient size and strength to resist any visible bending due to the applied load shall be inserted 1 inch under the open end of each cover plate. The ends of the panel shall be restrained to prevent movement. A downward force of 135 pounds shall be applied to the bar 30 inches from the fulcrum which is located at the end of the panel. Evidence of parting or fracture of a weld shall constitute failure of this test (see 3.11.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6 Inspection of packaging.

4.6.1 Examination. Examine the first article pack for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105. Sample size shall be determined by using MIL-STD-105, table I and table IIa. A lot shall be accepted when 0 defects are found and rejected when 1 or more defects are found.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects.

120. Type I, II, and III mats not packed as specified (see 5.2).
121. Arrangement of mats in bundle not as specified.
122. Strapping not zinc coated, properly tensioned, and sealed (see 5.2.1.1).
123. Strapping not positioned as specified in figure 2.
124. Marking illegible, incorrect, or incomplete (see 5.3).

5. PACKAGING

5.1 First article pack. Unless otherwise specified (see 6.2), the contractor shall furnish a first article pack for examination and test within the time frame specified (see 6.2) to prove prior to starting production packing, that the applied preservation, packing, and marking comply with the packaging requirements of this specification (see 6.4). Examination and tests shall be as specified herein.

5.2 Packing. Packing shall be level A, as specified (see 6.2 and 6.5).

5.2.1 Level A.

5.2.1.1 Type I. The full landing mat shall be bundled as specified herein. Each type I bundle shall contain 14 full panels nested together in pairs, bottom to bottom, in such a manner that the connector hooks will be protected between the rolled edge and first rig of the opposite panel. The two panels shall be staggered lengthwise approximately 3.250 inches to provide the minimum stacking height. The nested panel pairs shall be stacked to form a bundle. Strapping shall consist of five girthwise and one lengthwise straps located as shown in figure 2. Strapping shall conform to ASTM D 3953, type 1 or 2, zinc-coated, 1.25 x .035 inches, and ASTM D 4675.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

5.2.1.2 Type II and III. The female and male landing mats shall be bundled as specified herein. Type II and type III landing mats shall be bundled in a manner similar to that used for type I. Strapping shall consist of three girthwise and one lengthwise straps. Type II and type III shall be in separate bundles of 14 panels.

5.2.1.3 Type I, II and III. The landing mat panels shall be bundled as shown in figure 2 and as specified herein. Each bundle shall contain 13 type I, one type II and one type III panel. The panels shall be bundled as type I with the two half panels placed end to end and grouped with a full panel. The grouping containing the half panels shall be placed in the center of the stack. Strapping shall be as shown in figure 2.

5.3 Marking (see 6.5). Bundles shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The landing mats are intended for use as temporary airfield runway, taxiway and apron surfacing.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Issue of the DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. Type of mats required (see 1.2).
d. When a first article is not required (see 3.2).
e. Time frame required for submission of the weld joint specimens (see 3.2.1).
f. Whether Government designed inspection equipment will be loaned by the Government or shall be fabricated and furnished by the contractor (see 3.7 and 6.8).
g. When first article pack is not required (see 5.1).
h. Time frame required for submission of the first article pack when applicable (see 5.1).
i. Level of packing required (see 5.2).

6.3 First article. When a first article inspection is required, the item(s) should be a production model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the current version before use.

bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 First article pack. Any changes or deviations of production packs from the approved first article pack will be subject to the approval of the contracting officer. Approval of the first article pack will not relieve the contractor of his obligation to pack and mark the landing mats in accordance with this specification.

6.5 Levels of preservation. Levels of preservation has not been included as the mats do not require additional preservation. For the purpose of preservation/packing level marking the preservation shall be designated as level A/A.

6.6 Quality assurance provisions (QAP). The contracting officer should require the contractor to maintain records of all QAP inspections. A suggested paragraph is as follows:

"The contractor shall maintain complete records of all examinations and tests performed to verify the requirements of classified QAP characteristics. The records shall include as a minimum, lot size, sample size, drawing requirement, actual measurement, number and type of deficiencies found, quantity approved, quantity rejected, corrected action taken when applicable."

6.7 Definitions.

6.7.1 Quality assurance provisions (QAP). A QAP is a contractual requirement that supplements section 4 of the specification. A QAP indicates the minimum requirements which must be inspected on the product drawings to verify the design objectives of the product and assure interchangeability of repair parts.

6.7.2 Cracks. A crack is defined as a separation in the weld nugget or the heat effected zone.

6.8 Government inspection equipment design. Government inspection equipment design drawings exist and are listed on the top assembly. Gauges conforming to the drawings should be used to validate the characteristics designated on the drawings.

6.9 Government-loaned property. The contracting officer should arrange to furnish the property listed in 3.7.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

6.10 Subject term (key word) listing.

Airfield landing mat
Apron landing mat
Landing mat, apron
Landing mat, runway
Landing mat, taxiway
Runway landing mat
Taxiway landing mat

6.11 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - ME
Navy - YD

Review activity:
Navy - MC

Preparing activity:
Army - ME

Project 5680-0195

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

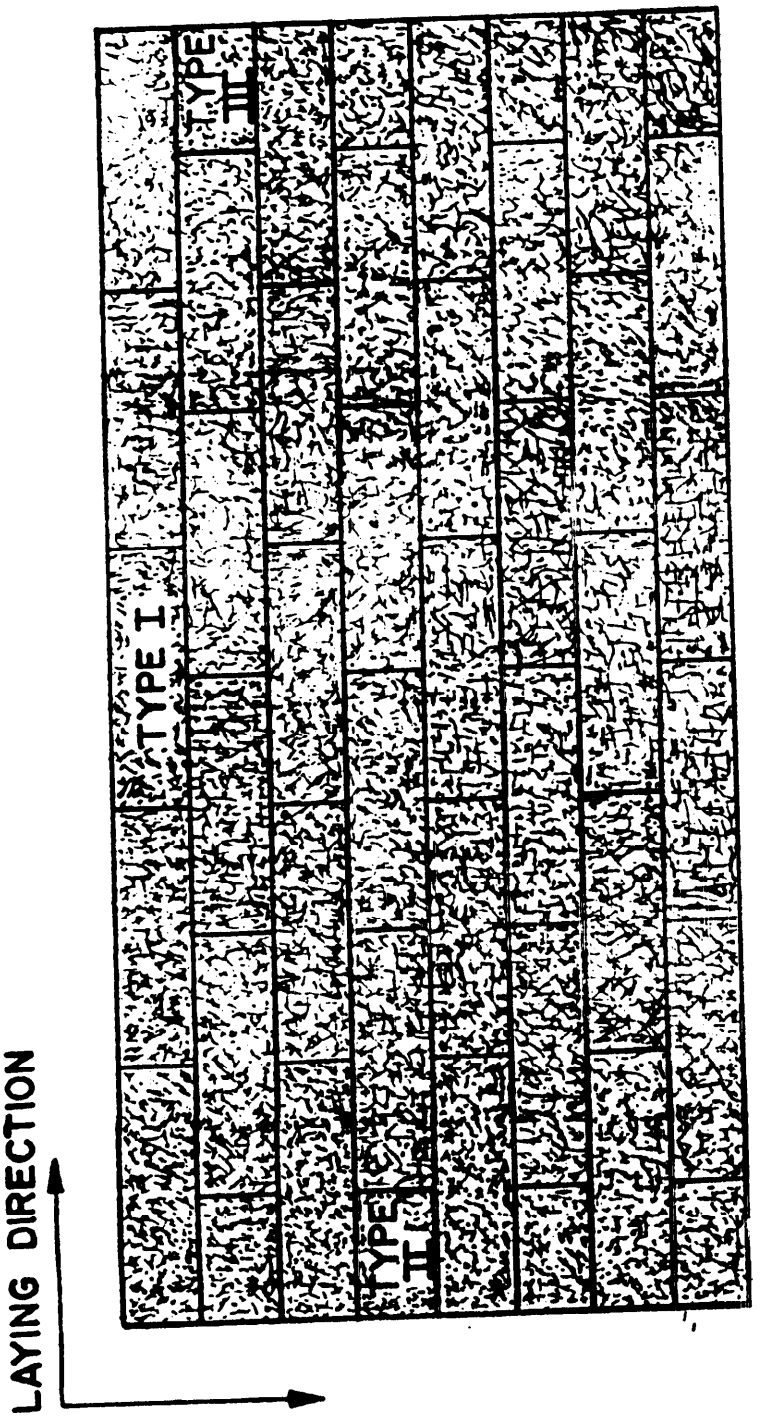


FIGURE 1. First article mat assembly test pattern.

X-2355A

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the current version before use.

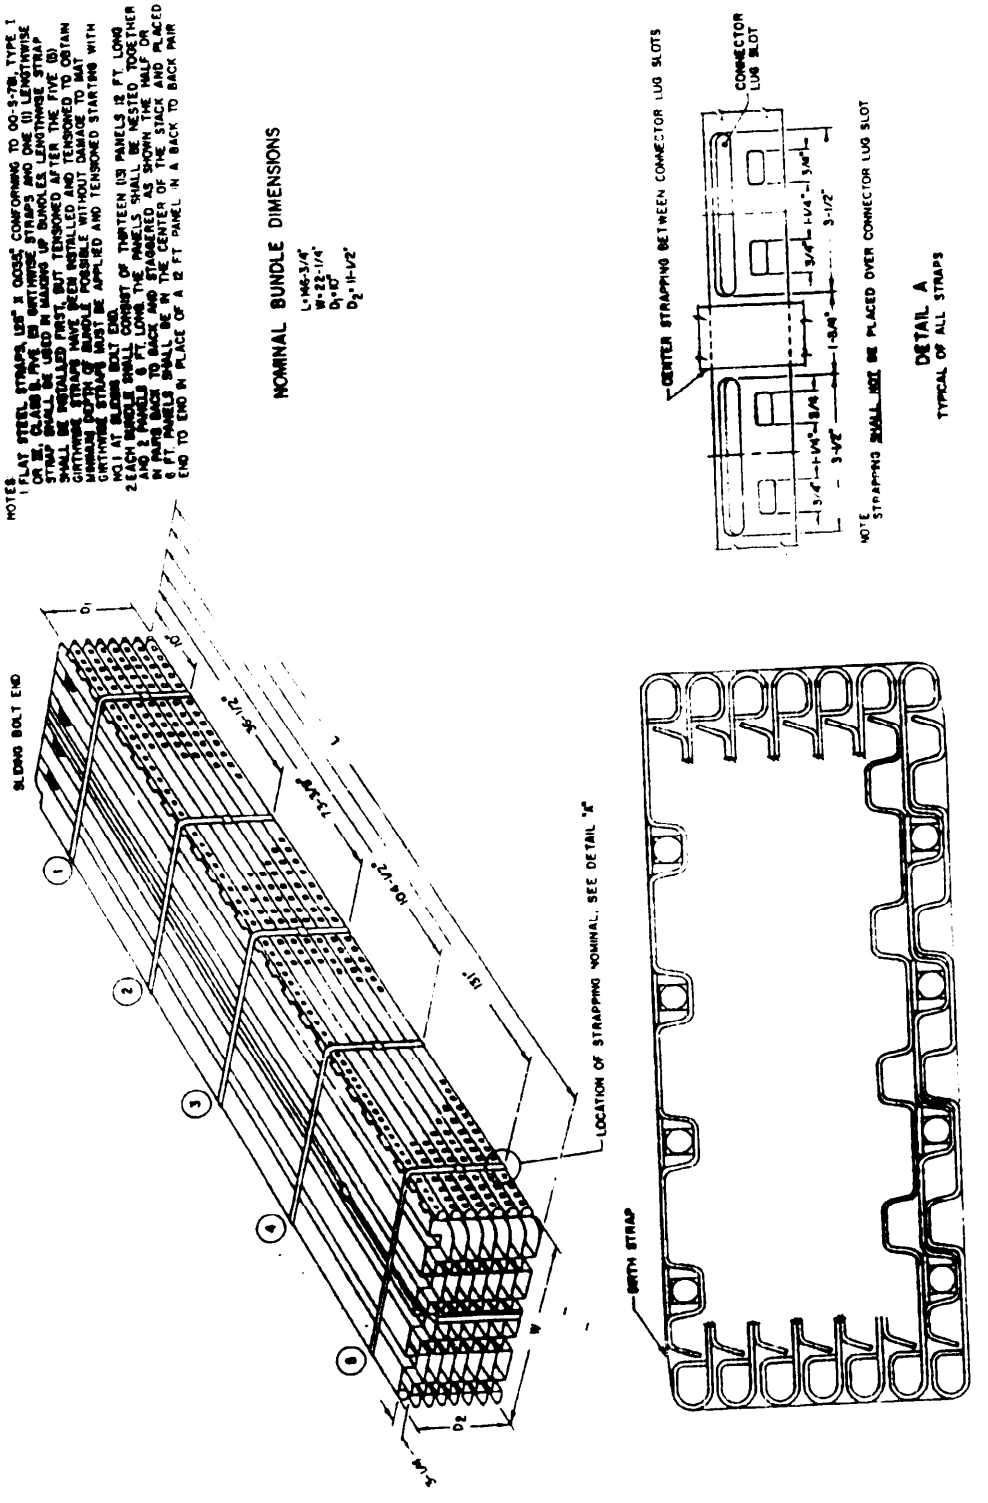


FIGURE 2. Level A packing.

X-1915A

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-M-527388	2. DOCUMENT DATE (YYMMDD) 920622

3. DOCUMENT TITLE
Mat, Landing; Steel and Non-Perforated (M8A1)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (if applicable) (2) AUTOVON	7. DATE SUBMITTED

8. PREPARING ACTIVITY

a. NAME Carolyn B. Johnson	b. TELEPHONE (Include Area Code) (1) Commercial (703) 704-3468	(2) AUTOVON 654-3468
c. ADDRESS (Include Zip Code) Army Belvoir RDE Center ATN: STRBE-TSE Fort Belvoir, VA 22060-5606	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.