MILITARY
SPECIFICATION

MIL-A-55101A(SigC)
Amendment 1
4 February 1964

ANTENNA AT-912( )/VRC

1. Sheet 1, Paragraph 2.1, replace with: The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extend specified herein.

2. Sheet 1, Paragraph 2.1, under SPECIFICATION, FEDERAL, add:

QQ-S-781	Strapping, Flat; Steel.
DDD-B-20	Bags, Mailing-(Cotton).
PPP-B-601	Boxes, Wood, Cleated Plywood.
PPP-C-843	Cushioning Material, Cellulosic
PPP-F-320	Fiberboard, Sheet, Stock and Cut Shapes.
PPP-T-76	Tape, Pressure-Sensitive Adhesive, Paper, Water Resistant.
PPP-T-97	Tape; Pressure-Sensitive Adhesive, Fiberglass Reinforced.

3. Sheet 2, Paragraph 2.1, under DRAWING, SIGNAL CORPS, Delete:

SC-A-362100	Preparation of Preproduction Packs.

4. Sheet 10, add Paragraph 3.16.7:

3.16.7 Admittance (see 4.9.6.3). - When assembled with units AT-1095( )/VRC and AB-719( )/VRC the AT-1096( )/VRC shall have the following admittance (See 4.9.6.3):

Frequency Mc	Admittance (Millimhos) G + jB
35.0 ± .03	G = 3.2 ± 1.0 B = -(23.5 ± 5.0)
50.0 ± .03	G = 2.7 ± 1.0 B = + (34.0 ± 5.0)
70.0 ± .03	G = 21.0 ± 7.0 B = -(7.3 ± 2.0)

FSC-5820

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:22Z
Check the source to verify that this is the current version before use.

5. Sheet 11, Paragraph 4.1, replace with:

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

6. Sheet 13, Table III - Group A inspection, add under Electrical, Admittance test

Rqt. Para.	Insp Para.	AQL	
		Major	Minor
3.16.7	4.9.6.3	0.65%	2.5%

7. Sheet 23, add Paragraph 4.9.6.3:

4.9.6.3 Admittance test (see 3.16.7).- When the admittance of the assembly is measured in accordance with Figure IV the requirements of 3.16.7 shall be met.

8. Sheet 28, Section 5, Preparation for Delivery, replace with:

5. PREPARATION FOR DELIVERY

5.1 Preservation and Packaging.-

5.1.1 Level A.- Each Antenna AT-912( )/VRC shall be packaged in accordance with Items 1 through 7 of Figure V and Table I and IA. Box closure of Item 7 shall be as specified in the Appendix of the applicable box specification.

5.1.2 Level C.- Each Antenna AT-912( )/VRC shall be packaged as specified in 5.1.1 except that Item 2 shall be domestic class, grade 175. Under Item 3, the box shall be class 1, 175 PSI and the tape shall conform to PPP-T-76.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:22Z
Check the source to verify that this is the current version before use.

5.1.3 Package Performance.- Package Testing shall be performed in accordance with the requirements of Specification MIL-P-116. The rough handling test and the cyclic exposure test will be required only when invoked in the bid request or contract (see 6.2).

5.2.1 Level A.- Each Antenna AT-912( )/VRC shall be packed in accordance with Item 8 of Figure V and Table IA.

5.2.2 Level B.- Each Antenna AT-912( )/VRC shall be packed as specified in 5.2.1.

5.2.3 Level C.- Each Antenna AT-912( )/VRC shall be packed as specified in 5.2.1 except that Item 8 shall be omitted.

5.3 Marking.- Interior packages and exterior shipping containers shall be marked in accordance with Military Standard MIL-STD-129.

9. Sheet 29, Paragraph 6.2(e) add: If rough handling test or cyclic exposure test is required.

10. Sheet 30, Paragraph 6.8, replace with:

6.8 Verification inspection.- Verification by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

11. Sheet 31, add Paragraph 6.9:

6.9 Dimensional data.- Sizes of packaging materials prescribed in Section 5 are based on the dimensions of the equipment cited on the applicable Bill of Material. When the dimensions of the equipment vary from those cited, the sizes of the packaging materials shall be adjusted accordingly. When shown in the Bill of Materials (see Section 5), corrugated fiberboard manufactured with A, B, or C fluting may be used at the option of the contractor. When the fluting used is not the same as that cited in the Bill of Material, the dimensions of the affected packaging and packing materials will be adjusted accordingly.

12. Sheet 31, NOTICE Paragraph: Delete.

Custodian:
Army - EL

Project Number 5820-A-214

Preparing Activity:
Army - EL

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:22Z
Check the source to verify that this is the current version before use.

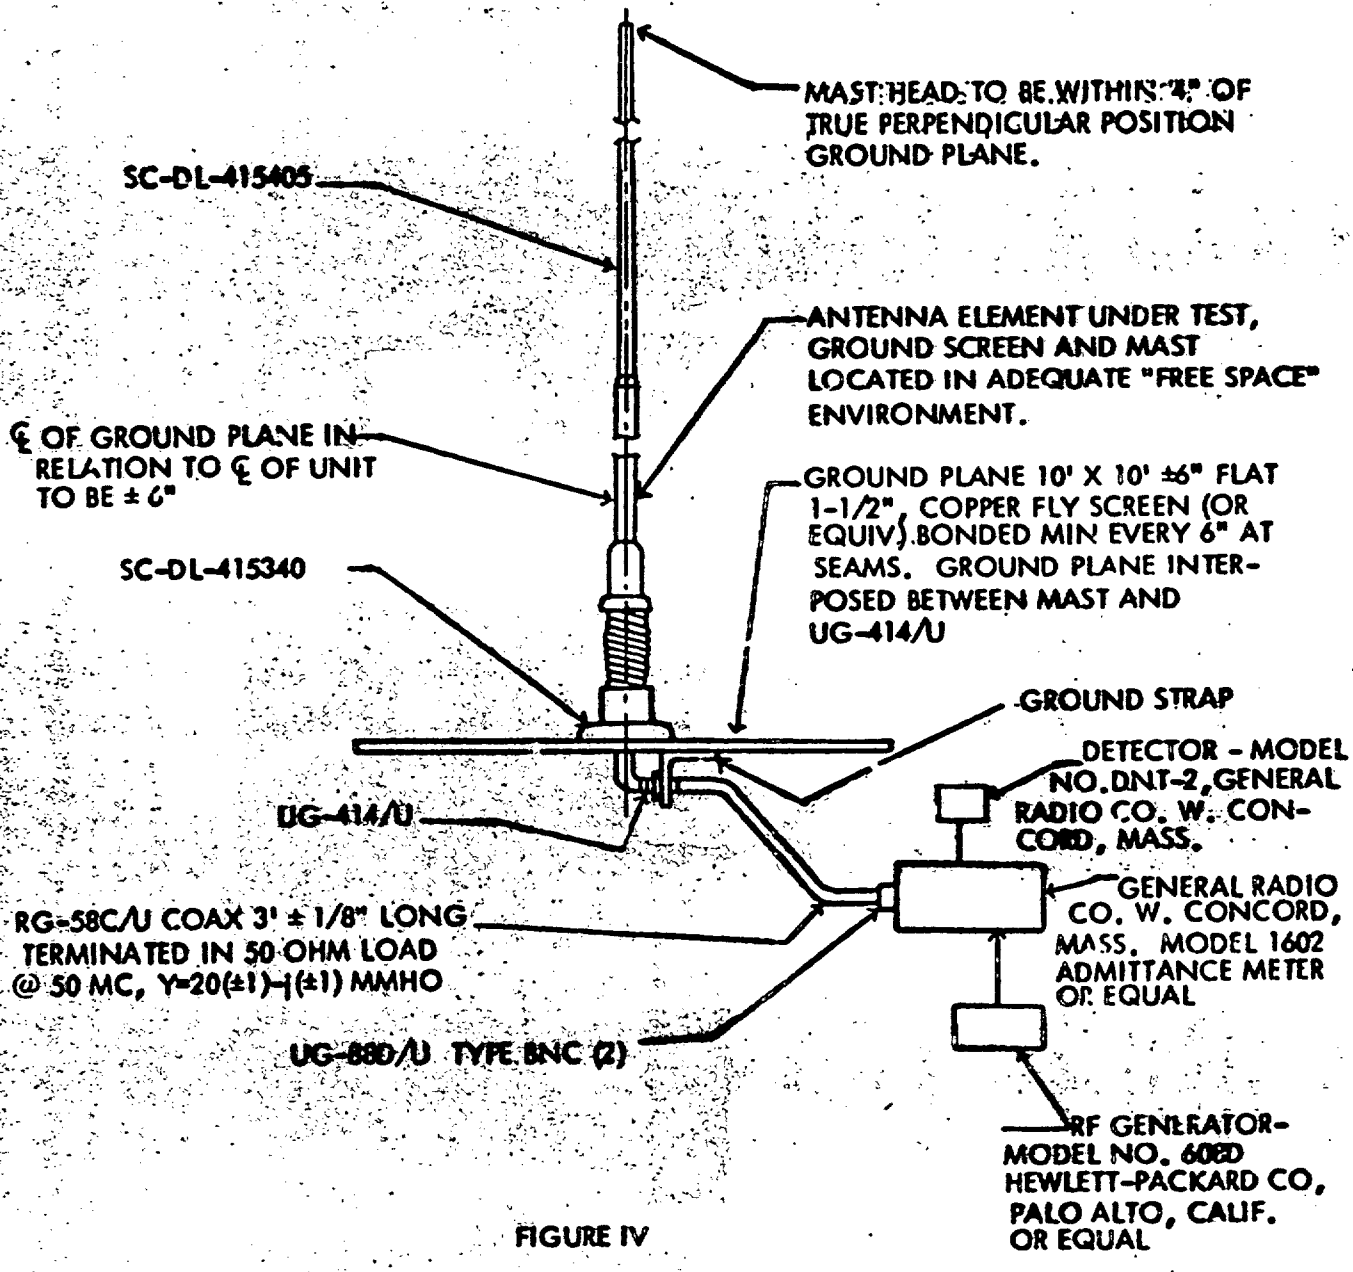


FIGURE IV

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:22Z
Check the source to verify that this is the current version before use.

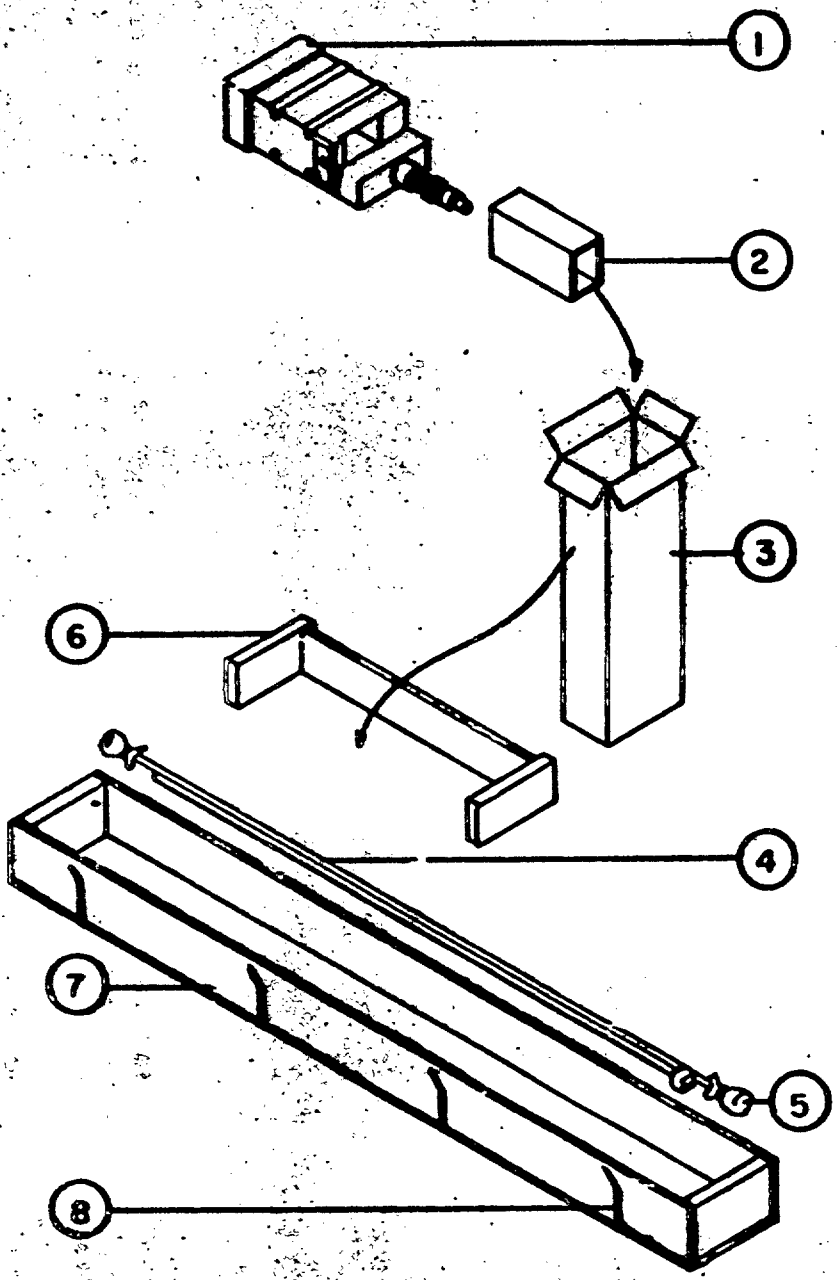


FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:22Z
Check the source to verify that this is the current version before use.

BILL OF MATERIAL
TABLE I

REF No.	ITEM Nomenclature	No. Reqd	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	F	S
1	Antenna AT-912( )/VRC Consisting of:	1	III				Net weight - 17 lbs						
	Matching Unit MX-2799( )/VRC with Base Antenna Support												
	AB-719( )/VRC	1	III	21-1/4	5-1/4	4							
	Hardware		III										
	Bag, Cloth	1		5	3		DDD-B-20						
	Tape, Filament	1		10	1/2		PPP-T-97	III					
	To secure bag of hardware to AB-719.												
2	Sleeve, Fiberboard (Double Thickness)	1	ID	3-1/2	2-7/8	7-1/2	PPP-F-320	CF	WR	SW	W6	C	
3	Box, Fiberboard	1		5-1/4	4	22	PPP-B-636	I	2	SW	6	C	RS
	Tape	2		9	2		PPP-T-76						
4	Antenna Element AT-1095( )/VRC (1 each) AT-1096( )/VRC (1 each)			64	1-1/2	1-3/4	OD of both elements taped together.						
	Tape, Filament	4		10	1/2		PPP-T-97	III					
5	Cushioning	2		5	4	1	PPP-C-843	II	B				
	Tape	2		10	2		PPP-T-76						
6	Blocking	1		24-3/8	6-7/8	3-3/8	To be nailed to sides of box.						
	Lumber	2		6-7/8	3-3/8	1-5/8	PPP-B-621						
	Lumber	1		22-1/8	3-3/8	3/4	PPP-B-621						

Lev. A - PACKED WEIGHT
Lev. A - PACKED VOLUME

T - Type V - Variety F - Flute
C - Class G - Grade S - Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:22Z
Check the source to verify that this is the current version before use.

BILL OF MATERIAL
TABLE IA

REF No.	ITEM Nomenclature	No. Req'd	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	F	S
7	Box, Wood or Cleated-Plywood	1		65	6-7/8	4-1/4	PPP-B-621		2				
	Modified to have one piece ends of two inch lumber.												
							PPP-B-601	III	2				A
	Note: Item 6 serves the purpose of additional battens or cleats, which is normally required for a box of this length.												
8	Strapping, Steel	4		35	3/8	.020	QQ-S-781	I	B		2		

Lev. A - PACKED WEIGHT - 35 lbs
Lev. A - PACKED VOLUME - 1.5 Cu.ft.

T - Type V - Variety F - Flute
C - Class G - Grade S - Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:22Z
Check the source to verify that this is the current version before use.