MIL-L-38779
6 December 1966
Superseding
MIL-L-25183A
24 July 1961
MIL-D-6579
5 July 1961
MIL-F-6580
16 September 1955

MILITARY SPECIFICATION

LAVATORIES AND ACCESSORIES, AIRCRAFT

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers two types of lavatories and their faucets and drains.

1.2 Classification. - The lavatories shall be of the following types, as specified:

Type I - Wall-Mounted Lavatory

Type II - Corner-Mounted Lavatory

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-C-320	Chromium Plating (Electrodeposited)

Military

MIL-D-1000	Drawings, Engineering and Associated Lists
MIL-A-8625	Anodic Coatings; for Aluminum and Aluminum Alloys
MIL-P-12808	Plumbing Fixtures and Accessories, Packaging of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-130	Identification Marking of U S Military Property
MS 33586	Metals - Definition of Dissimilar
MS 33658	Fitting End-Hose Connection, Standard Dimensions for

FSC 4510

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

Air Force - Navy

AN-901	Gasket-Metal Tube Connection Seal
AN-924	Nut-Flared Tube, Bulkhead and Universal Fittings
AN-6227	Packing, "O" Ring, Hydraulic

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. - When specified (see 6.2), before production is commenced, a sample lavatory and accessories covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2.1. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.1.1 Initial production sample (when preproduction sample is not specified).- When production is commenced, a sample lavatory and accessories covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2.2. The approval of the initial production sample authorizes continuation of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification.

3.2 Materials

3.2.1 General. - The lavatory and faucet and drain housing shall be made of aluminum. Other component parts shall consist of metals of adequate strength and durability to perform their respective functions and shall be of corrosion resistant metals or suitably protected to resist corrosion.

3.2.2 Dissimilar metals. - Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in Standard MS 33586.

3.3 Design

3.3.1 Lavatory. - The design of the lavatory shall consist of a bowl, tray, and skirt. In addition, it shall permit the installation of a faucet and drain assembly conforming to those described herein. It shall have a bar soap depression with a water drain and a spring loaded clamp down top to hold the bar of soap in place. The bowl shall have an anti-splash rim, and a volume of not less than 150 cubic inches. The lavatory shall conform to the design specified in Figure 1, a wall-mounted lavatory, or Figure 2, a corner-mounted lavatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

3.3.2 Faucet. - The design of the faucet shall follow current commercial practice for this type of equipment. The valve shall open to allow water to flow when the spring loaded actuating button is depressed, and shall stop the flow of water when the button is released. The faucet shall conform to the general design as shown in Figure 3.

3.3.3 Drain. - The design of the drain assembly shall consist of two (2) main subassemblies, the drain actuating mechanism and the drain valve. The actuating mechanism shall include a pushbutton housing unit, actuating rod and an adjusting link. The drain valve assembly shall include a drain housing, plug, plug seat, gasket lever and spring. The drain assembly shall conform to the overall dimensions as shown in Figure 4. The drain shall be suitable for installation in a 1 9/16 inch opening in a lavatory. When installed, a gasket shall prevent any leakage at the union of the drain and lavatory. The drain shall open when the actuating button is depressed, and shall return to seal the opening when the button is released.

3.4 Construction

3.4.1 Dimensions. - The dimensions shall be as shown in Figures 1, 2, 3 or 4, as applicable.

3.4.2 Weight. - Weight of components shall meet the requirements of 3.4.2.1, 3.4.2.2 or 3.4.2.3, as applicable.

3.4.2.1 Lavatory. - The weight of the complete lavatory, without faucet and drain assembly, shall not exceed 2.3 pounds.

3.4.2.2 Faucet. - The weight of the complete faucet assembly shall not exceed 0.7 pounds.

3.4.2.3 Drain. - The weight of the complete drain assembly shall not exceed 1.0 pounds.

3.4.2.4 Lavatory load limits. - When properly mounted, the lavatory shall be capable of supporting a load of 200 pounds applied at a midline at the farthest point from the mounting and a vertical load of 50 pounds applied at the faucet, without deformity.

3.4.3 Finish. - All aluminum alloys shall be anodized in accordance with Specification MIL-A-8625. All brass shall be chrome plated in accordance with Specification QQ-C-320, Type I.

3.5 Performance

3.5.1 Leakage

3.5.1.2 Faucet. - There shall be no leakage when a pressure of 10 pounds per square inch of water pressure is applied to the inlet of the faucet.

3.5.1.3 Drain. - There shall be no leakage when a lead of six (6) inches of water is applied to the inlet of the drain.

3.5.2 Actuating force

Source: https://assist.dla.mil - Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

3.5.2.1 Faucet. - A force of not less than 1 pound or more than 6 pounds shall be required to depress the actuating button to the full open position where a minimum water pressure of 1 or a maximum of 10 pounds per square inch is applied to the inlet of the faucet.

3.5.2.2 Drain. - A force of not less than 1 pound or more than 6 pounds shall be required to depress the actuating button to the full open position when a head of 6 inches of water is applied to the inlet of the drain.

3.5.2 Flow rate. - With a head of 2 feet of water, the water flow rate through the faucet shall not be less than 25 cubic inches nor more than 30 cubic inches per minute.

3.5.4 Hot and cold temperature exposure. - The faucet or drain shall show no signs of failure of operation, material, or finish when exposed to temperatures as low as minus 80 degrees Fahrenheit or as high as plus 140 degrees Fahrenheit.

3.6 Interchangeability. - All parts having the same manufacturer's part number shall be interchangeable with each other with respect to installation and performance. The drawing number requirements of Specification MIL-D-1000 shall govern changes in the manufacturer's part numbers.

3.7 Identification of product. - Equipment, assemblies, and parts shall be marked for identification in accordance with Standard MIL-STD-130.

3.8 Workmanship. - The lavatories and accessories shall be constructed in accordance with good commercial practices. They shall be free from any defects which might affect their appearance, proper functioning, and acid resistance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. - Inspection shall be classified as follows:

a. Preproduction sample inspection (when specified) (see 4.2.1).

b. Initial production sample inspection (when preproduction sample inspection is not specified) (see 4.2.2).

c. Quality conformance inspection (see 4.3.2).

d. Control inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

e. Examination of preparation for delivery (see 4.9).

4.2.1 Preproduction sample inspection (when specified).

4.2.1.1 Examination. - The lavatory and/or accessories shall be examined for workmanship, materials, finish, markings, weight and dimensions. Presence of one or more defects shall be cause for rejection.

4.2.1.2 Tests. - The lavatory and/or accessories shall be tested as specified in 4.6, 4.7, and 4.8, as applicable. Any test failure shall be cause for rejection.

4.2.2 Initial production sample inspection. - (When preproduction sample is not specified.) One lavatory and/or accessories shall be selected at start of production and subjected to the following examinations and tests.

4.2.2.1 Examination. - The lavatory and/or accessories shall be examined for workmanship, materials, finish, markings, weight and dimensions. Presence of one or more defects shall be cause for rejection.

4.2.2.2 Tests. - The lavatory and/or accessories shall be tested as specified in 4.6, 4.7, and 4.8, as applicable. Any test failure shall be cause for rejection.

4.3 Lot. - A lot shall consist of lavatories and/or accessories all of the same type, kind and dimensions, offered for acceptance at the same time.

4.3.1 Sampling for visual and dimensional examination. - Sampling shall be in accordance with Standard MIL-STD-105, using inspection level S-3, with an acceptable quality level (AQL) of 2.5 percent defective for visual examination, and inspection level S-2 with an acceptable quality level (AQL) of 4.0 percent defective for dimensional examination. The sample unit shall be one completely fabricated lavatory and/or accessories.

4.3.2 Quality conformance inspection

4.3.2.1 Visual examination of end product. - Visual examination shall be made of each sample unit selected in accordance with 4.3.1, to determine conformance to this specification, with respect to workmanship, materials, finish, markings, and weight. Any nonconformance shall be classified as a defect.

4.3.2.2 Dimensional examination of end product. - Dimensional examination shall be made of each sample unit selected in accordance with 4.3.1, to determine strict conformance to Figures 1, 2, and 3, as applicable. Any nonconformance shall be classified as defect.

4.4 Control inspection. - One lavatory and/or accessories shall be selected at random from each production run and tested as specified in 4.6, 4.7, and 4.8, as applicable. If the lavatory and/or accessories fail to meet the test requirements, no remaining items on hand from the production run, or later produced, will be acceptable until the extent and cause of failure are determined, and all deficiencies are corrected in all effected items in the production run.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

4.4.1 Control inspection may continue. - For production reasons, control inspection (tests) may be continued on production runs pending investigation of test failures, but final acceptance of the entire production runs shall not be made until it is determined that all deficiencies have been corrected and the items meet all the requirements of this specification.

4.5 Test conditions

4.5.1 Atmospheric conditions. - Unless otherwise specified, all tests required by this specification shall be made at an atmospheric pressure of approximately 29.92 inches of mercury and at a temperature of approximately 25 degrees Centigrade (77 degrees Fahrenheit). Where tests are made with atmospheric pressure or temperature substantially different from the above values, proper allowance shall be made for the change in instrument reading due to the difference.

4.6 Test methods, lavatory

4.6.1 Bowl capacity. - The bowl shall be filled with 150 cubic inches of water to determine if it has the proper volume.

4.6.2 Load limits. - The lavatory shall be mounted using provisions as referenced in applicable figures. A load of no less than 200 pounds shall be applied to the midline at the farthest point from the mounting. A vertical load of 50 pounds shall be applied to the faucet. In each case there shall be no evidence of failure or deformity of the metal.

4.7 Test methods, faucet

4.7.1 Leakage. - A water pressure of 10 pounds per square inch shall be applied to the inlet of the faucet for a period of five (5) minutes. There shall be no indication of leakage.

4.7.2 Actuating force. - The force required to depress the actuating button to the full open position shall not be less than 1 pound nor more than six (6) pounds, with the water pressure applied to the inlet at a minimum of 1 and a maximum of 10 pounds per square inch.

4.7.3 Flow rate. - The faucet assembly shall be connected to a container having a 1 square foot cross section, with at least a 26 inch depth. The time required to lower the water level, with the actuating button fully depressed from 26 to 22 inches (576 cubic inches), shall not be less than 19 nor more than 23 minutes.

4.7.4 Hot and cold temperature exposure. - The faucet or drain assembly shall be subjected to temperatures of plus 140 degrees Fahrenheit (plus or minus 5 degrees) and minus 80 degrees (plus or minus 5 degrees) each for a period of 4 hours. There shall be no indication of failure of operation, material, or finish.

4.8 Test methods, drain

4.8.1 Leakage. - The drain shall be installed in a vessel large enough to provide a 6 inch head. When closed, the drain shall not leak.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

4.8.2 Actuating force. - The force required to depress the actuating button to the full open position shall not be less than 1 pound or more than 6 pounds when the drain is subjected to a 6 inch head of water.

4.9 Examination of preparation of delivery. - An examination shall be made to determine that packaging, packing and marking comply with the requirements of Section 5 of this specification.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. - Preservation and packaging shall be Level A or C in accordance with MIL-P-12808.

5.2 Packing. - Packing shall be Level A, B, or C, in accordance with MIL-P-12808.

5.3 Marking. - Marking shall be in accordance with MIL-P-12808.

6. NOTES

6.1 Intended use. - This lavatory and/or accessories are intended for use on multi-place aircraft.

6.2 Ordering data. - Procurement document should specify the following:

a. Title, number and date of this specification.

b. Type and/or accessory required.

c. Applicable levels of preservation and packaging, and packing.

d. Whether preproduction sample is required.

Custodians:

Air Force - 69
Army - AV
Navy - AS

Review:

Army - AV
Navy - AS

Code C

Preparing Activity:

Air Force - 69

Proj No. 4510-0046

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

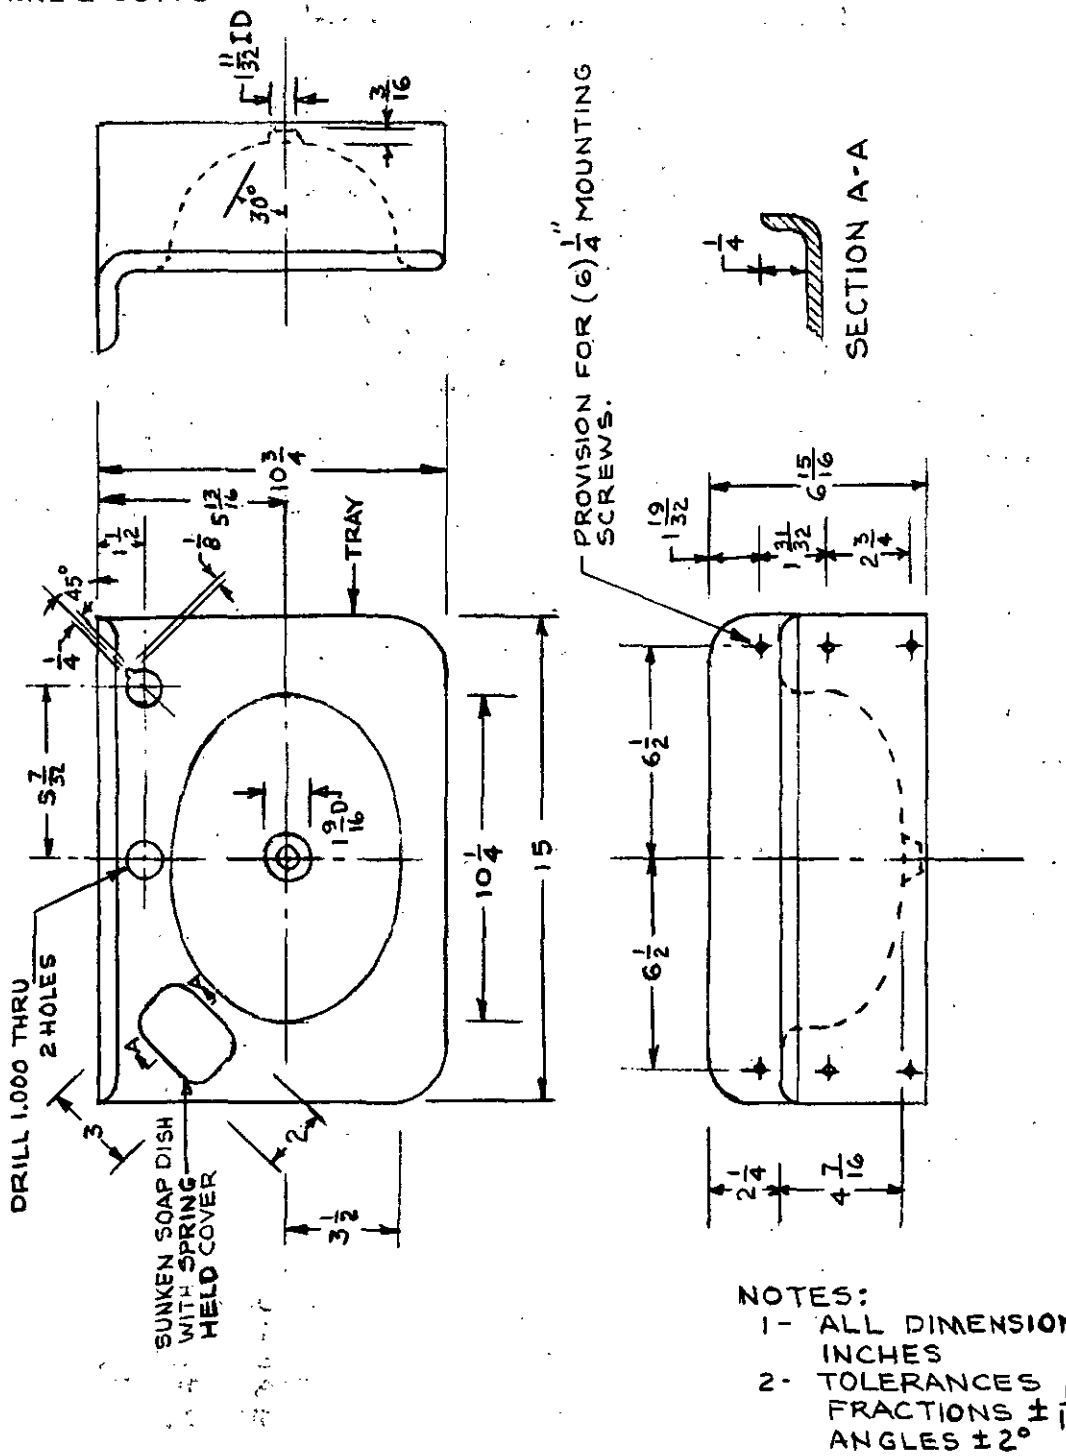


FIGURE 1

WALL MOUNTED LAVATORY

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.


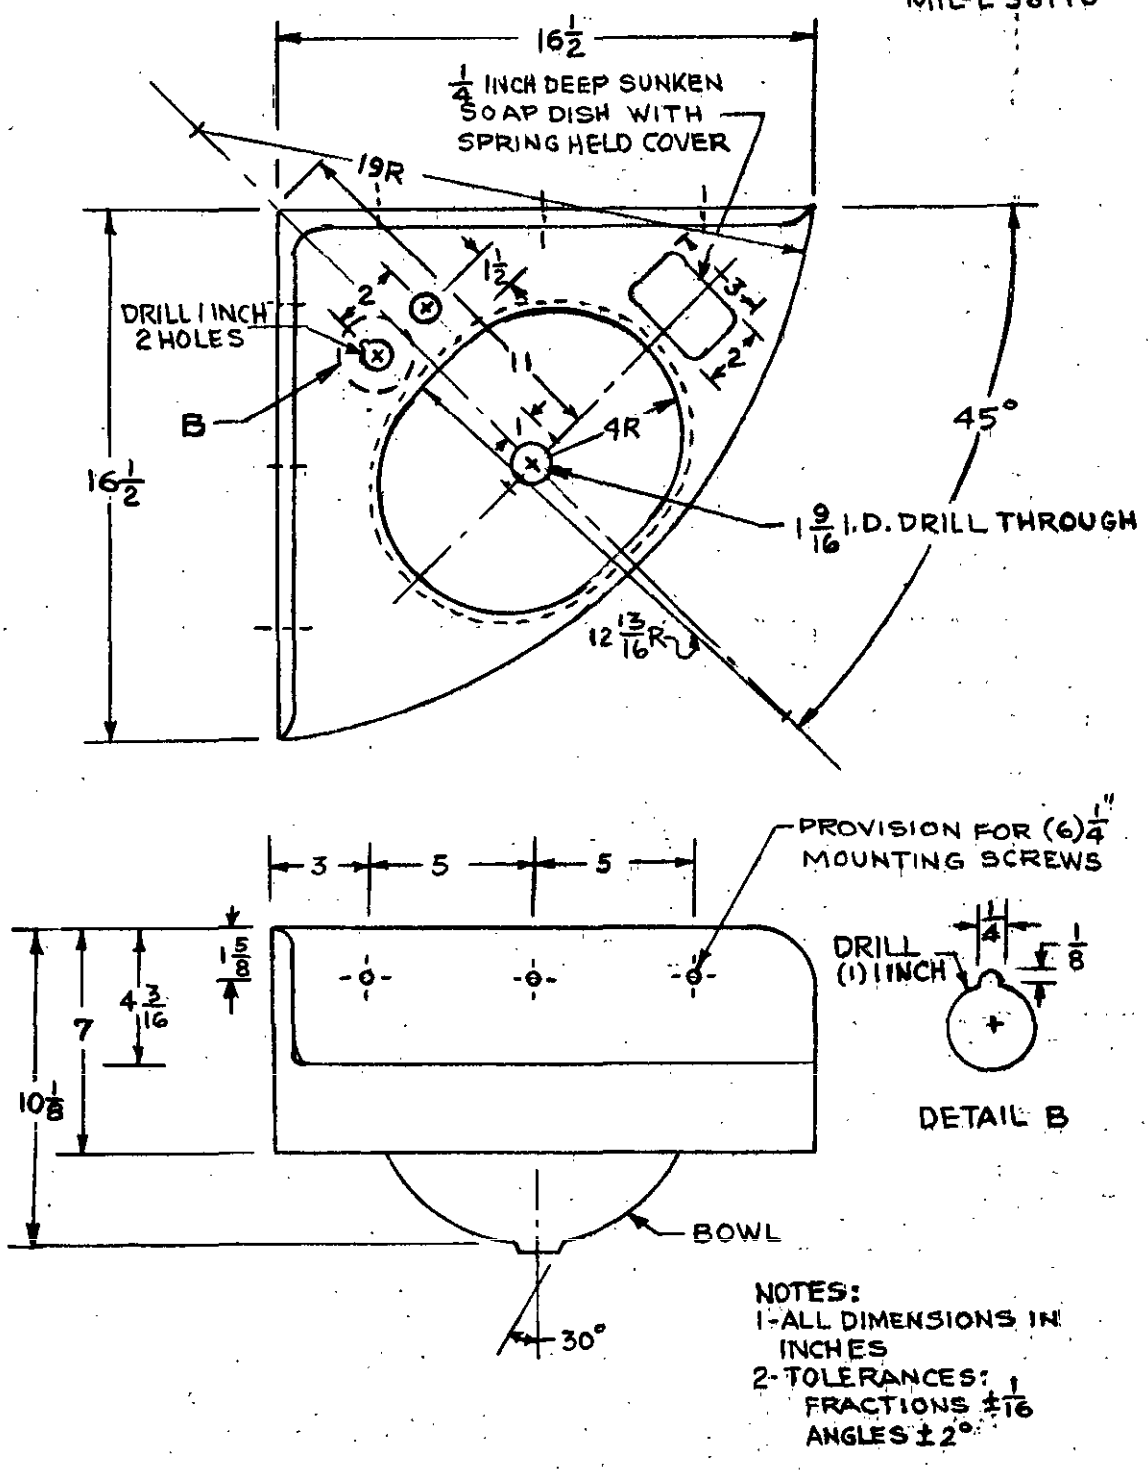


FIGURE 2
CORNER MOUNTED LAVATORY


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

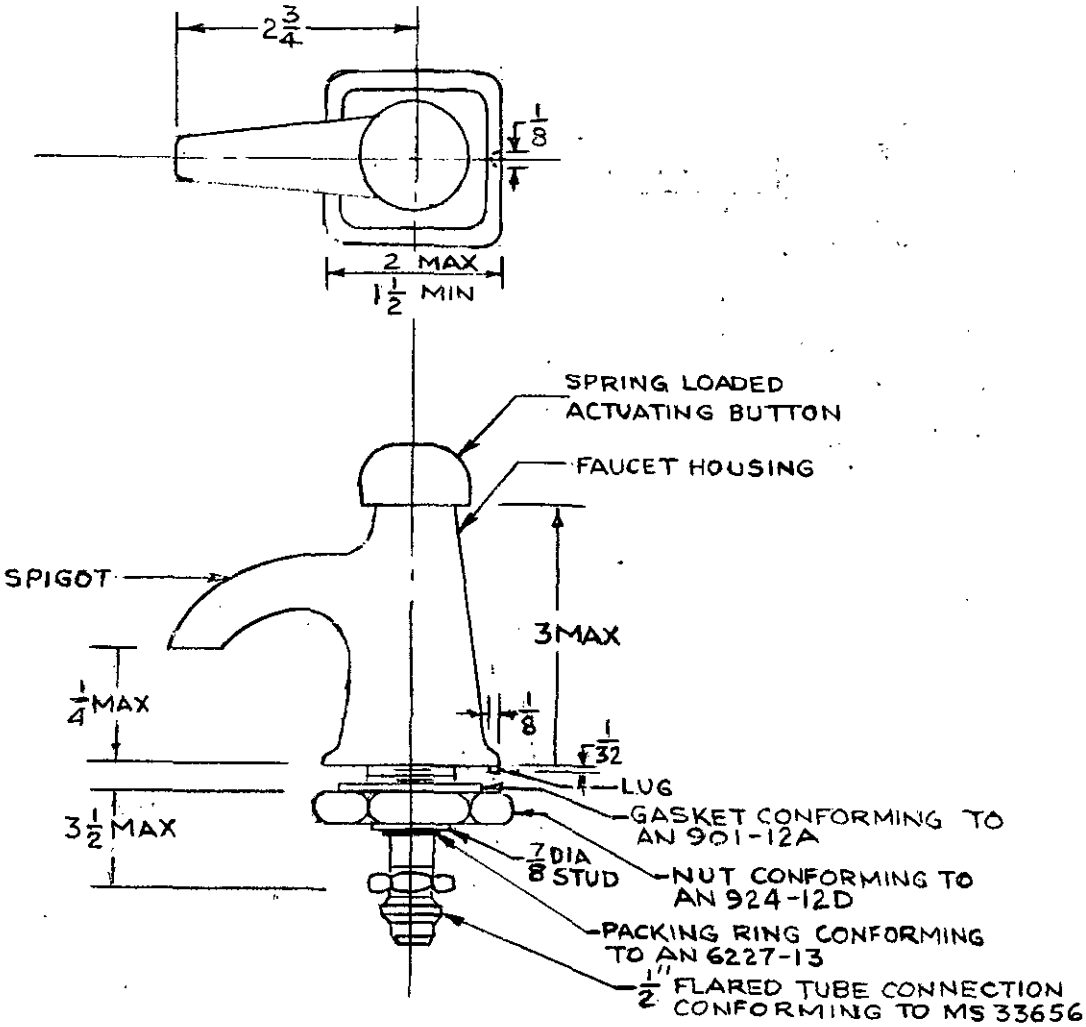

NOTES:
1. ALL DIMENSIONS IN INCHES
2 TOLERANCE:
FRACTIONS $\pm \frac{1}{64}$

FIGURE 3
FAUCET

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

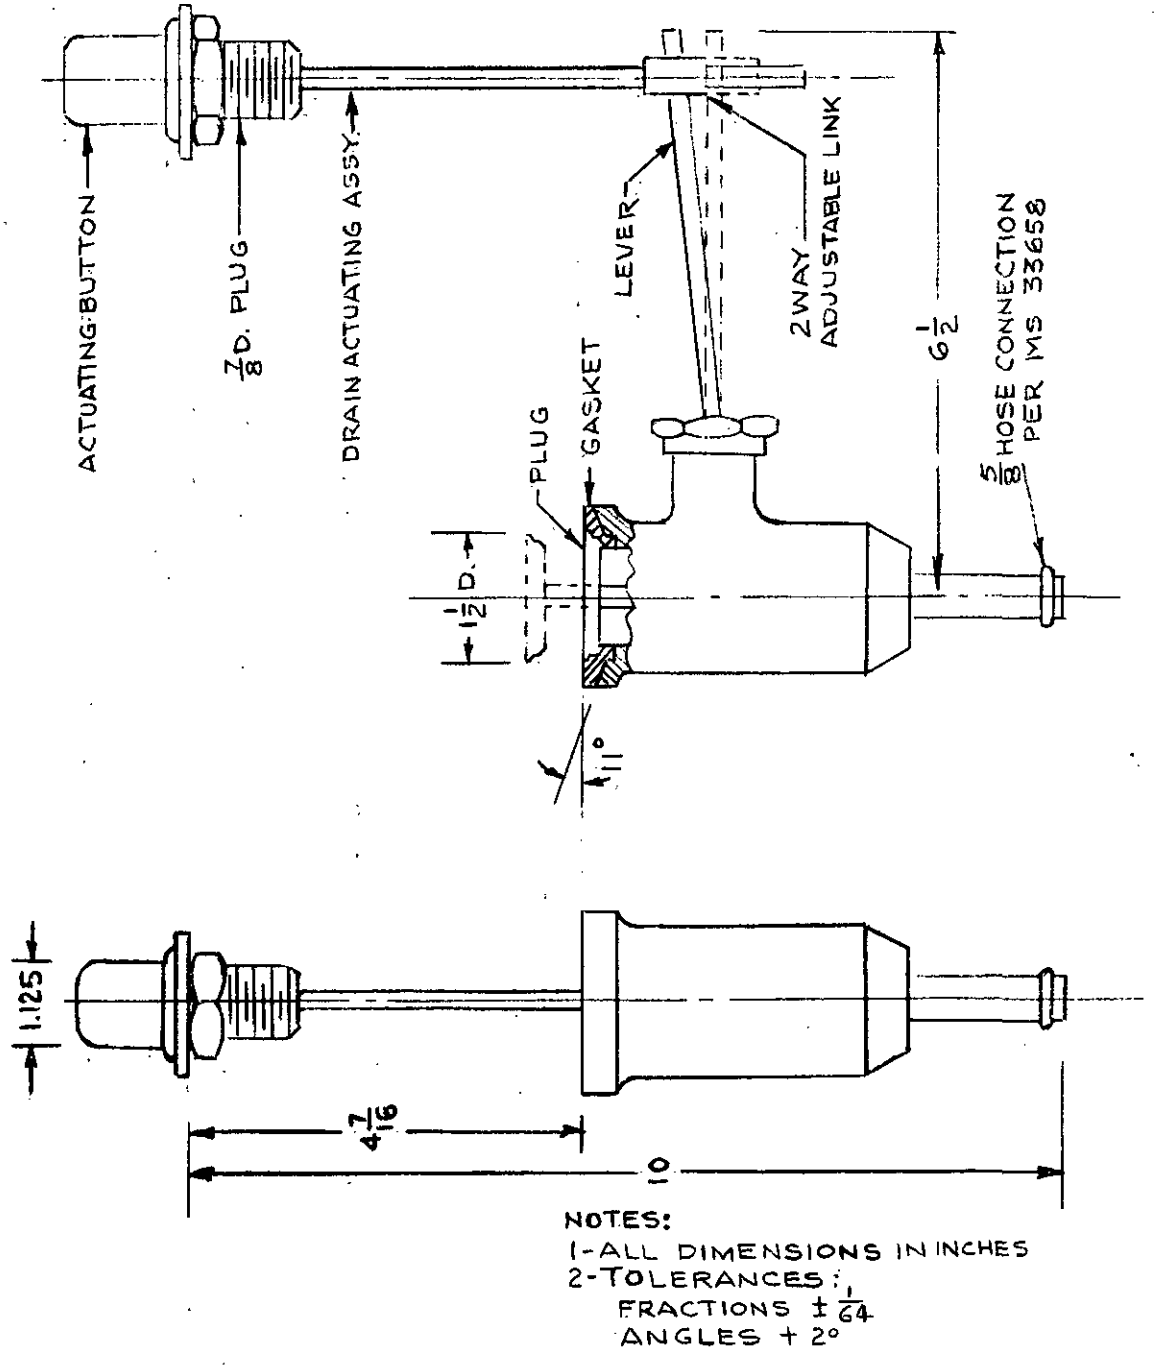

NOTES:
1-ALL DIMENSIONS IN INCHES
2-TOLERANCES:
FRACTIONS ± 1/64
ANGLES ± 2°

FIGURE 4
DRAIN ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET	Form Approved Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use of the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

MIL-L-38779 Lavatories and Accessories, Aircraft

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ Direct Government Contract ☐ Subcontract

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

   ☐ YES ☐ NO IF "YES" IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity)	DATE

DD Form 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

Department of the Air Force

OFFICIAL BUSINESS

Standardization Branch (MONSS)
Mobile Air Materiel Area
Brookley AFB, Ala 36615

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:26Z
Check the source to verify that this is the current version before use.