MIL-I-10634D (MU)
23 September 1968
Superseding
MIL-I-10634C
20 March 1964

MILITARY SPECIFICATION

IGNITER, ROCKET, M20A1
FOR
ROCKET, M28A2, M29A2 and M30
LOADING, ASSEMBLING AND PACKING

1. SCOPE

1.1 This specification covers special requirements not normally covered by the drawings and provides quality assurance provisions for the loading, assembling and packing for one type of initiating device designated as Igniter, Rocket, M20A1.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitations for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-223 - Powder, Black
MIL-A-2550 - Ammunition and Special Weapons; General Specification for
MIL-S-45428 - Squib, Electric, M2, Loading, Assembling, and packing
MIL-I-45607 - Inspection Equipment, Supply and Maintenance of

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

FSC: 1340

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:18Z
Check the source to verify that this is the current version before use.

MIL-STD-109 - Quality Assurance Terms and Definitions.
MIL-STD-1168 - Lot Numbering of Ammunition
MIL-STD-1235 - Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes.

DRAWINGS

ORDNANCE CORPS

8886427 - Body.
8886428 - Igniter, Rocket Motor, M20A1, for Rocket, M28A2, M29A2 and M30, Assembly and Details.
8886515 - Carton, Packing, Ammunition, for Igniter, Rocket, M20A1, Assembly, Details, Packing and Marking.
8886516 - Box, Packing, Ammunition, for Igniter, Rocket, M20A1, Assembly, Details and Packing.

PUBLICATIONS

ORDNANCE CORPS

ET -8886428 - Equipment Tabulation.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.

3. REQUIREMENTS

3.1 Material. - Materials and parts shall be in accordance with applicable specifications and drawings.

3.2 Igniter. - The igniter shall comply with all requirements specified on Drawing (dwg.) 8886428 and with all requirements specified in applicable specifications.

3.3 Moisture content of Black Powder. - The moisture content of the black powder used in loading the igniter at the time of loading shall not exceed 0.50 percent when tested as specified in MIL-P-223.

3.4 Functioning. - The igniter shall fire with a delay time not to exceed 100 milliseconds at any temperature from minus 40 degrees Fahrenheit (F) to plus 140 degrees F. and shall fire on the first attempt. (Ignition delay time is defined as the elapsed time from when current is applied to the appearance of flash of the black powder charge).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:18Z
Check the source to verify that this is the current version before use.

3.5 Workmanship. - All parts shall be free of cracks, dirt, grease, rust, or other foreign material that may impair functioning. The cleaning method shall not be injurious to any of the parts nor shall the parts be contaminated by the cleaning agents.

3.6 First article inspection. - This specification makes provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to MIL-STD-109 in order to define terms used herein. The provisions of MIL-A-2550 shall apply.

4.1.1 Submission of product. - At the time the completed lot of product is submitted to the Government for acceptance, the contractor shall supply the following information accompanied by a certificate which attests that the information provided is correct and applicable to the product being submitted:

a. A statement that the lot complies with all of the quality assurance provisions specified within this specification.
b. Number of units of product inspected.
c. Results obtained, by defect code, for all inspections performed.
d. Drawing, specification number and date, together with an identification and date of changes.
e. Certificates of conformance on all material purchased by the contractor when such material is controlled by Government or commercial specifications referenced in any of the contractual documents.
f. Number of items in the lot.
g. Date submitted.

The certificate shall be signed by a responsible agent of the certifying organization. The initial certificate submitted shall be substantiated by evidence of the agent's authority to bind his principal. Substantiation of the agent's authority will not be required with subsequent certificates unless, during the course of the contract, this authority is vested in another agent of the certifying organization.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:18Z
Check the source to verify that this is the currenversion before use.

4.2 First Article Inspection

4.2.1 Submission. - The contractor shall submit a first article sample to a Government approved facility as designated by the contracting officer (see 6.4) for evaluation in accordance with the provisions of 4.2.2. The first article sample shall consist of one hundred twenty (120) complete igniter assemblies and twenty (20) complete sets of parts (i.e., twenty (20) each of every component and every subassembly) which have been produced by the contractor or furnished by a supplier and which have been manufactured using the same production processes, procedures and equipment which will be used in fulfilling the contract. All parts and materials, including packaging and packing, shall be obtained from the same sources of supply as will be used in regular production. Prior to submission, the contractor shall inspect the sample to the degree necessary to assure that it conforms to the requirements of the contract and shall submit a record of this inspection with the sample, including statements of findings of tests and examinations and certificates of conformance for materials (see 4.1.1.e). A sample containing known defects will not be submitted unless specifically authorized by the contracting officer. A first article sample or portion thereof, as directed by the contracting officer, shall also be submitted whenever there is a lapse in production for a period in excess of 90 days, or whenever a change occurs in manufacturing process, material used, drawing, specification or source of supply such as to significantly affect product uniformity as determined by the Government.

4.2.2 Inspections to be performed. - Assemblies and components will be subjected by the Government to any or all of the examinations and tests specified in 4.3.2 and 4.3.3 of this specification and to any or all requirements of the applicable drawings.

4.2.3 Rejection. - If any assembly or component fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of an assembly or component in the sample to comply with any of the stated requirements. In the event of rejection, the Government reserves the right to require the contractor to take corrective action and submit a new first article sample, or portion thereof. Until a first article sample is accepted, the contractor is in no way authorized by the Government to initiate regular production unless otherwise directed by the Contracting Officer.

4.3 Inspection provisions

Source: https://assist.dla.mil -- Downloaded: 20260-17T14:18Z
Check the source to verify that this is the current version before use.

4.3.1 Lot formation. - The term "lot" as used throughout this specification refers to an inspection lot, which is defined as an essentially homogeneous collection of units of product from which a representative sample is drawn and inspected to determine conformance of the lot with applicable requirements. The sample selected shall represent only that quantity of units from which the sample was drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the lot has been produced by one manufacturer, in one unchanged process, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. Changes to the process, specifications, or drawings not affecting safety, performance, interchangeability, or storage, as determined by the Government, shall not be deemed to alter the homogeneity of the lot. Inspection lots shall comply with MIL-STD-105. Unless otherwise approved by the contracting officer the inspection lot size of end items deliverable under the contract shall be not less than the smallest weekly estimate of quantities contractually scheduled for production during the contract period nor more than the largest monthly quantity contractually scheduled for delivery during the contract period. Inspection lots of components or sub-assemblies, other than the items of delivery, shall be homogeneous and of a size mutually convenient to both the contractor and the Government inspector. Lot numbering, as required, shall be in accordance iwth MIL-STD-1168. Each lot shall contain:

a. parts bearing the same lot interfix number from one manufacturer.

b. Black powder from one batch or blending of batches which results in homogeneity of all black powder used in loading the entire igniter lot.

c. Squibs bearing the same lot interfix number from one manufacturer.

4.3.2 Examinations. - Sampling plans and procedures for the following classification of defects shall be in accordance with MIL-STD-105 except that inspection for critical defects (and majors, when so specified) shall be 100 percent. Contractor's sampling plans, if used, shall be approved by the Government and shall provide, as a minimum, the protection afforded the Government by the sampling plans in MIL-STD-105. Continuous sampling plans in accordance with MIL-STD-1235 for defects other than critical may be used if approved by the procuring activity. Also, at the option of the procuring activity, AQL's and sampling plans may be applied to the individual characteristics listed using an AQL of 0.40 percent for each major defect and an AQL of 0.65 percent for each minor defect. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:18Z
Check the source to verify that this is the current version before use.

4.3.2.1 Assembly, prior to loading (see dwg. 8886428).

Categories	Defects	Method of Inspection	Code No. (see 6.2)
Critical: None defined			
Major:	AQL 0.40 percent		
101.	Weight of charge	Balance	01001
Minor: None defined			

4.3.2.2 Assembly (see dwg. 8886428).

Categories	Defects	Method of Inspection	Code No.
Critical:			
1.	Powder leakage	Visual	02001
Major:	AQL 0.65		
101.	Thickness of flash, maximum (max.)	Gage	02002
102.	Squib damaged	Visual	02003
103.	Squib lead wires not shorted	Visual	02004
104.	Squib wire insulation damaged	Visual	02005
Minor:	AQL 0.65 percent		
201.	Evidence of poor workmanship (see 3.5)	Visual	02006

4.3.2.3 Carton, packing (sealed) (see dwg. 8886515).

Categories	Defects	Method of Inspection	Code No.
Critical: None defined			
Major:	AQL 0.65 percent		
101.	Sealing compound incomplete or inadequate (excluding pin holes or bubbles)	Visual	03001
102.	Carton damaged	Visual	03002
103.	Contents loose	Manual	03003
Minor:	AQL 1.00 percent		
201.	Marking incorrect, incomplete or illegible	Visual	03004
202.	Evidence of poor workmanship (see 3.5)	Visual	03005

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:18Z
Check the source to verify that this is the current version before use.

4.3.2.4 Box, packing (see dwg. 8886516).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined		
Major:	AQL 0.65 percent		
101.	Hardware missing, broken, or loose	Visual-Manual	04001
102.	Strapping missing, broken, or loose	Visual-Manual	04002
103.	Box damaged to the extent that contents are exposed or liable to become exposed	Visual	04003
Minor:	AQL 2.50 percent		
201.	Hardware improperly engaged	Visual	04004
202.	Strapping improperly assembled	Visual	04005
203.	Car seal missing or improperly sealed	Visual	04006
204.	Contents loose	Manual	04007
205.	Marking incorrect, incomplete or illegible	Visual	04008

4.3.3 Testing

4.3.3.1 First article sample (see 4.2.1). The assemblies and components submitted as the first article sample shall be tested as specified below after having been examined for requirements as specified in 4.2.2. Rejection and resubmission shall be in accordance with 4.2.3.

4.3.3.1.1 Internal pressure test of body (destructive) (see dwg. 8886427 and 4.4.1) - Code No. 07001.

4.3.3.1.2 Waterproofness after pull test (see dwg. 8886428, 4.4.2 and 4.4.4 - Code No. 02007.

4.3.3.1.3 Resistance (see dwg. 8886428 and 4.4.3) - Code No. 02008.

4.3.3.1.5 Waterproofness test of complete igniter (see dwg. 8886428 and 4.4.4) - Code No. 02009. - The entire sample submitted in 4.2.1 shall be subjected to this test. If the igniter assemblies have complied with the waterproofness test requirement the tested igniters shall be divided into three equal groups and tested in the following sequence:

4.3.3.1.6 Functioning time (see 4.3.3.2.6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:18Z
Check the source to verify that this is the current version before use.

4.3.3.2 Production

4.3.3.2.1 Moisture content of black powder (see 3.3) - Code No. 05001 - Major defect. - The moisture content of the black powder shall be determined for each lot at the time of loading. A sample shall be selected and tested as specified in Specification MIL-P-223. If the moisture content is in excess of the percentage specified and loading has not begun, the lot of black powder shall be rejected until proper corrective action has been accomplished as verified by repeating the moisture content test specified in Specification MIL-P-223. If loading has begun, action on the unloaded black powder shall be as specified above and all igniters loaded with the questionable black powder shall be rejected.

4.3.3.2.2 Internal pressure test of body (destructive) (see dwg. 8886427) - Code No. 07001 - Critical defect. - A sample of twenty five (25) bodies shall be selected from each lot for this test. The test shall be performed as specified in 4.4.1, using test equipment specified in 4.3.4. If any body fails to comply with the specified drawing requirement the lot shall be rejected and acceptance testing for the Government discontinued.

4.3.3.2.3 Waterproofness after pull test (see dwg. 8886428) Code No. 02007 - Major defect. - A single sample in accordance with MIL-STD-105 using an AQL of 0.40 percent shall be selected from each lot of complete assemblies. The sample shall be subjected to the tests in the sequence as specified in 4.4.2 and 4.4.4 using equipment in accordance with 4.3.4. Any assembly that fails the test as specified in 4.4.2 shall be classed defective and shall not be subjected to further testing. Assembly successfully completing the test as specified in 4.4.2 shall be subjected to the test as specified in 4.4.4. Any assembly that fails the test as specified in 4.4.4 shall be classed defective. The lot shall be rejected if the cumulative number of defects is equal to or greater than the rejection number of the applicable plan.

4.3.3.2.4 Resistance (see dwg. 8886428) - Code No. 02008 - Major defect. - This test shall be performed 100 percent. The test shall be performed as specified in 4.4.3 using test equipment specified in 4.3.4. Any assembly which fails to comply with the specified drawing requirement shall be classed defective and removed from the lot.

4.3.3.2.5 Waterproofness test of complete igniter (see dwg. 8886428) Major defect - Code No. 02009. - This test shall be performed 100 percent. The test shall be performed as specified in 4.4.4 using test equipment specified in 4.3.4. Any assembly which fails to comply with the specified drawing requirement shall be classed defective and removed from the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:18Z
Check the source to verify that this is the current version before use.

4.3.3.2.6 Functioning time (see 3.4) - time greater than 200 milliseconds, Critical defect - Code Nos. at minus 40 degrees F 02010, at 70 degrees F 02012, at 140 degrees F 02013; time between 100 and 200 milliseconds. Major defect - Code Nos. at minus 40 degrees F 02015, at 70 degrees F 02016, at 140 degrees F 02017. A sample of 150 igniters shall be selected. Fifty igniters will be conditioned at each of the three required temperatures. The igniters shall be tested as specified in 4.4.5 with test equipment as specified in 4.3.4. The lot shall be rejected if any igniter fires in excess of 200 milliseconds or if two or more igniters fire in excess of 100 milliseconds. The number of duds shall be recorded (see 4.3.3.2.6.1).

4.3.3.2.6.1 Duds (see 3.4) - Code No. 02011 - Major defect. - If during the combined functioning time tests at the various temperatures a total of three (3) duds are encountered a retest shall be performed using a sample of 300 igniters. One hundred igniters of the second sample shall be tested at each temperature phase. If during the retest one more dud is encountered, the retest shall be stopped and the lot rejected.

4.3.3.2.7 Check test for possible deterioration of squibs (see 6.6) - Major defect - Code No. 02014. - If the total elapsed time between original acceptance of the squib lot and the assembly of the squibs into the igniter exceeds two years, or if the squibs show evidence of having been subjected to adverse environmental conditions for any period of time, however brief, the squib lot shall be subjected to the check test for possible deterioration specified in Specification MIL-S-45428. This test shall be performed when required, by the contractor on squibs selected by the inspector at the facility assembling the igniter. The test shall be conducted at Government expense without cost to the contractor who produced the squibs or the contractor assembling the squibs into the igniter, and shall not constitute a basis for rejection against either contractor except where deterioration has occured as a direct result of carelessness in handling storage, etc. of the squib lot while the squib lot was under the jurisdiction of either contractor.

4.3.4 Inspection Equipment. - Equipment Tabulation Number ET-8886428 identifies the inspection equipment required to perform the examinations and tests prescribed in the section. The contractor shall design inspection equipment in accordance with the instructions in paragraph 6.3.

4.3.4.1 Government rights to documentation. - Inspection equipment drawings and lists provided and revised in accordance with the requirements of the ET may be used by DOD activities

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:18Z
Check the source to verify that this is the current version before use.

for design, procurement, manufacture, testing, evaluation, production and receiving inspection, overhaul, shipping, storage, identification of stock, ordering and storage of replacement of parts, inspection of items at overhaul, general maintenance of equipment, construction, survey and wherever inspection equipment drawings are needed.

4.3.4.2 Supply and maintenance. - Supply and maintenance of the equipment listed on the IEL shall be in accordance with MIL-I-45607.

4.4 Test methods and procedures

4.4.1 Internal pressure test of body (destructive). - The igniter body shall be assembled to the applicable test fixture specified in 4.3.4 and the specified internal air pressure applied at the minimum specified rate. Any body which fails to burst within the specified drawing limits shall be classed defective.

4.4.2 Pull test of lead wires. - The igniter assembly shall be assembled to the applicable test fixture specified in 4.3.4 and the minimum specified load shall be applied to the lead wires of the squib in the direction of the longitudinal axis of the squib for the minimum specified time. Observation shall be made for evidence of slippage of the squib in the igniter body or slippage of the lead wire in the squib body. If either lead wire shows evidence of slippage or the squib shows evidence of slippage in the igniter body the assembly shall be classed defective.

4.4.3 Resistance. - After being subjected to the pull test, the lead wires shall be connected to the applicable test fixture specified in 4.3.4 and the electrical resistance measured. Any igniter which fails to comply with the specified requirement shall be classed defective.

4.4.4 Waterproofness and functioning. - The igniter assembly shall be submersed in water at a depth of 1 inch and the water temperature maintained at ambient temperature. A vacuum of 10 inches of mercury shall be created above the water and maintained for 15 seconds, minimum. Any igniter assembly which leaks as evidenced by emitting a steady stream of air bubbles shall be classed defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:18Z
Check the source to verify that this is the current version before use.

4.4.5 Functioning. - The igniter assembly shall be conditioned at the required temperature, plus or minus 5 degrees F., for a minimum of 6 hours and fired, using the test circuit shown in Figure 1, in not less than 2 minutes and not more than 3 minutes after removal from the conditioning chamber. Prior to performing this test the test circuit shall be prepared for firing by adjusting the adjustable 10 ohm resistor, with the "Fire Switch" in the closed position, (see Figure I) until the current reading on the ammeter reads 545 milliamperes plus or minus 5 milliamperes. The "Fire Switch" shall be opened 5 seconds and then closed. The current shall reproduce to 545 milliamperes plus or minus 5 milliamperes. After removal of the 1 ohm precision resistor and the "Fire Switch" open, the igniter assembly shall be connected to the firing circuit (see Figure I) and fired by closing the "Fire Switch". The time lapse from when the "Firing Switch" is closed until igniter functioning occurs shall be recorded. Any igniter which fails to fire on the first attempt or fails to function in the required time shall be classed defective.

* This test may be dangerous and shall be performed behind a suitable barricade.

5. PREPARATION FOR DELIVERY

5.1 Packaging

5.1.1 Level B. - The igniter assemblies shall be packaged in accordance with dwg. 8886515.

5.2 Packing

5.2.1 Level B. - The igniter assemblies shall be packed in accordance with dwg. 8886516.

5.3 Marking. - Marking shall be in accordance with dwgs. 8886515 and 8886516.

6. NOTES

6.1 Ordering data. - Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Data cards shall be prepared for each lot in accordance with the information specified in MIL-STD-1167.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:18Z
Check the source to verify that this is the current version before use.

6.2 Inspection code numbers. - The five-digit code numbers assigned to the inspections herein are to facilitate future data collection and analysis by the Government.

6.3 Inspection equipment. - The contractor shall design inspection equipment as required by the referenced inspection Equipment Lists (EL) in accordance with the instructions of paragraphs 6.3.1 through 6.3.5.

6.3.1 Inspection equipment lists. - Inspection equipment lists indicate the availability of inspection equipment designs by showing in the "number" column of the list of inspection equipment (Form SMUPA 1010) the numbers of drawings or Federal Stock numbers of existing equipment designs, or codes as indicated in paragraph 6.3.2. Design action required of the contractor is described in paragraphs 6.3.3 and 6.3.4. The contractor will be required to prepare detailed drawings in accordance with 6.3.4 for all the equipment coded as "Contractor Design" in the number column. These contractor designs must be approved by the Government prior to fabrication or procuring of the equipment. Designs shall be submitted for approval as specified in 6.3.5.

6.3.2 Inspection equipment list codes. - The inspection equipment as defined in 6.3.3 and 6.3.4 will be designated in the EL by the following codes:

CD - Contractor design on controlled contractor format and/or commercial equipment.
MU - Army design, mandatory for use.

6.3.3 Army designs. - Army designs are reflected on detailed drawings which completely depict all the information necessary for the fabrication of the item of inspection equipment. The contractor need provide no design when an Army design is listed for an item of inspection equipment. Army designs fall into two basic classifications; mandatory (designated "MU") and non-mandatory (indicated by drawing or Federal Stock Number). When an inspection equipment list references mandatory Army designs, the contractor shall comply with, and use these designs accordingly. The contractor may, however, in connection with non-mandatory designs, and with the approval of the Government, design alternate inspection equipment or use comparable commercial equipment to facilitate his operations. Such contractor prepared designs or commercial equipment selections must be approved by the Government prior to fabrication or procuring of the equipment. Designs shall be submitted for approval as specified in 6.3.5.

6.3.4 Contractor designs. - Contractor designs are designs of inspection equipment for which the Government has assigned design responsibility to the contractor. Contractor designs

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:18Z
Check the source to verify that this is the current version before use.

shall be supported by detailed drawings which depict all information necessary to completely fabricate, calibrate and operate an item of inspection equipment. This requires that the necessary views, dimensions, materials, finish, notes, operating and calibration instructions be properly depicted in accordance with approved practices to the extent that further calculation or clarification will not be required. Unless otherwise specified, contractor designs may be devleoped on the format the contractor normally employs in his equipment design procedure provided such format reflects the detail and information specified above, subject to the following controls: All submitted contractor designs shall conform to MIL-D-1000, Category E, Form 2. Legibility and reproducibility shall permit conventional making of clearly understandable, high contrast reproductions. Contractors shall submit one copy of final designs as a rolled set. Designs shall be submitted for approval as specified in 6.3.5.

6.3.5 Submission of contractor designs. - All submitted designs shall contain a reference to the applicable five digit Code Number contained in Section 4 of this specification. Unless otherwise specified on the EL, all designs of equipment for inspection of defects classified as critical and major shall be submitted for approval to the Commanding Officer, Picatinny Arsenal, ATTN: SMUPA-ND1. All other designs of inspection equipment shall be approved by the inspection element of the agency administering the contract; submission shall be as directed by the contracting officer. Partial submission of inspection equipment designs is permissible and encouraged. However, the Arsenal completion date for design review will be based on the date of the final submission of designs. Picatinny Arsenal design review will be accomplished normally within one month after receipt.

6.4 Submission of First Article Samples. - Instructions as to the location for evaluation of the first article samples shall be obtained from the contracting officer. Upon receipt of such request, the contracting officer shall advise Picatinny Arsenal and instructions will be issued accordingly. All inquiries should be forwarded to: Commanding Officer, Picatinny Arsenal, ATTN: SMUPA-NI, Dover, New Jersey.

6.5 Submission of test data. - In addition to the normal distribution of records, one copy of all test data shall be forwarded to each of the following:

Commanding Officer
Picatinny Arsenal
ATTN: SMUPA-ND4 and SMUPA-DE1
Dover, New Jersey 07801

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:18Z
Check the source to verify that this is the current version before use.

6.6 Testing of Government owned squibs. - The Contracting Officer will arrange to have the igniter contractor reimbursed for expense incurred in the performance of the check test for deterioration of squibs when the contractor is directed to perform the test.


Custodian:
Army-MU
Navy-OS

Preparing activity:
Army-MU

Project No. 1340

User Interest activity:
Navy-OS

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:18Z
Check the source to verify that this is the current version before use.

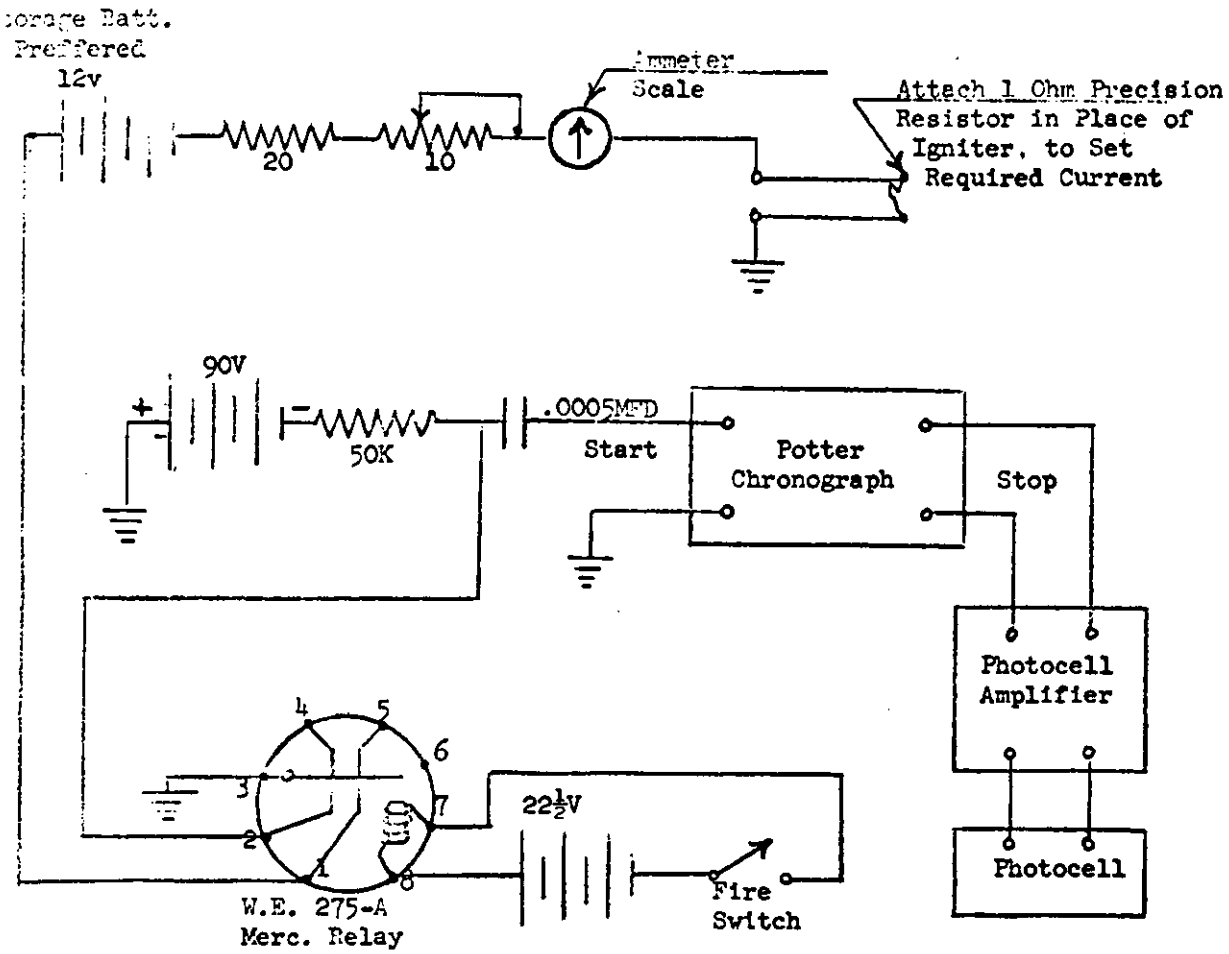

NOTE:

Firing Voltage Must Be At Least 12V So That Variation Of Squib Resistance Within Limits Of Specification Will Not Vary Firing Current By More Than Approx. 1%.

W. E. 275-A Merc. Relay Must Be Used Because Of Simultaneity Of Contact Closure.

Photo Tube Should Have S-1 Spectral Response.

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:18Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:18Z
Check the source to verify that this is the current version before use.