MILITARY SPECIFICATION

TANK, STORAGE, LIQUID OXYGEN/LIQUID NITROGEN, TMU-20/E

This military specification has been prepared by the Department of the Air Force, San Antonio Air Logistics Center/SFRM, Directorate of Energy Management (Code 68), Kelly AFB TX 78241-5000, based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-T-27483. It is subject to modifications. However, pending its promulgation as a coordinated military specification, it may be used in requisition.

1. SCOPE

1.1 Scope. This specification covers a skid-mounted, 5,000-gallon tank for storing liquid oxygen/liquid nitrogen, designated TMU-20/E.

1.2 Classification. Tanks covered by this specification shall be of the following type:

TYPE I LIQUID OXYGEN 5,000 GALLON
TYPE II LIQUID NITROGEN 5,000 GALLON

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extend specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and Supplement thereto in the solicitation (See 2.4.1).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this documents should be addressed to: SA-ALC/SFRM, Kelly AFB TX 78241-5000, by using the self-addressed Standardization Document Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3655

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

UU-T-81 - Tags, Shipping and Stock
PPP-T-60 - Tape, Pressure-sensitive Adhesive, Watterproof, for Packaging

MILITARY

MIL-P-116 - Preservation, Methods of
MIL-V-173 - Varnish, Moisture-and-Fungus-Resistant (for the Treatment of Communications, Electronic, and Associated Electrical Equipment)
MIL-P-514 - Plates, Identification, Instruction and Marking, Blank
MIL-R-3065 - Rubber, Fabricated Parts
MIL-A-8421 - Air Transportability Requirements, General Specification for
MIL-C-83286 - Coating Urethane, Alipmatic Isocyanate for Aerospace Applications
MIL-H-27301 - Hose Assembly, Metal, Cryrogenic Liquid, Transfer
MIL-T-27730 - Tape, Antiseize, Tetrafluoroethylene, with Dispenser
MIL-C-81302 - Cleaning Compound Solvent, Trichlorotriflouroethane

STANDARDS

FEDERAL

FED-STD-595 - Colors

MILITARY

DOD-STD-100 - Engineering Drawing Practices
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of U.S. Military Property
MIL-STD-143 - Specifications and Standards, Order of Precedence for the Selection of
MIL-STD-808 - Finishes, Protective and Codes for Finishing Schemes for Ground and Ground Support Equipment
MIL-STD-810 - Evnironmental Test Methods for Aerospace and Ground Equipment
MIL-STD-831 - Test Reports, Preparation of
MIL-STD-838 - Lubrication of Military Equipment
MIL-STD-889 - Metals, Dissimilar
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking, and Waterproofing, with Appropriate Test Methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

MIL-STD-1359 - Cleaning Methods & Procedures for Breathing Oxygen Equipment

MS33656 - Fitting End, Standard Dimensions for, Flared Tube Connection and Gasket Seal

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those in effect on the date of the solicitation (see 2.4.2).

Air Force-Navy Aeronautical

AN929-4 - Cap Assembly, Pressure Seal, Flared Tube Fitting

DRAWINGS

Ordnance Corps

8984433 - Seat, LOX Coupling, 3-1/2 Inch
8984434 - Nut, LOX Coupling, 3-1/2 Inch
8984435 - Cone, LOX Coupling, 3-1/2 Inch
8984990 - LOX Cap, 3-1/2 Inch
8984991 - LOX Plug, 3-1/2 Inch
8987830 - Assembly, LOX Coupling, Male Half, All Sizes
8987831 - Assembly, LOX Coupling, Female Half, All Sizes
8987832 - Gasket, LOX and LN2, All Sizes
8987839 - Ring, Retaining, LOX and LN2 All Sizes
8987855 - Seat, LOX Coupling 1 Inch
8987856 - Cone, LOX Coupling, 1 Inch
8987857 - Nut, LOX Coupling, 1 Inch
8987869 - Cap, LOX Coupling, 1 Inch
8987870 - LOX Plug, 1 Inch
8987876 - Seat, LN Coupling, 1 Inch Male
8987877 - Cone, LN Coupling, 1 Inch
8987878 - Nut, LN Coupling, 1 Inch
8987885 - Seat, LN Coupling, 3 Inch
8987886 - Cone, LN Coupling, 3 Inch
8987887 - Nut, LN Coupling, 3 Inch
8987888 - Assembly, LN Coupling, Male Half, All Sizes
8987889 - Assembly, LN Coupling, Female Half, All Sizes
8987890 - Cap, LN Coupling, 1 Inch
8987891 - LN Plug, 1 Inch
8987896 - LN Cap, 3 Inch
8987897 - LN Plug, 3 Inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

Air Force

49B6564	-	Ring-Eyebolt, 25,000 LB Cargo Tiedown
59C6671	-	Hose, Transfer-Cryogenic Liquid, Assembly of
7545352	-	Requirements for Finishes Protective; and Codes for San Antonio ALC Ground Support
8221044-01	-	Air Force Decal for Type I
8221045-01	-	Air Force Decal for Type II
8321391	-	Filter Assembly, 1 Inch
8443150	-	Valves, Globe Oxygen, Nitrogen
8518507	-	Filter Assembly, 2 Inch

PUBLICATION

Design Handbook

AFSC DH 1-11 - Air Transportability

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the non-Government documents which are current on the date of the solicitation (see 2.4.3).

American Society of Mechanical Engineers (ASME)

ASME Boiler and Pressure Vessel Code

ASME Boiler and Pressure Vessel Code, Section VIII, Div. I,
ASME Boiler and Pressure Vessel Code, Section V
ASME Boiler and Pressure Vessel Code, Section IX

American Society for Testing and Materials (ASTM)

*ASTM-D-3951-82 Standard Practice for Commerical Packing
*DOD Adopted

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

2.4 Sources of documents.

2.4.1 Government specifications and standards. Copies of the referenced military specifications and standards are available from the Department of

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

Defense Single Stock Point, Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia PA 19120-5099. For specific acquisition functions, these documents should be obtained from the contracting activity or as directed by the contracting activity.

2.4.2 Other Government documents. Copies of other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity. Certain documents listed may be obtained as follows:

a. Copies of drawings required by suppliers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.

b. Copies of GPO Style Manual should be addressed to the Superintendent of Documents, US Government Printing Office, Washington DC 20402. When indicated, reprints of certain regulations may be obtained from the federal or service agency responsible for issuance thereof.

2.4.3 Sources for Non-Government publications. Non-Government documents are generally available for reference from libraries and technical groups. The documents listed may be obtained as follows:

a. ASME: Copies may be purchased from American Society of Mechanical Engineers, United Engineering Center, 345 East 47th Street, New York, NY 10017.

b. ASTM: Copies may be purchased from American Society for Testing and Materials, 1816 Race Street, Philadephia PA 19103.

3. REQUIREMENTS

3.1 First Article. This specification makes provisions for first article testing.

3.2 Components. The tank shall consist of the following major components:

Item Or System Name	See Requirements
Liquid storage tank assembly	3.8.1
Pressure buildup system	3.8.2
Control housing assembly	3.8.3
Control panel	3.8.4
Skid base	3.8.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

3.2.1 Component schematic. Figure 1 is a component schematic of the tank lines, valves, relief devices, and instruments. The piping is shown on both ends for illustration purposes only. The actual tank design shall have all components with exception of the outer shell relief device located on one end of the tank.

3.3 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.4 Materials

3.4.1 Fungusproof materials. Materials that are nutrients for fungi shall not be used where it is practicable to avoid them. When used and not hermetically sealed, they shall be treated with varnish conforming to MIL-V-173. However, if they will be used in a hermetically sealed enclosure, fungicidal treatment will not be necessary.

3.4.2 Metals. Wherever practicable, lightweight metals shall be used in the construction of the tank. Metals shall be of the corrosion-resistant type, or treated to resist corrosion due to environmental conditions.

3.4.2.1 Chilled surfaces. All metallic surfaces of the tank and components thereof that contact liquid oxygen or that are in a location where they will be chilled sufficiently during operation to cause condensation of moisture from the atmosphere shall be fabricated from corrosion-resistant materials that require no paint or other organic chemical coating to protect them from corrosion.


3.4.2.2 Dissimilar metals. Unless protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.4.3 Gasketing and insulating materials. Plastic, rubber, or similar gasketing and insulating materials shall be compounded to insure their suitability for the intended application and, where applicable, their resistance to hydrocarbons or low temperatures. Mylar super insulation or perlite are acceptable for annular insulation space.

3.4.3.1 Nonmetallic components. Packings, gaskets, seals, and other nonmetallic components that come into contact with high-purity nitrogen or oxygen shall be compounded of materials compatible with use in a pure oxygen or nitrogen atmosphere under the conditions to which they will be subjected, and that are not adversely affected or deteriorated by continued use in an oxygen or nitrogen atmosphere. Polytetrafluoroethylene gasketing material for other than the 8987832 gasket shall be impregnated with not less than 25 percent pulverized glass fiber filler.

3.4.4 Rubber goods. All rubber goods, such as door seals, shall be fabricated from rubber compounds conforming to MIL-R-3065.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

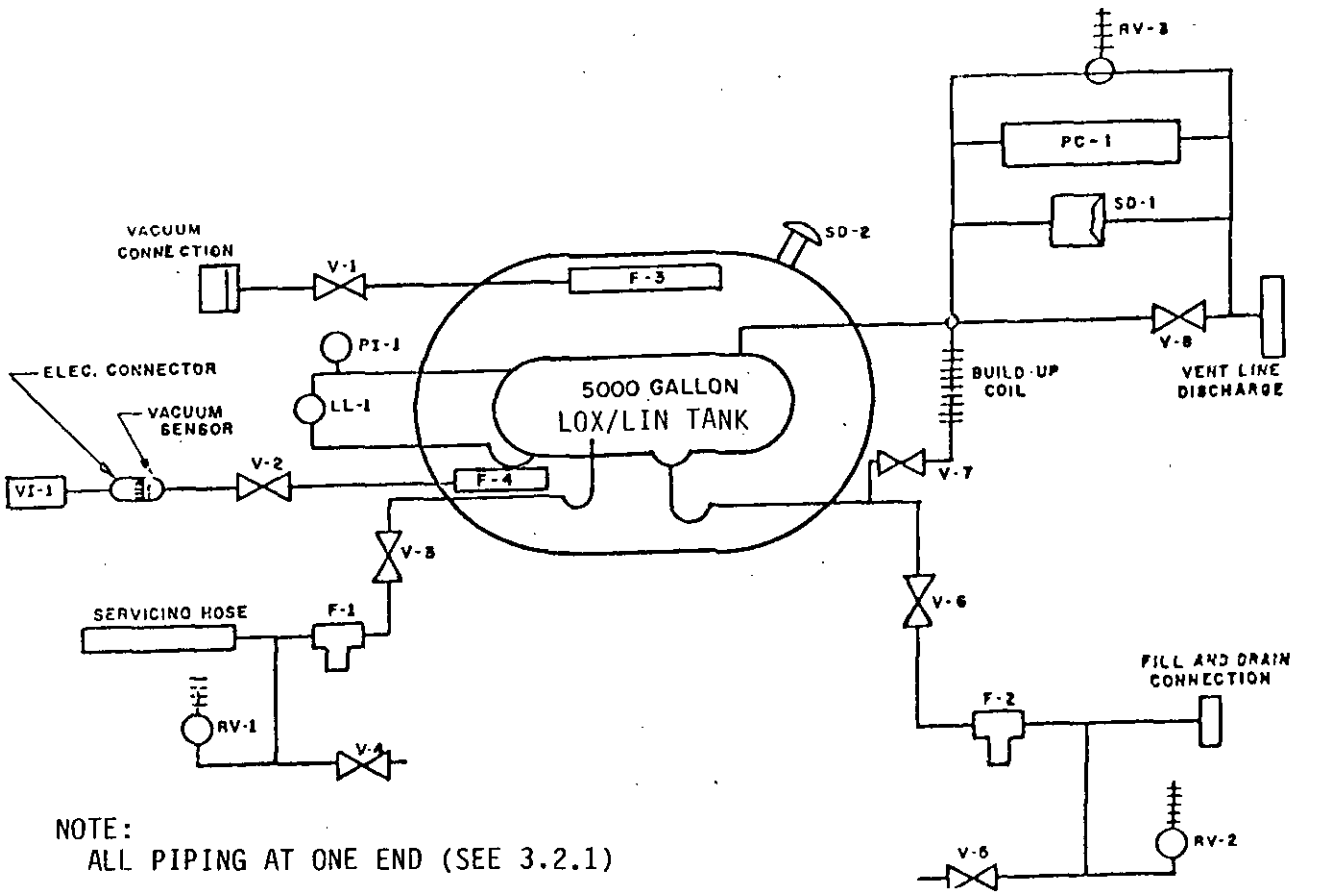

NOTE:
ALL PIPING AT ONE END (SEE 3.2.1)

SD-1 INNER SHELL SAFETY HEAD
SD-2 OUTER SHELL SAFETY HEAD
F-1 SERVICING LINE FILTER
F-2 FILL-DRAIN LINE FILTER
F-3 VACUUM FILTER (POWDER INSULATED TANK)
F-4 VACUUM INDICATOR FILTER (POWDER INSULATED TANKS)
LL-1 TANK LIQUID LEVEL INDICATOR
PI-1 VAPOR PHASE PRESSURE RELIEF VALVE
RV-1 SERVICING LINE PRESSURE RELIEF VALVE
RV-2 FILL-DRAIN LINE PRESSURE RELIEF VALVE
RV-3 INNER SHELL PRESSURE RELIEF VALVE
V-1 VACUUM LINE SHUTOFF VALVE
V-2 VACUUM INDICATOR SHUTOFF VALVE
V-3 SERVICING LINE SHUTOFF VALVE
V-4 SERVICING LINE DRAIN VALVE
V-5 FILL-DRAIN LINE DRAIN VALVE
V-6 FILL-DRAIN LINE SHUTOFF VALVE
V-7 PRESSURE BUILDUP CONTROL VALVE
V-8 VAPOR VENT LINE SHUTOFF VALVE
V1-1 ANNULAR SPACE VACUUM INDICATOR
PC-1 ADJUSTABLE PRESSURE CONTROL

FIGURE 1. Component Schematic

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

3.4.5 Combustible materials. Readily combustible materials shall not be used.

3.4.6 Recycled, Virgin and Reclaimed Materials. Provided that all other requirements of this specification are met, reclaimed materials shall be used to the maximum extent possible with no exclusion to the use of recovered materials and no requirement that an item be manufactured from virgin materials.

3.5 Design. The tank shall be a complete self-contained, liquid oxygen/ liquid nitrogen storage unit including all parts, controls, instruments, and accessories, designed for:

a. Being fitted with liquid oxygen or nitrogen at a using site under high flow rates.

b. Storing the liquid with low evaporation loss rates until needed, and at that time transferring the liquid into smaller containers.

3.5.1 Reliability. The tank shall have a mean-time-between-failure (MTBF) of not less than 21 servicing cycles at 0.9 confidence. (see 6.3.1 and 6.3.6)

3.5.2 Maintainability. Parts and assemblies shall be located and mounted to provide adequate clearance for repair and other maintenance and, where practicable, to permit removal and replacement of any part or assembly by removing or disconnecting only mounting bolts or fasteners, panel doors, tubing, or control cable to the part or assembly being removed.

3.5.2.1 Operating clearance. To the maximum practicable extent, maintainability provisions shall incorporate features insuring operating clearance for facilitating maintenance and servicing at low ambient temperatures (see 6.3.2) by personnel wearing heavy gloves or mittens and handicapped by bulky clothing and footgear.

3.5.2.2 Intricate devices. Intricate locking devices, controls, and threaded fastenings that can be easily overtorqued by personnel lacking feel through thick gloves or numbness shall be avoided where possible.

3.5.2.3 Cover and plate fasteners. Covers and plates that must be removed for component adjustments or for component or part removal shall be equipped with substantial quick-disconnect fastenings.

3.5.3 Liquid loss. The tank shall be designed to insure the minimum practicable loss of oxygen or nitrogen for purging, cool-down, pressure building, et cetera.

3.5.4 Detachable fittings. Wherever practicable, the tank shall be designed to include readily detachable- and attachable-type fittings in the liquid and vapor lines to permit rapid component removal and replacement. Disconnect points shall be clearly indicated and identified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

3.5.5 Protective covers. All cover plates, gaskets, and fittings necessary for protection of contained apparatus during operation, storage, and shipment of the tank shall be provided.

3.5.6 Common parts. The tank shall be designed to provide for the maximum practicable interchangeability of hardware and fastening devices by using the minimum number of types and sizes of bolts, screws, nuts, washers, and other common hardware.

3.5.7 Handling and transport provisions.

3.5.7.1 Aircraft loading and transport. The tank design and configuration shall permit loading into and air transport by Type C-5 aircraft. Applicable aircraft cargo compartment and loading door dimensional data is contained in AFSC DH-1-11.

3.5.7.2 Equipment Restraint Criteria. The tank shall withstand the equipment restraint criteria forces specified in MIL-A-8421 when transported empty.

3.5.7.3 Hoisting and tiedown provisions. Tiedown provisions, including four or more tiedown ring assemblies conforming to Drawing 49B6564, shall be furnished as necessary for compliance with MIL-A-8421. The tiedown provisions may serve as both the tiedown and hoisting provisions if the tank design and tiedown ring location will prevent damage when the tank is lifted by a single-hook overhead crane. The hoisting provisions shall permit lifting of the complete assembled empty tank with a vertical acceleration of 2 gravitational units (g), and shall be so located on the tank that transportation personnel can easily rig safe slings from common cable and spreader bar components for hoisting by a single-hook overhead crane.

3.5.8 Lubricants. The tank shall be designed to fully comply with the requirements specified herein when components needing lubrication are serviced with military specification or federal specification lubricants in accordance with MIL-STD-838. No hydrocarbon based lubricant shall be used in a location that is likely to come in contact with liquid oxygen or liquid nitrogen.

3.6 Construction. The tank shall be constructed to withstand the strains, shocks, vibrations, and other detrimental conditions incident to operation, maintenance, shipping, and storage with a minimum loss of service time for maintenance, repair, and periodic servicing.

3.6.1 Foolproofness. Where improper installation of an item could cause malfunctioning of that item or the system in which it is installed, an unsymmetrical mounting means shall be provided. This mounting shall be so designed that the item can only be installed in its proper operating position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

3.6.2 Component mounting. Components that need not be removed or repositioned for use shall be securely mounted to the liquid storage tank assembly or other major components in a manner that will insure against damage or unnecessary movement during operation and transport. All subbases and other fixtures needed for safe and secure component mounting shall be provided and installed.

3.6.3 Tubing and lines. Tubing and lines shall be located in protected positions, securely fastened to frame or body structures, and provided with metal protective loom or grommets at each point where they pass through members, except where a through-the-frame connector is provided.

3.6.4 Pressure Vessels. Unless otherwises specified herein the liquid storage tank assembly, piping, and connections thereto shall be fabricated in accordance with Section VIII, Division I, latest edition of ASME Boiler and Pressure Vessel Code. The pressure vessel shall be cylindrical, and shall be mounted to the skid base such that its longitudinal axis is horizontal and shall meet the dimensional requirements of paragraph 3.10.

3.6.5 Controls, instruments, and accessories. All automatic and manual controls, instruments, fittings, safety devices, and accessories needed for safe and efficient operation of the tank shall be provided.

3.6.5.1 Installation. The controls, pressure gages, and instruments shall be installed in locations where they will not be contacted by liquid oxygen or liquid nitrogen leaking from lines or connections and where water cannot drip on them as a result of vapor condensing on cold lines.

3.6.6 Parts fabrication. Sheet-metal parts shall be of such thickness, rigidity, and strength as to withstand dents, warping, vibration, radiated heat, et cetera, encountered in service and maintenance and under the conditions specified herein.

3.6.7 Locking devices. Where practicable, all screws, pins, bolts, et cetera, shall be equipped with locking devices. Safety wire, self-locking nuts, cotter pins, lockwashers, et cetera, will be acceptable. Where practicable, lockwashers shall be secured to bolts or screws. Cotter pins shall be of a type fabricated from corrosion-resistant steel or other corrosion-resistant material.

3.6.8 Thread sealer. Tape conforming to MIL-T-27730 or other pipe thread sealing materials specifically approved by the procuring activity shall be applied to threads prior to assembly of all pipe threaded fittings subject to contact by liquid gaseous oxygen or nitrogen. The tape shall be applied starting with the third thread to prevent contaminating the system.

3.6.9 Cleaning solvent drains. Provisions shall be included to insure that cleaning solvent and flushing liquids can be readily and thoroughly removed from the liquid storage tank assembly, from the pressure buildup

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

system, and from the associated tank piping and components following cleaning operations. Readily removable and replaceable threaded plugs or similar devices may be used in locations where it would be impractical to provide drain valves.

3.6.10 Pressure relief devices. Pressure relief devices shall be provided in any line or component that can be so isolated by closing valves, or otherwise, that dangerous pressures can develop. All pressure relief devices shall be installed at readily accessible locations. Provisions shall be incorporated to insure discharge of pressure without damage to equipment or danger to personnel. Safety valves shall be sized and selected in accordance with Section VIII of the ASME Boiler and Pressure Vessel Code.

3.6.11 Certification of welders. All tank welding shall be accomplished by welders certified in accordance with ASME Section IX of the Boiler and Pressure Vessel Code.

3.7 Performance. The tank shall meet the requirements specified herein when tested in accordance with the test methods specified under 4.6.

3.7.1 Storage capacity. The tank shall be capable of storing under the conditions specified herein not less than 5,000 U.S. gallons of 99.5 percent pure liquid oxygen or nitrogen at its atmospheric pressure boiling temperature. The liquid storage tank assembly shall have an internal volume of not less than 5,250 U.S. gallons in order to provide an expansion (vapor) space of not less than 5 percent of the total design capacity.

3.7.2 Heat leak evaporation rate. The tank heat leak evaporation loss rate shall not exceed the equivalent of 120 pounds of oxygen or 130 pounds of nitrogen per 24-hour day when:

a. The tank inner shell is filled to not less than 50 percent of design capacity with liquid oxygen or liquid nitrogen at atmospheric pressure

b. The tank is in a location where the ambient temperature is not less than 125°F

c. The upper surface of the tank is continuously exposed to solar or equivalent heat radiation of 100 to 120 watts per square foot for not less than 8 hours each day. Test procedure shall be in accordance with MIL-STD-810 and para 4.6.7.

d. Not less than 30 days have elapsed since evacuation of the tank annular space

e. The tank has been subjected to all tests specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

3.7.3 Vacuum retention. The tank annular space absolute pressure shall not rise above 35 microns Mercury (Hg) or show any increase attributable to leakage or outgassing within 7 days (168 hours) when:

a. Prior to the 7-day test period, the tank annular space is evacuated to insure an absolute pressure of equal or less than 35 microns Hg within 24 hours after the warm tank is filled with liquid oxygen or liquid nitrogen to 50 percent or more of design capacity

b. The vacuum line is sealed after evacuation to prevent further evacuation prior to completion of the 7-day test period and the final absolute pressure measurement

c. The vacuum retention testing specified under 4.6.6 is accomplished during the 7-day test period

d. The tank inner shell is pressurized to not less than 30 pounds per square inch (psi) with oxygen or nitrogen gas throughout the 7-day test period

e. The tank is subjected to ambient temperature throughout the test period.

3.7.4 Air transportability. The tank shall not be damaged by the equipment restraint criteria specified in MIL-A-8421 when transported empty.

3.7.4.1 The empty tank shall also withstand, without damage, like forces as imposed by the equipment restraint criteria specified in MIL-A-8421 while being transported on a railroad car, seagoing vessel, or truck.

3.8 Details of components

3.8.1 Liquid storage tank assembly. The liquid storage tank assembly shall consist of the following:

a. Inner shell

b. Outer shell

c. Inner shell suspension

d. Insulation

e. Manway

f. Piping and connections

g. Safety devices

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

h. Controls

i. Instruments

3.8.1.1 Fabrication. The liquid storage tanks assembly shall be a welded vessel designed and fabricated in accordance with Section VIII, Division I of the ASME Boiler and Pressure Vessel Code to contain, and retard evaporation loss of liquid oxygen or liquid nitrogen as necessary to insure compliance with the performance requirements specified in 3.7.1 and 3.7.2. Only inner shell shall be stamped per ASME Code, Section VIII, Division I, for the specified maximum allowable working pressure.

3.8.1.1.1 Dissimilar metal vacuum joints. Any disimilar metal vacuum joint (see 6.3.3) used in the tank construction shall withstand:

a. Thermal shocks from 125°F to the atmospheric pressure boiling tempera-ture of liquid nitrogen

b. Axial vibration at a frequency of 60 cycles per second (cps) and a double amplitude of not less than 0.050 inch with only one end of the joint fastened to the vibration input device and while submerged in liquid nitrogen at its atmospheric pressure boiling temperature

c. Lateral vibration at a frequency of 60 cps and a double amplitude of not less than 0.200 inch with only one end of the joint fastened to the vibration input device and while submerged in liquid nitrogen at its atmospheric pressure boiling temperature without developing leakage detectable with a helium mass spectrometer operated at its maximum sensitivity.

3.8.1.2 Component Arrangement. The liquid storage tank assembly shall be fabricated with the inner shell suspended within the outer shell to maintain a vacuum tight annular insulation space of sufficient distance between corresponding points on the shells and heads to meet the requirements specified herein.

3.8.1.3 Inner Shell. The inner shell shall physically store the liquid oxygen/liquid nitrogen in so far as essential, it should be designed for 100% joint efficiencies and 100% radiography of longitudinal and circumferential welded points per ASME Code, Section VIII, Division I, para UW-11a. The minimum surface area shall be consistent with the requirements specified herein.

3.8.1.3.1 Attachments. The inner shell shall be equipped with all parts, fittings, and accessories necessary to provide for support, entry for cleaning, liquid transfer, total draining, venting, safety, and determination of liquid level. The inner shell shall include sump and drain provisions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

3.8.1.3.2 Inner Shell Material. The inner shell shall be fabricated from 18CR-8N Stainless Steel Material Type 304 to insure compliance with the requirements specified herein, and is resistant to corrosion caused by contact with liquid or gaseous oxygen or nitrogen, moist air, water, or cleaning solvents such as trichlorotrifluoroethane.

3.8.1.3.3 Inner Shell Design Pressure. (See 6.3.4) The inner shell shall be designed and constructed for a maximum allowable working pressure (55 psig) adequate to permit the vapor space pressure relief valve setting specified in 3.8.1.9.3.1.1 and for a normal working pressure of not less than (50 psig) for transferring liquid oxygen under the conditions specified herein. Design and construction shall also be such to insure against:

a. Distortion or dammage when the liquid storage tank annular insulation space is evacuated to a full vacuum (15 psia) or is pressurized to the outer shell pressure relief device maximum opening pressure, and

b. Collapse of or damage to the inner shell when it is evacuated to and absolute pressure to 100 microns Hg or less, with the annular insulation space at 15 psia pressure.

3.8.1.3.4 Sump and drain provision. The inner shell shall be constructed with a sump, to which the liquid fill-drain shall connect, and a smooth inside bottom surface throughout an arc of not less than 6 inches on each side of the vertical centerline for the entire length of the inner shell to insure complete drainage into the sump. The sump shall be not less than 11 inches in diameter.

3.8.1.4 Outer Shell. The outer shell shall provide support for the inner shell and inner shell suspension system. It shall be designed from 65 to 70% joint efficiencies and NO radiography of longitudinal or circumferential welded joints is required per ASME Code, Section VIII, Division I, para UW-11c. The underside of the outer shell shall be provided with reinforced pads for the saddles support and to comply with the requirements specified herein and shall be equipped with skids specified in 3.8.5 for mounting the tank on a flat concrete pad or other suitable surface.

3.8.1.4.1 Outer Shell Material. The outer shell shall be fabricated for material SA-515, GR-60 GR-65, or SA-516, GR-60, GR-70 which have sufficient strength, rigidity, and vacuum holding properties to insure compliance with design temperature of -20°F to +150° and with the requirements specified herein.

3.8.1.4.1.1 The outer shell sections through which piping connections to the inner shell pass shall be fabricated from material resistant to corrosion caused by contact with oxygen/nitrogen, moist air, salt atmosphere, or water, to protect against corrosion in case the protective

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

coating is damaged by the extreme changes in temperature that it must undergo on and adjacent to the lines carrying liquid and cold vapors. The use of 18CR-8NI stainless steel or equivalent low thermal conductive sleeves material to isolate the liquid-and vapor-carrying lines from the outer shell will be acceptable.

3.8.1.4.2 Outer Shell Design Pressure. The outer shell shall be designed and constructed in accordance with Section VIII, Division I of the ASME Boiler and Pressure Vessel Code for full vacuum (15 psia) to insure sufficient strength and rigidity to prevent:

a. Distortion or damage when the liquid storage tank assembly annular insulation space is evacuated to a full vacuum or pressurized to the outer shell pressure relief device maximum opening pressure.

b. Collapse of or damage to the outer shell during performance of maintenance functions.

3.8.1.4.2.1 Outer Shell Support of Inner Shell. The outer shell shall be designed and constructed in accordance with Section VIII of the ASME Boiler and Pressure Vessel Code in addition to the requirements of 3.8.1.4.2, the outer shell shall be designed to support the weight and contents of the inner shell in a manner which will meet the requirements of 3.7.2 and 3.7.3.

3.8.1.4.3 Vacuum line. The outer shell shall be provided with a vacuum line and fittings designed for effective evacuation of the annular insulation space. The vacuum line shall incorporate a filter, a shutoff valve, and a vacuum line disconnect fitting. The vacuum line shall be installed to exhaust gases from the highest point of the annular insulation space, adjacent to the outer shell, and shall, to facilitate pumping down, incorporate features that will aid the flow of gases through the insulation to the vacuum line. All permanent joints in the vacuum line shall be welded. Disconnect points shall use 150 lbs min rating flanged and O ring bolted fittings.

3.8.1.4.3.1 Vacuum line shutoff valve. The vacuum line shutoff valve shall be of a type suited to high vacuum service, and that can be readily opened or closed with one hand. The valve shall seal the vacuum line as necessary for compliance with 3.7.3 when closed with one hand, and shall provide the least practicable resistance to gas flow when open. One inch NPT Bellows sealed vacuum valve shall be considered as meeting the requirement outlined herein.

3.8.1.4.3.1.1 Vacuum line shutoff valve mounting. The vacuum line shutoff valve shall be solidly mounted in an accessible location where it cannot be mistaken for a tank control valve. It shall be so mounted to supporting members that force applied in opening or closing the valve will not damage the vacuum line piping.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

3.8.1.4.3.2 Vacuum line filter. The vacuum line filter shall be a removable flanged and bolted type unit extending into the tank annular space, and shall have an effective filtering area of not less than 1,000 square inches. The filter shall present the minimum practicable restriction to gas flow consistent with effectively preventing insulation passing from the annular space into the vacuum pump line. In addition, the filter shall be designed to withstand backflow of gases as would be associated with inadvertent opening of the vacuum shutoff valve to the atmosphere.

3.8.1.4.3.3 Vacuum line disconnect fitting. The vacuum line fitting shall terminate with a 1¼ inch 150 lb rating carbon steel flange connection equipped with an O Ring and blindflange cover.

3.8.1.4.3.3.1 Vacuum line disconnect fitting mounting. The vacuum line disconnect fitting shall be mounted in a location readily accessible from outside the control housing assembly for attachment of a vacuum pump hose. The disconnect fitting shall be so mounted that forces applied to the fitting during attachment or removal of the vacuum pump hose, or while the vacuum pump hose is attached, will not damage the vacuum line.

3.8.1.5 Inner shell suspension system. The inner shell shall be supported and positioned within the outer shell by a suspension system that will thermally isolate inner shell from the outer shell and provide an annular insulation space as specified in 3.8.1.2.

3.8.1.5.1 Strength. The inner shell suspension system shall be of sufficient strength and rigidity to solidly support and prevent damage to or unnecessary movement of the inner shell when it is filled with liquid oxygen/nitrogen to any level, or subjected to the forces specified in 3.7.4.

3.8.1.5.2 Heat transfer resistance. The inner shell suspension system shall be fabricated from material possessing the maximum practical resistance to heat flow, and shall provide the minimum practicable heat transfer area between the inner and outer shells without sacrifice of necessary strength and rigidity.

3.8.1.6 Annular space insulation. The liquid storage tank assembly annual insulation space shall be filled with an insulation that will, together with evacuation of the annular space, insure compliance with the requirements specified in 3.7.2 The insulating material shall be of a composition that will not spark or burn when touched with a glowing platinum wire in an atmosphere of pure oxygen. Application of the insulation shall be such as to insure against settling or displacement in service.

3.8.1.7 Manway. A manway with a free passage area of not less than 16 inches in diameter shall be installed in the top of the liquid storage tank

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

assembly to permit entry for cleaning and inspecting the complete interior of the inner shell without breaking the annular space vacuum. The manway joints, seams, and attachment points shall be smoothed and rounded after assembly as necessary to eliminate all sharp edges, corners, points, and other obstructions to safe entry. Use of manway as an exit for lines leading from the inner shell will not be acceptable.

3.8.1.7.1 Manway installation. All manway seams and all joints between the manway assembly and the inner and outer shells that will be exposed to annular insulation space vacuum shall be of welded construction. Gasketed or other nonpermanent type seams, joints, or attachments will not be acceptable for sealing the annular insulation space vacuum.

3.8.1.7.2 Covers. Sturdy covers shall be provided as necessary to seal the manway against damage, liquid entry, and inner shell pressure loss during use of the tank under the conditions specified herein. If the cover arrangement seals the manway at the inner shell entrance in addition to sealing the manway at the outer shell entrance, the outer shell cover shall be equipped with a bursting disc or other positive sealing, pressure relief device capable of preventing a pressure buildup between the manway covers that could damage the bellows specified in 3.8.1.7.3.

3.8.1.7.3 Bellows. A flexible bellows of sufficient diameter to permit ready installation and removal of the inner shell cover, if used, through the outer shell access hole shall be provided to seal the manway from the annular space. A shield shall be fabricated inside the bellows to protect the bellows from damage during passage or manway cover removal.

3.8.1.7.4 Insulation. The space within the flexible bellows and between the manway covers or between the outer shell manway cover and the inner shell manway entrance covering device shall be packed or otherwise filled with a readily removable and replaceable insulation that will insure the minimum convection and conduction losses.

3.8.1.8 Piping and connections

3.8.1.8.1 Intertank piping connections. Piping and connections between the inner and outer shells shall be held to the minimum necessary for insuring safety and performance in accordance with the requirements specified herein. Connecting piping shall be: (a) of 18CR-8NI Stainless Steel material possessing the maximum practicable resistance to heat flow, and; (b) installed to provide the maximum practicable length of heat transfer path combined with the minimum practicable heat transfer area.

3.8.1.8.1.1 Liquid lines. Separate liquid fill-drain and liquid servicing lines, valves, filters, and disconnects shall be provided. The centerline distance between the fill-drain line termination and the servicing line termination shall be a minimum of 9 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

3.8.1 8.1.1.1 Liquid fill-drain line. The liquid fill-drain line shall be sized and installed to provide for liquid oxygen flow or transfer into or out of the liquid storage tank assembly inner shell at a rate of 100 gpm without the pressure drop through the line and filter exceeding 5 psig. The diameter of the line shall be not less than 2 inches. The line shall terminate outside the tank assembly outer shell in a 3-inch male external pipe thread.

3.8.1.8.1.1.1.1 Liquid fill-drain line installation. The liquid fill-drain line shall be installed to drain liquid from the bottom of the sump specified in 3.8.1.3.4. In addition, the liquid fill-drain line installation shall be such as to:

a. Insure against liquid entering the line from the inner shell when all liquid shutoff valves are closed

b. Insure that the inner shell and sump can be gravity drained below the level of the inner shell inside bottom surface through the fill-drain line without pressurization when the tank is set on a level surface

c. Minimize heat transfer between the inner and outer shells

d. Expose the least practicable length of line outside the outer shell.

3.8.1.8.1.2 Liquid fill-drain line shutoff valve. A manually operated shutoff valve having a free passage size approximately equal to that of the liquid fill-drain line inner diameter when fully open shall be provided in the liquid fill-drain line as near as practicable to the point where it enters the outer shell. The valve shall be so located and installed that liquid flow to the pressure buildup coil will not be restricted. General design and construction shall be specified in 3.8.1.10.1 through 3.8.1.10.2.

3.8.1.8.1.2.1 Liquid fill-drain line shutoff valve mounting. The liquid fill-drain line shutoff valve shall be solidly mounted in a location readily accessible to an operator standing on the ground outside the control housing assembly. The liquid fill-drain line shutoff valve shall be so mounted to supporting members that force applied in opening or closing the valve will not damage the liquid fill-drain line piping.

3.8.1.8.1.3 Liquid fill-drain line disconnect coupling.

a. For type I, liquid oxygen. A 3½ inch, male, liquid oxygen coupling half assembly consisting of a coupling seat, gasket, and cap conforming to Drawings 8984433, 8987832, and 8984990 respectively, assembled as shown on Drawing 8987830, shall be installed on the liquid fill-drain line external pipe thread using an appropriate reducing bushing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

b. For type II, liquid nitrogen. A 3 inch male liquid nitrogen coupling half assembly consisting of a coupling seat, gasket, and cap conforming to Drawings 8987885, 8987832, and 8987896 respectively, assembled as shown on Drawing 8987888, shall be installed on the liquid fill-drain line external pipe thread using an appropriate reducing bushing.

3.8.1.8.1.3.1 Liquid fill-drain line disconnect coupling mounting. The disconnect coupling shall be solidly mounted as near as practicable to the fill-drain valve in a location readily accessible to an operator standing on the ground outside the control housing assembly. The disconnect coupling mounting location shall provide sufficient clearance around the coupling for use of strap wrenches or other tools to assist in attachment or removal. The disconnect coupling shall be so mounted to supporting structures or members that a torque of 300 pound-feet (lb ft) per inch of nominal line size applied to the coupling in either direction of rotation with a 24-inch wrench will not damage the tank piping or connections. The mounting of the fill-drain line shutoff valve and the disconnect coupling to supporting members shall be accomplished with material possessing considerable resistance to heat flow to reduce to a minimum evaporation of liquid filled into the tank through the liquid fill-drain line.

3.8.1.8.1.4 Fill-drain line filter. The fill-drain line shall be provided with a filter between the shutoff valve and the fill-drain line male coupling through which all liquid oxygen/nitrogen entering or leaving the tank through the fill-drain line disconnect coupling shall flow. The filter shall be located and installed to insure ready access for inspection, cleaning, and removal.

3.8.1.8.1.4.1 Liquid fill-drain line filter design. The filter shall be as specified in Air Force Drawing 8518507.

3.8.1.8.1.5 Liquid servicing line. The liquid servicing line shall be sized and installed to provide for filling smaller tanks and portable liquid servicing trailers at rates up to and including 25 gpm without the pressure drop across the line and filter exceeding 5 psig. The diameter of the line shall be not less than 1 inch.

3.8.1.8.1.5.1 Liquid servicing line installation. The liquid servicing line shall be installed with a standpipe or other arrangement that will withdraw liquid at a height of 2 $\pm$1/4 inch above the bottom of the inner shell to preclude withdrawing sediment with the liquid. In addition, the liquid servicing line installation shall be such as to:

a. Insure against liquid entering the line from the inner shell when all liquid shutoff valves are closed

b. Insure that the inner shell can be gravity drained to the level of the standpipe through the liquid servicing line without pressurization

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

c. Minimize heat transfer between the inner and outer shells

d. Expose the least practicable length of line outside the outer shell

3.8.1.8.1.5.2 Liquid servicing line shutoff valve. A manually operated shutoff valve having a free passage size approximately equal to that of the liquid servicing line inner diameter when fully open shall be provided in the liquid servicing line as near as practicable to the point where it enters the tank outer shell. The valve shall be so located and installed that liquid flow to the pressure buildup coil will not be restricted. General design, construction, and mounting shall be as specified in Air Force Drawing No. 8443150.

3.8.1.8.1.5.2.1 Liquid servicing line shutoff valve mounting. The liquid servicing line shutoff valve shall be solidly mounted in a location readily accessible to an operator standing on the ground outside the control housing assembly. The liquid servicing line shutoff valve shall be so mounted to supporting members that force applied in opening or closing the valve will not damage the liquid servicing line piping.

3.8.1.8.1.5.3 Servicing line disconnect fitting. The liquid servicing line shall terminate outside the liquid storage tank assembly outer shell in a 1-inch external pipe thread.

a. For Type I, liquid oxygen. A coupling half assembly consisting of a seat, cap, and gasket conforming to Drawings 8987855, 8987869, 8987832 respectively, assembled as shown on Drawing 8987830 shall be provided on the one inch external pipe thread

b. For Type II, liquid nitrogen. A coupling half assembly consisting of a seat, cap, and gasket conforming to Drawings 8987876, 8787890, 8987832 respectively, assembled as shown on Drawing 8987888 shall be provided on the one inch external pipe thread.

3.8.1.8 1.5.3.1 Servicing line disconnect fitting mounting. The servicing line disconnect fitting shall be solidly mounted as follows:

a. As near as practicable to the servicing line shutoff valve in a location readily accessible to an operator standing on the ground outside the control housing assembly

b. Where the disconnect fitting will not be subjected to bending or other damaging stresses when the attached hose is secured in its storage provisions

c. Where there will be sufficient clearance around the fitting for use of strap wrenches or other tools to assist in attachment or removal of the liquid servicing hose or the disconnect fitting itself

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

d. Where sufficient clearance for attachment or removal of fill-drain hoses without interference will be insured.

The disconnect fitting shall be so mounted to supporting structures or members that a torque of 300 lb ft per inch of nominal line size will not damage the tank in either direction of rotation with a 24-inch wrench will not damage the tank piping or connections. The mounting of the servicing line valve and of the disconnect fitting to supporting members shall be accomplished with material possessing considerable resistance to heat flow to reduce to a minimum evaporation of liquid serviced through the line and hose.

3.8.1.8.1.5.4 Servicing line filter. The servicing line shall be provided with a filter between the shutoff valve and the servicing line disconnect fitting through which all liquid transferred through the servicing line shall flow. The filter shall be located and installed to insure ready access for inspection, cleaning, and removal. The design of the filter shall be in accordance with Air Force Drawing No. 8321391.

3.8.1.8.1.6 Liquid servicing hose. One 10-foot length of cryogenic liquid hose, Part No. 59C66710-2 conforming to MIL-H-27301, shall be provided with each tank. One end of the hose shall be connected to the 1-inch male pipe thread of the liquid servicing line. The other end of the hose shall be provided with a 1-inch close nipple and a 1-inch female coupling.

a. For Type I, liquid oxygen. The coupling assembly shall consist of a coupling cone, coupling nut, retaining ring and plug conforming to Drawings 8987856, 8987857, 8987839, and 8987870, respectively, assembled as shown on Drawing 8987831.

b. For Type II, liquid nitrogen. The coupling assembly shall consist of a coupling cone, coupling nut, retaining ring and plug conforming to Drawings, 8987877, 8987878, 8987839 and 8987891 respectively, assembled as shown on Drawing 8987889.

3.8.1.8.1.7 Vapor vent line. The vapor vent line shall permit filling the liquid storage tank assembly through the liquid fill-drain line specified in 3.8.1.8.1.1.1 at any rate up to and including 100 gpm without the inner shell vapor phase pressure exceeding 15 psig when the liquid storage tank assembly is cold. The vapor vent line shall also permit cooling down of the liquid storage tank assembly within 15 minutes when all components have stabilized at 125°F without the inner shell vapor pressure exceeding 15 psi. The diameter of the line shall be not less than 3 inches. The vapor vent line installation shall be such as to minimize heat transfer between the inner and the outer shells and to provide for filling the tank to not less than 5,100 gallons before liquid vents through the vapor vent line.

3.8.1.8.1.7.1 Vapor vent line shutoff valve. A manually operated shutoff valve having a free passage size approximately equal to that of the vapor

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

vent line inner diameter when fully open shall be provided in the vapor vent line as near as practicable to the point where it enters the outer shell. The valve shall provide positive shutoff when closed. General design, construction, and mounting shall be as specified in Air Force Drawing No. 8443150.

3.8.1.8.1.7.1.1 Vapor vent line shutoff valve mounting. The vapor vent line shutoff valve shall be solidly mounted in a location readily accessible to an operator standing on the ground in front of the control panel. The vapor vent line shutoff valve shall be so mounted to supporting members that force applied in opening or closing the valve will not damage the vapor vent line piping.

3.8.1.8.1.7.2 Vapor vent line discharge. The vapor vent line shall discharge toward the ground outside the control housing assembly in a location where high concentrations of oxygen gas and liquid overflow will not constitute a hazard or create fog in the control housing assembly. The line shall terminate in a 3-inch, female pipe thread in an area which is convenient for attachment of a hose from a purging unit.

3.8.1.8.1.8 Liquid level gage lines. If a differential-pressure-type liquid level gage is furnished, separate liquid level gage sensing lines shall be provided to the inner shell and shall be of a minimum size consistent with dependable operation of the gage.

3.8.1.8.1.9 Full trycock line. A full trycock line shall be provided for indicating when the liquid storage tank assembly is filled to 5,000 +50, -0 gallons. The full trycock line shall be of the minimum size consistent with dependable liquid level indications.

3.8.1.8.1.9.1 Trycock line shutoff valve. A manually operated full trycock line shutoff valve shall be provided in the full trycock line as close as practicable to where it passes through the outer shell. The general design and construction of the trycock line shutoff valve shall be as specified in 3.8.1.10.1 through 3.8.1.10.2.

3.8.1.8.1.9.1.1 Trycock line shutoff valve mounting. The full trycock line shutoff valve shall be solidly mounted in a location readily visible and accessible to an operator standing on the ground at the control panel. The valve shall be so mounted that excessive force applied in opening and closing the valve will not be transmitted to the full trycock line piping.

3.8.1.8.1.9.2 Discharge point. The full trycock line shall terminate in a location where discharge therefrom will be readily visible to an operator standing on the ground, at or near the control panel.

3.8.1.9 Safety devices. Where necessary, pressure relief devices shall be provided for protection of the liquid storage tank assembly and its associated components. All pressure relief devices and drains shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

installed in readily accessible locations and, except for the outer shell rupture disc, shall dis-charge all vented liquid or vapor toward the ground in a location which will insure against (a) damage to the equipment or danger to personnel, and; (b) creating fog where it will obscure controls, instruments, or fittings in the control housing assembly. All safety devices shall be fabricated from corrosion-resistant materials not adversely affected by extended contact with oxygen, moist air, water, or cleaning solvents such as trichlorotrifluoroethane.

3.8.1.9.1 Inner shell safety head. A bursting-disc type safety head utilizing a readily replaceable disc in a union-type fixture shall be provided to relieve the inner shell vapor phase pressure to the atmosphere should this pressure become excessive and the pressure relief valve fail to open. The safety head relief pressure shall be not less than 1-1/2 times the tank inner shell maximum working pressure.

3.8.1.9.1.1 Inner shell safety head installation. The inner shell safety head shall be installed with a sufficient length of tubing between itself and the vapor vent line to prevent frosting of the safety head unless the safety head actually ruptures to relieve the inner shell pressure.

3.8.1.9.2 Outer shell safety head. A bursting-disc-type safety head or a flat-plate-type safety disc assembly in which the plate bears on an O-ring shall be provided on the outer shell for venting the annular space to the atmosphere should the annular space pressure become excessive. If a bursting-disc-type safety head is provided, it shall be equipped with a vacuum support to prevent inward distortion when the annular space is evacuated. The flat-plate-type safety disc assembly may be used only if the plate will be retained against the O-ring with sufficient pressure to provide a positive seal against the entrance of gases or moisture under all conditions of operation, even when no vacuum exists in the annular insulation space.

3.8.1.9.2.1 Outer shell safety head installation. The outer shell safety head shall be installed on the end of the tank farthest removed from the control housing assembly. The design and installation shall be such that discharge from the safety head will be directed away from the control housing assembly and personnel adjacent thereto.

3.8.1.9.3 Inner shell vapor space pressure control. A pressure control device shall be connected into the liquid storage tank assembly vapor vent line between the outer shell and the vent line shutoff valve to vent gas as necessary to prevent the inner shell vapor space pressure exceeding the set point by more than 2-1/2 psig. The device shall not vent gas until the inner shell vapor pressure rises to within 2-1/2 psig of the set pressure. The pressure venting set point shall be adjustable by means of a control knob from 10 to 30 psig.

3.8.1.9.3.1 Pressure control device installation. The pressure control device shall be installed in a manner that will prevent freezeup of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

device when venting oxygen/nitrogen vapor and will permit the inner shell vapor space to be vented to atmospheric pressure by opening the vent valve.

3.8.1.9.3.1.1 Inner shell vapor space pressure relief valve. An automatic pressure relief valve shall be connected into the vapor vent line between the outer shell and the vent line shutoff valve to relieve inner shell excess pressure. The relief valve shall open at a pressure sufficiently below the inner shell bursting-disc-type safety head breaking pressure to insure against rupture of the safety head unless the relief valve fails. The opening pressure shall be not less than 55 psig, and the valve shall be sized to insure against the inner shell vapor space pressure exceeding 65 psig when:

a. The tank is filled to not less than 90 percent of design capacity

b. The buildup valve is left wide open

c. All other valves are closed.

3.8.1.9.3.1.1.1 Inner shell vapor space pressure relief device installation. The inner shell vapor space pressure relief valve shall be installed in a manner that will prevent frosting of the relief valve, unless the relief valve actually opens to relieve the inner shell vapor phase pressure.

3.8.1.9.4 Liquid fill-drain line pressure relief and drain valves

3.8.1.9.4.1 Fill and drain line pressure relief valve. An automatic pressure relief valve shall be provided in the fill-drain between the shutoff valve and the disconnect coupling for venting excess pressure from the fill-drain line. The relief valve shall be designed to open at a pressure in excess of that at which the inner shell vapor space pressure relief valve opens but less than the safe working pressure of the fill-drain line.

3.8.1.9.4.1.1 Fill-drain line automatic pressure relief valve installation. The fill-drain line automatic pressure relief valve shall be installed with a sufficient length of tubing between itself and the fill-drain line to prevent frosting of the relief valve unless the relief valve actually opens to relieve the fill-drain line pressure.

3.8.1.9.4.2 Fill-drain line drain valve. A manually operated valve for draining liquid from the fill-drain disconnect coupling when removing the fill-drain hose shall be provided in the fill-drain line between the shutoff valve and the disconnect coupling, as near the disconnect coupling as practicable. The drain valve shall be located and installed to be readily accessible to an operator standing on the ground outside the tank control housing assembly. If practicable, the automatic pressure relief valve and the drain valve may be combined into one unit. The drain valve shall discharge beneath the control housing assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

3.8.1.9.5 Liquid servicing line pressure relief and drain valves

3.8.1.9.5.1 Servicing line pressure relief valve. An automatic pressure relief valve shall be provided in the servicing line between the shutoff valve and the servicing hose for venting excess pressure from the servicing line and servicing hose. The relief valve shall be designed to open at a pressure in excess of that at which the inner shell vapor space pressure relief valve opens but less than the safe working pressure of the servicing line and servicing hose.

3.8.1.9.5.1.1 Servicing line automatic pressure relief valve installation. The servicing line automatic pressure relief valve shall be installed with a sufficient length of tubing between itself and the servicing line to prevent frosting of the relief valve unless the relief valve actually opens to relieve the servicing line pressure.

3.8.1.9.5.2 Servicing line drain valve. A manually operated valve for draining liquid from the servicing line and the servicing hose shall be provided in the servicing line between the shutoff valve and the servicing hose as near the servicing hose as practicable. The drain valve shall be located and installed to be readily accessible to an operator standing on the ground outside the control housing assembly. If practicable, the automatic pressure relief valve and the drain valve may be combined into one unit. The drain valve shall discharge beneath the control housing assembly.

3.8.1.9.6 Additional pressure relief valves. Additional automatic pressure relief valves shall be installed in each circuit or component not specified and which can be so isolated by closing valves or otherwise that a dangerous pressure could build up. These relief valves shall each be designed to open at a pressure sufficiently low to insure against damage to the component or circuit affected. However, the operating pressure shall be in excess of that at which the inner shell vapor space pressure relief valve opens.

3.8.1.10 Controls

3.8.1.10.1 Shutoff and control valves. Manually operated shutoff and control valves shall be provided wherever needed for control of the liquid storage tank assembly inner shell vapor phase pressure, vapor phase venting, liquid transfer, and tank instrumentation.

3.8.1.10.1.1 Valve design and construction. Valves shall be designed and constructed in accordance to Air Force Drawing No. 8443150.

3.8.1.10.2 Valve mounting. All valves used during liquid transfer shall be so mounted and installed that they can be readily opened or closed, and so that their control handles will be readily available to an operator standing on the ground at the control panel. All valves shall be so

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

mounted to supporting members or large size piping that force applied to the control handles in opening or closing the valves will not damage the tank piping, and so mounted that the operator will be protected from liquid spray if a fitting or coupling leaks or breaks.

3.8.1.11 Instruments. All instruments necessary for effective and safe operation of the tank shall be provided. These shall include the following:

3.8.1.11.1 Liquid level gage. A liquid level gage designed for flush mounting on the control panel and having a dial diameter of not less than 6 inches shall be provided to indicate the quantity of liquid oxygen/liquid nitrogen contained in the liquid storage tank assembly inner shell with an accuracy of ±3 percent of tank design capacity.

3.8.1.11.1.1 Graduations. The liquid level gage shall be graduated in gallons of liquid oxygen/liquid nitrogen. The graduations shall be printed on the gage face in black or a white background.

3.8.1.11.1.2 Liquid level gage mounting. The liquid level gage shall be securely mounted on the control panel in a position readily visible during liquid transfer or filling to an operator standing on the ground in front of the control panel.

3.8.1.11.1.3 Pulsation snubbers. If a differential-pressure-type liquid level gage is furnished, it shall be provided with restriction orifices in each sensing line to act as pulsation snubbers for preventing undue fluctuation of the indicating needle.

3.8.1.11.1 4 Gage construction. If a differential-pressure-type liquid level gage is furnished, it shall be so designed that breakage of the gage glass will not subject the sensing element to damaging pressures when the tank inner shell is pressurized to 55 psig.

3.8.1.11.2 Vapor phase pressure gage. A pressure gage with a dial diameter of not less than 6 inches shall be provided for indicating the tank inner shell vapor phase pressure. The gage shall be designed for flush mounting, shall be graduated over approximately 270 degrees of the dial face, and shall be accurate to within ±2 percent of full scale range.

3.8.1.11.2.1 Range. The indicating range of the vapor phase pressure gage shall be approximately 1-1/2 times the normal working pressure to the tank inner shell, unless a higher range is necessary to prevent the indicator from moving off scale before reaching the relief pressure of the inner shell safety head and the vapor space pressure relief valve specified in 3.8.1.9.1 and 3.8.1.9.3.

3.8.1.11.2.2 Vapor phase pressure gage installation. The vapor phase pressure gage shall be so installed that no combination of valve or control

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

settings can interfere with it indicating the inner shell vapor space pressure. The gage shall be securely mounted on the control panel in a position where it will be readily visible during liquid storage or transfer to personnel standing on the ground in front of the control panel.

3.8.1.11.2.3 Pressure sensing tap. A tap into the pressure gage line shall be provided for attachment and use of external test equipment. The tap shall terminate in a No. 4 size flared tube connection confroming to MS33656 installed on the control panel near the pressure gage. The fitting shall be sealed with an AN929-4 cap assembly.

3.8.1.11.3 Vacuum indicator. A vacuum indicator shall be provided to indicate the actual absolute pressure within the liquid storage tank assembly annular insulation space. A thermocouple gage tube, NSN 6685-00-877-9593 shall be installed in the vacuum system. The tube shall be mounted with a vacuum tight isolation valve.

3.8.1.11.3.1 Type. If electrically operated the vacuum indicator shall be of the intermittent-reading type having externally attached batteries. It shall be wired to consume current and indicate the absolute pressure only when the reading switch is closed. The reading switch shall be spring-loaded or otherwise constructed to require physical pressure for closing and to automatically open when the pressure is released.

3.8.1.11.3.2 Vacuum connection. Connection to the tank annular space shall be made through a filter that will prevent insulating material from entering the gage sensing element. Provisions shall also be incorporated that will permit replacing the sensing element without destroying or appreciably degrading the vacuum in the annular insulation space. Use thermocouple valve part number 4551F28, or equivalent.

3.8.1.11.3.3 Mounting. The vacuum indicator and the reading switch shall be mounted on the tank head where they will be readily visible and accessible to an operator standing on the ground in front of the control panel.

3.8.2 Pressure buildup system. The pressure buildup system shall operate to pressurize the liquid storage tank assembly inner shell vapor space to 30 psig when the assembly contains 150 gallons or more of liquid oxygen/ liquid nitrogen.

3.8.2.1 Buildup rate. After calculated adjustment to standard temperature and pressure (STP) the liquid storage tank presssure buildup system shall pressurize the inner shell vapor space to 30 psig within 10 minutes after closing the vapor vent line shutoff valve and initiating buildup when the inner shell is filled to between 15 and 20 percent of rated capacity and has been vented to atmospheric pressure for not less than 4 hours.

3.8.2.2. Pressure buildup system components. The pressure buildup system shall consist of a vaporization coil and controls, together with the

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

connections, piping, mounting, instruments, and accessories needed for proper and safe operation.

3.8.2.3 Method of operation. The pressure buildup system shall operate by vaporizing a portion of the liquid contained in the liquid storage tank assembly inner shell and pressurizing the inner shell vapor space with the resultant vapors. Vaporization of the liquid shall be accomplished in an atmospheric air heated coil that forms a direct external connection between the inner shell liquid and vapor phases through the pressure control system.

3.8.2.4 Vaporization coil. The vaporization coil shall be designed and constructed to receive liquid from the liquid storage tank assembly inner shell and vaporize it at the rate necessary for compliance with the performance requirements of 3.8.2.1 by heat exchange with ambient air, and discharge the resultant vapors into the inner shell vapor space. The vaporization coil shall include all shrouding, baffling, and ducting necessary for insuring proper airflow distribution over the heat exchange surfaces.

3.8.2.4.1 Vaporization coil material. The vaporization coil and the associated piping, supports, attachments, and connections shall be constructed from materials of types that will not be attacked or adversely affected by contact with liquid oxygen, liquid nitrogen, gaseous oxygen, gaseous nitrogen, water, dust, mud, moist air, or cleaning solvents.

3.8.2.4.2 Vaporization coil installation. The vaporization coil shall be installed where it will be protected from adverse environmental conditions and mechanical damage. The connection of the vaporization coil to the vent line shall be located in a readily accessible area and designed to permit easy disconnection of the vaporization coil from the vent line. A cap shall be provided to seal the hole in the vent line resulting from disconnection of the vaporization coil.

3.8.2.5 Operating controls. The pressure buildup system shall include all controls necessary for complying with 3.8.2 and 3.8.2.1. Normal operation of the pressure buildup system shall not require control operation other than closing of the vapor ventline shutoff valve and opening the pressure buildup control valve.

3.8.2.5.1 All manually actuated controls used in normal operation of the pressure buildup system shall either be mounted on the control panel or easily accessible within the control housing assembly.

3.8.3 Control housing assembly. A sturdy, heavy-gage, sheet-metal or high impact resistance housing assembly shall be fabricated onto one end of the liquid storage tank assembly. The housing shall contain and provide protection for the tank control, for the tank instrumentation, and for the accessories.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

3.8.3.1 Control housing assembly design and construction. The control housing assembly shall be designed and constructed to protect the enclosed components from mechanical damage, direct solar radiation, rain, sleet, snow, mud, sand, and other adverse weather and environmental conditions. The control housing assembly shall be so constructed that it, or applicable sections thereof, can be readily removed from the liquid storage tank assembly for maintenance or removal of components.

3.8.3.1.1 The control housing assembly shall be constructed from material resistant to corrosion caused by wetting with condensed water, and so that retention of condensed water with the control housing will be effectively prevented.

3.8.3.1.2 The top of the control housing assembly and the tops of all protuberances therefrom shall be shaped and slanted to resist the retention of snow, rain, or sleet. Doors and panels that must be opened for use of the tank shall be so constructed and installed that snow or ice will not lodge thereon in a manner that will prevent easy operation or access.

3.8.3.2 Size. The control housing assembly shall be of sufficient size to provide ready access to the enclosed components for operation, servicing, maintenance, and repairs, and to provide space for the storage of accessories, liquid servicing hose, and tools.

3.8.3.3 Access openings. Doors or hinged panels shall be provided in the control housing assembly as necessary for access for operation, inspection, servicing, maintenance, and repair of the equipment. The doors and hinged panels whose positions may have to be regulated shall be provided with means for securing them in any position from fully closed to wide open when subjected to wind velocities up to and including 70 miles per hour (mph).

3.8.3.3.1 Hinges and latches. All doors and hinged panels shall be equipped with sturdy hinges and latches that will hold them securely closed during storage. Latches shall also be provided for securely holding open the doors and panels that must be opened for tank use. These latches shall securely retain the doors or panels in the set position even when subjected to wind gusts up to and including 70 mph.

3.8.3.3.2 Latches. The latches and position regulating devices on all doors and hinged panels that must be opened for normal operation, servicing and maintenance of the storage tank shall be of the quick release type, readily operable by personnel wearing heavy arctic mittens and without tools. Provisions shall be incorporated for locking the control housing assembly with common padlocks.

3.8.3.4 Ventilation provisions. Ventilation openings or other air circulation provisions shall be provided in the control housing assembly as necessary to prevent the accumulation of gases or fog resulting from moist air being chilled in the control housing during liquid transfer or tank

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

filling. The ventilation openings shall be so located or shielded that the entrance of rain, snow, or other precipitation will be effectively prevented.

3.8.3.5 Liquid servicing hose storage provisions. Provisions for protection and storage of the liquid servicing hose shall be furnished inside the control housing assembly. The storage provisions shall include quick disconnect fasteners which will securely retain the servicing hose in proper storage position while it is connected to the servicing line and the control housing assembly access openings are closed. The storage provisions shall protect the hose against damage when the tank is subjected to the equipment restraint criteria specified in MIL-A-8421. The free end of the servicing hose shall be covered to protect it against entrance of contaminants. The hose shall be easily and quickly released for servicing by personnel wearing heavy gloves.

3.8.4 Control panel. A control panel shall be provided and shall be of sufficient size for installation of the instruments and control needed in normal tank use. It shall be so installed on the tank that all instruments, controls, et certera, mounted thereon will be readily visible and accessible to an operator standing on the ground in front of the control panel. All valve handles and gage faces shall be not less than 27 inches above ground level. Whenever practicable, instruments that must be monitored in making a control or adjustment shall be so located that an operator or maintenance man can simultaneously make the control or adjustment and adequately read the related instruments.

3.8.4.1 Protection. The control panel shall be protected by a panel or door when the tank is not in use for liquid transfer. The control panel shall be so mounted or recessed into the control housing assembly that it will be shielded from rain and snow when the door or panel is open.

3.8.4.2 Instruments and controls.

3.8.4.2.1 Instruments. All instruments necessary for indicating the information needed in controlling the equipment and determining it performance shall be securely mounted on the control panel

3.8.4.2.2 Controls. Insofar as practicable, all manually operated controls used in normal operation of the equipment shall be located on the control panel.

3.8.5 Skid base. The liquid storage tank assembly shall be provided with a skid base designed to serve as a combination base and mounting platform for the tank when it is placed on a flat, level, hard surface such as a concrete floor or pad. Overall size of the skid base shall be such that the weight of the storage tank assembly is distributed over an area not less than the vertical projection of the outer shell outline.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

3.8.5.1 Bearing members. The skid base members bearing on the supporting surface shall have a width of not less than 8 inches in contact with the supporting surface. The bearing members shall include not less than one member on each side of the tank, each member constructed to be in contact with the supporting surface over not less than the length of the outer shell and the control housing assembly.

3.8.5.2 Skid base ends. Each end of the skid base shall be curved with a radius of not less than 6 inches or turned up at a 30 to 45 degree angle so that the bottom surface rises smoothly to a height of not less than 6 inches above a flat surface on which the tank is placed.

3.8.5.3 Towing provisions. The skid base shall be designed and fabricated to permit and facilitate attachment of a cable and pulling the tank over a flat concrete or asphalt paved surface by a tug or other towing vehicle without distortion or of damage to the tank. Provide ring eyebolt at both ends in accordance to Air Force Drawing 49B6564 or equivalent.

3.8.5.4 Forklift entries. The skid base shall incorporate symmetrically about the center-of-gravity centerline of the empty tank the forklift entries shown on figure 3. The entries shall extend the complete width of the skid base and shall contain no obstructions or irregularities that could impede movement of forklift tines through the length of the entries. The entries shall restrain 72 inch or shorter forklift tines from tilting or oscillation as necessary to prevent damaging the tank during lifting or movement operations.

3.8.6 Compartments

3.8.6.1 Handbook and record compartment. A compartment shall be provided integral to each end item for containing the equipment operation handbook and the equipment maintenance and inspection record. The compartment shall be weatherproof if not contained in an enclosure and minimum size of 9 by 11-1/2 by 4 inches.

3.8.6.2 Couplings.


a. Type I, liquid oxygen. Provide two 3-1/2 inch, female coupling half assemblies consisting of a coupling cone, coupling nut, retaining ring and plug conforming to Drawing 8984435, 8984434, 8987839 and 8984991, respectively, assembled as shown on Drawing 8987831.

b. Type II, liquid nitrogen. Provide two 3 inch, female coupling half assemblies consisting of a coupling cone, coupling nut, retaining ring and plug conforming to Drawing 8987886, 8987887, 8987839, and 8987897 respectively, assembled as shown on Drawing 8987889.

A male thread fixture should be provided in an appropriate place within the Control Housing assembly to hold these coupling in place.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

5,000 GALLON CAPACITY
LIQUID OXYGEN/LIQUID NITROGEN
STORAGE TANK

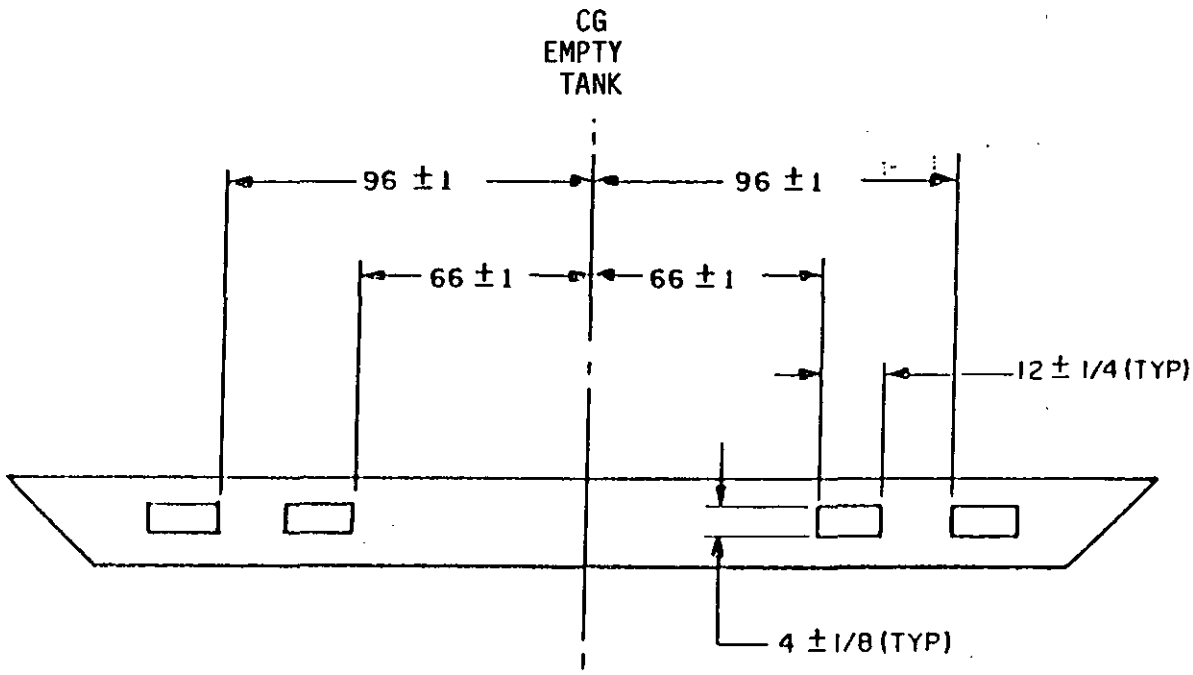

DIMENSIONS IN INCHES

TOLERANCES AS NOTED

FIGURE 3.. Forklift Entries

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

3.9 Part numbering of interchangeable parts. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The item identification and part number requirements of DOD-STD-100 shall govern the manufacturer's part numbers and changes thereto.

3.10 Dimensions. The overall dimensions of the tank, with all access openings closed, shall not exceed 25 feet in length, 9 feet in width, and 10 feet in height.

3.11 Weight. The weight of the empty tank and its accessories shall not exceed 25,000 pounds.

3.12 Finishes and protective coatings

3.12.1 Surfaces contacting oxygen or nitrogen. All surfaces, parts, fittings, et cetera, of the tank that will be in contact with high-purity oxygen or nitrogen shall be thoroughly cleaned with a nonflammable solvent, such as trichlorotrifluoroethane in accordance with MIL-C-81302 to remove all metal shavings, oil, grease, and other foreign material. No other cleaning, priming, or painting with organic materials shall be performed on these surfaces.

3.12.2 Exposed parts and surfaces. All exposed metal parts and surfaces, except parts and surfaces that contact high-purity oxygen or nitrogen shall be cleaned, treated, and finished as specified in MIL-STD-808 and Air Force Drawing No. 7545352.

3.12.2.1 Finish Code F105, shall apply to all exterior parts and surfaces of the tank. The final finish paint coating color shall be gloss white, No. 17875 in accordance with FED-STD-595.

3.12.2.2 Final film color designation YL in accordance with MIL-STD-808 shall apply to control panels, equipment items, and mounting parts installed within the control housing assembly. Unless otherwise specified all final finish paints coating shall be polyurethane type conforming to MIL-C-83286.

3.13 Marking

3.13.1 Tank Marking. Tank description and warning marking shall be in the form of decalcamanias which shall be government furnished property. Each tank shall require four each of the decalcamania described by San Antonio Air Logistics Center Sketch 8221044-01 for liquid oxygen and 8221045-01 for liquid nitrogen. The decalcamanias shall be applied one on each side of the tank at the middle, above the horizontal center line of the tank, and one each centered at each end of the tank.

3.13.2 Control marking. All valves, gages, controls, and indicators used in operation of the tank shall be identified by securely attached

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

nameplates of such composition that exposure to oil, dirt, light, et cetera, will not fade or cause them to become eradicated. Tags shall not be used, metal stamped letter such as V4, V5 will satisfy the above requirements.

3.13.3 Warning plate. A weatherproofed red plate containing the following information shall be provided adjacent to the liquid servicing line:

WARNING - TANK IS NOT TO BE FILLED
THROUGH THIS LINE - FOR
SERVICING ONLY.

3.13.4 Operating and precautionary instructions. Brief operating and precautionary instructions shall be permanently affixed on or near the tank control panel. The instructions shall be clear, concise and adequate to enable operation of the tank without damage to the equipment or injury to personnel. Instruction panels shall be made from sheet aluminum or sheet zinc not less than 0.050 inch thick, anodized or etched to produce raised markings with a black or other dark color background, and with a border of not less than 1/4 inch.

3.13.5 Transportation data plate. A transportation data plate in accordance with MIL-P-514 shall be securely attached to the outside of the control housing assembly adjacent to the nameplate. The transportation data plate shall include the following information:

TRANSPORTATION DATA PLATE

Shipping Weight	Overall Width
Shipping Cubage	Overall Height
Overall Length	C. G. Location

T.O. or T.M Number.

3.13.6 Lifting instruction plate. An instruction plate shall be furnished containing all information necessary for transporation personnel to:

a. Safely lift and move the empty tank with forklift trucks of up to and including 10,000 pounds capacity, and

b. Rig a safe lifting sling from common cable and spreader bar components and safely lift the empty tank with a 2-g acceleration.

The plate shall be securely attached to the outside of the control housing assembly near the transporation data plate. The lifting instruction plate shall be of the same material and prepared in the same manner as the transportation data plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

3.13.7 Color marking. The indicating scale of each instrument (pressure gage, differential pressure indicator, temperature indicator, liquid level indicator, et cetera) used for normal operation and control of the tank shall be permanently and plainly marked with green and red to show the proper operating and the other-than-proper-operating or danger zones respectively.

3.13.8 Insulation identification plate. An insulation identification plate containing all information necessary to completely identify the insulation material and showing the quantity in pounds of the insulation material installed in the liquid storage tank assembly annular space shall be permanently affixed in a readily accessible and protected location that will be within the control housing assembly when it is closed for transport or storage. The insulation identification plate shall be prepared in the same manner as the operation and precautionary instruction plate.

3.14 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130.

3.14.1 Tank nameplate location: The tank nameplate shall be securely attached to the outside of the control housing assembly in a readily visible location. Tank nameplate part number 44078 shall be furnished by the government.

3.15 Workmanship. All parts of the tank shall be fabricated and finished in a workmanlike manner. Particular attention shall be given to the following:

a. Freedom from blemishes, defects, burrs, and sharp edges

b. Accuracy of dimensions, radii of fillets, and marking of parts and assemblies

c. Thoroughness of soldering, welding, brazing, painting and riveting

d. Thorough removal of rust, slag, flux, and other foreign materials from the inside of the liquid storage tank assembly and from all piping, valve, connection, filter housing, and other surfaces that contact oxygen/nitrogen product

e. Alignment of parts and tightness of assembly screws, bolts, rivets, et cetera

3.16 General cleaning instructions. Following completion of fabrication and assembly operations, the tank shall be thoroughly cleaned and degreased to remove dirt; excess soldering, brazing, and welding flux; welding slag; scale; loose, spattered, or excess solder; metal chips; loose or chipped paint; spilled chemicals; and other foreign materials. Cleaning shall be continued until visual inspection shows no evidence of contamination or

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

foreign matter, ultraviolet inspection of surfaces contacting oxygen/nitrogen product shows no evidence of fluoroescence, and particulate contamination of liquid oxygen/nitrogen withdrawn does not exceed the following:

a. When the tank is filled to 90 percent or more of design capacity with filtered liquid oxygen and allowed to set for not less than 2 hours, the residue remaining after evaporation of the first liter of liquid withdrawn through the liquid fill-drain line with its filter removed shall contain:

(1) No solid particle with any dimension greater than 1,000 microns

(2) No fibrous particle (see 6.3.6) with a length greater than 6,000 microns

(3) Not more than 25 milligrams total of both solid and fibrous particles

b. When the liquid oxygen/nitrogen remaining in the tank after withdrawal of the 1-liter sample specified above is discharged through the fill-drain line specified in 3.8.1.8.1.1 and the filter specified in 3.8.1.8.1.4 at not less than 150 gpm, the total amount of contaminant collected on the filter shall not exceed 0.5 gram.

3.16.1 Degreasing. The tank surfaces, parts, fittings, et cetera, that will be in contact with high-purity oxygen or nitrogen shall be degreased in accordance with MIL-STD-1359. Precautions shall be taken to insure that solvents do not contact parts fabricated from incompatible materials.

3.16.1.1 Petroleum and other flammable solvents shall not be used on such surfaces.

3.16.1.2 All cleaning materials solvents shall be thoroughly removed from the tank components following the cleaning and degreasing processes.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conformed to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, not does it commit the government to acceptance of defective material.

4.2 Classification of tests. The inspection and testing of the tank shall be classified as follows:

a. First article testing . . . . . See 4.4

b. Acceptance tests . . . . . See 4.5

4.3. Test conditions

4.3.1 Tools. Special tools and field equipment shall be used to the maximum practicable extent during testing. Use of these tools shall be sufficient to determine their usefulness. Instances where the special tools furnished are inadequate shall be recorded in detail.

4.3.2 Instrumentation

4.3.2.1 Pressures. Pressures in excess of 1 millimeter (mm) Hg absolute and pressure differentials, except pressure drops in the fill-drain and servicing line, shall be operated by the vapor pressure and measured by differential pressure gages furnished as part of the tank.

4.3.2.1.1 Absolute pressure below 1 mm Hg shall be measured by the use of calibrated instruments designed to read total pressures (including permanent gases and condensible vapors).

4.3.2.1.2 Pressures in excess of atmospheric shall be recorded in pounds per square inch gage. Pressures up to and including atmospheric shall be recorded in microns or millimeters of mercury absolute, as applicable. Differential pressures shall be recorded in inches of water or inches of mercury, as applicable.

4.3.2.1.3 Barometric pressure. Barometric pressure shall be measured by a properly calibrated mercurial barometer and recorded in millimeters of mercury absolute.

4.3.2.2 Temperatures. Temperatures shall be measured by appropriately located thermometers, or by thermocouples used with calibrated potentiometers. Temperatures shall be recorded in degrees Fahrenheit.

4.3.3 Flow rates

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

4.3.3.1 Liquid. Liquid oxygen/nitrogen flow rates shall be determined by either of the following methods:

a. Passing the liquid through a properly calibrated recording or totaling-type liquid flowmeter designed to handle the liquid being measured.

b. Collecting the liquid and weighing on an accurate scale.

4.3.3.1.1 Liquid flow rates shall be recorded in gallons per minute of the liquid at its atmospheric pressure boiling temperature.

4.3.3.2 Gas. Gaseous oxygen or nitrogen flow rates shall be determined by passing the material through a properly calibrated recording or totaling-type gas meter designed to handle the gas being measured.

4.3.3.2.1 Gaseous flow rates shall be converted to weight flow rates for the material handled, expressed in pounds per hour, pounds per minute, et cetera, as applicable.

4.3.4 Observations. During the progress of all tests, such characteristics as ease of control, pressure regulation, freedom from leaks, and ease of operation shall be observed to determine whether the tank complies with all requirements specified herein.

4.3.5 Vacuum pumping. A vacuum pump shall be attached to the tank vacuum line disconnect fitting and the liquid storage tank annular space pumped down to insure an absoute pressure of less than 35 microns Hg within 24 hours after the warm liquid storage tank assembly is filled with liquid oxygen to 40 percent or more of design capacity.

4.3.5.1 Vacuum line seal. Upon completion of the vacuum pumping, the vacuum pump shall be disconnected and the vacuum line so sealed that further vacuum pumping cannot be accomplished without breaking the seal. The vacuum line shall remain sealed throughout all testing specified herein.

4.3.6 Test data

4.3.6.1 Correction of data. If the tests specified herein cannot be conducted under the specified conditions, the tests may, upon approval of the procuring activity, be conducted under other conditions and the performance under the specified conditions calculated from the test results obtained. The manner of calculation shall be demonstrated, and actual test data proving the correctness of the calculation methods shall be presented for review by the procuring activity.

4.3.6.2 Operational data. Operational data shall be recorded at the intervals specified under the individual test instructions. The data recorded shall include the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

a. Liquid storage tank

(1) Tank vapor phase pressure (psig)

(2) Tank liquid level gage reading (gallons)

b. Servicing data

(1) Pressure of liquid entering transfer hose (psig)

(2) Flowmeter reading (gpm)

(3) Pressure of liquid at end of transfer hose (psig)

(4) Actual delivery rate of liquid (gpm).

4.3.6.3 Psychrometric data. Wet- and dry-bulb temperature readings shall be recorded at the intervals specified under the individual tests.

4.3.6.4 Barometric pressure. The barometric pressure shall be measured and recorded at the intervals specified under the various test procedures specified under para 4.6.

4.3.6.5 Tolerances

4.3.6.5.1 Data on absolute pressures measured in the range from 0 to 10 microns Hg shall be accurate to within 0.5 micron Hg.

4.3.6.5.2 Data on absolute pressures measured in the range from 10 to 50 microns Hg shall be accurate to within 2 microns Hg.

4.3.6.5.3 Data on absolute pressures measured in the range from 50 to 250 microns Hg shall be accurate to within 5 microns Hg.

4.3.6.5.4 Data on absolute pressures measured in the range from 250 to 500 microns Hg shall be accurate to within 10 microns Hg.

4.3.6.5.5 Data on absolute pressures measured in the range from 500 to 1,000 microns Hg (1mm Hg) shall be accurate to within 20 microns Hg.

4.3.6.5.6 Data on absolute pressures measured in the range from 1mm Hg to and including atmospheric shall be accurate to within 0.1 mm Hg.

4.3.6.5.7 Data on gage pressures measured in the range from atmospheric to 10 psig shall be accurate to within 1/2 psig.

4.3.6.5.8 Data on gage pressures measured in the range from 10 to 50 psig shall be accurate to within 1 psig.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

4.3.6.5.9 Data on gage pressures measured in excess of 50 psig shall be accurate to within 2 percent of the numerical reading.

4.3.6.5.10 Data on weights, weight flow rates, and volume flow rates shall be accurate to within 1 percent of the numerical reading.

4.3.6.5.11 Data on gas and vapor flow rates shall be accurate to within 1 percent of the numercial reading.

4.3.6.5.12 Data on temperatures shall be accurate to within 2°F.

4.3.6.6 Pressure test record. A record of the pressures at which each tank component is tested and the length of time during which it is subjected to the pressure shall be retained.

4.3.7 Preliminary run-in. The nature and extent of running-in shall be determined by the manufacturer, and shall be performed prior to the testing specified herein. All necessary adjustments other than normal control adjustments shall be made during this run-in and shall remain undisturbed thereafter.

4.4 First Article testing (see 6.2)

4.4.1 First Article test sample. One tank shall be subjected to the first article tests specified in 4.4.3.

4.4.2 First Article test report. After the First Article tests are completed, a First Article test report shall be prepared in accordance with MIL-STD-831 and three copies of the report furnished to the procuring activity.

4.4.2.1 Reliability and maintainability information. The following information shall be included as an appendix to the First Article test report.

a. A description of and the appropriate information below concerning any first article tests that were conducted prior to those described in the test report and that were intended to apply to the contract.

(1) All failures, servicing, adjustments, maintenance, and irregular functioning shall be identified by accumulated operating time, cycles, or position in the test procedure, as appropriate. Test conditions at the time of the events identified shall be recorded.

(2) Test operator and maintenance technician errors, test equipment and test facility failures, and other events that might act as grounds for a request that an equipment failure not be counted as a reliability failure shall be recorded. Detailed descriptions of the events and the analysis to substantiate any such requests made shall be included and shall be clearly cross-referenced to each applicable failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

(3) A summary of the engineering analysis and of any tests conducted to determine assignable causes for any failure or irregular functioning.

(4) A summary of the engineering analysis leading to any corrections made to design, construction, quality control, or other procedures, or leading to any corrections to be made to production items, or proposed to be made. The summary shall also include an analysis of the predicted effectiveness of such corrections. Failures that have been corrected by design changes or by other means shall be counted as reliability failures until the corrections have been both analyzed and verified by test sufficient to substantiate the effectiveness of the correction to the satisfaction of the procuring activity.

(5) Clock time and man-hours required for each maintenance and servicing action taken during the tests. Only the time needed for actually pre-paring for and performing the tasks shall be measured and reported. A brief description of the experience and qualifications of the personnel taking such actions shall be included. The information shall include a summary of the data resulting from the servicing and maintenance tests required by 4.6.17. In addition, the clock time and the man-hours required for actual access and disassembly shall be recorded for any teardown inspections done for mechanical checks in accordance with 4.6.18. The number and description of parts and assemblies removed and causing interference shall be noted for each teardown and inspection made. Administrative time, such as filling out records, and logistics time, such as obtaining parts from stock, shall be included.

(6) Test activity or contractor comments on item features or requirements that, if modified, should improve the item.

(7) Test activity or contractor comments on use or maintenance conditions to be avoided or cultivated to increase the reliability or useful life of the item.

b. Any of the above information that is already included in the test report body or in other documents submitted to the procuring activity need not be repeated in the information required by this paragraph, but clear reference to the location and to the date of submission of the data shall be included.

c. All table and column headings and all abbreviations and symbols used shall be clearly defined where used or in a table of abbreviation and symbol definitions placed in the front part of the appendix.

4.4.3 First Article tests. The First Article tests shall consist of all the tests described under para 4.6.

4.5. Acceptance tests. The acceptance tests shall consist of the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

a. Individual tests . . . . . See 4.5.1

b. Sampling plan and tests . . . . . See 4.5.2

4.5.1 Individual tests.

4.5.1.1 Spring-loaded relief valve test. Each spring-loaded relief valve shall be subjected to the test specified in 4.6.1.

4.5.1.2 Tank tests. Each tank shall be subjected to the following tests as described under 4.6:

a. Examination of product . . . . . See 4.6.2

b. Functional check . . . . . See 4.6.3

c. Pressure test . . . . . See 4.6.4

d. Individual article vacuum retention test . . . . . See 4.6.6.2

e. Evaporation loss rate individual acceptance test . . . See 4.6.7.2

f. Cleaning effectiveness test . . . . . See 4.6.8.1 through 4.6.8.4

4.5.2 Sampling plan and tests

4.5.2.1 Bursting disc sampling test

4.5.2.1.1 Bursting disc lot. A bursting disc lot shall consist of discs manufactured under essentially the same conditions and submitted for inspection at substantially the same time.

4.5.2.1.2 Bursting disc sampling and test. Three discs from each lot of fifty or less shall be selected at random and each subjected to a gradually increasing, clean, dry, oil-free air or nitrogen pressure until it ruptures. In case a disc fails at a pressure outside the limits established by the tank manufacturer for compliance with this specification, five additional sample discs from the same lot shall be tested in the same manner.

4.5.2.1.2.1 Bursting disc rejection and retest. If more than one of the original samples or any of the five additional sample discs fail at a pressure outside the specified limits, the entire lot shall be rejected.

4.5.2.2 Valve sampling test. One of each type (same size, design, and construction) valve from each lot of one hundred or less shall be selected at random and subjected to the testing specified in Air Force Drawing 8443150.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

4.5.2.3 Sampling test of filters. The liquid fill-drain line and the servicing line filters shall be run through the acceptance tests of Air Force Drawing No. 8321391 and Air Force Drawing No. 8518507.

4.5.2.4 Dissimilar metal vacuum joint sampling tests

4.5.2.4.1 Joint lot. A lot shall consist of joints manufactured under essentially the same conditions and submitted for inspection at substantially the same time.

4.5.2.4.2 Joint sampling and test. One of each size, style, and construction dissimiliar metal vacuum joint from each lot of 25 or less shall be selected at random and subjected to the testing specified in 4.6.6.1.2. In case the joint fails to fulfill all specified requirements, three additional samples from the lot shall be tested in the same manner.

4.5.2.4.3 Joint rejection and retest. If any of the three additional sample joints fails to fulfill all specified test requirements, the entire lot shall be rejected.

4.6 Test methods

4.6.1 Spring-loaded relief valve. Prior to installation on the tank, each spring-loaded relief valve shall be subjected to a gradually increasing pressure of clean, dry, oil-free air, oxygen or nitrogen at its inlet until it starts to discharge. The pressure shall than be reduced until the valve completely reseals. This procedure shall be repeated until the valve has started to discharge, and resealed, not less than twice. Following this test, the valve shall be checked for leakage by application of a soap film across the outlet and over all outside surfaces with not less than the maximum working pressure of the component which the valve will be used to protect, being applied at the valve inlet. Failure to open or reseal within the specified limits or an indication of leaking during the soap film test shall be cause for rejection.

4.6.2 Examination of product. The tank shall be inspected to determine compliance with the requirements specified herein with respect to dimensions, workmanship, finish, and marking. The tank shall be subjected to a thorough inspection to determine quality, ease of adjustment, alignment, and functioning of all parts.

4.6.3 Functional check. All mechanical parts shall be checked for free and proper functioning.

4.6.4 Pressure test. Each component and circuit of the tank that operates under positive pressure in normal service shall be pressure tested in accordance with section VIII of the ASME Boiler and Pressure Vessel Code. Automatic pressure relief devices need not be installed for this test. Any distortion, damage, or leaks resulting from the pressure testing shall be cause for rejection of the components affected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

4.6.5 Handling and transportability tests

4.6.5.1 Forklift handling test. Two forklift trucks, with tines not more than 72 inches long and each capable of handling at least half the empty tank total weight, shall be used as follows to lift and move the empty tank:

a. Raise the empty tank not less than 3 feet above the floor or ground, using the pairs of forklift entries near the ends of the skid base (see figure 3). One forklift truck shall be placed on one side of the tank with the other forklift truck on the opposite side of the tank and at the opposite end.

b. Move the tank a horizontal distance of not less than 50 feet to a new location.

c. Set the tank on the floor or ground at the new location.

d. Back each forklift truck not less than 10 feet away from the tank.

e. Repeat steps a through d, except reposition each forklift truck on the same side of this tank as before to use the forklift entries at the other end of the skid base (opposite end from those used in steps a through d).

Any damage to or distortion of any tank component or interference with forklift handling shall be cause for rejection.

4.6.5.2 Hoisting provision test. Weights totaling not less than the empty weight of the completely assembled tank with all accessories shall be attached to the tank in such a manner that the combined weight of the tank and weights will be supported by the hoisting provisions specified in 3.5.7.3 when the tank is raised by an overhead crane. Filling an equivalent weight of liquid into the liquid storage tank assembly inner shell may be substituted for attachment of external weights if desired. The assembly (tank and weights) shall then be raised completely off the floor by an overhead crane to a height of not less than 3 feet, held in that position for not less than 1 minute, and then lowered to the floor, by means of the hoisting provisions. This procedure shall be repeated three times. Any evidence of damage to or distortion of any tank component shall be caused for rejection.

4.6.5.3 Equipment Restraint Criteria. Capabilities of the tank design and construction for fulfilling the equipment restraint criteria specified in MIL-A-8421 may be substantiated by calculations in accordance with paragraph 4.2.3 of MIL-A-8421 and shall be included as part of the test report specified in paragraph 4.4.2 of this specification. Calculation shall be approved by the engineer in the procuring activity before the performance of the first article testing paragraph 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

4.6.6. Vacuum retention testing

4.6.6.1 First article vacuum retention. Following the lifting provision testing specified in 4.6.5.1, the liquid storage tank assembly shall be filled with liquid oxygen or liquid nitrogen to not less than 60 percent of design capacity (unless already so filled) and permitted to temperature stabilized until a constant annular insulation space absolute pressure is obtained. After temperature stabilization, and with the inner shell vapor space at approximately atmospheric pressure, the annular insulation space absolute pressure shall be determined with an instrument of the type specified in 4.3.2.1.1. The inner shell vapor space shall then be pressurized to not less than 30 psig with oxygen or nitrogen gas obtained by vaporizing part of the contained liquid with the pressure buildup system, and the tank allowed to set for not less than 7 days (168 hours) so filled and pressurized. The pressure shall be controlled by use of the inner shell vapor space pressure control specified in 3.8.1.9.3 and the pressure buildup system specified in 3.8.2. Freezeup of the pressure control device or interference with venting shall be cause for rejection.

4.6.6.1.1 Following completion of the test period in 4.6.6.1, the liquid storage tank assembly inner shell vapor space pressure shall be reduced to atmospheric and the annular insulation space absolute pressure determined with an instrument of the type specified in 4.3.2.1.1. The annular insulation space absolute pressure shall not exceed 35 microns Hg or show any increase attributable to leakage or outgassing, or the tank shall be considered to have failed the test.

4.6.6.1.2 Dissimilar metal vacuum joints used in the tank constructions shall be tested as follows:

a. Subject the joint assembly to 10 thermal shocks. Each thermal shock shall be accomplished by first heating the complete joint assembly to not less than 125°F and then, before the joint has cooled below 125°F, quickly submerging the complete joint assembly in liquid nitrogen at its atmospheric pressure boiling temperature. The joint assembly shall remain submerged in the liquid nitrogen until the joint has cooled to approximately liquid nitrogen temperature. The joint assembly will be considered to have reached liquid nitrogen temperature when bubbles cease to emanate from its surface in large numbers.

b. Secure the joint assembly by one end only (with the other end free to move) to a vibration input device which will vibrate the joint assembly in liquid nitrogen. The joint assembly shall then be subjected to axial vibration at a frequency of 60 cps and a double amplitude of not less than 0.050 inch for not less than 30 minutes while the joint asssembly is submerged in liquid nitrogen at its atmospheric pressure boiling temperature.

c. Secure the joint assembly as in b, above. The joint assembly shall then be subjected to lateral vibration at a frequency of 60 cps and a

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

double amplitude of not less than 0.200 inch for not less than 30 minutes while the joint is submerged in liquid nitrogen at its atmospheric pressure boiling temperature.

Any leakage rate increase detectable with a helium mass spectrometer operating at its maximum sensitivity, comparing checks prior to and following the temperature shock and vibration testing specified above, shall be cause for rejection.

4.6.6.2 Individual article vacuum retention test. The liquid storage tank assembly inner shell shall be filled with liquid oxygen or liquid nitrogen to not less than 60 percent of design capacity and permitted to temperature stabilize. Following temperature stabilization of the liquid storage tank assembly (as indicated by a constant annular insulation space absolute pressure), and with the inner shell vapor space at approximately atmospheric pressure, the annular insulation space absolute pressure shall be determined and the tank tested for leakage or outgassing as specified in 4.6.6.1 and 4.6.6.1.1. The annular insulation space absolute pressure shall not exceed 35 microns Hg following the test or show any increase attributable to leakage or outgassing, or the tank shall be considered to have failed the test.

4.6.7 Heat leak evaporation loss rate

4.6.7.1 Initial first article test. The initial first article heat leak evaporation loss rate test shall consist of the following individual test operation conducted in the order listed. Throughout the complete test, the inner shell vapor phase pressure shall remain at as near atmospheric as necessary pressure drops through the measuring apparatus will permit.

4.6.7.1.1 Following the vacuum retention test and with the tank remaining filled to not less than 50 percent of design capacity with liquid oxygen or liquid nitrogen, the tank shall be placed in a location where the ambient temperature will remain at not less than 125°F throughout the periods specified.

4.6.7.1.2 The inner shell vapor space shall be vented to atmospheric pressure for not less than 24 hours through the flow measuring apparatus that will be used for determining the evaporation loss rate.

4.6.7.1.3 The tank shall remain under the specified ambient temperature and inner shell vapor phase pressure conditions for an additional 72 hours while heat leak evaporation rate losses for the tank are determined by passing all vapors vented from the inner shell through a recording- or totaling-type gas flowmeter. During this 72 hour period, the upper surface of the tank shall be exposed to the full impact of solar or equivalent heat radiation of 100 to 120 watts per square foot for three separate periods of not less than 8 hours each, with each exposure followed by a period of not less than 16 hours during which no radiation is applied. The total weight

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

of vapors vented during the test, the weight of vapors vented since the preceding reading, the average ambient temperature to which the tank has been subjected during the preceding period, and the average barometric pressure to which the tank has been subjected during the preceding period shall be recorded at intervals of not to exceed 8 hours during the 72-hour test period, and the average ambient temperature to which the tank was exposed during the 72 hour test period shall be calculated. The evaporation loss rates shall be reported as the pounds of liquid oxygen vaporized per 24 hour day, and shall not exceed the limit specified in 3.7.2, or the tank shall be considered to have failed the test.

4.6.7.1.4 The tank shall be removed from the high temperature test conditions and exposed to ambient temperature conditions for not less than 36 hours to permit temperature stabilization.

4.6.7.1.5 The tank shall be subjected to the individual acceptance evaporation loss rate test specified in 4.6.7.2 to establish comparative data for determining whether production tanks are capable of complying with the requirements of 3.7.2.

4.6.7.2 Evaporation loss rate individual acceptance test. Following the vacuum retention test and with the inner shell remaining filled to not less than 50 percent of design capacity, the tank shall be placed where it will be subjected to local or shop ambient temperatures throughout the test. The inner shell vapor space shall be vented to atmospheric pressure for not less than 24 hours through the flow measuring apparatus that will be used for determining the evaporation loss rate. The heat leak evaporation loss rate for the tank shall then be determined by passing all vapors vented from the inner shell through a recording or totaling type gas flowmeter for an additional period of not less than 72 hours. Throughout the test, the inner shell vapor phase pressure shall remain at as near atmospheric as necessary pressure drops through the flow measuring apparatus will permit.

4.6.7.2.1 The total weight of vapors vented during the test, the weight of vapors vented since the preceding reading, the average ambient temperature to which the tank has been subjected during the preceding period, and the average barometric pressure to which the tank has been subjected during the preceding period shall be recorded at intervals of not to exceed 8 hours throughout the 72 hour test. The actual loss rate in pounds for each reading, the average actual loss rate in pounds over the entire 72 hour test period, and the average ambient temperature to which the tank was exposed during the 72 hour test period shall be calculated. The production item average loss rate for the 72 hour test period shall be corrected from the average temperature experienced during the test period to the average temperature at which the comparative data specified in 4.6.7.1.5 was obtained, and the result reported as the pounds of liquid oxygen or liquid nitrogen vaporized per 24 hour day. This loss rate shall not exceed the limit establishesd by the comparative data obtained in 4.6.7.1.5 for compliance with 3.7.2, or the tank shall be considered to have failed the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

4.6.8 Cleaning effectiveness tests

4.6.8.1 Visual inspection. All equipment, pipes, and components that will contact liquid oxygen/nitrogen shall be visually examined for evidence of corrosion products, metal chips, scale, weld scale, oil, grease, paints, preservatives, decals, or other contamination of foreign matter. Any evidence of contamination or foreign matter shall required recleaning and retest.

4.6.8.2 Ultraviolet light inspection. All accessible surfaces and parts that will contact liquid oxygen/nitrogen shall be visually inspected for hydrocarbons with untraviolet light. Any evidence of fluorescence shall require recleaning and retest.

4.6.8.3 Particulate matter. Following the cleaning and degreasing operations specified herein and equipment final assembly, the liquid storage tank inner shell shall be filled to not less than 90 percent of design capacity with liquid oxygen or liquid nitorgen. The tank shall then be permitted to set for at least 2 hours undisturbed. Following the 2 hour period, a 2 liter or larger Dewar flask shall be placed under the discharged end of the fill-drain specified in 3.8.1.8.1.1.1 with its filter removed, the fill-drain line shutoff valve opened, and not less than 1 liter of the first liquid discharge through the line collected in the Dewar flask. This sample shall be evaporated to dryness and the residue examined for particulate matter. The liquid storage tank and the associated piping and fittings shall be recleaned and this test repeated until the particulate matter remaining as residue contains:

a. No solid particle with any dimension greater than 1,000 microns

b. No fibrous particles with a length greater than 6,000 microns

c. Not more than 25 milligrams total of both solids ands fibrous particles.

4.6.8.4 Total solids. Following withdrawal of the 1-liter sample specified in 4.6.8.3, the entire load of contained liquid shall be discharged at a flow rate of not less than 150 gpm through the fill-drain line specified in 3.8.1.8.1.1.1 and the filter specified 3.8.1.8.1.4. The filter shall be thoroughly cleaned and the removed material collected, dried, and weighed after each use. If more than 0.5 gram of contaminant material is collected on the filter during discharge of the liquid from the tank, the liquid storage tank assembly and the associated piping and fittings shall be recleaned. Cleaning and testing shall be repeated until the total amount of contaminant collected on the filter from discharging the liquid storage tank assembly load is less than 0.5 gram.

4.6.9 Shutoff and control valve tests. The valve shall be subjected to the tests specified in Air Force Drawing 8443150.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

4.6.10 Disconnect coupling torque resistance tests. The liquid fill-drain line disconnect coupling and the servicing line disconnect fitting shall each be subjected to a torque of not less than 300 lb ft per inch of nominal line size applied to the coupling or fitting first in one and then in the other direction of rotation with a 24 inch wrench. Any twisting of, distortion of, or damage to the tank piping or connections resulting from this torque shall be cause for rejection.

4.6.11 Dimensions and weight. The overall dimensions and total weight, including all equipment and accessories, of the completely assembled empty tank shall be recorded on the test data sheets. The dimensions and weight shall not exceed the limits specified in 3.10 and 3.11.

4.6.12 Liquid storage capacity. The tank storage capacity shall be determined by filling a liquid into the inner shell with the tank setting on its skid base on a flat, level surface until the filling liquid overflows through the full trycock line specified in either measuring the volume of the filling liquid or determining its volume from weights before and after filling. Following this, the inner shell shall be filled until the filling liquid overflows through the vapor vent line specified in 3.8.1.8.1.7, and the quantity of filling liquid determined as above. The inner shell shall then be filled completely to determine the total internal volume, and the quantity of filling liquid again determined as above. The actual liquid volume when the inner shell is filled to overflow through the full trycock line, when filled to overflow through the vapor vent line, and when completely filled shall all three be recorded in U.S. gallons and shall be accurate to within + 50 gallons. The tank storage capacity at which liquid starts to discharge through the full trycock line, the capacity at which liquid starts to discharge through the vapor vent line, and the total internal volume shall comply with 3.7.1, 3.8.1.8.1.7 and 3.8.1.8.1.9, or the tank shall be considered to have fail the test.

4.6.13 Pressure buildup

4.6.13.1 Buildup with low liquid level. The liquid storage tank assembly shall be filled with enough liquid oxygen or liquid nitrogen to insure between 300 and 350 gallons remaining in the inner shell after the specified stabilization. The tank shall then be set with the inner shell vapor space vented to atmospheric pressure for not less than 4 hours. Following this stabilization period, the inner shell vapor vent line shutoff valve shall be closed and the pressure buildup valve opened. The inner shell vapor phase pressure shall reach 30 psi, or the tank shall be considered to have failed the test.

4.6.13.2 Pressure build rate. The liquid storage tank assembly shall be filled with oxygen or liquid nitrogen between 15 and 20 percent of capacity and permitted to set with the inner shell vapor space vented to atmospheric pressure for not less than 4 hours and until all external components of the tank reach approximately ambient temperature. The inner shell vapor vent

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

line shutoff valve shall then be closed and the pressure buildup system actuated. The length of time required after closing of the vent valve until the vapor phase pressure has reached 30 psig shall be recorded on the test data sheets and shall not exceed 10 minutes, or the tank shall be considered to have failed the test.

4.6.14 Liquid transfer tests

4.6.14.1 Fill-drain line transfer. Liquid oxygen/nitrogen shall be transferred into the tank through a fill-drain specified in 3.8.1.8.1.1.1 at not less than 100 gpm for a length of time adequate to determine the pressure drop resulting from friction losses in the filter and line. The pressure drop shall not exceed 5 psig, or the tank shall be considered to have failed the test.

4.6.14.2 Servicing line transfer. Liquid oxygen shall be transferred from the tank through the servicing specified in 3.8.1.8.1.5 at not less than 25 gpm for a length of time adequate to determine the pressure drop resulting from friction losses in the filter and line. The pressure drop shall not exceed 5 psig, or the tank shall be considered to have failed the test. Liquid nitrogen may be used at a flow rate which will provide a pressure drop equivalent to that resulting from the specified liquid oxygen flow. If liquid nitrogen is employed for this purpose, data shall be provided to substantiate the flow rate used.

4.6.14.3 Vapor vent line. The tank shall be subjected to conditions that will insure all liquid storage tank assembly components attaining a temperature of not less than 125°F. After the liquid storage tank components have stabilized at this temperature, liquid oxygen or liquid nitrogen shall be transferred into the inner shell through the fill-drain line until the inner shell has cooled sufficiently to permit filling at the 100 gpm rate specified in 3.8.1.8.1.7. The rate of transfer during cooldown shall be the maximum that will maintain a liquid storage tank assembly inner shell pressure of less than 15 psig. The cooldown time shall not exceed 15 minutes, or the tank shall be considered to have failed the test. Following cooldown, the liquid storage tank assembly shall be filled at a rate of not less than 100 gpm. The inner shell vapor phase pressure shall not exceed 15 psi when filled at the specified rate, or the tank shall be considered to have failed the test. Liquid nitrogen may be used at a flow rate which will provide a pressure drop equivalent to that resulting from the specified liquid oxygen flow. If liquid nitrogen is employed for this purpose, data shall be provided to substantiate the flow rate used.

4.6.14.4 Vapor relief capacity. Following the vapor vent line test specified in 4.6.14.3 and with the liquid storage tank assembly remaining filled to not less than 90 percent of design capacity, the vapor vent line shutoff valve specified in 3.8.1.8.1.7.1 shall be tightly closed, the inner shell vapor space pressure control specified in 3.8.1.9.3 rendered

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

inoperative, the pressure buildup system set for maximum pressure buildup rate, and all other valves closed. The excess pressure shall be permitted to vent through the relief valve specified in 3.8.1.9.3.1.1 until the inner shell vapor space pressure reaches its maximum reading. The pressure shall not exceed 65 psig under these conditions, or the tank shall be considered to have failed the test.

4.6.15 Wind test. It shall be demonstrated, by testing or calculations, that the tank will withstand the 70 mph wind specified in 3.8.3.3 and 3.8.3.3.1.

4.6.16 Servicing and maintenance. All normal preventive maintenance and servicing operations specified in the maintenance and instruction handbook prepared by the contractor shall be performed to determine their adequacy, easy of accomplishment, and the accessibility of parts and assemblies for performance of same, unless such instructions are contrary to those necessary for compliance with the requirements specified herein. Insofar as practicable, these operations shall be conducted as part of the normal preventive maintenance, servicing, and inspections performed in accomplishing the testing specified herein. The servicing shall include vacuum pumping and sealing of the vacuum line. Interference or obstructions to servicing or preventive maintenance shall be recorded in detail on the test data sheets. The clock time and the manhours required for each task shall be measured.

4.6.17 Mechanical check. Upon completion of the above tests, a critical inspection shall be made of components to determine their operability and any damage or undue wear incurred during the tests. Teardown and parts measurement shall be made only in those cases where service life is in question. Where teardown and parts meansurement are performed, wear or distortion that exceeds limits permitted by the manufacutuer for new parts shall be cause for considering the part or parts affected as having failed to complete the test satisfactorily. The clock time and man-hours required for actual access, removal, and disassembly shall be measured for all teardown made.

4.6.17.1 Steel parts subject to high stress in operation and that are suspected of having defects shall also be subjected to magnetic particle inspection (magnaflux) and shall exhibit no indications of damage attributable to the tests, or shall be considered as having failed the test. Grinding checks and subsurface indications of laps or seams shall not be caused for rejection. Magnetic particle inspection shall be performed in accordance with ASME Code Section V.

4.6.17.2 Nonmagnetic parts suspected of defects shall be subjected to inspection with fluorescent penetrant (black light) and shall exhibit no breaks or other defects that would impair their life or usefulness. Penetrant inspection shall be performed in accordance with ASME Code Section V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

4.6.18. Servicing cycle (see 6.3.6). The tank shall be filled to design capacity with liquid oxygen or liquid nitrogen and permitted to set with the inner shell vapor space vented to atmospheric pressure until all components, other than the vapor vent line, external to the liquid storage tank assembly reach approximately ambient temperatures. The tank shall then be subjected to the testing specified in 4.6.18.1 through 4.6.18.3.

4.6.18.1 Following the filling and stabilization specified in 4.6.18, a servicing cycle shall be performed. The servicing cycle operation shall be accomplished as follows:

a. Connect the tank transfer hose disconnect fitting to a container suitable for use with liquid nitrogen or liquid oxygen

b. Close the vapor vent line shutoff valve

c. Open the pressure buildup valve until the inner shell vapor phase pressure has risen to 30 psig, after which close the pressure buildup valve

d. Fully open the servicing line shutoff valve and transfer not less than 10 gallons of liquid through the servicing hose into the receiving containter

e. Close the service line shutoff valve

f. Open the vapor vent line shutoff valve to vent the inner shell to atmospheric pressure

g. Permit the tank to set with the vapor vent line shutoff valve fully open until all traces of ice and frost have disappeared from the pressure buildup coil, tank valves, and tank servicing line. The application of external heat to expedite warmup is permissible.

4.6.18.2 The servicing cycle specified in 4.6.18.1 shall be repeated until the storage tank has been subjected to not less than 50 cycles.

4.6.18.3 The tank shall complete not less than 50 servicing cycles without necessity for servicing or maintenance of any kind, or shall be considered to have failed the test.

4.6.19 Reliability demonstration and test. Satisfactory completion of all tests required herein will be considered to demonstrate acceptable compliance with the quantitative reliability requirements of this specification.

4.6.20 Maintainability evaluation. The tank shall be inspected and evaluated from the standpoint of ease of maintenance, servicing, and operation. Particular attention shall be given maintenance with a minimum number of common tools, servicing and operation by personnel wearing heavy

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

gloves, and provisions made to prevent accumulation of dirt, snow, ice, et cetera, that may hinder servicing operation.

4.7. Inspection of preparation for delivery. Preservation, packaging, packing, and marking shall be inspected to determine conformance to the requirements of section 5 herein.

5. PACKAGING

5.1 Preservation. Preservation shall be levels A or C as specified (See 6.2).

5.1.1 Level A. Unless otherwise specified (see 6.2). tanks shall be packaged in accordance with Method III of MIL-P-116. Unit quantities shall be one each.

5.1.1.1 Cleaning. The tank shall be thoroughly cleaned to remove excess and spilled lubrication materials, loose or chipped paint, spilled chemicals, and other foreign materials. All cleaning solvents shall be thoroughly removed from the tank components prior to delivery.

5.1.2 Repainting. Tank surfaces on which the paint is damaged or defective shall be thoroughly cleaned and repainted as specified under 3.12.

5.1.3. Liquid storage tank assembly purging and sealing. The liquid storage tank assembly inner shell shall be drained of all liquids and purged with not less than 1,000 standard (68°F and 760 mm Hg) cubic feet of clean, dry, oil-free nitrogen gas introduced through the vapor phase vent line specified in 3.8.1.8.1.7. The liquid fill-drain and servicing line shutoff valves shall be opened individually and the gas flow permitted to purge the respective lines, valves, and fittings. The bulk of the purge gas shall be exhausted through the liquid fill-drain line specified in 3.8.1.8.1.1.1.

5.1.3.2 Following the purging, the inner shell shall be pressurized to not less than 10 psig nor more than 20 psig with clean, dry, oil-free nitrogen gas, after which every valve and line leading into the inner shell shall be closed. The ends of all pipes, tubes, and coupling shall be securely sealed with pressure-sensitive tape conforming to PPP-T-60. The liquid storage tank assembly annular space shall be evacuated to the absolute pressure recommended in the tank operating and servicing instruction handbook if it is not at or below that pressure. The vacumm line shutoff valve shall be tightly closed after the evacuation and the vacuum line sealed with the cap provided.

5.1.3.2 A type A tag conforming to UU-T-81, with tag and printing waterproofed, stating that the liquid storage tank assembly inner shell is cleaned and pressurized with clean, dry, oil-free nitrogen gas and

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

indicating the date and the pressure to which the annular space has been evacuated, shall be securely attached to the vapor vent line shutoff valve handle in a conspicuous location.

5.1.4 Preservatives. Preservatives and lubricants shall not be applied to any part of the euqipment that will come into contact with high purity oxygen.

5.1.5 Security for shipment. Small items and packages not fastened to major components shall be secured to or packed with major components to insure against accidental loss, or damage caused by movement during shipping.

5.2 Packing.

5.2.1 Levels A and B Unless otherwise specified (see 6.2), the tank shall be provided with a wooden shield constructed to provide protection for the instruments and controls while the tank is in transit or storage. The shield shall enclose the entire instrument and control area and shall be securely fastened to the tank. Exterior shipping containers will not be required.

5.2.2 Level C. Tanks that require overpacking for acceptance by the carrier shall be packed in a manner that will insure safe transportation at the lowest rate to the point of delivery. Containers shall conform to the Uniform Freight Rules Classification or regulations of other carriers as applicable to the mode of transportation.

5.3 Physical protection. Cushioning, blocking, bracing, bolting as required shall be in accordance with MIL-STD-1186, except for domestic shipments, waterproofing requirements for cushioning materials and containers shall be waived.

5.4 Shipment marking. Interior and exterior containers shall be marked in accordance with MIL-STD-129, The nomenclature shall be of the following:

a. Tank Storage, Type I, Liquid Oxygen. (see para 6.4) 5,000 Gallon Capacity, TMU-20/E, Skid Mounted.

b. Tank, Storage, Type II, Liquid Nitrogen. (see para 6.4) 5,000 Gallon Capacity, TMU-20, Skid Mounted.

6. INFORMATION FOR GUIDANCE ONLY

(This section contains information of a general or explanatory nature)

6.1 Intended use. The TMU-20/E tank is intended for storage at air bases of liquid oxygen/nitrogen with low evaporation loss rate until needed. The stored liquid oxygen is then transferred from this tank to trailer-mounted

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

tanks for distribution to aircraft systems requiring liquid oxygen/nitrogen.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification

b. Whether a complete set of all special tools, other than common handtools and those normally available in motor vehicle repair shops, are to be provided (see 3.8.6)

c. Location and conditions for first article testing (see 4.4)

d. That, when specified, the first article tests may be waived if the contractor's item has previously passed the first article tests specified herein

e. Required level of preservation, packaging and packing (see 5.2 and 5.3)

f. When the tank is not to be protected in accordance with method II of MIL-P-116 (see 5.2.1)

g. When the tank is to be provided with a wooden shield (see 5.3.1)

6.3 Definitions. For the purpose of this specification, the following definitions will apply:

6.3.1 MTBF. MTBF is the average (arithmetic mean) of the operating time between failures or the mean-time-between-failure. Note that the point estimate of MTBF from demonstration data (the sum of the test operating time divided by the number of counted failures) is larger than the MTBF min. demonstrated at a specific confidence as described below. Note also, that the MTBF min. considered acceptable and to be demonstrated is often lower than the MTBF reasonably expected and attainable within the current state-of-the-art. MTBF is often used as an expression representing MCBF (mean-cycles-between-failure).

6.3.2 Ambient conditions. Ambient conditions are the dry-bulb temperature, wet-bulb temperature, and the relative humidity of the atmospheric air surrounding and in the vicinity of the tank, but unaffected by any heat or cold emanating from the tank itself.

6.3.3 Dissimilar metal vacuum joint. A dissimilar metal vacuum joint is a mechanical (welded or other type) joint between different base metals, or between alloys with different base metals as the principal constituent, used in the tank construction where the joint must function to seal the liquid storage tank assembly annular insulation space from a different pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

6.3.4 Pressures. All pressures referred to herein, unless specified as absolute or denoted by the symbol psia, will be interpreted as pounds per square inch (psi) gage.

6.3.5 Fibrous particle. A fibrous particle is defined as a long, slender particle whose maximum cross-sectional dimension is 40 microns.

6.3.6 Servicing cycle. A servicing cycle is defined as pressuring the liquid storage tank assembly inner shell vapor space, transferring liquid into another vessel, and depressurizing the inner shell vapor space back to approximately atmospheric pressure.

6.4 Applicable Generic NSN: This information is provided for the convenience of the procuring activity for acquisition purposes only. The following generic NSN's apply:

a. NSN 3655-00-838-2797YD - Tank Storage, Liquid Oxygen, 5,000 Gal (Type I)

b. NSN 3655-01-221-7598YD - Tank Storage, Liquid Nitrogen, 5,000 Gal (Type II)

6.5 Subject term (Key Word) listing.

Liquid Oxygen
Liquid Nitrogen
Storage Tank
Skid-Mounted
Pressure Vessel
Vacuum Retention
Air Transportability
Servicing
Operation

Custodian:
Air Force - 68

Preparing activity:
Air Force - 68

(Project 3655-F108)

Reviewing Activity
Air Force - 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

☆ U.S. Government Printing Office: 1982—350-979/5804

(Fold along this line)

(Fold along this line)

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASH DC

POSTAGE WILL BE PAID BY HQ U.S. AIR FORCE

SA-ALC/SFRM
KELLY AFB TX 78241-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-27483F	TANK,STORAGE,LIQUID OXYGEN/LIQUID NITROGEN, TMU-20/E

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.