MIL-R-53002(ME)
16 February 1982

MILITARY SPECIFICATION

RETROFIT KIT, ROLLER, MINE CLEARING:

TRACK-WIDTH, TANK-MOUNTED.

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification defines the requirements for the mine clearing roller system retrofit kit (M60 series tank).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2) , the following specifications and standards of the issue listed in that issue ofthe Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-601 - Boxes, Wood, Cleated Plywood.

MILITARY

MIL-B-117 - Bag, Sleeve and Tubing -Interior Packaging.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1095

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

MIL-T-704	- Treatment and Painting of Materiel.
MIL-I-6866	- Inspection, Penetrant Method of.
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold-application.

STANDARDS

FEDERAL

FED-STD-101	- Preservation, Packaging, and Packing Materials, Test Procedures.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of U.S. Military Property.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents form a part of this specification to the extent specified herein.

DRAWINGS

ME

TA13222E0025	- Retrofit Kit, Mine Clearing Roller System.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN WELDING SOCIETY (AWS)

D1.1 - Structural Welding Code, Section 5, Qualification.

(Application for copies should be addressed to American Welding Society, 2501 Northwest Seventh Street, Miami, FL 33125.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

- Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.

(Application for copies should be addressed to American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. Requirements for the retrofit kit shall be in accordance with Top Assembly, TA13222E0025 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the kit. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.2 First article (first produced kit). The contractor shall furnish one or more kits as specified (see 6.2) for examination and testing within the timeframe specified (see 6.2) to prove that his production methods will produce kits that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Carburization. Carburization and heat treatment methods will be in accordance with drawing 13222E0074 and the Quality Assurance Provisions (QAP).

3.4 Material. Material shall be as specified on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.4).

3.5 Safety. Nonfunctional sharp edges, projecting points, and excessive length of fastening devices shall be avoided.

3.6 Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable. Interchangeable parts are defined as two or more like parts possessing such functional and physical characteristics as to be equivalent in performance and durability and capable of being

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

exchanged one for the other without alteration of the parts themselves or of adjoining parts and without selection for fit or performance.

3.7 Treatment and painting. The portions of the kit normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, type A, color forest green. Nonpermissible galvanic couples (dissimilar metals) as defined in MIL-T-704 shall be insulated as specified.

3.8 Identification marking. The kit shall be identified in accordance with MIL-STD-130.

3.9 Workmanship. Each kit shall be clean and free from sand, dirt, fins, pits, scale, rust, burrs, sharp edges, cracks, poor or unsound welds, or any other defects that could impair its installation/utilization.

3.9.1 Metal fabrication. Metal used in fabrication shall be free from rust and corrosions. Flame cutting, using tips suitable for the thickness of the steel, may be employed instead of shearing and sawing. Precaution shall be taken to avoid overheating. Maintain proper cooling rates to preclude adverse effects to the properties of the metal. These precautions are necessary to ensure end use applications. External surfaces shall be free from burrs, sharp edges, and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

3.9.2 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, and mill scale that can be removed by chipping and wire brushing, and other foreign matter. Welds shall withstand stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading. Parts to be joined by fillet welds shall be brought into as close contact as possible and in no event shall be separated by more than 3/16 inch unless appropriate bridging techniques are used. The welding process used in installation of the kit shall be in accordance with TA13222E0025. No deviations from these requirements are permissible without prior Government approval.

3.9.2.1 Welders. Before assigning any welder to manual welding work covered by this specification, the contractor shall provide the contracting officer with certification that the welder has passed qualification tests as prescribed by either of the following listed codes for the type of welding operations to be performed and that such qualification is effective as defined by the particular code:

AWS D1.1, Structural Welding Code, Section 5, Qualification.
ASME Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.

Contractors who make only horizontal welds need not qualify welders for “all position welding.” Subject to approval by the Government, the contractor's standard welder qualification may be substituted for the above codes provided that the contractor's procedure is equivalent to the above codes. The contractor shall be responsible for determining that automatic welding equipment operators are capable of producing quality welds in accordance with AWS or ASME codes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

3.9.3 Inspection. Inspect all welds with dye penetrant in accordance with MIL-I-6866. No cracks are permissible. Workmanship specimens required by the applicable specifications shall be approved by quality assurance representatives of the contracting activity.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified (see 6.2), the contractor is responsible for the performance of all inspection requirements as specified herein. Except an otherwise specified (see 6.2), the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. Inspection records and examinations and tests performed by the contractor shall be kept complete and available to the Government for a period of 4 years following completion of the contract. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for ensuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards, drawings, QAP, and tolerances as applicable.

4.2 Classification of inspections. Inspection shall be classified as follows:

(a) Initial production inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection comparison (see 4-6).
(4) Inspection of packaging (see 4-7).

4.3 Initial production inspection. When specified (see 6.3), one or more initial production kits from the first ten units being fabricated by production tooling will be selected by the Government for examination and tests. These kits will be examined for the characteristics listed in column 3 of table I and subjected to the test specified in column 3 of table II to determine conformance to the requirements of this specification. The inspection will be performed by the contractor at the contractor's location and witnessed by Government inspectors. Acceptance of an initial production kit shall not exclude the remaining kits from the quality conformance inspection and acceptance provisions specified in 4.4. In addition to any test specified as part of the initial production test, the Government reserves the right to conduct any or all other tests contained in this specification as part of the initial production test. Failure of such additional tests shall have the same effect as failure of those tests specified as initial production tests.

4.3.1 Inspection failure. Failure of an initial production kit to meet any requirement specified herein during, and as a result of, examination and tests specified in 4.3 and 4.4 shall be cause for refusal by the Government to continue acceptance of production kits until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government. Any deficiencies found as a result of the initial production inspection will be considered prima facie evidence that all kits accepted prior to the completion of initial production inspection are similarly deficient, unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105.

4.4.2 Examination.

4.4.2.1 Samples. Samples selected in accordance with 4.4.1 shall be examined for the major and minor defects specified in column 3 of table I. Acceptable Quality Level (AQL) shall be 2.5 percent defective for major defects and 4.0 percent defective for minor defects.

4.4.3 Tests.

4.4.3.1 Samples. Samples selected in accordance with 4.4.1 shall be subjected to the test specified in column 3 of table II. Failure of any test shall be cause for rejection.

4.5 Inspection schedule.

4.5.1 Examination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

TABLE I. Examination schedule.

Init. Prod.	Qual. Conf.	Characteristic	Req. Para.
1	2	3	4
		MAJOR	
X	X	101. Dimensions are not as specified.	3.1.1
X	X	102. Parts and components are not complete.	3.1.1
X	X	103. Safety is not as specified.	3.5
X	X	104. Workmanship is not as specified.	3.9
X	X	105. Welding certification is not furnished.	3.9.2.1
X	X	106. Parts are not as specified.	3.6
X	X	107. Material is not as specified.	3.4
X	X	108. Carburization and heat treatment is not as specified.	3.3
		MINOR	
X	X	201. Treatment and finish are not as specified.	3.7
X	X	202. Identification marking is not as specified.	3.8

4.5.2 Tests.

4.5.2.1 Test conditions. Unless otherwise specified, conformance tests shall be performed by the contractor at the contractor's location, witnessed by Government inspectors.

4.5.2.2 Test schedule.

TABLE II. Test schedule.

Init. Prod.	Qual. Conf.	Test	Test Para.	Req. Para.
1	2	3	4	5
-	X	Production pack	4.7.1.2	3.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

4.5.2.3 Test procedures (initial production testing). One or more initial production kits, selected at random, shall be examined for the characteristics listed in column 3 of table I and subjected to the test specified in column 3 of table II to determine conformance.

4.6 Inspection comparison. The Government may select kits at any time during the initial production period and subject these kits to the examinations specified in 4.4.2 and the tests specified in 4.5.2 to determine conformance to the requirements of this specification. The inspection will be performed by the contractor at the contractor's location, witnessed by Government inspectors, on kits selected at random from those which have been accepted by the Government but will not include the previously inspected initial production model. In addition to any test specified as part of the inspection comparison, the Government reserves the right to conduct any and all other tests contained in this specification as part of the inspection comparison. Failure of such additional tests shall have the same effect as failure of those tests specified as inspection comparison.

4.6.1 Inspection failure. Failure of an inspection comparison kit to meet any requirement specified herein during and as a result of the examination and tests specified in 4.5.2 shall be cause for rejection of the inspection comparison kit and shall be cause for refusal by the Government to continue acceptance of initial production kits until evidence has been provided by the contractor, at no cost to the Government, that all deficiencies have been corrected. Any deficiencies found as a result of the inspection comparison will be considered prima facie evidence that all kits accepted prior to the completion of inspection comparison are similarly deficient, unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.7 Inspection of packaging.

4.7.1 Examination. The preproduction pack shall be examined for the defects specified in table III. Presence of one or more defects shall be cause for rejection.

4.7.1.1 Tests. The kit, prepared for shipment, shall be subjected to the pendulum impact test in accordance with FED-STD-101, Test Method 5012. At the conclusion of the test, any shifting of packed components, loosening or breaking of holddown provisions, ties, blocking or bracing, or damage to system components shall constitute failure of the test and be cause for rejection.

4.7.2 Quality conformance inspection (packaging).

4.7.2.1 Unit of product. For purposes of inspection, a complete kit prepared for shipment as specified shall be considered a unit of product.

4.7.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

4.7.2.3 Examination. Each sample kit shall be examined for the characteristics as listed in table III. AQL shall be 2.5 percent defective.

TABLE III. Examination schedule.

Number	Characteristic	Requirement Paragraph
	MAJOR	
109.	Preservation is not as specified.	5.2
110.	Packing for level A is not as specified.	5.3.1
111.	Packing for commercial is not as specified.	5.3.2
112.	Box for level A is not as specified.	5.3.1
113.	Blocking for level A is not as specified.	Appendix
114.	Technical publications are not boxed as specified for level A.	5.4
115.	Marking is missing, illegible, incomplete or incorrect.	5.5

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination and testing within the time frame specified (see 6.2) to prove prior to starting production packaging that the applied preservation, packing and marking comply with the packaging requirements of this specification. Examination and tests shall be those specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.2). The preproduction pack may be prepared utilizing either the preproduction model or a production kit. When the preproduction model is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government, to facilitate comparison between the preproduction model and production kit.

5.2 Preservation. Any uncoated ferrous surfaces of the kit shall be coated with preservative conforming to MIL-C-16173, grade 1, or equivalent.

5.3 Packing. Packing shall be level A or commercial as specified.

5.3.1 Level A. The kit shall be packed in a box conforming to PPP-B-601, overseas type, style I. Components and blocking shall be in accordance with packaging data sheet (Appendix). The box shall be reinforced with flat steel strapping in accordance with the box specification. Loose hardware should be wrapped and placed in a container in accordance with packaging data sheet (Appendix).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

5.3.2 Commercial. A complete kit shall be packed in a container in accordance with MIL-STD-1188.

5.4 Technical publications. The kit installation manual shall be placed in the box containing the kit, and the box shall be marked to indicate that the manual is included. Technical publications shall be placed individually in a polyethylene envelope in accordance with MIL-B-117, 4 mil thick and heat sealed.

5.5 Marking.

5.5.1 Military. Marking for shipment and storage shall be in accordance with MIL-STD-129.

5.5.2 Commercial. Marking for commercial packaging shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The kit contains components that are mounted and welded to provide "hard points" on an unmodified M60 series tank in order that the tank may be equipped with the Mine Clearing Roller System (NSN 2590-01-063-0253).

6.2 Ordering data. The basic acquisition document should specify the following:

(a) Title, number and date of this specification.
(b) Time frame required for submission of preproduction model, and number of kits required (see 3.2).
(c) Time frame required for submission of initial production model and number of kits required (see 3.2).
(d) Government and contractor testing responsibilities.
(e) Data requirements.
(f) Degree of packing required (see 5.3).

6.3 Initial production inspection. The quantity of initial production kits required for tests and examinations shall be specified by the contract or the contracting officer.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.4).

Custodian:
Army - ME

Preparing activity:
Army - ME

Review activity:
Army - AT

Project 1095-A158

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

APPENDIX

RETROFIT KIT

10. Scope. This appendix covers packaging data sheets.

20. APPLICABLE DOCUMENTS

20.1 Government documents.

SPECIFICATIONS

FEDERAL

PPP-B-636	- Box, Shipping, Fiberboard.
PPP-T-60	- Tape; Packaging, Waterproof.

MILITARY

MIL-B-121	- Barrier Material, Greaseproof, Waterproof, Flexible.
MIL-P-14232	- Parts, Equipment and Tools for Amy Material, Packaging of.

MILITARY

MIL-STD-731	- Quality of Wood Members for Containers and Pallets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

APPENDIX

PACKAGING DATA SHEET	Sheet of 1	Sheets 6	FSCM	Part Number 13222E0025P	National Stock Number

Federal Item Name: Retrofit Kit — Original Date 5/15/79

Item Weight 223 — Item Cube 1.55 cu. ft. — Item size 18-3/4"X 14-1/4"X 10" — Revision — Date

Level A Unit Pack	Unit Pack Qty		Method	Cleaning		Drying		MIL-P-116
	Step	Drawing Specification	Size	Style	Type	Grade	Class	Unit Pack
Preservative	1A	MIL-C-16173				1		Size 21-1/2"X 16-3/4"X 16"
Preservative								
Intimate Wrap	2B	MIL-B-121	SIZES ARE SHOWN					Weight 259 #
Cushioning								
Desiccant								Cube 3.30 cu. ft.
Container	3C	PPP-B-601	ON	I	O/S			
Barrier								
Container	*D	PPP-B-636					WR	
Closure	*E	PPP-T-60	BILL OF MATERIALS		IV			
Bag								
Closure								Preparing Activity

Intermediate Pack	Int Pack Qty		Item Characteristics (MIL-STD-147)					Approval
	Step	Drawing Specification	Size	Style	Type	Grade	Class	
								Source DF
Marking Para 3.8	Inspection - MIL-P-14232 Provision		Level A Packing Req	Level B Unit Pack Req				Level B Packing Req

Specification, standards, and drawings listed of the issue in effect on date of invitation for bid form a part of this instruction. Preservation, packing and marking for the item identified shall be in accordance with this data sheet and the referenced and applicable general requirements of specification MIL-P-14232. Terms of measurement for unit pack, size, weight and cube are as follows - size: feet and hundredths of a foot; weight: pounds and hundredths of a pound; cube: feet and thousandths of a foot.

Notes

A - Apply to unpainted, unplated metal surfaces
B - See sheet 6 for sizes & use
C - See sheet 2
*D - See sheet 2 and 6 for size & use
*E - See sheet 2 and 6 for size & use

Nonmandatory Design

STA FORM 6165 (TEMP) 8 Apr 76 To Be Used In Lieu Of AMC Form 1029 Until Revision Is Complete

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

APPENDIX

Packaging Data Sheet (Continued)	Sheet of 2	Sheets 6	FSCM	Part Number 13222E0025P	National Stock Number	Revision Date

NUMBER	DESCRIPTION	SIZE	SPECIFICATION DATA	QTY
1	SKIDS	3" x 4" x 16-1/4"	MIL-STD-731 GROUP II OR III CLASS 2 WOOD	3 each
2	BOX	21-1/2" x 16-3/4" x 16"	PPP-B-601 STYLE I OVERSEAS TYPE	1 each
3	BLOCKING	1" x 3" x 13-7/8"	MIL-STD-731 GROUP II OR III CLASS 2 WOOD	1 each
4	BLOCKING	2" x 8" x 18-1/2"	MIL-STD-731 GROUP II OR III CLASS 2 WOOD	1 each
5	BOLTS, CARRIAGE NUTS AND WASHERS	1/4" x 9-1/2"		2 each
6	WRAP	1-32" x 24" 2-24" x 24" 3-20" x 16" 4-12" x 12" 5- 9" x 9"	MIL-B-121 TYPE I GRADE A CLASS 1	AS REQ.
7	POLY BAGS	1-10" x 12" 2-9" x 12"	MIL-B-117 4 MIL	AS REQ.
8	FIBERBOARD CTN.	9" x 3-1/2" x 3-1/2"	PPP-B-636D CLASS WATERPROOF VARIETY SW GRADE W5C	1


NONMANDATORY DESIGN

Approval

STA FORM 6165 A (TEMP) 8 Apr 76 To Be Used In Lieu Of AMC Form 1029A Until Revision Is Complete


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

APPENDIX

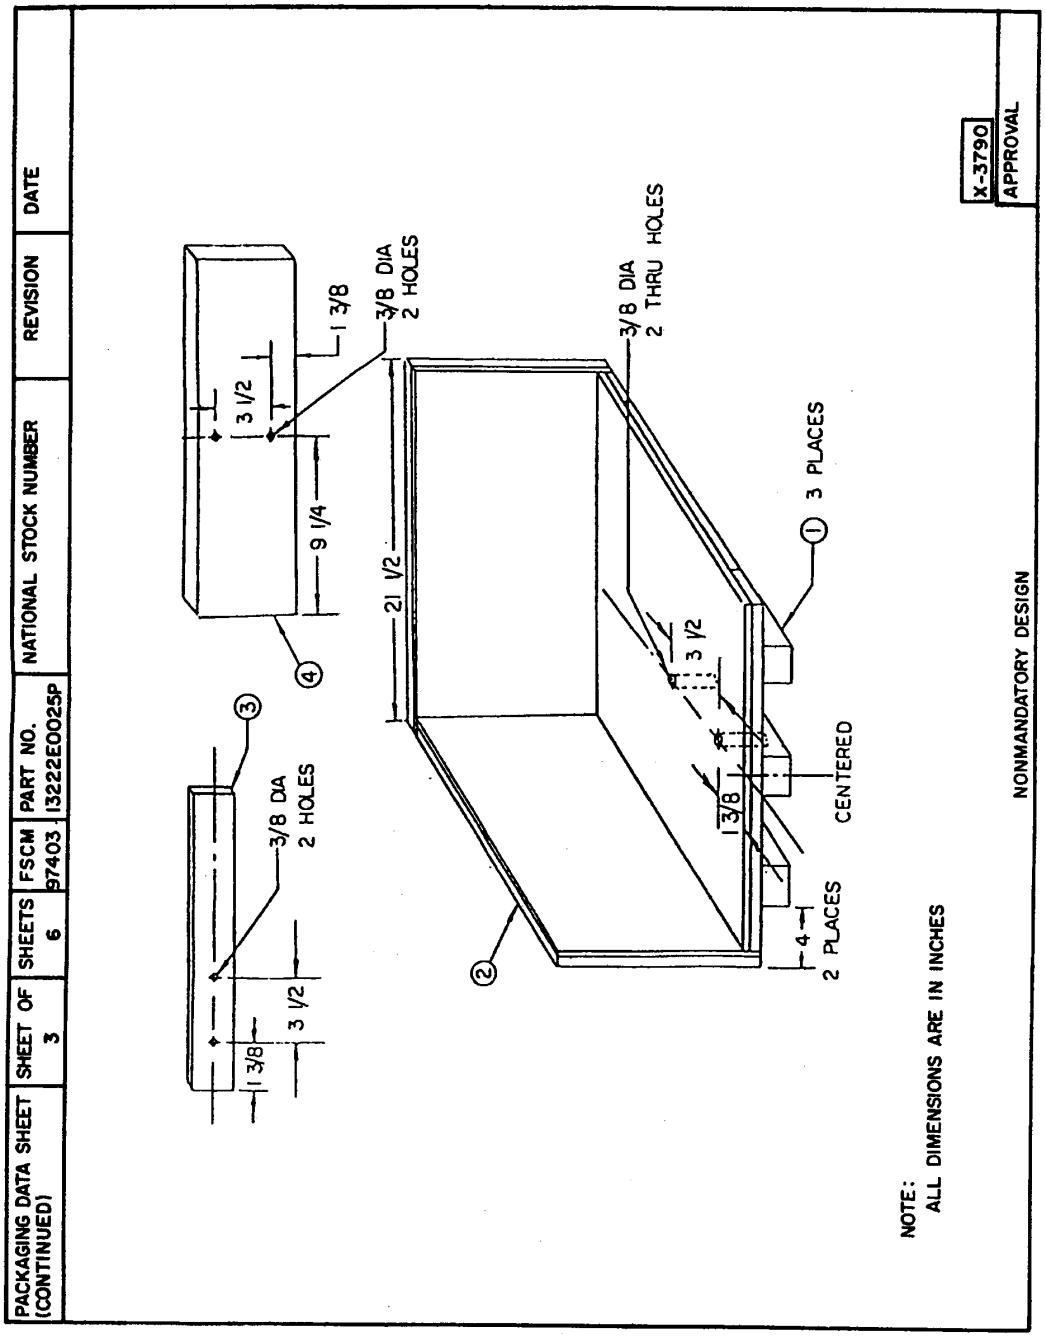

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

APPENDIX

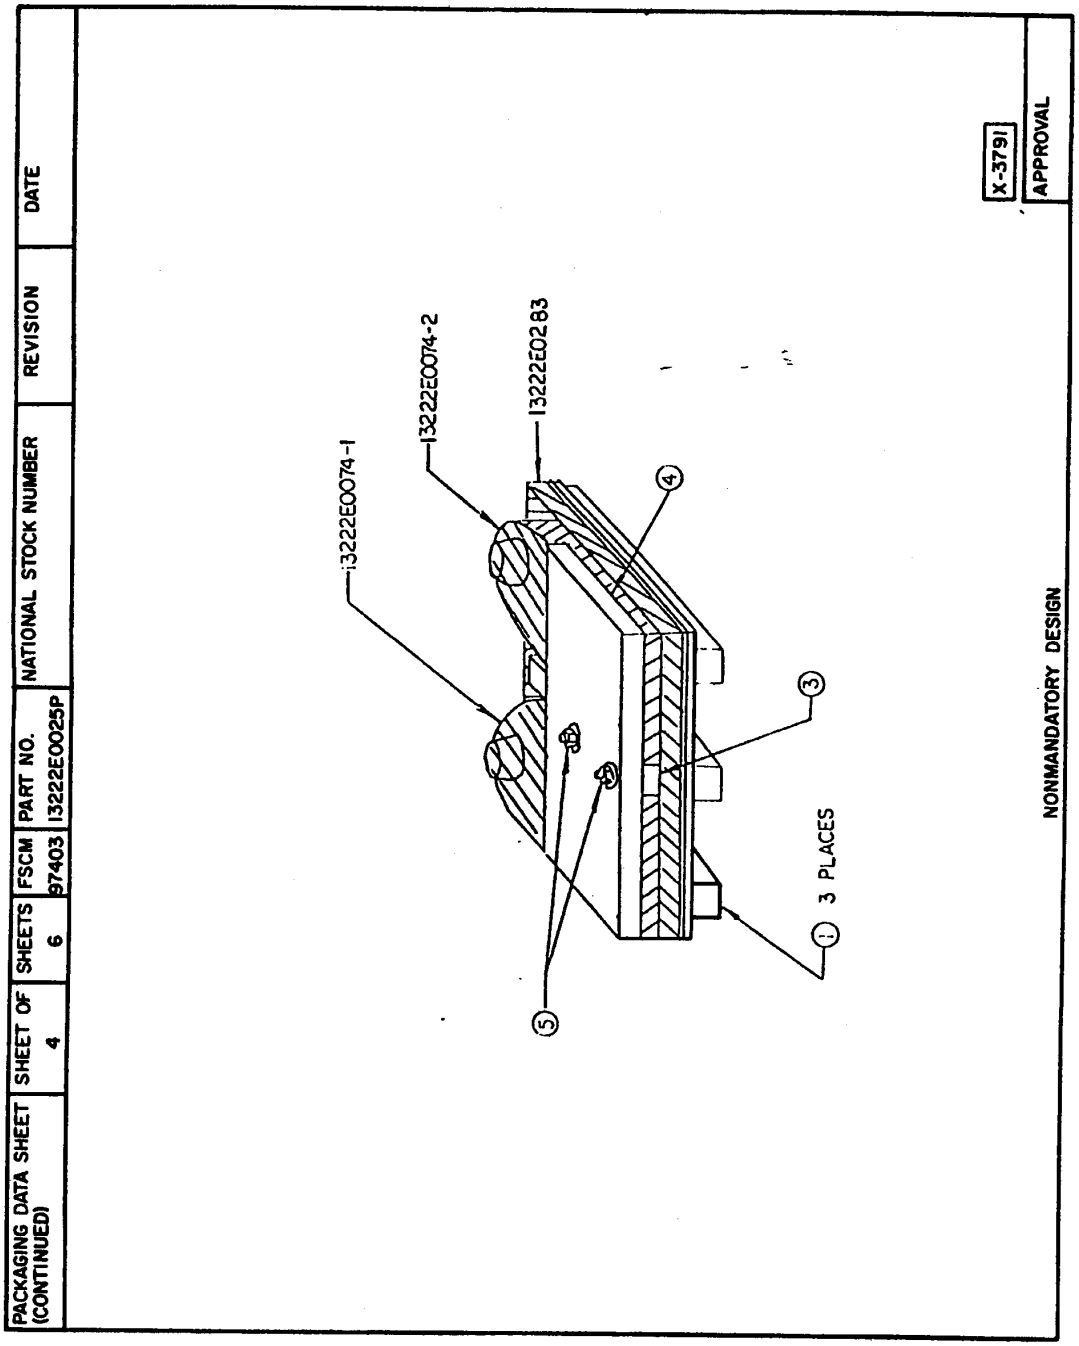

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

Packaging Data Sheet (Continued)	Sheet of 5	Sheets 6	FSCM	Part Number 13222E0025P	National Stock Number	Revision Date

1 - THE BOX (#2) AND BLOCKING (#3) AND (#4) SHOULD BE PREPARED ACCORDING TO SHEET #3 and #4. BOX AND BLOCKING SHOULD BE PREDRILLED TO DIMENSIONS SHOWN ON SHEET #3.

2 - ONE PIECE OF GD.A (#6), 32 x 24 SHOULD BE PUT INTO CTNR. SO THAT IT LIES FLAT ON BASE AND AGAINST SIDE AND END WALLS OF CTNR.

3 - PRESERVE AND PUT INTO CTNR. P/N 13222E0283. BOLTS SHOULD COME UP THROUGH HOLES OF P/N 13222E0283.

4 - LAY ONE PIECE GD.A (#6), 20 x 16 ON TOP OF P/N 13222E0283 (SEE SHEET #4) AND PUT BLOCKING #3 SHEET 2 OVER BOLTS.

5 - PRESERVE AND WRAP P/N 13222E0074-1 AND 2 WITH GD.A (#6), 24 x 24 AND PUT INTO CTNR (SEE SHEET #4).

6 - INSTALL BLOCKING #4 (SHEET 3) OVER BOLTS AND TIGHTEN DOWN WITH NUTS AND WASHERS.

7 - PRESERVE P/N MS90725-225, 12 PCS SCREW, WRAP WITH GD.A (#6), 12 x 12, AND SECURE WRAP WITH PPP-T-60 TAPE AS REQUIRED. PUT PACKAGED ITEM INTO CTN. #8, IDENTIFY.

8 - PRESERVE P/N MS35338-53, 12 PCS LOCKWASHER, WRAP WITH GD.A (#6), 12 x 12, AND SECURE WRAP WITH PPP-T-60 TAPE AS REQUIRED. PUT PACKAGED ITEM INTO CTN #8, IDENTIFY.

9 - PRESERVE P/N 13222E0032, 5 PCS PAD, WRAP WITH GD.A (#6), 12 x 12, AND SECURE WRAP WITH PPP-T-60 TAPE AS REQUIRED. PUT PACKAGED ITEM INTO CTN #8, IDENTIFY.

10 - PRESERVE P/N MS 90725-60, 17 PCS BOLT, WRAP WITH GD.A (#6), 9 x 9, AND SECURE WRAP WITH PPP-T-60 TAPE AS REQUIRED. PUT PACKAGED ITEM INTO CTN #8, IDENTIFY.

NONMANDATORY DESIGN

Approval

STA FORM 6165 A (TEMP) 8 Apr 76 To Be Used In Lieu Of AMC Form 1029A Until Revision Is Complete

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

Packaging Data Sheet (Continued)	Sheet of 6	Sheets 6	FSCM	Part Number 13222E0025P	National Stock Number	Revision Date

11 - PRESERVE P/N MS35338-46, 17 PCS LOCKWASHER, WRAP WITH GD.A (#6), 9 x 9, AND SECURE WRAP WITH PPP-T-60 TAPE AS REQUIRED. PUT PACKAGED ITEM INTO CTN #8, IDENTIFY.

12 - PRESERVE P/N 13222E0494, 2 PCS BLOCK, WRAP WITH GD.A (#6), 9 x 9, AND SECURE WRAP WITH PPP-T-60 TAPE AS REQUIRED. PUT PACKAGED ITEM INTO CTN #8, IDENTIFY.

13 - TAPE CTN #8 CLOSED WITH PPP-T-60 TAPE AS REQ AND PUT INTO BOX #2.

14 - PUT TWO MANUALS TITLED, "RETROFIT MANUAL FOR M60-SERIES TANK (M60, M60A1, M60A1 RISE, M60A3) TO ACCEPT ROLLER, MINE-CLEARING: TRACK-WIDTH, TANK-MOUNTED" INTO 2 POLY BAGS (#7) SIZE 9 x 12 AND HEAT SEAL. PUT INTO BOX #2.

15 - CLOSE BOX #2 AND INSTALL TWO BANDS 75" EACH.

NONMANDATORY DESIGN

Approval

STA Form 6165 A (TEMP) 8 Apr 76 To Be Used In Lieu Of AMC Form 1029A Until Revision Is Complete

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T21:49Z
Check the source to verify that this is the current version before use.