MILITARY SPECIFICATION

TEST SET, RECEIVER TS-3565( )/TRS-2

This specification is approved for use by EL, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the equipment identified as the Test Set, Receiver TS-3565( )/TRS-2. It is used in conjunction with an FM signal generator to measure sensitivity and check operation of Receiver, Radio R-1808( )/TRS-2 which is part of the Platoon Early Warning System (PEWS) AN/TRS-2( ). The Test Set also allows testing of Sensor Interface Wire Link MX-9738( )/TRS-2.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to US Army Electronic Command, ATTN: DRSEL-RD-TS-S, Fort Monmouth, N.J 07703 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

NN-P-71	Pallet, Material Handling, Wood Stringer Construction, 2-Way and 4-Way (Partial)
QQ-S-781	Strapping, Steel, Flat and Seals
PPP-B-585	Boxes, Wood, Wirebound
PPP-B-601	Boxes, Wood, Cleated Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Box, Shipping, Fiberboard
PPP-B-640	Box, Fiberboard, Corrugated
PPP-F-320	Fiberboard, Corrugated and Solid Sheet Stock (Container Grade), and Cut Shapes
PPP-S-760	Strapping, Non-Metallic (and Connectors)
PPP-T-97	Tape, Pressure Sensitive Adhesive, Filament Reinforced

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

Military

MIL-P-116	Preservation-Packaging, Methods of
MIL-P-11268	Parts, Materials, and Processes Used in Electronic Equipment
MIL-M-13231	Marking of Electronic Items
MIL-F-14072	Finishes for Ground Electronic Equipment
MIL-P-19644	Plastic Molding Material (Polystyrene Foam, Expanded Bead)
MIL-P-26514	Polyurethane Foam, Rigid or Plastic, for Packaging
MIL-E-52798	Enamel, Alkyd, Camouflage

STANDARDS

Federal

FED-STD-356	Commercial Packaging of Supplies and Equipment

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-461	Electromagnetic Interference Characteristics, Requirements for Equipment
MIL-STD-781	Reliability Tests, Exponential Distribution
MIL-STD-810	Environmental Test Methods
MIL-STD-1472	Human Engineering Design Criteria for Military Systems, Equipment and Facilities

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

DRAWINGS

Electronics Command

DL-SM-B-783450	Test Set, Receiver TS-3565( )/TRS-2
SM-A-783480	Acceptance Test Procedure TS-3565( )/TRS-2

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procurement activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified by the contract, the contractor shall furnish First Article units in accordance with 4.3.

3.2 Construction. The TS-3565( )/TRS-2 shall be constructed in accordance with the requirements of this specification, and of Data List DL-SM-B-783450.

3.3 Parts, materials, and processes; general. In addition to the requirements of this specification and the drawings specified in 3.2, the requirements of MIL-P-11268, including the selection requirements therein, shall apply.

3.4 Finish, protective. Equipment shall be given protective finish in accordance with MIL-F-14072. This includes the finish of hardware such as handles, hinges, screws, etc., and necessary touchup after mounting. The final paint film on Type I surfaces shall be lusterless forest green in accordance with MIL-E-52798(ME). All external surfaces shall be coated/treated to remove shiny surfaces.

3.5 Marking.

3.5.1 General. Marking shall conform to MIL-M-13231 (see 4.4). Front panel marking shall be Group I as described in that specification.

3.5.2 Visibility. Wherever practicable, parts shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

3.5.3 Serial numbers. The Test Set, Receiver TS-3565 ( )/TRS-2 shall have serial numbers.

3.6 Electrical performance requirements.

3.6.1 Signal generator drive. The modulation output of the test set shall be at least 750 mv P-P into 1500 ohms (see 4.7.1).

3.6.2 Wire module drive. (See 4.7.2)

3.6.2.1 Low level/wire simulating mode. With the test set data terminal terminated into a resistive load of 62K ohms, rated at 1/4 watt or greater, the voltage measured between the terminals (not between terminal and ground) shall be at least .35V P-P and not greater than .55V P-P with the wire simulator switch on.

3.6.2.2 High level/field wire mode. With the test set data terminals terminated into a resistive load of 1K ohms, rated at 1/4 watt or greater, the voltage measured between the terminals (not between terminal and ground) shall be at least 6.0V P-P and not greater than 9.5V P-P with the wire simulator switch off.

3.6.3 Power consumption. The test set battery current shall not exceed 1.0 ma at standby with 9V dc input and shall not exceed 30 ma when processing a message with 9V dc input. (See 4.7.3)

3.6.4 Message format. The test set shall produce a message format at both the modulation output and data terminals in accordance with Figure 1. When the message is correctly being produced the indicator lamp shall light. (See 4.7.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

3.6.5 Message selection. The test set shall provide the capability, by means of front panel switches, to select and set the message to any one of 8 "Area" codes, and 16 "ID Number" codes. The "Parity" selector switch shall assure that the total number of "Area", "ID Number", and "Parity" switches in the "1" position is an odd number. The "Class" switch shall provide for classification (personnel "P" or vehicle "C") selection. (See 4.7.5)

3.6.6 Low voltage. The test set shall operate at voltages as low as 6.2V dc, but not below 5.2V dc. This shall be verified as follows: The code indicator lamp shall light upon manual triggering with 6.2 Vdc input or higher. The code indicator lamp shall not light upon manual triggering with 5.2 Vdc input or lower. (See 4.7.6)

3.7 Service conditions. The equipment shall meet the following service conditions.

3.7.1 Temperature.

3.7.1.1 Low temperature. During testing as specified in 4.8.1.1, the equipment shall meet the requirements specified in 3.6.

3.7.1.2 High temperature. During testing as specified in 4.8.1.2, the equipment shall meet the requirements specified in 3.6.

3.7.2 Altitude. The equipment shall meet the requirements specified in 3.6 both during and after testing as specified in 4.8.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

3.7.3 Vibration. Before and after testing as specified in 4.8.3, the equipment shall meet the requirements specified in 3.6.

3.7.4 Shock, bench-handling. Before and after testing as specified in 4.8.4, the equipment shall meet the requirements specified in 3.6.

3.7.5 Shock, transit drop. Before and after testing as specified in 4.8.5, the equipment shall meet the requirements specified in 3.6.

3.7.6 Leakage (immersion). The equipment shall show no evidence of leakage after it is tested as specified in 4.8.6. This test shall be performed both prior to vibration and following transit drop shock.

3.7.7 Humidity. After testing as specified in 4.8.7, the equipment shall exhibit no physical damage such as corrosion, rust, blistering, swelling or deterioration of parts and materials, and shall meet the requirements of 3.6.

3.8 Burn-in. Each test set shall be capable of meeting the requirements herein, without subsequent processing after subjection to the burn-in procedure of para. 4.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

3.9 Electromagnetic interference. The test set shall meet the emission and susceptibility requirements of Table VI, Ground C-E Equipment and Component Items of Equipment, of MIL-STD-461A, Notice 4, as defined herein:

(1) RE02 (2) RS03
RE02.1

(1) Radiated switching transients shall comply with the limits of para. 6.13.4 of MIL-STD-461A, Notice 4.

(2) The test set shall be immersed in electric fields of the following intensity using the specified modulation characteristics:

Frequency Range	Field Intensity
10kHz to 2MHz	1 volt/meter
2MHz to 30MHz	5 volt/meter
30MHz to 400MHz	10 volt/meter

The test frequency shall be modulated 1000Hz, 50%, AM over the 50kHz to 200MHz frequency range and 1 usec pulse, 1000Hz prf, over the 25MHz to 400MHz frequency range.

3.10 Interchangeability. Like units, assemblies, sub-assemblies and replaceable parts shall conform to requirement 7 of MIL-STD-454. All modules shall be fully interchangeable. (See 4.10)

3.11 Weight. The equipment weight shall not exceed 4.5kg, (10 pounds).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

3.12 Workmanship. The equipment shall be manufactured and assembled in accordance with Requirement 9 of MIL-STD-454.

3.13 Systems safety engineering.

3.13.1 Personnel hazards. Personnel hazards shall be kept to a minimum through compliance of configuration changes and parts selection with Requirement 1 of MIL-STD-454. Compliance with these requirements will be verified through a visual inspection (See 4.12).

3.13.2 Edge rounding exposed. Exposed edges shall be rounded to a minimum radius of 0.04 inch (1 mm), and exposed corners to a minimum of 0.5 inch (13 mm).

3.13.3 Radioactive materials. Radioactive materials shall not be used (e.g., luminous dials/markings, electron tubes, surge arrestors and lenses).

3.14 Human factors engineering. Design configuration as affecting operation, maintainability and handling shall be maintained through compliance of configuration criteria to the requirements of MIL-STD-1472.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for Inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3): Does not include preparation for delivery.

b. Inspections covered by subsidiary documents (see 4.4).

c. Quality conformance inspections:

(1) Quality conformance inspection of equipment before preparation for delivery (see 4.5).

(2) Quality conformance inspection of preparation for delivery (see 4.13).

4.3 First article. Unless otherwise specified in the contract or purchase order, the first article inspection shall be performed by the contractor.

4.3.1 The contractor shall furnish three first article units of the TS-3565( )/TRS-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

TABLE I
FIRST ARTICLE INSPECTION

Inspections	Reqt. Para.	Test Para.	Unit 1	Unit 2	Unit 3
1. Inspections covered by subsidiary documents		4.4	Inspections to be performed on all units		
2. Burn-in	3.8	4.6		''	
3. Group A inspection	(See Table II)			''	
4. Group B inspection	(See Table III)			''	
5. Group C inspection					
Subgroup 1	(See Table IV)		x		
Subgroup 2	(See Table IV)			x	
Subgroup 3	(See Table IV)				x

NOTES:

1. Inspections 1 through 4, in the order shown, shall be performed on all first article units before subjecting these units to any other inspection requirements specified in the table.

2. The implementation of the inspections covered by 5 shall be expedited to satisfy contract delivery requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

4.3.2 First article inspection. The first article inspection shall consist of the inspections in Table I, and shall be performed in the order specified therein.

4.3.3 First article data. The first article test plan and test report(s) shall be as required in the contract or purchase order. (See 6.6)

4.4 Inspections covered by subsidiary documents. The following shall be inspected under the applicable subsidiary documents as part of the inspection required by this specification, and the inspection requirement specified in the contract or purchase order.

Item	Where Required
Parts, materials, and processes; general	3.3
Finish, protective	3.4
Marking	3.5

4.5 Quality conformance inspection of equipment before preparation for delivery. The contractor shall perform the inspections specified in 4.4, and 4.5.1 through 4.5.5. Each unit on contract shall be subjected to the burn-in of 4.6 prior to acceptance inspection. This does not relieve the contractor of his responsibility for performing any additional inspection which is deemed necessary to control the quality of the product and to assure compliance with all specification requirements.

4.5.1 Group A inspection. Each unit on contract or purchase order shall be inspected for conformance to the inspections specified in Table II. Discrete lots shall be formed from units that pass this inspection. Factors of lot composition not defined herein, nor in the contract or purchase order, shall be in accordance with MIL-STD-105. Each lot shall be subject to sampling inspection, utilizing the procedures of MIL-STD-105, using the general inspection levels and AQLs indicated in Table II.

4.5.1.1 Order of inspection within Group A. Group A inspection shall be performed in an order satisfactory to the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

TABLE II

GROUP A INSPECTION

Inspection	Req't. Para.	Test Para.	AQL Major	AQL Minor
Visual and Mechanical	3.12	4.12	1.0%	4.0%
Electrical			*	
Signal Generator Drive	3.6.1	4.7.1	1% For The Group	
Wire Module Drive	3.6.2	4.7.2		
Power Consumption	3.6.3	4.7.3		
Message Format	3.6.4	4.7.4		
Message Selection	3.6.5	4.7.5		
Low Voltage	3.6.6	4.7.6		

*All electrical defects are major.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

4.5.2 Group B inspection. Group B inspection shall normally be performed in inspection lots that have passed Group A inspection and on samples selected from units that have been subjected to and meet Group A inspection. This inspection shall conform to Table III and to the special inspection levels of Table I of MIL-STD-105.

4.5.2.1 Group B sampling plans. The Group B sampling plans, for the AQL's listed in Table III, shall be as follows:

AQL	Inspection Level
6%	S-3

4.5.2.2 Order of inspection within Group B. Group B inspection shall be performed in an order satisfactory to the Government.

TABLE III

GROUP B INSPECTION

Inspection	Reqt. Para.	Test Para.	AQL
Interchangeability	3.10	4.10	6%
Weight	3.11	4.11	6%

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

4.5.3 Group C inspection. Group C inspection shall be performed on units that have passed Group A and Group B inspection. The inspection shall consist of the inspections specified in Table IV. Samples shall be selected in accordance with 4.5.3.1.

4.5.3.1 Sampling for Group C inspection. One (1) sample unit shall be selected at random for each subgroup of inspections in Table IV from every 200 units or fraction thereof produced. The first samples selected shall be at the start of the contract from the first quality conformance inspection production lot.

4.5.3.2 Order of inspection within Group C. Group C inspection shall be performed in the order shown in each subgroup of Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

TABLE IV

GROUP C INSPECTION

Inspection	Reqt. Para.	Test Para.
Subgroup 1		
Low Temperature	3.7.1.1	4.8.1.1
High Temperature	3.7.1.2	4.8.1.2
Altitude	3.7.2	4.8.2
Leakage (Immersion) #1	3.7.6	4.8.6
Vibration	3.7.3	4.8.3
Shock, Bench Handling	3.7.4	4.8.4
Shock, Transit Drop	3.7.5	4.8.5
Leakage (Immersion) #2	3.7.6	4.8.6
Subgroup 2		
Humidity	3.7.7	4.8.7
Subgroup 3		
Electromagnetic Interference	3.9	4.9

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

4.5.3.3 Group C failures. Actions required relative to Group C failure shall be as specified in the contract or purchase order.

4.5.4 Reinspection of conforming Group C sample units. Unless otherwise specified, sample units which have been subjected to and passed both Group B and Group C inspections may be accepted on the contract provided all damage is repaired and the sample units are resubjected to and pass Group A inspection.

4.6 Burn-in. Each test set, before undergoing Group A and B testing, shall be subjected to a 24 hour (on-time) burn-in period under the following conditions and the approved test procedure required elsewnere in the contract.

a. The equipment shall be mounted on a vibration table in its (the equipment's) normal operating position. Test Level B of MIL-STD-781B shall apply for temperature and vibration requirements. The equipment shall be turned on and operated for 12 hours, and then turned off for a minimum of 1 hour, followed by a second 12 hour period of operation.

b. The second 12 hour period shall be failure free. The failure definition of para. 4.10.2 shall apply. If a failure should occur during the second 12 hour failure free period, the equipment shall be repaired, returned to burn-in and burn-in continued until a 12 hour failure free period has been achieved.

c. Assemblies failing electrical acceptance tests subsequent to satisfactory completion of burn-in may be repaired with a burned-in assembly and electrically retested, accepted and delivered without repeat of burn-in.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

4.7 Electrical performance tests.

4.7.1 Signal generator drive. The signal generator drive voltage shall be measured in accordance with SM-A-783480.

4.7.2 Wire module drive. The wire module drive voltages shall be measured in accordance with SM-A-783480.

4.7.3 Power consumption. The test set battery current shall be measured in accordance with SM-A-783480.

4.7.4 Message format. The test set message format shall be measured in accordance with SM-A-783480.

4.7.5 Message selection. The test set message selection capability shall be measured in accordance with SM-A-783480.

4.7.6 Low voltage. The test set shall be tested for low voltage operation in accordance with SM-A-783480.

4.8 Service condition tests.

4.8.1 Temperature.

4.8.1.1 Low temperature. The equipment shall be tested in accordance with Method 502.1, Procedure I of MIL-STD-810. The storage temperature shall be -57°C (-70°F) and shall be maintained for a period of not less than two (2) hours following stabilization of the test item. The low operating temperature shall be -18°C (0°F).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

4.8.1.2 High temperature. The equipment shall be tested in accordance with Method 501.1, Procedure II of MIL-STD-810. The internal chamber temperature for Step 2 shall be 65.5°C (150°F). The highest operating temperature shall be 51.7°C (125°F).

4.8.2 Altitude. The equipment shall be tested in accordance with Method 500.1, Procedure I of MIL-STD-810. This test shall include exposure to an altitude of 40,000 feet, non-operating.

4.8.3 Vibration. The equipment shall be tested in accordance with Method 514.2, Procedure XI, Part 2, of MIL-STD-810.

4.8.4 Shock, bench-handling. The equipment shall be tested in accordance with Method 516.2, Procedure V of MIL-STD-810.

4.8.5 Shock, transit drop. The equipment shall be tested in accordance with Method 516.2, Procedure II of MIL-STD-810.

4.8.6 Leakage (immersion). The equipment shall be tested in accordance with Method 512.1, Procedure I of MIL-STD-810. Following the immersion period, there shall be no evidence of leakage and the equipment shall be operated to insure that no degradation in performance has resulted.

4.8.7 Humidity. The equipment shall be tested in accordance with Method 507.1, Procedure II of MIL-STD-810.

4.9 Electromagnetic interference (EMI). The test set shall be tested to meet the EMI requirements of 3.9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

4.10 Interchangeability. The dimensions listed below shall be gauged or measured to determine conformance to the physical interchangeability requirement of 3.10. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

a. External and internal dimensions of case covers and insertable assemblies, when such dimensions affect mating of parts.

b. Dimensions of cavities, when such dimensions affect insertion of items

c. Location of hinges and fasteners on separable parts or assemblies which must mate, such as cases, covers, and mountings.

4.11 Weight. The equipment shall be weighed to determine compliance with 3.11.

4.12 Visual mechanical inspection. Equipment shall be examined to insure freedom from the defects listed in MIL-STD-252. An inspection shall be performed to verify compliance with these portions of 3.13 (Systems Safety Engineering) and 3.14 (Human Factors Engineering) which can be determined visually.

4.13 Quality conformance inspection of preparation for delivery. Preparation for delivery shall be inspected in accordance with MIL-P-116 to determine conformance to the requirements of Section 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A, B or Commercial, as specified (See 6.1).

5.1.1 Level A.

5.1.1.1 Cleaning. Test Set, Receiver TS-3565( )/TRS-2 shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. Test Set, Receiver TS-3565( )/TRS-2 shall be dried in accordance with the applicable procedures of MIL-P-116.

5.1.1.3 Preservative application. No preservative required.

5.1.1.4 Unit packing. Unit packing shall be in accordance with the methods prescribed in MIL-P-116 as specified herein.

5.1.1.4.1 Technical literature. Each technical literature shall be unit packed method IC-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

5.1.1.4.2 Test Set, Receiver TS-3565( )/TRS-2. Each test set shall be individually unit packed method III as follows: place the set and accessories within the carrying case. Close the case and secure the fastenings provided. Cushion the case on all surfaces with cells or pads or both fabricated of fiberboard conforming to PPP-F-320, type CF, class weather-resistant, variety SW, grade W5c, designed to protect all projections and absorb the shock of impact in handling and transit. As an alternate, cushioning material may be fabricated of plastic molding material conforming to MIL-P-19644 or polyurethane foam conforming to MIL-P-26514. Place each cushioned case within a close-fitting fiberboard box conforming to PPP-B-636, W5c. Place the technical literature, unit packed as specified in 5.1.1.4.1, on top of the contents, directly under the lid of the box. Close the box in accordance with appendix of the box specification.

5.1.2 Level B. Cleaning, drying, preservative application and unit packing shall be as specified in 5.1.1.

5.1.3 Commercial preservation. Preservation shall be in accordance with FED-STD-356.

5.2 Packing. Packing shall be level A, B or Commercial, as specified (see 6.1). Shipping containers for level A and B shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. A quantity of Test Set, Receiver TS-3565( )/TRA-2 unit packed as specified in 5.1, shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type 1, finish A.

5.2.2 Level B. A quantity of Test Set, Receiver TS-3565( )/TRS-2 unit packed as specified in 5.1, shall be packed within a close-fitting box conforming to PPP-B-640, class 2, style E, or PPP-B-636, type CF, class weather-resistant. The gross weight of boxes conforming to PPP-B-640 shall not exceed 250 pounds. Closure shall be in accordance with the appendix of the applicable box specification. Reinforcing shall be by pressure-sensitive filament tape banding or nonmetallic strapping conforming to PPP-T-97 and PPP-S-760, respectively; selection of the material and application shall be in accordance with the appendix of the applicable box specification. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, containers will be pallet-mounted on pallets conforming to NN-P-71, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type 1, finish A, or shrink film.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial packing. Packing shall be in accordance with FED-STD-356.

5.3 Marking.

5.3.1 Military marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2 Commercial marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with FED-STD-356.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification and any amendment thereto.

b. Level A, level B or Commercial preservation and packing (See Section 5).

c. When the rough handling test is required.

d. Place of final inspection.

e. Government furnished equipment or contractor furnished equipment as follows:

Receiver, Radio R-1808
Signal Generator FM, AN/URM-70

f. Government furnished batteries or contractor furnished power source as follows:

BA-90 or BA-3090

6.2 Group C inspection. Approval to ship may be withheld, at the discretion of the Government, pending the decision from the contracting officer on the adequacy of corrective action. (See 4.5.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

6.3 Nomenclature. The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: AN/GRS-2W. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

6.4 Equipment power source. The test set uses one (1) BA-90 or BA-3090 battery.

6.5 Environmental. Environmental pollution prevention measures are contained in the packaging material specifications referenced herein. Refer to material specifications or preparing activity for recommended disposability methods.


6.6 Data requirements. Deliverable data required by this specification is cited in the following paragraphs:

Paragraph	Data requirements
4.3.3	First Article Test Plan and Report

Custodian
ARMY-EL

Preparing Activity
ARMY-EL
Project Nr. 6625-A701

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

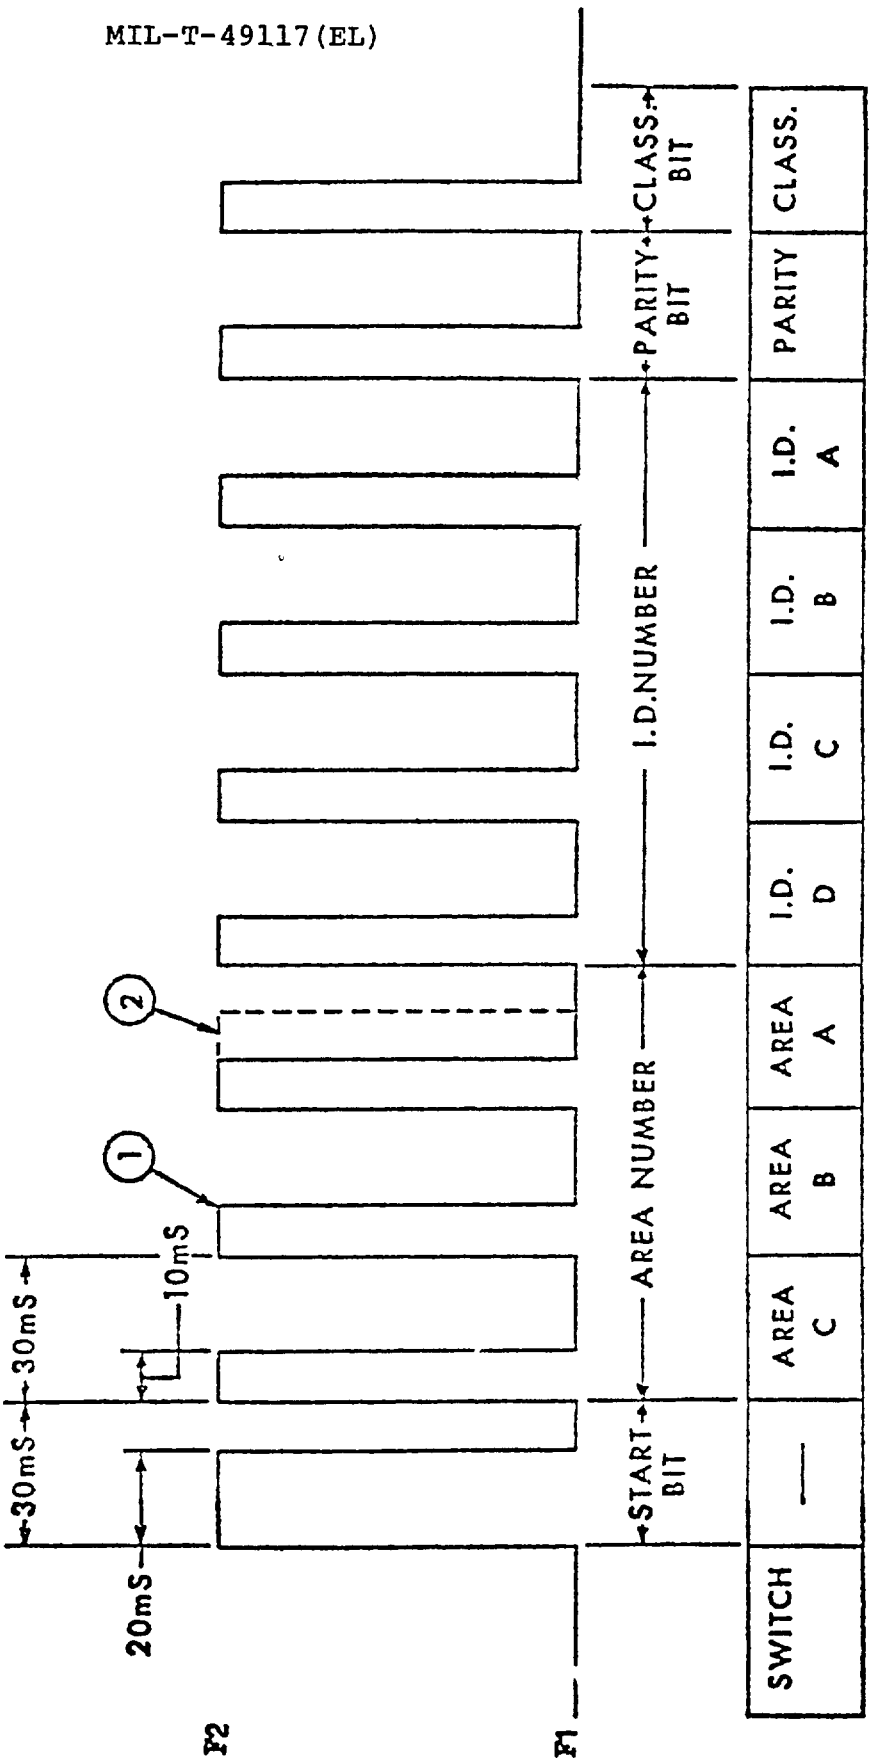

NOTES: (1) 10 ms WIDTH CORRESPONDS TO A "0" OR "P"
(2) 20 ms WIDTH CORRESPONDS TO A "1 OR "C"
F1 - 1,500 Hz ± 3%
F2 - 1,800 Hz ± 3%

FIGURE 1 TEST SET DATA SIGNAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel either Government or contractor involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION MIL-T-4977(EL) TEST SET, RECEIVER TS-3565( )/TRS-2

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes" in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: ~~AMSEL~~ DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.