GUN, TWIN 40 MM, SELF-PROPELLED, M42A1

This amendment forms a part of Military Specification MIL-G-11725B(AT), dated 20 August, 1985, and is approved for use by US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1.1, under "SPECIFICATIONS, FEDERAL", delete "VV-G-76 - Gasoline, Automotive." and substitute: "VV-G-1690 - Gasoline Automotive, Leaded or Unleaded."

2.1.1, under "SPECIFICATIONS, MILITARY", following "MIL-G-3056 - Gasoline, Automotive, Combat." add: "MIL-H-6083 - Hydraulic Fluid, Petroleum Base, for Preservation and Testing."

2.1.1, under "STANDARDS, MILITARY", delete "MIL-STD-210 - Climatic Extremes for Military Equipment." and "MIL-STD-417 - Rubber Compositions, Vulcanized General Purpose, Solid (Symbols and Tests)."

2.1.1, under "STANDARDS, MILITARY", following "MIL-STD-461 - Electromagnetic Interference Characteristics Requirements for Equipment." add: "MIL-STD-462 - Electromagnetic Interference Characteristics, Measurement of."

2.1.1, under "STANDARDS, MILITARY", following "MIL-STD-642 - Indentification Marking of Combat and Tactical Vehicles." add: "MIL-STD-1474 - Noise Limits for Army Materiel." and "MIL-STD-45662 - Calibration Systems Requirements."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:54Z
Check the source to verify that this is the current version before use.

2.1.1, delete in its entirety, "ENGINEERING PARTS LIST - 7968000 - Gun, Twin 40MM, Self-Propelled, M42A1." and substitute the following:

"2.1.2 Drawings. the following drawing forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of solicitation."

DRAWINGS
ARMY

8750204 - Gun, Twin 40MM Self-Propelled, M42A1.

(Copies of specification, standards and drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)"

PAGE 4

3.2.1, line 3, delete "on the EPL cited".

3.2.2, delete and substitute:

"3.3.2 Ozone resistance. When rubber components are required to be ozone resistant, the degree of resistance shall be as specified in the applicable specification or drawings (see 4.1.4)."

3.3, line 3, delete "Engineering Parts List (EPL) 9968000," and substitute: "drawing number 8750204."

PAGE 6

3.3.5, delete and substitute:

"3.3.5 Exhaust system. The exhaust system as installed, shall be gas tight, leakproof and shall prevent the concentration of carbon monoxide (CO). The concentration of toxic fumes in the crew compartment shall be not more than 50 parts per million (ppm) for CO and be not more than 5 ppm for oxide of nitrogen (NO_x)1/. The toxic fume limitation considers operation of the heater when installed.

1/ NO_x is a term used to describe all compounds containing oxides of nitrogen."

PAGE 7

3.3.9, line 4, delete "CO_2" and subtitute: "carbon dioxide (CO_2)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:54Z
Check the source to verify that this is the current version before use.

PAGE 8

3.4.1, line 5, delete "VV-G-76" and substitute: "VV-G-1690".

PAGE 9

3.4.3 Add the following figure 1:

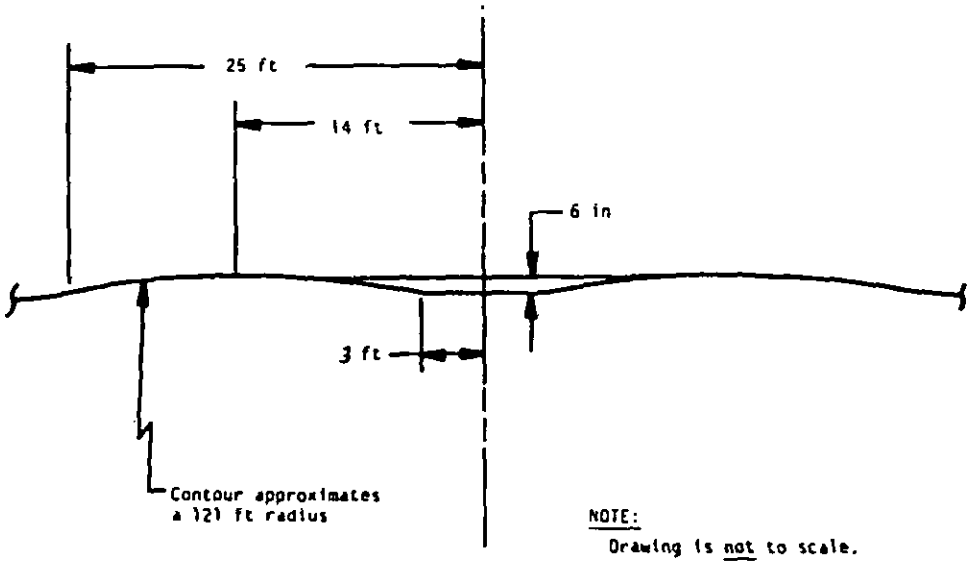


FIGURE 1. Profile of test track (artificial bump).

PAGE 13

Add the following paragraphs:

"3.9 Vibration and noise. With a sound level meter located in the vicinity of the driver's right ear, and with the vehicle traveling at a rate of 30 mph in a 1-2-3 gear range on a hard-surfaced straight road, with all hatches and doors closed, the sound level shall be not more than the following values:

a. When using the "C" weighting position of the sound level meter, the noise level shall be not more than 128 decibels (db).
b. When using the "B" weighting position of the sound level meter, the noise level shall be not more than 124 db.
c. When using the "A" weighting postion of the sound level meter, the noise level shall be not more than 119 db.

3.9.1 Noise hazard caution sign. The vehicle driver and crew compartments shall be posted as noise hazardous areas as specified in MIL-STD-1474. Hearing protection shall be provided for the driver and all crew members while the vehicle is in operation."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:54Z
Check the source to verify that this is the current version before use.

PAGE 20

Table IV, Carbon dioxide distribution test under "Government Proving Ground" add "X" and add the following line item after "Carbon dioxide distribution test".

"

Title	Paragraph Number	Place of Manufacture	Government Proving Ground
Vibration and noise test	4.5.3.13		X

"

PAGE 30

4.5.3.3, delete and substitute:

"4.5.3.3 Exhaust system. To determine conformance to 3.3.5, the exhaust system shall be examined for proper installation and absence of leaks. Carbon monoxide and NO_x levels shall not exceed that specified."

4.5.3.11, line 2, after "test" delete "(see 3.5.14)" and subtitute: "in accordance with MIL-STD-462."

PAGE 31

Add the following paragraph:

"4.5.3.13 Vibration and noise. To determine conformance to 3.9, the vehicle noise level measured at the location indicated shall be not more than the specified db, when measured with a sound level meter which meets the requirements of MIL-STD-1474. The driver and crew compartments shall have signs posted indicating noise hazard, and specified in 3.9.1."

5.1, delete and substitute:

"5.1 Vehicle processing. Preservation and processing shall be in accordance with MIL-G-45178 for the level(s) specified by the procuring activity (see 6.2)."

6.2, delete subparagraph b. and substitute:

b. Selection of level(s) of preservation and processing for shipment and storage (see 5.1)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:54Z
Check the source to verify that this is the current version before use.

Add the following paragraph:

"6.7 Subject term (key word) listing.

M42A1, gun, twin 40mm, self-propelled
Self-propelled gun, twin 40mm
Twin 40mm, self-propelled gun
40mm, twin gun, self-propelled"

Under "Custodian", delete "Army - WC"

Custodian:
Army - AT

Preparing activity:
Army - AT

(Project 2350-A381)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:54Z
Check the source to verify that this is the current version before use.