INCH-POUND

MIL-PRF-1/1361J
22 October 2019
SUPERSEDING
MIL-PRF-1/1361H
12 June 2012

PERFORMANCE SPECIFICATION SHEET

ELECTRON TUBE, THYRATRON
TYPES 7390 AND 7390A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the electron tube described herein shall consist of this document and MIL-PRF-1.

DESCRIPTION: Triode, hydrogen, ceramic-metal.
See figures 1 and 1A.
Mounting position: Vertical, base down.
Weight: 9 pounds (4.1 kilograms) nominal.

ABSOLUTE RATINGS:

Parameter:	Ef	epy	epx	Ebb	egy	egx	Ecc	ib	Ib	Ip
Unit:	V ac	kv	kv	kV dc	v	v	V dc	a	A dc	A ac
Maximum:	6.6	3.3 1/	33 2/	---	3/	650	---	2,000	4.0	72
Minimum:	6.0	7	5% epy	3.5	---	---	---	---	---	---
Test conditions:	6.3	3.3	---	---	1,100	---	0	---	---	---

ABSOLUTE RATINGS:

Parameter:	tj	prr	$\frac{dik}{dt}$	Pb	tk	TA	Cooling	Eres	Ires
Unit:	µs	---	$\frac{a}{\mu s}$	---	sec	°C	---	V ac	A ac
Maximum:	0.01	---	10,000	$30x10^9$	5/	+75	6/	5.5 8/	12
Minimum:	---	---	---	---	900	-55	---	3.5	---
Test conditions:	---	465	---	---	900	---	7/	9/	---

See footnotes at end of table I.

GENERAL:

Qualification: Required.

This specification sheet uses accept on zero defect sampling in accordance with MIL-PRF-1, table III.

Service-life guarantee – 500 hours minimum tube operating time.

Marking – Tubes sold under service-life guarantee shall be marked with the contract number and with the number of tube operating hours guaranteed.

AMSC N/A

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:34Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection.

Inspection	Method MIL-STD-1311	Notes	Conditions	Symbol	Limits		Unit
					Min	Max	
Qualification inspection							
Operation at elevated ambient temperature	3246	7/ 10/ 12/	TA = 75°C, except t = 5 hours	egy	---	1,100	v
Life test (2)	---	7/ 13/ 14/	epy = 25 kv; prr = 740; Ib = 4.0 A dc (min); egy = 1,200 v; Zg = 50 ohms (min); t = 500 hours	---	---	---	---
Life-test (2) end points:	---						
Operation (1)	3246	---	Zg = 50 ohms (min)	egy	---	1,200	v
DC anode voltage for conduction (1)	3247	---	egy = 1,200 v; Zg = 50 ohms (min)	Ebb	---	3,000	V dc
Time jitter	3261	---	egy = 1,200 v; Zg = 50 ohms (min)	tj	---	0.01	μs
Conformance inspection, part 1							
Heater current (cathode)	3241	---		If	22	35	A ac
Heater current (reservoir)	3241	---	Eres = 4.5 V ac	Ires	7	10.0	A ac
DC anode voltage for conduction (1)	3247	15/	Eres = 105 percent of optimum value	Ebb	---	2,500	V dc
Instantaneous starting	3267	7/ 10/ 16/	Eres = 105 percent of optimum reservoir voltage; epy = 24 kv (min)	---	---	---	---
Operation (1)	3246	7/ 10/ 11/ 17/ 18/	epy = 36 kv; t = 1 hour	egy	---	1,100	v
Operation of optimum reservoir voltage	3246	---	Operation (1)	Eres	3.5	5.5	V ac
Pulse emission (method A)	3251	20/	ik = 2,000 a; tp = 5.0 μs ± 10 percent; prr = 60 ± 10 percent; tr = 0.5 μs (max)	egk	---	300	v

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:34Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

Inspection	Method MIL-STD-1311	Notes	Conditions	Symbol	Limits		Unit
					Min	Max	
Conformance inspection, part 2							
Vibration	---	24/	MIL-STD-202-201	---	---	---	---
Shock, specified pulse	1042	4/ 24/		---	---	---	---
DC anode voltage for conduction (2)	3247	21/	Eres = 95 percent of optimum value	Ebb	---	2,500	V dc
Operation (1A)	3246	7/ 18/ 19/ 22/	Operation (1)	egy	---	1,100	v

Operation (2)	3246	7/ 13/ 17/ 18/	epy = 25 kv;
			t = 1 hour;
			prr = 740;
			Ib = 4.0 A (min)
				egy	---	1,100	v

Operation (2A)	3246	7/ 18/ 22/	Operation (2)	egy	---	1,100	v
Anode delay time	3256	---	Operation (1A); t = 2 minutes	tad	---	1.0	µs
Anode delay time drift	3256	23/	Anode delay time	Δtad	---	0.1	µs
Time jitter	3261	---	Operation (1A), except epy = 7.0 kv; tj measured after 60 minutes of operation	tj	---	0.01	µs
Conformance inspection, part 3							
Life test	---	7/ 10/ 14/ 25/	Group C; epy = 1,200 v; Zg = 50 ohms (min); t = 500 hours	---	---	---	---
Life-test end points:	---	25/					
Operation (1)	3246	---	Zg = 50 ohms (min)	egy	---	1,200	v
DC anode voltage for conduction (1)	3247	---	egy = 1,200 v; Zg = 50 ohms (min)	Ebb	---	3,000	V dc
Time jitter	3261	---	egy = 1,200 v; Zg = 50 ohms (min)	tj	---	0.01	µs

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:34Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

1/ Instantaneous starting is not recommended. When it is necessary, the maximum permissible epy is 22 kv and it shall not be attained in less than 0.04 second.

2/ In pulsed operation, the peak inverse voltage shall not exceed 5.0 kv during the first 25 μs following the pulse.

3/ The driver pulse, measured at the tube socket with thyratron grid disconnected: 1,300 volts minimum; 2,500 volts maximum; tr = 0.35 μs maximum; grid pulse duration 2.0 μs minimum. Impedance of drive circuit 10 to 25 ohms.

4/ Shock tests shall be performed in accordance with MIL-STD-202-213, except as noted. The tube shall be mounted on suitable rigid fixtures in the positions described below by means of its mounting flange. The tube shall not be clamped, braced, or supported by means other than its mounting flange.

The tube shall be subjected to three blows in each of the following positions:

Position of tube in elevator assembly	Intensity and duration of blow
Vertical: Base down	80 G, 11 ms, half-sine shock pulse
Horizontal: Center line through heater terminals, vertical	60 G, 11 ms, half-sine shock pulse
Horizontal: Center line through heater terminals, horizontal	60 G, 11 ms, half-sine shock pulse

The tests shall be performed with both heater and reservoir at substantially full operation temperatures. Means for detecting heater current variations and shorts between anode and grid and between grid and cathode shall be provided. No temporary or permanent changes in heater or reservoir currents or temporary or permanent shorts between electrodes shall occur.

5/ Standby operation, with heater and reservoir voltage on, is not recommended. Where standby operation is necessary, provisions shall be made to operate the tube at full equipment conditions for a minimum of 2 hours during each 12-hour period of standby.

6/ Maintain grid seal temperature within 225°C above ambient temperature by blower directed at seal and lower ceramic cylinder. Approximately 15 cfm of air is required at rated power levels.

7/ Approximately 15 cfm of air may be directed at grid seal and lower envelope.

8/ The optimum reservoir voltage for operation in accordance with operation (1) conditions is inscribed on the base of the tube and must be held within ± 2.5 percent. Applications involving other operation conditions will necessitate the re-determination of the optimum reservoir voltage.

9/ Adjust reservoir voltage to value indicated on the tube within ± 5 percent, except as otherwise specified.

10/ The anode circuit constants shall be chosen so that at epy = 33.0 kv; under resonant charging conditions; ib = 2,000a minimum; dik/dt shall be 10,000a/μs minimum; tp = 2.5 ± 10 percent μs; prr = 500 minimum. Grid pulse measured at tube socket with thyratron grid disconnected: tr = 0.35 μs minimum, tp = 2.0 μs maximum; internal impedance of driver: 75 ohms minimum.

11/ This test is to be the first test performed at the conclusion of the instantaneous starting test.

12/ The tube shall be capable of operating under the following conditions:

a. Apply cathode heater voltage and adjust reservoir voltage to 95 percent of the optimum reservoir voltage and allow both to warmup for 15 minutes.

b. Raise anode voltage directly to the specified voltage at a rate of not less than 30 kv per minute.

c. The tube shall operate at the specified anode voltage for a total of 2 hours which may include one interruption. A total of four interruptions at any anode voltage is permitted provided that the total test time required to perform this part of the operation test does not exceed 135 minutes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:34Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

d. After the above operation is at full anode voltage, increase the reservoir to 105 percent of the optimum value. The tube shall continue to operate for an additional 2 hours with not more than one interruption.

e. After the above operation at full anode voltage, decrease the reservoir voltage to optimum value. The tube shall continue to operate for an additional hour without interruption.

13/ The anode circuit constants shall be chosen so that at epy = 25.0 kv under resonant charging conditions; ib = 1,000 a minimum; rate of rise of dik/dt shall be 5,000 a/μs minimum; tp = 5.0 ± 10 percent μs; prr = 500 minimum. Grid pulse measured at tube socket with thyratron grid disconnected: tr = 0.35 μs minimum; tp = 2.0 μs maximum; internal impedance of driver: 75 ohms minimum.

14/ During every 96-hour period, the life test shall be shut off for a minimum of 30 minutes. With qualifying activity approval occasional shutdowns for testing or plant closing to cover off hours is permissible under life test.

15/ This test shall be conducted within 60 seconds after the operation (1) test.

16/ The tube shall operate satisfactorily on push-button starting within three attempts when the epy is applied to the tube under test in such a manner as to rise from 0 to 24 kv minimum within 0.04 second. (The filter in the rectifier shall be designed so that the epy reaches at least 9.0 kv within 0.015 second.) Any tube failing to start within three attempts will be considered a failure.

17/ The tube shall be capable of operating under the following conditions:
a. Apply cathode heater voltage and adjust reservoir voltage to 105 percent of the optimum value and allow both cathode and reservoir to warmup for 15 minutes.
b. Raise anode voltage directly to the specified voltage at the rate of not less than 30 kv per minute.
c. The tube shall operate at the specified anode voltage for a total of 60 minutes which may include one interruption. A total of six interruptions at any anode voltage is permitted provided that the total test time required to perform the operation test does not exceed 120 minutes.

18/ No anode or grid voltage other than that required for an instantaneous start test shall have been applied to the tube for a minimum period of 2 hours prior to this test.

19/ Type 7390A only.
a. The temperature indicator shall be such that a green field is visible in the indicator window when the tube is operating properly within its ratings and a red field indicated when conditions exist that produce deleterious anode hearing.
b. During operation (1A), the thermometer shall indicate the green background throughout the test, and the dividing line between the green and red zones shall be at least .188 inch (4.77 mm) to the right of the pointer at the center of the windows.
c. Any external forced-air cooling of the tube shall be directed on the tube in such a manner that it will not affect the calibration of the temperature indicator.

20/ Measure the voltage between grid and cathode not more than 2.5 μs maximum after the beginning of the current pulse. The average voltage shall not rise during the last 4.0 μs.

21/ This test shall be conducted within 60 seconds after the operation (1A) test.

22/ The tube shall be capable of operating at the following conditions:
a. Apply cathode heater voltage and adjust reservoir voltage to 95 percent of the optimum reservoir voltage and allow both to warmup for 15 minutes.
b. Raise anode voltage directly to the specified voltage at a rate of not less than 30 kv per minute.
c. The tube shall operate at the specified anode voltage for a total of 60 minutes which may include one interruption. A total of six interruptions at any anode voltage is permitted provided that the total test time required to perform the operation test does not exceed 120 minutes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:34Z
Check the source to verify that this is the current version before use.

23/ During the interval between 2 and 60 minutes of the anode delay time test, the Δtad relative to the tad value observed on the anode delay time shall not exceed the specified value.

24/ Tube shall be vibrated as described for 2 hours each in the vertical direction, in the horizontal direction parallel to the heater connections, and in the horizontal direction perpendicular to the heater connections. After shock and vibration tests, the tube shall meet all the conformance inspection, part 1 and part 2, test requirements except the provisions of 19/. An aging period not to exceed 1 hour is permitted after mechanical tests.

25/ With qualifying activity approval the manufacturer may provide, in accordance with MIL-PRF-1, service-life guarantee, in lieu of performing life testing. Life test endpoints specified shall apply to service-life guarantee conformance as well as life test conformance. The number of hours of system-deployed, accumulated tube-operating time shall be approved by the qualifying activity and shall be a minimum of 500 hours. Service-life guarantee shall define tube operating time and not time from purchase or delivery. Tubes sold under service-life guarantee shall be marked with contract number and with the number of tube operating hours guaranteed. The qualifying activity may restore life testing requirements when service performance or tube reliability indicate it is justified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:34Z
Check the source to verify that this is the current version before use.

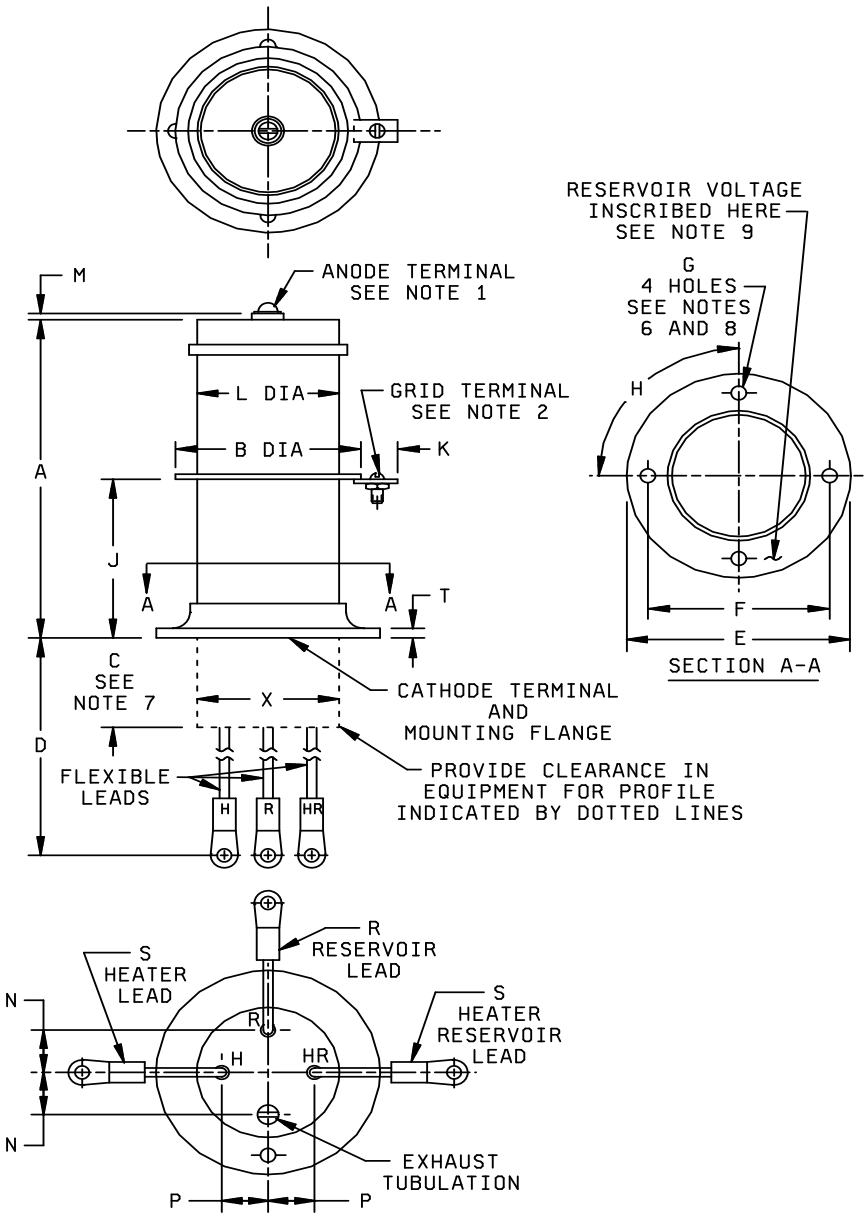


FIGURE 1. Outline drawing of electron tube type 7390.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:34Z
Check the source to verify that this is the current version before use.

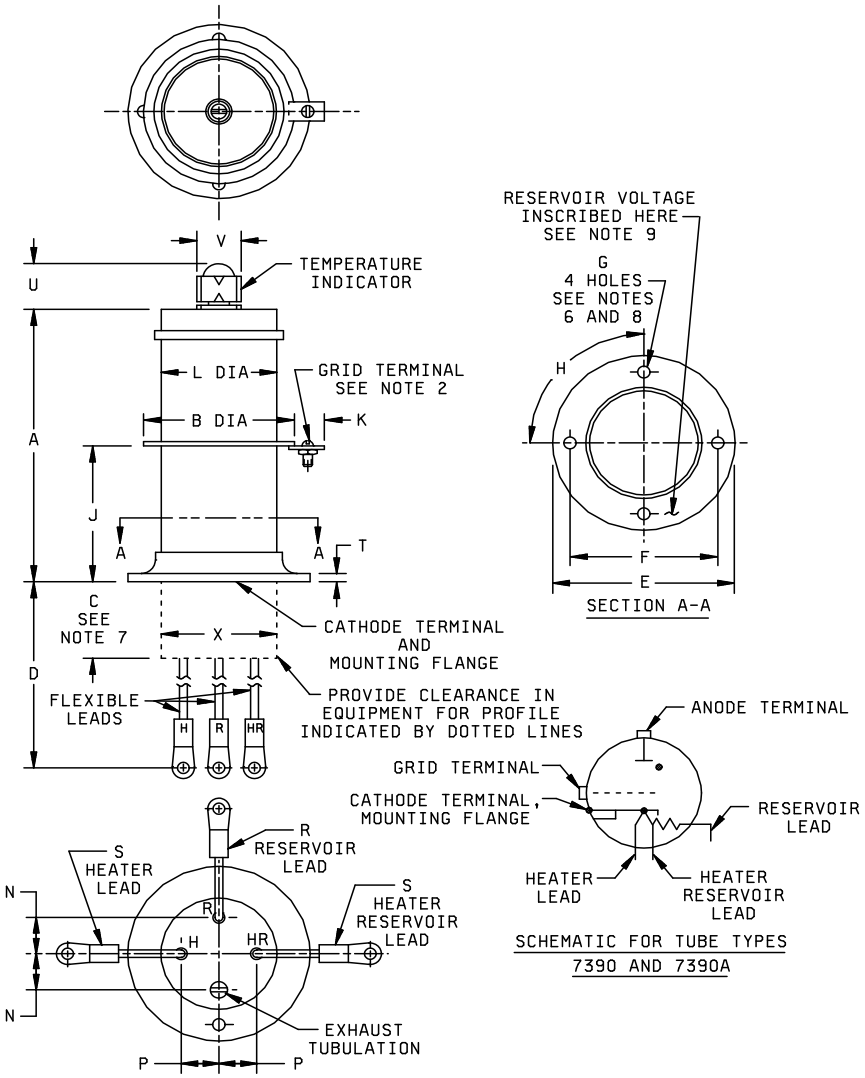


FIGURE 1A. Outline drawing of electron tube type 7390A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:34Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
Conformance inspection, part 2				
A	8.000	10.500	203.20	266.70
B	---	5.625	---	142.88
D	9.500	10.500	241.30	266.70
E	5.938	6.063	150.83	154.00
F	5.324	5.364	135.23	136.25
U	---	2.500	---	63.50
V	---	1.500	---	38.10
Conformance inspection, part 3 (see note 10)				
C	---	3.000	---	76.20
G	.307	.323	7.80	8.20
J	3.750	5.750	95.25	146.05
K	---	.500	---	12.70
L	4.375	4.625	111.13	117.48
M	---	.375	---	9.53
N	.875	1.875	22.23	47.63
P	1.000	2.000	25.40	50.80
X	---	4.563	---	115.90
Reference dimensions				
H	89°30'	90°30'	89°30'	90°30'
R	5,000 CM (see notes 3, 4, and 5)			
S	10,000 CM (see notes 3, 4, 5, and 6)			
T	.125		3.18	

NOTES:


1. Anode terminal shall be .25-20UNC-2A roundhead machine screw .50 inch (12.7 mm) long with washer .250 inch (6.35 mm) clearance diameter and .50 inch (12.7 mm) outside diameter.
2. Grid terminal shall be 6-32UNC-2A roundhead machine screw .50 inch (12.7 mm) long with washer, .188 inch (4.77 mm) inside diameter and .375 inch (9.53 mm) outside diameter, and with 6-32UNC-2B hex nut.
3. Lead terminals shall be in accordance with figure 2.
4. Insulation sleeving shall be as specified in MIL-I-3190.
5. Leads shall be flexible. Dimensions S and R define cross sectional area of lead conductors. Lead connections shall be suitably identified. Lead connections, lead identification, lead insulation, and lead insulation sleeving shall be inspected under qualification and shall be as follows:

Lead	Lead insulation Color	Type	Sleeving color
H (heater)	Yellow	HA-1	Other than black
HR (heater-reservoir)	Yellow	HA-1	Black
R (reservoir)	Red	HA-1	Other than black

6. Heater leads, 2 mounting holes as applicable, and grid terminals shall be aligned within ± 10°.
7. Dimension C and X defines extent of rigid portion of tube below mounting flange. Clearance for this part of tube shall be provided in equipment.
8. Holes G shall be inspected for orientation by using the base gauge outlined on figure 3.
9. The optimum reservoir voltage shall be inscribed permanently on the top surface of mounting flange, as shown.
10. Dimensions shall be checked during the initial production and once each succeeding 12-calendar months in which there is production. An accept on zero defect sampling plan shall be used, with sample of three tubes with an acceptance level of zero defects.
11. Dimensions are in accordance with ASME Y14.5M.

FIGURES 1 AND 1A. Outline drawing of electron tube types 7390 and 7390A - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:34Z
Check the source to verify that this is the current version before use.

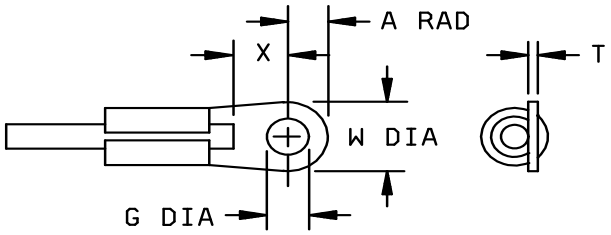


Lead	Lug designations	G				W		A		X		T	
		Inches		Millimeters		In.	mm	In.	mm	In.	mm	In.	mm
		Min	Max	Min	Max	Max	Max	Max	Max	Min	Min	Max	Max
Reservoir	#10	.187	.207	4.75	5.26	.395	10.03	.200	5.08	.275	6.99	.060	1.52
Heater-reservoir	1/4	.260	.313	6.60	7.95	.605	15.37	.305	7.75	.380	9.65	.060	1.52
Heater	1/4	.260	.313	6.60	7.95	.605	15.37	.305	7.75	.380	9.65	.060	1.52

NOTES:
1. Dimensions are in inches.
2. There shall be no obstruction within the distance X from the center of the lug screw hole.
3. Lugs or terminals shall be permanently marked as follows: H (heater), HR (heater-reservoir), and R (reservoir).

FIGURE 2. Pressure type terminal lugs with insulating sleeves.

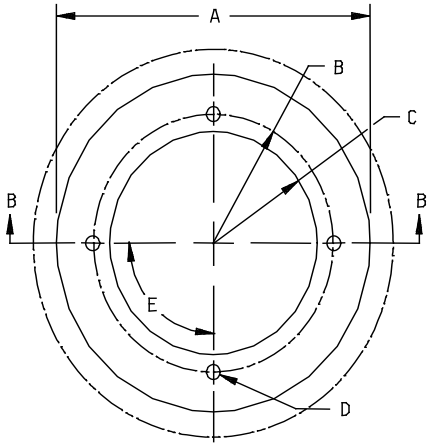



Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	7.000 DIA		177.80 DIA	
B	2.671 R	2.673 R	67.84 R	67.89 R
C	2.312 R	2.314 R	58.72 R	58.78
D	.2765 DIA	.2775 DIA	7.02 DIA	7.05 DIA
E	88°	92°	88°	92°
F	.296	.328	7.52	8.33
G	.250 STOCK		6.35 STOCK	

NOTES:
1. Dimension are in inches.
2. Millimeters are provided using 1.00 inch = 25.4 mm.
3. Dimensions are in accordance with ASME Y14.5M.

FIGURE 3. Base gauge for electron tube types 7390 and 7390A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:34Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-1, this specification sheet references the following:
MIL-STD-1311
MIL-I-3190
MIL-STD-202-201
MIL-STD-202-213
ASME Y14.5M

Revision notations. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5960-2019-015)

Review activities:
Army - AR
Navy - AS, CG
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:34Z
Check the source to verify that this is the current version before use.