MILITARY SPECIFICATION

SWITCHING GROUP, RF, AN/UPA-61( )

This amendment forms a part of Military Specification MIL-S-28738C(EC) dated 15 May 1975.

PAGE 2

2.1, line 1: Delete "Reliability Tests Exponential Distribution" and substitute "Reliability Design Qualification and Production Acceptance Tests: Exponential Distribution".

PAGE 3

3.7.1, line 1: Delete "specified" and substitute "upper limit".

PAGE 8

Add new paragraphs: 3.11 and 3.11.1 as follows:

"3.11 Safety.

"3.11.1 Leakage current (equipment). When practicable, the leakage current of the equipment shall not exceed 5mA to ground, whether or not such equipment contains radio interference filters or capacitors. Should the AIMS RF Switching Group have an unavoidable leakage current in excess of 5mA, a warning plate shall be attached to the front panel of each equipment reading: "DANGER - Do not energize this equipment unless frame and all exposed metal parts are grounded.""

PAGE 14

Table I: After "Interchangeability" add

"Leakage current (equipment)	3.11.1	4.5.15	"

PAGE 15

Table III: After "Enclosure" add

"Leakage current (equipment)	3.11.1	4.5.15	6.5	"

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 20261O-20T14:05Z
Check the source to verify that this is the current version before use.

PAGE 17

After 4.5.14 add new paragraph 4.5.15 as follows:

"4.5.15 Leakage current measurement. Leakage current, as part of the safety criteria of the AIMS RF Switching Group, shall be measured in the following manner. Each equipment shall be placed on an insulated surface and test connections made as shown in the Test Diagram for Leakage Current, FIGURE 5. The ground connection between the equipment and the safety ground conductor shall be opened. The equipment shall be operated with nominal input voltage and frequency. The probe shall be connected to the equipment enclosure and the leakage current measured for every combination of switch positions available in the test diagram. All parts not electrically common with the equipment enclosure shall also be tested for leakage current. Equipments having more than one mode of operation, such as transmit and receive, shall be tested in each mode."

PAGE 19

After page 19, add new Figure 5 as page 20.

Preparing activity:
Navy - EC
(Project 5985-N470)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:05Z
Check the source to verify that this is the current version before use.

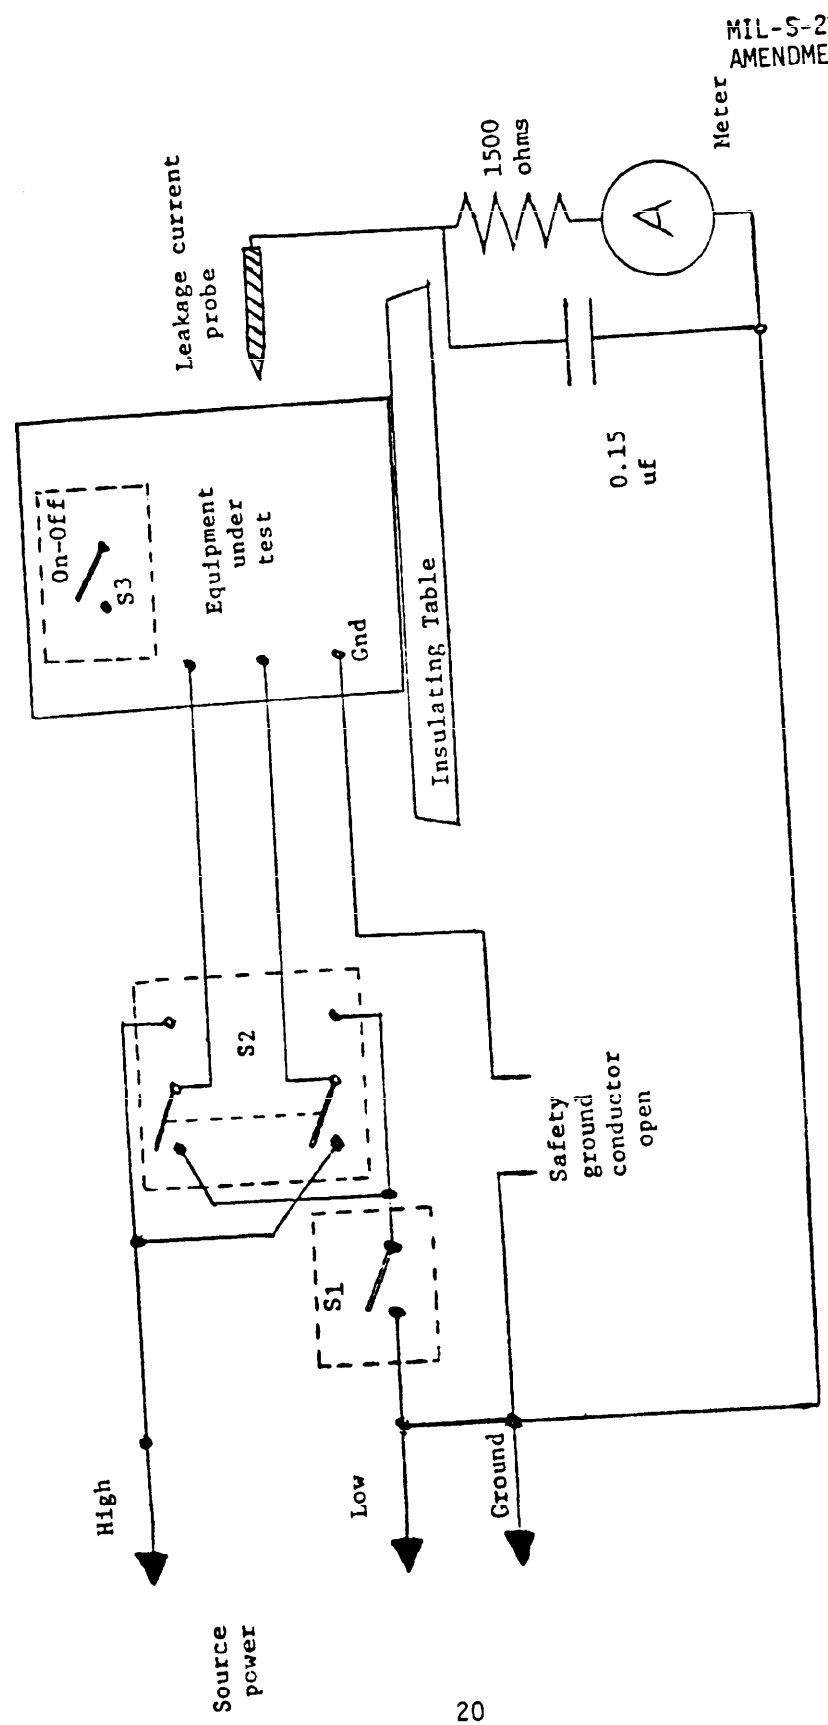


FIGURE 5. Test diagram for Leakage current.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:05Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:05Z
Check the source to verify that this is the current version before use.