MIL-C-29202A(YD)
27 July 1985
SUPERSEDING
MIL-C-29202(YD)
23 May 1980

MILITARY SPECIFICATION

COACH RECRUITER, FORWARD CONTROL, 4 BY 2

This specification is approved for use by the Naval Facilities Engineering Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a gasoline-engine-driven, four-wheel, two-rear-wheel-drive, forward control type of vehicle chassis having a minimum gross vehicle weight (gvw) of 14,500 pounds (lb), equipped with a custom recruiting coach body mounted on chassis frame.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

FEDERAL

W-B-131	- Battery, Storage: Vehicular, Ignition, Lighting and Starting.
W-C-596	- Connector, Plug, Receptacle and Cable Outlet, Electrical Power, General Specification for.
W-C-596/12	- Connector, Receptacle, Electrical, General Purpose, Duplex, Hospital Grade Grounding, 2 Pole, 3 Wire, 15 Amperes, 125 Volts, 50/60 Hertz.
W-C-596/13	- Connector, Plug, Electrical, General Purpose, Hospital Grade Grounding, 2 Pole, 3 Wire, 15 Amperes, 125 Volts, 50/60 Hertz.
ZZ-T-381	- Tire, Pneumatic, Vehicular (Highway).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 2320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-297 - Rustproofing of Commercial (Nontactical) Vehicles.
FED-STD-595 - Colors.

MILITARY

MIL-STD-281 - Automobiles, Trucks, Truck-Tractors Trailers and Trailer Dollies, Preservation and Packaging of.
MIL-STD-1223 - Administrative Wheeled Vehicles Treatment, Painting, Rustproofing, Undercoating, Identification Marking, Data Plates and Warranty Notice Standards.

(Copies of specifications, standards, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents form a part of this specification to the extent specified herein.

DEPARTMENT OF TRANSPORTATION (DoT)

Federal Motor Vehicle Safety Standards and Regulations.
Federal Motor Carrier Safety Regulations.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

ENVIRONMENTAL PROTECTION AGENCY (EPA)

Interstate Motor Carrier Noise Emission Standards.
Control of Air Pollution From New Motor Vehicles and New Motor Vehicle Engines: Certification and Test Procedures.

(Application for copies should be addressed to the Public Affairs Office, Environmental Protection Agency, Rockville, MD 20852, or CFR, Title 40 should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

ANSI/UL 711 - Fire Extinguishers, Rating and Fire Testing of.
ANSI/UL 1093 - Halogenated Agent Fire Extinguishers.

(Application for copies should be addresssed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

WC 3 - Rubber-Insulated Wire and Cable for the Transmission and Distribution of Electrical Energy.
WD 5 - Specific-Purpose Wiring Devices.

(Application for copies should be addressed to the National Electrical Manufacturers Association, 2101 L Street, N.W., Washington, DC 20037.)

STATE OF CALIFORNIA

California Vehicle Code.

(Application for copies should be addressed to the Department of Motor Vehicles, 2570 24th Street, Sacramento, CA 95809.)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

501C - Fire Safety Criteria For Recreational Vehicles.

(Application for copies should be addressed to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269.)

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

TIRE AND RIM ASSOCIATION, INC. (TRA)

TRA Yearbook.

(Application for copies should be addressed to the Tire and Rim Association, Inc., 3200 West Market Street, Akron, OH 44313.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish a coach for first article inspection and approval (see 4.2.1).

3.2 Standard vehicle and accessories. Except as specified herein, vehicle, components, assemblies, and accessories to be delivered under the contract, shall be standard or optional items which meet or exceed the requirements of this specification. Chassis items shall be as represented in the chassis manufacturer's technical data and the body and mounted equipment shall be as represented in the body and the equipment manufacturer's technical data. Technical data shall be limited to specifications and technical material, identical to that furnished to the authorized company representatives for selection of vehicle models and components.

3.2.1 Special requirements. In addition to standard vehicle and components specified in 3.2, vehicle shall be furnished with special equipment as specified herein.

3.2.1.1. Exterior painting and marking. Treatment, painting, identification marking, data plates, and warranty notice shall be in accordance with MIL-STD-1223 as specified for the Navy, except exterior color shall be gloss white No. 17886, in accordance with FED-STD-595. When exterior skin of vehicle is corrugated, the seal, lettering and markings may be placed on an aluminum sheet and riveted in place with the concave openings at end of sheet filled to present a neat appearance. In addition to the marking and exterior color requirements specified above, the following markings and exterior colors shall be painted on the vehicle:

a. Bottom dark blue color stripe: A 4-inch wide stripe shall be painted starting at the top of the wheel wells and continuing longitudinally the full length of both sides and across the rear of the coach exterior. The color shall be dark blue No. 15050 in accordance with FED-STD-595.
b. Middle dark blue color stripe: A 1-inch wide stripe shall be painted and located bordering the lower window ledge and continuing longitudinally the full length of both sides and across the front and rear of the coach exterior. A second 1-inch stripe located 2 inches below the first stripe shall be painted continuing longitudinally the full length of both sides and across the front and rear of the coach exterior. The color shall be dark blue No. 15050 in accordance with FED-STD-595.
c. Top dark blue color stripe: A 1-inch wide stripe shall be painted and located near the drip rail line and continuing longitudinally the full length of both sides of the coach exterior. The color shall be dark blue No. 15050 in accordance with FED-STD-595.
d. Recruiting command seal: Government-furnished recruiting command seals, 16 inches in diameter, shall be applied on right front side, left front side, and rear of vehicle (or on spare tire cover) as indicated on Figure 1.
e. Lettering: The following lettering shall be painted on the vehicle as indicated on Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

1. NAVY INFORMATION CENTER. Right and left side. This lettering shall begin 4 feet from the rear edge and shall be spaced lengthwise 13 feet forward. Bottom of the letters shall be 2 inches up from the top of the bottom dark blue stripe. Color shall be blue No. 15050 in accordance with FED-STD-595. Lettering style shall be HELVETICA MEDIUM. All of the above letters to be 6 inches high.
2. GO NAVY. At two locations, at front roof peak, centered, and centered at vehicle rear. This lettering to be included in a space 3-1/2 feet wide. The letters shall be blue No.15050, in accordance with FED-STD-595. All the above letters to be 6 inches high. Lettering style shall be HELVETICA MEDIUM.

f. Identification markings. The identification markings "US NAVY," "FOR OFFICIAL USE ONLY," and "USN REGISTRATION NUMBERS" specified in MIL-STD-1223 for the right and left of the vehicle shall be located at left and right side rear. Rear marking shall be as specified in MIL-STD-1223. All markings shall be black paint No. 17038, in accordance with FED-STD-595.

3.2.1.2 Rustproofing. Vehicle shall be rustproofed as specified in FED-STD-297. In addition, rustproofing shall be applied at the following areas:

a. Chassis frame members and chassis cross members.
b. Boxed in areas of lights, conduit, clips, and brake line metal tubing.
c. All exposed areas under the vehicle.
d. The rustproofing shall be applied on all surfaces.
e. The material may be applied using an atomized type of spray or be brushed.

3.2.1.3 Dissimilar metals. Where dissimilar metals are in contact, the contact face shall be primed with a highly alkaline resistant primer to preclude galvanic and electorlytic action.

3.2.1.4 Heavy-duty cooling system. A heavy-duty cooling system shall be furnished that shall maintain engine coolant at a temperature below the boiling point with truck loaded to rated gvw, and operated at an altitude of 10,000 feet above sea level or in an ambient air temperature of not less than 125 degree Fahrenheit (°F).

3.2.1.5 Coolant system and indicators. The coolant system shall be filled to capacity with a solution of ethylene glycol and water in equal parts by volume. Coolant system shall include a surge tank or a coolant recovery reservoir of not less than 2-quart capacity. A high coolant temperature or low coolant level alarm buzzer and red indicator warning light shall be provided on the driver's compartment dash instrument panel.

3.2.1.6 Towing devices. Not less than two hooks, loops, or pins, for towing vehicle, shall be furnished on front of the vehicle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

3.2.1.7 Wheel splash and stone throw protection. Each wheelwell, front and rear, shall be provided with splash shields. Mud flaps shall be provided at the rear of the front wheels, and at the rear of the rear wheels. All splash shield and mud flap installations, front and rear, shall conform to SAE J682.

3.3 General design.

3.3.1 Federal motor vehicle safety standards. Vehicle shall comply with all DoT Federal Motor Vehicle Safety Standards in effect on the date of manufacture.

3.3.2 Air pollution control. Vehicle shall comply with the EPA Regulations governing Control of Air Pollution from New Motor Vehicles and New Motor Vehicle Engines in effect on the date of manufacture. In addition, vehicle destined for California shall comply with the State of California regulations governing air pollution control in effect on the date of manufacture.

3.3.3 Exterior sound level. The exterior sound level produced by the vehicle shall conform to the EPA Noise Emission Standards for Medium and Heavy Trucks. The interior sound level shall conform to DoT Federal Motor Carrier Safety Regulations, section 393.94.

3.3.4 Interior sound level. The interior sound level in the driver's area shall be in accordance with DoT Federal Motor Carrier Safety Regulations, section 393.94. The average interior sound level in the conference area, with the coach stationary and the auxiliary generator and air conditioning system operating, shall be not more than 80 decibels.

3.3.5 Curb weight. Curb weight shall include the weight of the complete vehicle, with all attachments, accessories, and installed equipment as specified herein, and full complement of fuel, lubricants, and coolant.

3.3.6 Payload. The payload shall consist of the lavatory holding tank and fresh water storage tank filled to capacity and computed at 8.4 lb per gallon, two people whose individual weight shall be computed at 175 lb each, and a payload of 1,000 lb. The sum of the payloads shall be computed as being equally distributed on the floor area of the vehicle.

3.3.7 Weight rating. The gvw rating shall consist of curb weight and payload to provide not less than 14,500 lb gvw.

3.3.8 Ratings. Vehicle ratings shall be manufacturer's published rating. Component and vehicular ratings shall not be raised to meet the requirements of this specification.

3.3.9 Dimensions and clearances. The recruiting coach dimensions and clearances shall conform to Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and clearances (inches)

Overall height, not more than	135
Overall length, not less than	300
Overall width, not more than	96
Interior height, not less than	74
Interior width, not less than	86
Interior length, from rear of driver's compartment to rear of coach, not less than	228
Wheelbase, not less than	178
Ground clearance under axles, not less than	8-1/2

3.4 Performance.

3.4.1 Speeds. High and low speed requirements shall be met with coach loaded to specified gvw.

3.4.1.1 High speed gradeability. Vehicle shall ascend a continuous grade of 1.5 percent at 55 miles per hour (mph). High speed gradeability requirements shall be met with the transmission in direct drive. Gradeability shall be verified with calculations in accordance with SAE J688 Truck Ability Prediction Procedure.

3.4.1.2 Low speed gradeability. Vehicle shall ascend grades of at least 10 percent at a speed of at least 15 mph in lower speed gear.

3.4.1.3 Maximum geared speed. Maximum geared speed shall be not less than 60 mph.

3.4.2 Brake performance. Service brakes shall comply with the performance requirements specified in DoT Federal Motor Carrier Safety Regulations, section 393.52. Service brakes shall control and hold the coach, loaded to the rated gvw, on a 30 percent grade. Parking brake shall hold the coach, loaded to the rated gvw, headed either up or down the grade, without slipping on a 30 percent grade.

3.5 Chassis components.

3.5.1 Engine. The gasoline engine furnished shall be the manufacturer's standard or optional engine for the commercial model vehicle which meets or exceeds the requirements of this specification. The engine shall be liquid cooled, internal combustion, four-stroke cycle, gasoline engine with not less than eight cylinders and a minimum 350 cubic inch displacement. The engine furnished shall produce the required vehicle performance when operated on unleaded fuel with a research octane rating of 91, at engine speed not more than manufacturer's recommended operating speed. The rated net torque output of the engine shall be not less than 160 lb feet.

3.5.1.1 Oil filter. Full flow type oil filter shall be furnished.

3.5.1.2 Radiator fill neck. Radiator water fill neck shall be accessible to the operator when standing on the ground surface at the front of the vehicle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

3.5.1.3 Oil filler cap. The engine oil fill tube and oil level dipstick shall be furnished and located in the engine compartment. These components shall be readily accessible to the operator when standing on the ground surface at the front of the vehicle for checking oil level and adding crankcase oil.

3.5.2 Electrical systems. Electrical systems shall be in accordance with DoT Federal Motor Carrier Safety Regulations, section 393.27 through 393.31, and 393.33.

3.5.2.1 Radio interference suppression. Vehicle chassis shall be suppressed to limit electromagnetic radiation in accordance with SAE J551. Suppressors used shall conform to SAE J552.

3.5.2.2 Ignition system. A 12 volt (V), direct current (dc) ignitions system shall be furnished. An alternator of not less than 60 ampere (A) rated capacity and which provides not less than 7A dc output at normal engine idle speed shall be furnished.

3.5.2.3 Battery system. The battery system provided shall be accessible to the operator when standing on the ground surface for inspection and servicing.

3.5.2.3.1 Chassis battery. A 12V battery shall be furnished for the chassis having a reserve capacity of 110 minutes and a rating of 450 cold crank A at 0°F in accordance with SAE J537. The battery shall be of the maintenance-free type having the maintenance-free characteristics listed in W-B-131.

3.5.2.3.2 Auxiliary battery. An auxiliary deep cycle type battery, similar or equal to GNB type AP105AH, with dual battery isolator shall be furnished. The auxiliary battery shall be charged from the chassis alternator and the power converter battery charger. Provisions for the auxiliary battery to start the chassis engine and the auxiliary generator engine shall be furnished. A battery voltage meter shall be provided and located on the driver's compartment instrument panel. The auxiliary battery shall primarily be used as an alternate power source for body 12V electrical systems (see 3.7.1).

3.5.2.4 Exterior lighting. All vehicle (chassis and body) lights, reflectors, and wiring shall be as specified herein and shall conform to DoT Federal Motor Carrier Safety Regulations, section 393.12, 393.19, 393.20, and 393.22 through 393.26. Chassis electrical system shall be 12V. Body electrical system shall be as specified herein. Lights and reflectors shall not be mounted on rub rails or vehicle bumpers. A rear mounted illuminated license plate holder shall be provided. Two backup lights shall be provided at rear of vehicle.

3.5.2.4.1 Turn signals. Turn signal lamps shall conform to SAE J588. Operating units shall conform to SAE J589, class A, and shall be mounted on the steering column. Operating units shall be provided with a visible and audible flash indicator. Turn signals shall be of the self-canceling type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

3.5.2.4.2 Emergency flashers. Vehicle shall be provided with four-way emergency flashers with a visible and audible flash indicator. Emergency flashers shall be operable with ignition switch "ON" or "OFF". Mounting and location of the flashers shall be at the manufacturer's option.

3.5.2.4.3 Lighting socket. An automotive trailer type lighting socket and cover assembly conforming to SAE J560 shall be installed in a readily accessible location at the rear of the coach. The receptacle shall be wired to permit operation of all exterior lights on a towed trailer from the coach electrical system.

3.5.3 Fuel system. Fuel system shall conform to DoT Federal Motor Carrier Safety Regulations, section 393.65 and 393.67.

3.5.3.1 Air cleaner. An air cleaner shall be furnished. When equipped with an oil-bath type, oil capacity shall be not less than 1 quart.

3.5.3.2 Fuel tank(s). Gasoline fuel tank(s) with a total capacity of not less than 60 gallons shall be furnished to supply the chassis engine and auxiliary generator engine. When one tank is furnished, the fuel supply line to the generator shall be so designed to prevent depletion of the fuel supply to less than 1/4 tank capacity. When two tanks are furnished, the auxiliary generator shall draw its fuel from the smallest tank. A fuel tank selector valve shall be furnished for the two-tank system for chassis engine, readily accessible to operator and marked to indicate tank selection. A fuel gage for each tank shall be installed in the driver's compartment on the instrument panel. An identification plate shall be installed in the driver's compartment on the instrument panel. An identification plate shall be located near each tank filler opening identifying the tank. A similar identification plate shall identify each fuel gage. Each tank filler shall be located on driver's side of vehicle and shall be arranged for safe and convenient filling from exterior of body. The access for each filler neck shall be designed to prevent the entry of spilled fuel to any point inside the exterior body panel. Sealing may be accomplished by use of a neoprene rubber thimble or grommet, or other device installed in the access hole. Locking type gas cap(s) or locking door(s) for the gas filler cap compartment shall be provided with common keys.

3.5.4 Exhaust system. The vehicle exhaust system conforming to DoT Federal Motor Carrier Safety Regulations, section 393.83, shall be substantially constructed, effectively leak proof, and quiet in operation. Properly supported tailpipe shall extend to the rear bumper and shall be located to properly and effectively minimize the possibility of exhaust fumes entering the body. The exhaust system shall include muffler(s). The exhaust system beyond the engine compartment shall be insulated from the fuel tank and tank connections by securely attached metal shields at any point where it is 12 inches or less from the fuel tanks, tank connections, fuel line connections or battery box.

3.5.5 Automatic transmission. Manufacturer's standard automatic transmission recommended for the make and model coach shall be provided. Transmission shall provide required performance under all normal operating conditions and under all conditions specified herein. Transmission shall have not less than three forward speeds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

3.5.6 Drive line components. Drive line components shall be adequate to transmit the maximum delivered torque of the engine, as developed through the maximum gear train reduction. Propeller shaft guards shall be provided in accordance with DoT Federal Motor Carrier Safety Regulations, section 393.89.

3.5.7 Frame. Chassis frame shall be the manufacturer's standard for the type and size of vehicle furnished, and shall be adequate for mounting the body and equipment specified herein. Frame modifications shall be as recommended by the chassis manufacturer for the body builders layout.

3.5.8 Suspension. Vehicle shall be equipped with suspension system with components having a rated capacity at least equal to the load imposed on each member, measured at the ground, with vehicle loaded to specified gvw. Rear wheels shall be designed and located such that there will be no interference with the use of the tire chains. Vehicle shall be equipped with the heaviest duty shock absorbers available for the make and model chassis furnished at each wheel. When specified (see 6.2), a stabilizer bar shall be furnished at front and rear.

3.5.9 Axles. Axle ratings shall be at least equal to the load imposed on each axle, measured at the ground, when vehicle is loaded to specified gvw.

3.5.10 Wheels, rims, tires, and tubes. Vehicle shall be equipped with single front and dual rear wheels. Rims and tire ratings shall conform to TRA recommendations, for the type and size of tires furnished. Tire, rim, disk wheel sizes, and ply rating shall be the same for all wheels on the vehicle. All wheels shall be disk wheels.

3.5.10.1 Tires. Tires shall be tube or tubeless steel belted radial truck type with highway tread. Tires shall be of a rated capacity at least equal to the load imposed on each tire, measured at each wheel, at the ground, with vehicle loaded to specified gvw. Tires shall conform to TRA recommendations or to ZZ-T-381 with a tire designation system the same as the TRA.

3.5.10.2 Inner tubes. When tube type tires are furnished, inner tubes shall be of the heavy-duty type, and shall be of the proper size for tires furnished. Tire flaps shall be provided for tube tires in accordance with TRA recommendations.

3.5.10.3 Balancing. Each tire, tube, and flap shall balance within practicable limits. Wheels, hubs, and brake drums shall be effectively in balance. Balancing shall be adequate to preclude wheel shimmy at all effective speeds.

3.5.10.4 Spare wheel assembly. A spare wheel shall be mounted on a carrier at the rear or stowed in one of the storage cabinets in the vehicle. Carrier design shall enable removal or mounting of spare wheel assembly using only the tools specified in 3.5.16. The spare tire carrier shall not be located at front of vehicle.

3.5.11 Brakes. Brakes shall conform to DoT Federal Motor Carrier Safety Regulations, section 393.40 through 393.42 and 393.45 through 393.51.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

3.5.11.1 Service brakes. Vehicle shall be equipped with power assisted, hydraulic actuated, four-wheel, service brakes. When specified (see 6.2), front wheels shall be furnished with disk brakes.

3.5.11.2 Parking brake. Vehicle shall be equipped with a parking brake.

3.5.12 Horn. Manufacturer's standard electric horn shall be provided.

3.5.13 Steering. Power steering shall be furnished.

3.5.14 Windshield wipers and washers. Vehicle shall be equipped with dual windshield wipers. Wiper system furnished shall sweep the maximum practicable area of windshield surface. Windshield washers shall be provided.

3.5.14 Windshield. Tinted safety glass windshield shall be furnished.

3.5.15 Bumpers. Manufacturer's standard front bumper shall be provided. Rear bumper shall conform to DoT Federal Motor Carrier Safety Regulations, section 393.86.

3.5.16 Tools. Vehicle shall be furnished with tools required for exchanging mounted tire assembly with a spare wheels assembly (see 3.5.10.4), and shall include a hydraulic jack, jack handle, and wheel nut wrench. The jack shall be of such closed height as to permit its location under axle, or other satisfactory lift point, at any wheel with the tire flat. The jack shall be capable of raising any wheel of loaded vehicle to a height adequate to permit removal and replacement of wheel and tire assembly. Two 4 inch by 12 inch by 20 inch long rectangular hardwood type blocks with an approximately 30° taper on one end shall be furnished.

3.5.16.1 Tool stowage compartment. A tool stowage compartment of sufficient size to accommodate the hydraulic jack, jack handle, and wheel nut wrench shall be provided on the exterior of the coach body. Compartment shall be weatherproof and door shall be provided with a key type lock. Compartment door shall have a door holder when open. A divided section shall be provided in the compartment for stowage of the highway warning kit specified 3.13.

3.5.17 Trailer hitch. The manufacturer's standard automotive weight carrying trailer hitch shall be funished. The hitch shall conform to SAE J684 for class 3 nonpassenger carrying trailers (3,500 - 5,000 lb).

3.5.18 Controls and operating mechanism. Controls and operating mechanisms shall be located for left-hand drive. Controls shall be complete and conveniently operable by the driver when in a seated position. Controls shall be designed and located to permit easy entrance and exit of operator to and from driver's seat. Instruments and controls shall be identified as to their function and installed in a manner to facilitate removal and servicing. Instruments shall be panel mounted and be clearly visible to the driver when seated in normal driving position.

3.5.19 Heating, defrosting, ventilating, and cooling. Heating, defrosting, and ventilating system shall conform to DoT Federal Motor Carrier Safety Regulations, section 393.77 and 393.79.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

3.5.19.1 Heater and defroster. The manufacturer's standard hot water heater and defroster shall be provided. The heater shall have fresh air intakes. Discharge outlets shall be provided to direct heated air to floor and to defroster louvers. Heater shall be complete with blower and mounted controls convenient to the driver. Two additional heating stations with 12V blower and mounted controls shall be provided. Heating station controls shall be provided at the driver's compartment instrument panel. One heating station shall be located on the rear wall of the coach, and the other one located on the curb side wall near the side entrance door area in the working/display area. Copper tubing or automotive type heater hose shall be utilized for the hot water system from the chassis engine. Means shall be provided in the hot water system to prevent static lock.

3.5.19.2 Cooling. The driver's compartment shall be equipped with manufacturer's standard air conditioning system. The air-conditioner compressor shall be driven by the engine while in transit. Controls shall be complete and conveniently operable by the seated driver.

3.5.20 Accessories and equipment. Chassis equipment shall be complete with all accessories furnished as standard equipment by the manufacturer. The following minimum equipment shall be furnished:

a. Key-operated ignition switch.
b. Ammeter.
c. Fuel gage.
d. Oil pressure gage.
e. Engine temperature gage.
f. Speedometer.
g. Recording odometer.
h. Headlight high beam indicator light.
i. Inside rearview mirror.
j. Ash receptacle.
k. Cigar lighter.
l. Driver's compartment dome light.
m. Two map reading lamps shall be provided, one each in the vicinity of the driver and assistant driver seat. Each lamp shall be individually controlled by an ON-OFF switch.
n. Dual sun visors.

3.5.21 Rearview mirrors. Outside rearview mirrors, each with at least two supporting arms, shall be mounted on each side of the vehicle. The mirrors shall be coindividual (flat and convex), enclosed on a two-arm swing-away frame.

3.6 Coach body construction. The coach shall have a frame and body shell integrated with a front cockpit cage. The body shell and frame shall be bolted to the chassis frame (see 3.5.7). Coach body arrangements and configurations shall be specified herein (see figures 1, 2, 3, and 4).

3.6.1 Body framing structure. Body framing structure shall be of all aluminum or steel. The structure shall be constructed to preclude buckling of the skin sheets when vehicle is operating under the intended service. All exterior door(s), windows, and other cutouts shall be reinforced. Materials

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

shall be free from any defects that will effect performance and appearance. Aluminum shall have corrosion-resistant properties inherent in the chemical compositions of the aluminum.

3.6.1.1 Body exterior. Body exterior side panels shall be not less than 0.040-inch aluminum alloy or 0.0359-inch non-spangle type zinc-coated steel or not less than 1/8-inch bonded laminated fiberglass. On semimonocoque construction, side panels shall be not less than 0.032-inch aluminum alloy. Molded fiberglass construction may be utilized for all, or portions of the exterior, of the driver's compartment area when metal side panels are funished.

3.6.2.2 Roof panel. Body roof panel shall be of one piece construction. The body roof panel may be crowned or flat in design and be secured to prelude vibration and to permit drainage. Body roof panel shall be not less than 0.030-inch aluminum alloy or 0.0239-inch zinc-coated steel or not less than 1/8-inch bonded laminated fiberglass.

3.6.2.3 Body framing components. Body framing components shall be fastened together in a manner which will preclude loosening of bolts, screws and rivets, as well as cracking of welded joints when the vehicle is properly maintained, and operated under the intended service conditions. Fasteners shall be compatible to the metal being secures. Fasteners shall be sealed before employment. Self-tapping screws shall not be used in area subjected to stress; and wood shall not be utilized for structural framing.

3.6.2.4 Insulation. The body shall be insulated on sides, ends, ceiling, and floor with fire-retardent insulation to meet the interior sound and thermal requirements as specified herein. Insulations shall not support combustion or sustain flame, mold, rot or sustain vermin, corrode metals, absorb odors and shall be essentially odorless. Insulation shall not disintegrate under vibration or settle and leave voids. Means shall be provided to drain condensation to ground. The insulating material density shall be such as to maintain inside temperatures at 68° to 78°F, with outside ambient temperatures of 0° to 110°F.

3.6.2.5 Waterproofness. The coach shall be leakproof to preclude entrance of water when exposed to a spray of 25 pound-force per square inch (psi) located 2 feet from the coach for at least 30 minutes. Spray shall be projected on all sides, roof, and bottom of the coach at one time.

3.6.3 Interior construction. Interior walls shall be covered with walnut color, similar or equal to marlite panels, manufactured by Marlite Division of Masonite Corporation of Dover, Ohio. The partition and curtains separating the conference area from the display area shall be constructed of fire-retardant materials. The ceiling shall be lined with off-white acoustic tile or off-white prefinished vinyl laminated plywood or vinyl covered aluminum. The entire surface of the interior floor shall be covered with rubber foam back high grade industrial indoor-outdoor type carpeting. The carpeting color shall be blue. The step area shall be covered with non-skid rubber. All cabinetry shall be 3/4-inch exterior plywood covered with walnut Formica, except work desk, counter, and tables which shall be white Formica with leather grain patter, smooth finish shall be used. All edges shall be covered with Formica and beveled. All cabinet doors shall be constructed of 1/2-inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

exterior plywood covered with walnut Formica furnished with continuous type piano hinges and positive latching. All equipment furnished shall be provided with a means for securing during vehicle over-the-road travel.

3.6.4 Exterior door(s). The recruiting coach shall be provided with a minimum of one exterior door. The door(s) shall be of the manufacturer's standard size and be provided with weatherproof, nonabsorbent, light tight, rubber sealing gaskets. A curb side entrance door shall be provided for the working/display area. The side entrance door shall have a stationary window in the upper half, and be fitted with corrosion-resistant hardware including locks and latches with outside and inside handles. The manufacturer's standard side entrance door access step(s) shall be provided.

3.6.4.1 Interior door. One interior door for the lavatory shall be furnished. The door furnished shall be a continuous piano hinged door. Locking device(s) shall be provided to secure the door when the lavatory is being used. The size of the door shall be manufacturer's standard.

3.6.5 Windows. Two side windows shall be located on each side of the conference area, one side window located on the curb side above the work desk in the working/display area, and a window in the rear wall of the coach. Windows shall be of size suitable for the intended service and shall provide maximum practicable vision. Windows shall be of safety window glass, and tinted in accordance with manufacturer's standard for an air-conditioned coach. The four side windows in the conference area and the side window over the work desk shall be of the horizontal sliding type, and fitted with locking devices. All windows shall be provided with the window drapes, with a color similar or equal to blue No. 15200 of FED-STD-595. Each horizontal sliding window shall be provided with a corrosion-resistant screen.

3.6.6 Driver's compartment. A driver's compartment shall be provided. The driver's compartment shall consist of the vehicle operating controls, driver's seat, copilot seat, and as a minimum, equipment specified herein. The manufacturer's standard safety and convenience features normally provided shall be included unless specifically excluded by this specification. Carpeting shall be provided and shall be of the same type and color as specified in 3.6.3. The floor area in front of the driver's and copilot's seat, although carpeted, shall be provided with a fixed mat or corrosion-resistant scuff plate.

3.6.6.1 Driver's seat. Driver's seat shall be heavy-duty, bucket type, adjustable fore and aft and for height without the use of tools, and able to rotate. Seat shall be positioned for convenient and safe operation of all controls by the driver. The seat and back shall be substantially constructed and provided with tilting adjustments for cushion and back to provide maximum driver comfort. Arm rest shall be provided on each side of the driver's seat.

3.6.6.2 Copilot seat. The copilot seat shall be the same as the driver's seat, except able to rotate 180°.

3.6.6.3 Seat restraints. As a minimum, manufacturer's standard fastening devices, seat belts shall be furnished and installed on the driver's seat, copilot seat, and two pairs on forward facing dinette seat in the conference area.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

3.6.6.4 Accessibility. Access to the driver's seat and copilot's seat shall be designed for comfort and convenience.

3.6.6.5 Engine cover. The engine cover located in the driver's compartment shall be fully insulated, sound proof, and carpeted. Manufacturer's standard seat accessory tray shall be located on the top of the engine cover.

3.6.6.6 Radio. A manufacturer's standard vehicle radio, with antenna, shall be provided in the driver's compartment. The radio shall be an AM-FM pushbutton type, balanced control. The antenna shall be installed in accordance with the manufacturer's standard in order to provide maximum clarity and fidelity. Two high fidelity, flush mounted, 6-inch speakers shall be provided with one located in the driver's area and one located in the copilot's area.

3.6.7 Recruiting area. The recruiting area shall consist of a conference area and a working/display area. The longitudinal interior length of the recruiting area shall be not less than 19 feet, measured from the rear of the driver's compartment to the rear of the coach. The areas shall be configured as indicated in figures 2, 3, and 4.

3.6.7.1 Conference area. The conference area shall be for applicant interview and counseling. The area shall consist of one sofa; one dinette seat; one dinette table, and one storage cabinet. The sofa shall be located on the street side of the coach, and the dinette table, dinette seat, and storage cabinet on the curbside of the coach.

3.6.7.1.1 Sofa. A built-in sofa, not less than 60 inches long with built-in arm rests, and storage underneath, shall be provided. The wood construction shall utilize 3/4-inch exterior plywood and covered with walnut Formica, including edges. The sofa shall include seat cushion(s) with 6-inch foam padding and back cushion(s) with 3-inch padding and covered with off-white commercial grade Naughahyde. Access door(s) or removeable seat shall be provided to permit access to storage area.

3.6.7.1.2 Dinette seat. A built-in forward facing dinette seat, with storage underneath, shall be provided. The length of the dinette seat shall accommodate two adults. The forward facing dinette seat shall meet DoT Federal Motor Vehicle Safety Standards for passenger seating. The wood construction shall utilize 3/4-inch exterior plywood and covered with walnut Formica, including edges. The dinette seat shall include seat cushion(s) with 6-inch foam padding and seat back(s) with 3-inch padding and covered with off-white commercial grade Naughahyde. Access door(s) shall be provided in the lower front face for access to storage space.

3.6.7.1.3 Dinette table. A dinette table able to drop down for storage, but when in use to provide a writing surface for the length of the dinette seat, shall be provided. The dinette table shall be 24 inches wide and 30 inches high. The wood construction shall utilize 3/4-inch exterior plywood and table top and edges covered with white Formica with leather grain. The table shall be provided with a corrosion-resistant metal foldup leg. The table top shall have rounded corners.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

3.6.7.1.4 Storage cabinet. A built-in storage cabinet shall be provided with the same height as the dinette seat back. The construction shall be 3/4-inch exterior plywood and covered with walnut Formica, including edges. The cabinet door shall be positive latching and hinges shall be continuous piano hinge type.

3.6.7.2 Partition. A partition shall be provided between the conference area and the working/display area. The partition shall be of the permanent type, floor to ceiling, and shall be the same length as the dinette seat and storage cabinet in the conference area. The partitiion shall be constructed of 3/4-inch exterior plywood or of 2-inch stud construction on not more than 16-inch centers, and covered with walnut Formica, including edges. A drawn fireproof 100 percent nylon curtain shall be provided from the end of the fixed partition to the left street side of the coach wall. The color of the curtain shall be similar or equal to blue No. 15050, of FED-STD-595.

3.6.7.3 Working/display area. Aft of the partition, a multiuse working/display area, shall be provided. The area shall consist of a work desk, chair, projection screen, cabinet module, lavatory, refrigerator, and other components and accessories as specified herein.

3.6.7.3.1 Work desk. A built-in work desk 40 inches long by 24 inches wide and 30 inches high shall be provided. The work desk shall be located longitudinally on the curb side at the rear of the coach. The desk shall convert from a work desk to a typing desk by means of a pullout shelf. One drawer and one typewriter storage compartment shall be provided. For design purposes, a typewriter of 7.25 inches high, 15.2 inches deep, and 15.5 inches wide should be assumed. The work desk shall be constructed of 3/8-inch exterior plywood and covered with walnut Formica. The desk top and edges shall be covered with white Formica. The desk shall have rounded corners. One 120V alternating current (ac) 3 wire (W) grounding duplex convenience receptacle shall be provided and installed at the desk area. One 12V dome light with individual switch shall be provided under the overhead storage cabinets over the work desk. The light shall be connected to the 12V dc lighting system.

3.6.7.3.2 Chair. A chair shall be provided for the work desk. The chair shall be of the low profile type with chrome base and low arms to fit under the desk. The chair cushion shall be covered with a commercial grade Naughahyde, blue in color similar to No. 15050 of FED-STD-595. Means shall be provided to secure the chair when the coach is in transit.

3.6.7.3.3 Projection screen. One projection screen shall be furnished and installed. It shall be a translucent screen for exterior viewing. This screen shall be 24 inches by 36 inches and shall be similar or equal to Polacoat (3M) rigid lenscreen. The screen shall be installed on the right (curb) side of the body. An externally mounted, corrosion-resistant sealed hinged, weather-tight protective cover, shall be provided. Means shall be provided to retain the cover in the fully opened position as well as fastening devices to retain the cover in the travel position. The screen shall be so located that an internally mounted projector can be mounted on the projection counter in a direct line with screen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

3.6.7.3.4 Cabinet module. A cabinet module shall be provided on the street side of the coach. The module shall extend longitudinally the full length of the working/display area from the lavatory to the forward end of the area. The module shall include a wardrobe closet, a projection counter, and below projection counter storage. The wardrobe close shall be full height from floor to ceiling and located next to the lavatory. The wardrobe closet shall include coat hooks and a shelf near the top. A full height door with positive latching device and continuous piano type hinge shall be provided. The wardrobe closet and door shall be constructed of 3/4-inch exterior plywood and covered with walnut Formica. The projection counter shall extend longitudinally from the wardrobe closet to the forward end of the working/display area. The projection counter shall be continuous over the refrigerator to be furnished, and counter height shall be not less than 39 inches and shall be not less than 28 inches deep. The projection counter top and edges shall be covered with white Formica and leather grain. The storage below the projection counter shall include drawers, cabinets with adjustable shelves, and toe kick. The drawers and cabinet doors shall be provided with positive latching devices. All cabinetry shall be constructed of 3/4-inch exterior plywood and covered with walnut Formica. Cabinet door hinges shall be continuous piano hinge type. Six equally spaced 120V ac 3W grounding duplex convenience receptacles shall be provided on the interior wall over the projection counter. Two speaker jacks shall be provided on the interior wall over the projection counter.

3.6.7.3.5 Lavatory. A lavatory shall be provided in the left rear portion of the working/display area. The lavatory shall include a 12V Newmatic II recirculating type toilet (Monogram Industries, Inc., Los Angeles, California); a Wash-N-Dri Rack; a mirror; a vent window; 12V switch operated vent blower; cold water supply faucet and oval stainless steel sink; tissue holder; two coat hooks; a 12V dome light with rocker switch; and a 120V ac 3W grounding duplex convenience receptacle. The lavatory partitions shall be full height and the construction, including the door, shall be 3/4-inch exterior plywood covered with walnut Formica. Fastening devices shall be provided to preclude lavatory door opening when in transit. A chassis holding tank, minimum capacity 30 gallons shall be furnished. The toilet shall be plumbed for dumping straight into an external sewer line and/or holding tank. A 3-inch heavy-duty, flexible sewer hose, not less than 10 feet long, shall be provided. One end of the sewer hose shall have a male connector that fits all sizes, and the other end shall have a female connector properly mated to the coach sewer dump valve. A chassis holding tank monitor shall be provided on the driver's compartment insturment panel. When specified (see 6.2), the plumbing and holding tank shall be protected for sub zero temperatures.

3.6.7.3.5.1 Fresh water storage tank and system. The fresh water storage tank shall be of sufficient strength and thickness to support the imposed loads, and shall have a capacity of not less than 30 gallons. The water supply shall be supported by a 12V dc automatic demand type pump to both the toilet and the cold water supply faucet. The tank shall be provided with a readily accessible drain, with valve, so locate as to permit complete drainage of the tank. The drain shall be directed to the ground. An external water hookup and fill shall be provided on the exterior of the coast to allow filling from external sources, and a water system shall be provided with an inline strainer. Twenty-five feet of 1/2-inch nontoxic, odorless, and

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

tasteless water hose rated at not less than 150 psi shall be provided. A fresh water storage tank monitor and a 12V toggle switch for the fresh water automatic pump shall be provided on the driver's compartment instrument panel.

3.6.7.3.6 Refrigerator. A manufacturer's standard minimum 2.5 cubic foot refrigerator shall be installed under the projection counter at the forward side of the cabinet module. Fastening devices shall be provided to preclude door opening when in transit.

3.6.7.4 Overhead storage cabinets. Overhead storage cabinets shall be provided over both sides of the conference area, and over the street side of the working/display area, and over the work desk on the curbside of the working/display area. The overhead storage cabinets shall be constructed of 3/4-inch exterior plywood and covered with walnut Formica. The cabinets shall be not less than 8 inches high and 12 inches deep. All cabinet doors shall be sliding type with positive latching.

3.6.8 Sound system. A sound system, including wiring, shall be provided as specified herein. An external and an internal system shall be furnished. Sound system jacks shall be provided on the interior wall over the projection counter. One jack shall be designated for the Government installed external speakers which will be used as a public address system and in conjunction with the outside viewing screen. Two weatherproof external speaker jacks and two corrosion-resistant external speaker mounting fixtures shall be provide. The speaker mounting fixtures shall permit attachment of the speakers without tools. The exterior speaker jacks and speaker mounting fixtures shall be located, one each side, 5 feet from the centerline of the projection screen and above the screen. The second sound system jack shall be designated for the internal sound system. Two high fidelity minimum 8-inch oval type interior speakers shall be mounted within its own module enclosure, and installed in conjunction with the overhead storage cabinets over the projection counter. One shall be located over each end of the projection counter. Speaker jacks shall be provided at each speaker and wired into the internal sound system speaker jack at the projection counter. The two high fidelity speakers shall also be connected to the cab radio through an ON-OFF control switch.

3.6.9 Roof vent. Two roof vent openings shall be provided on the longitudinal centerline of the roof, one over the forward half and one over the rear half of the coach. Each opening shall be capable of accepting the air conditioner specified in 3.9.2. Except when an air conditioner is installed in the vent, the opening shall be provided with a weatherproof cover with means for opening and closing from inside of the coach and the opening shall be screened.

3.6.10 Awning. A permanently installed roll-up awning in a case shall be provided. The awning shall provide ease of operation by one person. The awning shall be located on the right (curb) side and shall cover, as a minimum, an area beginning at the forward edge of the side entrance door to the rear end of the coach. When in the rolled-out position, the awning shall extend a minimum of 7 feet from the coach proper. Awning material shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

mildew-proof and water-repellant. The awning color shall be blue and white stripes. The awning stowage container(s) shall be permanently mounted at the roof line.

3.6.11 External receptacle(s). Two weatherproof duplex grounding 120V receptacles and one weatherproof, single, locking type, 240V, 20A, 2 pole (P), 3W grounding receptacle shall be furnished on the curb side of the coach. The external receptacles shall be located above the body floor line and below the window line, and 5 feet apart from the centerline of the projection screen. All external receptacles shall have marking plates identifying the voltage and amperes available at the receptacle.

3.6.12 Exterior stowage compartment. One exterior stowage compartment shall be provided. Compartment shall be weatherproof, and door equipped with devices for holding in open position, and key type lock with common keys. A divided section shall be provided for the sewer hose, and one for the fresh water hose.

3.7 Body electrical system. The recruiting coach body electrical system shall be in accordance with NFPA 501C and SAE J555. All electrical equipment, receptacles, and lighting furnished (except as noted) shall be connected to the 120/240V, 60 Hertz (Hz), 3W grounded, single phase power provided by the auxiliary generator or local power source via lead-in cable. All wiring and equipment shall be provided with overcurrent circuit breaker protection. Provisions shall be made for two spare circuits. All distribution wiring shall be adequately supported and protected with grommets wherever passing through paneling, sheet metal, supports or framework. Electrical loads shall be balanced as close as practicable. Wiring shall be concealed, yet easily accessible for repairs. Electrical equipment, lighting, heating, cooling, and ventilation systems shall be selected for minimum amperage draw, where practical and consistent with specified requirements. A main distribution panel shall be provided and shall be installed in the coach and located to provide ready accessibility. All circuits shall be properly identified. A grounding cable and suitable grounding rod shall be furnished for gounding the electrical system. A portable power cable, 50 feet long, NEMA type G, 4 conductor, No. 6 AWG, conforming to NEMA WC 3 shall be furnished for supplying external power to the coach. The cable shall have a plug on one end and be permanently wired to the distribution panel at the other end. The plug shall conform to W-C-596 and NEMA WD 5 with NEMA confirguration 14-50p. A storage cabinet shall be provided for the power cable. A marking plate shall be provided in accordance with paragraph 4.7.9.4 of NFPA 501C.

3.7.1 Electrical system (12V).

3.7.1.1 Power converter. An automatic power converter, with battery charger, shall be furnished. The power converter shall convert 120V from auxiliary generator or external power source to 12V dc. The power converter shall be of adequate capacity for all the 12V requirements specified herein.

3.7.1.2 Distribution panel (12V). A distribution panel for the 12V electrical system shall be furnished. This panel shall be rated for not less than 30A. The panel shall be equipped with automatic circuit breakers and shall be grounded. The panel shall be provided with the following circuits:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

a. Fresh water pump circuit.
b. Toilet circuit.
c. Lavatory vent blower circuit.
d. Dome lights on two circuits.

The panel shall be provided with a hinged cover, and located near the driver's seat area.

3.7.1.3 Lighting system (12V). A 12V lighting system shall be provided. The lighting system shall be dome lights with individual switches. One shall be located in the lavatory near the mirror area. One shall be located under the overhead storage cabinets over the work desk. Two shall be located under the overhead storage cabinets over the projection counter. One shall be located in the auxiliary generator compartment. Two ceiling mounted lights over the sofa area. Two ceiling mounted lights over the dinette seat and table area. Three ceiling mounted lights located on the longitudinal centerline of the coach in the working/display area with one near the side entrance door, and the other two equally spaced towards the rear of the coach. An exterior recessed weatherproof outdoor type service light shall be provided for the side entrance door with individual switch located on the inside. An individual switch for the ceiling mounted lights in the conference area, and an individual switch for the ceiling mounted lights in the working/display area shall be provided inside at the side entrance door. A master control switch for all the 12V ceiling mounted dome lights shall be provided at the driver's compartment instrument panel.

3.7.2 Split power distributution. A split power distribution system shall be provided. The system shall be provided with a double throw switch at the distribution panel to manually switch from outside power source to engine-drive generator power source. The system shall be designed so that when the engine-driven generator is shut off and the power cable is disconnected from the receptacle, the system shall require personnel to activiate the switch for the type of power required.

3.7.3 Distribution panel (120/240V). A single phase, 3W, 120/240V distribution panel for the 120/240V electrical system shall be furnished. The panel shall be rated for not less than 100A. The panel shall be equipped with automatic circuit breakers and shall be grounded. The panel shall be provided with the following circuits:

a. A separate circuit for each electrical heater.
b. A separate circuit for each air conditioner junction box.
c. Power converter circuit.
d. Duplex receptacles on two circuits.
e. Sound system circuit.
f. Auxiliary 240V outdoor receptacle circuit.

The panel shall be provided with a hinged cover. All circuit breakers shall be permanently and legibly identified to which functions they control. This identification or marking shall be either on the breaker panel or inside the distribution panel cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

3.7.4 Receptacles and plugs. All 120V receptacles and matching plugs shall be 2P, 3W, 15A, 120V, grounding type, conforming to W-C-596, W-C-596/12, and W-C-596/13, as applicable. Not less than eleven 120V ac 3W grounding duplex convenience receptacles shall be provided and located as follows:

a. One at the work desk on the right (curb) side wall.
b. One in the lavatory.
c. Six equally spaced over the projection counter.
d. One at the dinette table located on the curb side wall below the window.
e. Two exterior weatherproof receptacles (3.6.11).

One weatherproof, single, locking type, 240V, 20A, 2P, 3W grounding receptacle conforming to W-C-596 and NEMA WD 5, NEMA type L6-20R, and matching plug, NEMA type L6-20P, shall be provided. The receptacle shall be located on the exterior, as specified in 3.6.11. Two junction boxes shall be furnished in the ceiling adjacent to each roof vent specified in 3.6.9. Each junction box shall be wired for the subsequent installation of air conditioner(s) specified in 3.9.2.

3.8 Auxiliary generator set. A remote start, minimum 6.5 kilowatt, vacu-flo or air-vac type, air cooled, four-stroke-cycle gasoline-engine-driven, 120/240V ac, single phase, 60 Hz, 1,800 revolutions per minute generator set shall be provided. The generator set shall be capable of furnishing continuously sufficient power to operate simultaneously all electrical equipment at maximum design loads as tested in 4.4.1.5. The auxiliary generator shall provide 120V ac power to the duplex receptacles specified, to the electric heaters, power converter, to the roof air conditioner and for the sound system. The auxiliary generator shall have a separate battery charging circuit. Shock mounts, having an adequate safety factor, shall be provided under the generator. Means of monitoring the voltage, cycle, and elapsed running time for the the powerplant shall be provided at the driver's console. The auxiliary generator is to be installed in a rear compartment located on the left (street) side of the coach. The generator is to be mounted in the compartment in a manner to expedite maintenance and servicing. A 12V dome light, with individual switch, shall be provided to facilitate inspection and servicing. The generator set shall be suppressed to limit electromagnetic radiation in accordance with SAE J551. Generator compartment door shall have a key type lock and shall have means for holding in the open position. The auxiliary generator compartment air cooling system shall be baffled to prevent entrance of water and undesirable environmental contaminants.

3.8.1 Control panel. The auxiliary generator control panel shall be located on the auxiliary generator set, and also in the driver's compartment. Each control panel shall include start-stop controls, and battery charging indicator. An engine oil pressure gage shall be located on the generator control panel.

3.9 Heating/cooling requirements.

3.9.1 Electric heater. A 120V, minimum 1500 watt, thermostatically controlled, forced-air electric heater shall be provided. The heater shall be incorporated into the roof mounted air conditioner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

3.9.2 Roof-mounted air conditioner. Air conditioning for the coach shall be provided by one roof-mounted air conditioning unit located in the rear roof vent specified in 3.6.9. Air conditioning unit shall be similar or equal to Sunchaser. The air conditioning unit shall have a rated capacity of not less than 13,500 British thermal units. Drainage from the air conditioner to the ground shall be provided. When specified (see 6.2), a second air conditioner shall be furnished and located in the front roof vent. The air conditioner(s) shall be wired into the junction boxes in the ceiling adjacent to roof vents.

3.10 Fire extinguisher. Two fire extinguishers, located as specified herein, shall be furnished. One extinguisher shall be located in the driver's compartment and one in the working/display area adjacent to the side entrance curb side door. Extinguishers shall be Halon 1211 Marine type in accordance with ANSI/UL 1093, having an ANSI/UL 711 rating of 10B:C. A marine/vehicle mounting bracket shall be furnished with each extinguisher.

3.11 Transit requirements. All equipment and accessories in the coach, including doors and drawers, shall be provided with means for securing, during transit of the coach to prevent movement and damage.

3.12 Hardware. All hardware, such as locks, grab handles, hinges, and towel bars, shall be of the best quality, heavy-duty, rustproof, and of a design consistent with the coach's overall appearance. All locks on the coach shall be key operated. Not less than five sets of keys shall be furnished.

3.13 Highway warning kit. Highway warning kit shall be furnished. Highway warning kit shall confrom the DoT Federal Motor Carrier Safety Regulations, section 393.95(f). Kit shall be stowed in compartment specified in 3.5.16.1

3.14 Lubrication. Means for lubrication shall be in accordance with the manufacturer's standard practice. The lubricating points shall be easily visible and accessible. Hydraulic lubrication fittings shall be in accordance with SAE J534. Where use of high pressure lubricating equipment, 1,000 psi or higher, will damage grease seals or other parts, a suitable warning shall be affixed to the equipment in a conspicuous location.

3.15 Servicing and adjustment. Prior to acceptance of the vehicle by the Government inspector, contractor shall service and adjust each vehicle for operational use including at least the following: Focusing of lights; adjustment of the engine and accessories; adjustment of electrical and braking systems; charging of battery; alinement of front wheels; inflation of tires; complete lubrication of engine, chassis, operating mechanisms and auxiliary generator set with grades of lubricants recommended for the ambient air temperature at the delivery point; servicing of liquid cooling system with a solution of equal parts of ethylene glycol and water; and servicing windshield washer reservoir with water and appropriate additives. In addition, complete servicing of all body interior electrical, heating, plumbing, and air conditioning systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

3.16 Workmanship.

3.16.1 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to insure uniformity of size and shape.

3.16.2 Bolted connections. Boltholes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.16.3 Riveted connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall be driven with pressure tools and shall completely fill the holes. Rivet heads, when not countersunk or flattened, shall be of approved shape and of uniform size for the same diameter of rivet. Rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member.

3.16.4 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Welds shall be of sufficient size and shape to develop the full strength of the parts connected by the welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the weld are subjected to proof and service loadings.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and inapplicable referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

4.2.1 First article inspection. The first article inspection shall be performed on one coach when a first article is required (see 3.1 and 6.2). This inspection shall include the examination of 4.3 and the tests of 4.4. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.4.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.3, the tests of 4.4, and the packaging inspection of 4.5.

4.3 Examination. Each coach shall be examined for compliance with the requirements specified in section 3 of this specification. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.4 Tests. The first article shall receive the tests of 4.4.1. Each production unit shall receive the test of 4.4.2. Failure to pass any test shall constitute cause for rejection.

4.4.1 First article tests. When first article is required, the coach shall be subjected to the tests specified in 4.4.1.1 through 4.4.1.6. Failure to pass any phase of the required tests shall be cause for the Government to refuse acceptance of all coaches until corrective action has been taken. Acceptance rights under provisions of the contract.

4.4.1.1 Vehicle weight. The first article coach shall be weighed to determine curb weight and distribution of curb weight on front and rear axle. The imposed loading on front and rear axle will be computed using the curb weight and the payload (see 3.3.6) to provide the specified gvw. The calculated imposed loads on front and rear axle will be utilized to ascertain that the suspension, axles, and tires furnished are of adequate capacity to meet requirements of 3.5.8, 3.5.9, and 3.5.10.1.

4.4.1.2 Road test. The first article coach shall be road tested (less payload) for a distance of not less than 70 miles. At least 50 miles of this distance shall be over improved roads at speeds as great as 55 mph. At least 20 miles of this distance shall be over unimproved roads at speeds as great as 15 mph. During the road test, the service brakes shall be tested to verify conformance to stopping requirements of 3.4.2. After the road test, the coach shall be examined for evidence of misalinement, binding, or other malfunction and inspection of interior equipment for satisfactory securement during transit.

4.4.1.3 Interior sound level test. An interior and sound level test shall be conducted in the conference area to verify conformance to the requirements in 3.3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

4.4.1.4 Leakproof test. A test shall be conducted as specified in 3.6.2.5 to verify that the coach is leakproof.

4.4.1.5 Auxiliary generator test. An operational test of not less than 4 hours shall be conducted to verify satisfactory operation of the auxiliary generator. The auxiliary generator shall be started and shut off at least four times during the test from the remote control station and the compartment control panel. During this test, the electrical system shall be operating at maximum design load with all circuits loaded simultaneously to design capacity, except that either the heating load or the air conditioning load, whichever is greater, shall be in operation, but not both at the same time. The generator set shall be capable of supplying the maximum design load continuously without degradation in performance, malfunctioning, overheating, or shortened life expectancy.

4.4.1.6 Equipment operational tests. An equipment operational test shall be conducted to verify satisfactory performance of the following: Toilet and sewer system; fresh water pump and fill system; 12V lighting system; sound system; awning system; and electrical system.

4.4.2 Production unit tests. Each production coach shall be tested as specified in 4.4.1.5 and 4.4.1.6. Failure to pass any phase of the tests shall be cause for rejection.

4.5 Packaging inspection. The vehicle shall be inspected to verify conformance to the requirements of section 5.

5. PACKAGING

5.1 Vehicle processing. The equipment shall be preserved and packaged in accordance with the contractor's standard practice. When specified (see 6.2), equipment shall be preserved, packaged, and marked in accordance with the mobile requirements of MIL-STD-281 with the level of preservation and packaging as specified (see 6.2).

6. NOTES

6.1 Intended use. Vehicles covered by this specification are designed to provide complete recruiting office functions and services.

6.2 Ordering data. Procurement documents shaould specify the following:

a. Title, number, and date of this specification.
b. When a first article is required for inspection and approval (see 3.1, 4.2.1, and 6.4).
c. When stabilizer bars are required (see 3.5.8).
d. When disk brakes are required (see 3.5.11.1).
e. When the plumbing and holding tank are required to be protected for sub zero temperatures (see 3.6.7.3.5).
f. When a second air conditioner is required (see 3.9.2).
g. When preservation and packaging in accordance with MIL-STD-281 is required, and the level of preservation and packaging required (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

6.3 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL) and invokes the provisions of paragraph 52.227-7031 of the Federal Acquisition Regulations (FAR), the data requirements will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL (DD Form 1423) incorporated into the contract. When the provisions of FAR 52.227-7031 are not invoked, the data shall be delivered in accordance with the contract requirements.

6.4 First article. When a first article inspection is required, the item will be tested and should be a first production item or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

Custodian:


Navy - YD

Preparing Activity:


Navy - YD

(Project 2320-N179)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

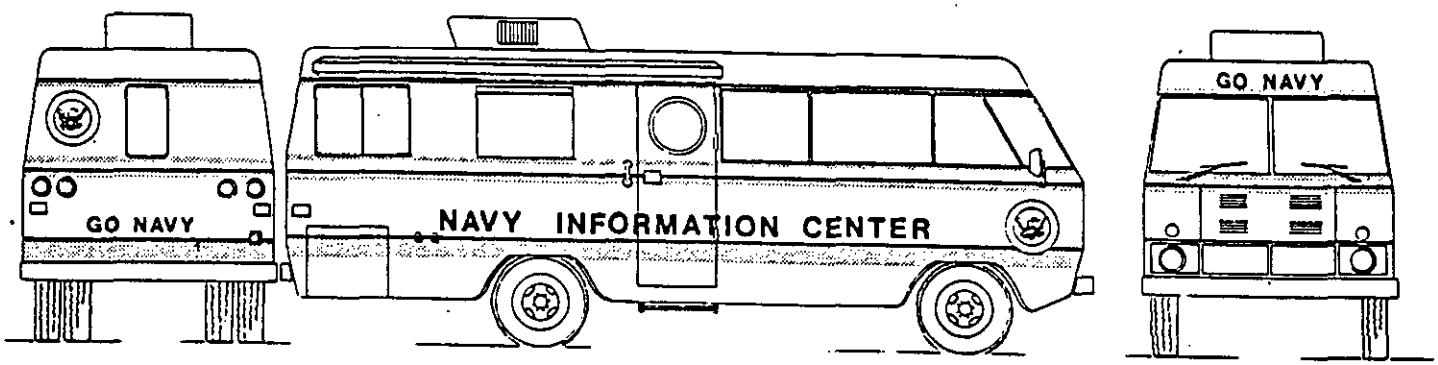

EXTERIOR VIEWS
Figure 1

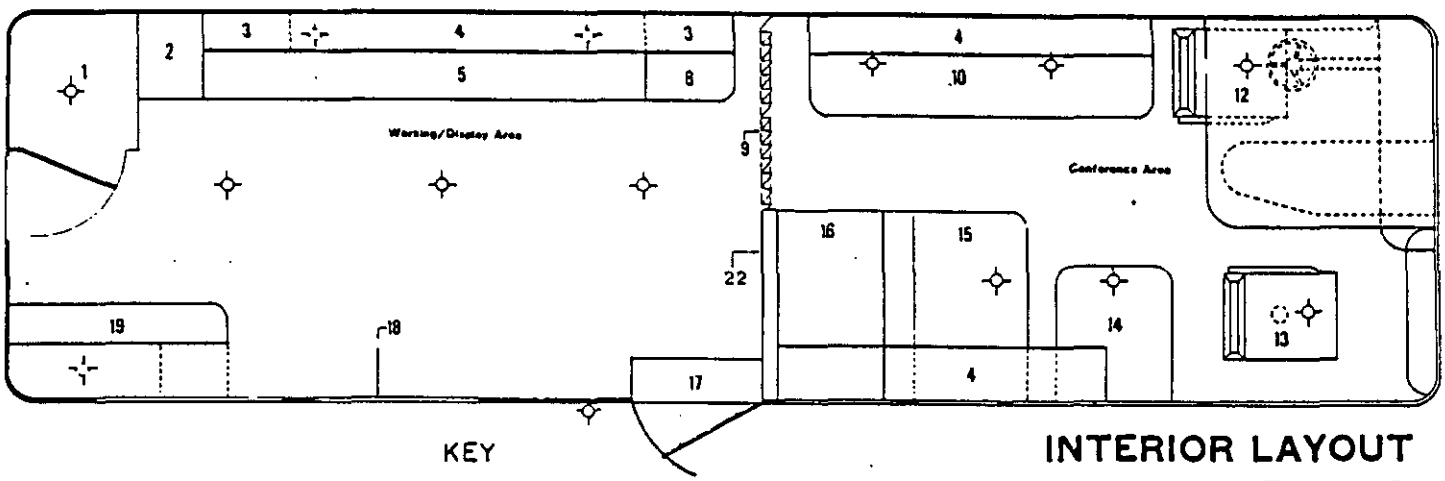


KEY

INTERIOR LAYOUT
Figure 2

1. LAVATORY
2. WARDROBE CLOSET
3. SPEAKER
4. OVERHEAD CABINET
5. PROJECTION COUNTER
8. REFRIGERATOR
9. CURTAIN
10. SOFA
12. DRIVER SEAT
13. CO-PILOT SEAT
14. DINETTE TABLE
15. DINETTE SEAT
16. STORAGE CABINET
17. SIDE ENTRANCE DOOR
18. PROJECTION SCREEN
19. WORK DESK
22. PARTITION

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.

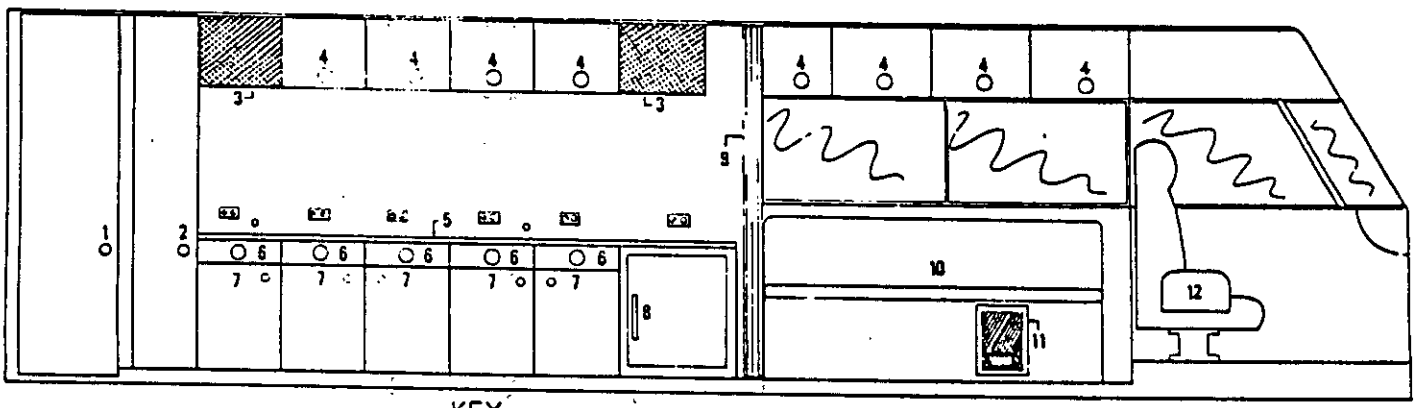


KEY

1. LAVATORY
2. WARDROBE CLOSET
3. SPEAKER
4. OVERHEAD CABINET
5. PROJECTION COUNTER
6. DRAWER
7. CABINET
8. REFRIGERATOR
9. CURTAIN
10. SOFA
11. ELECTRIC HEATER
12. DRIVER SEAT

STREETSIDE INTERIOR ELEVATION

Figure 3

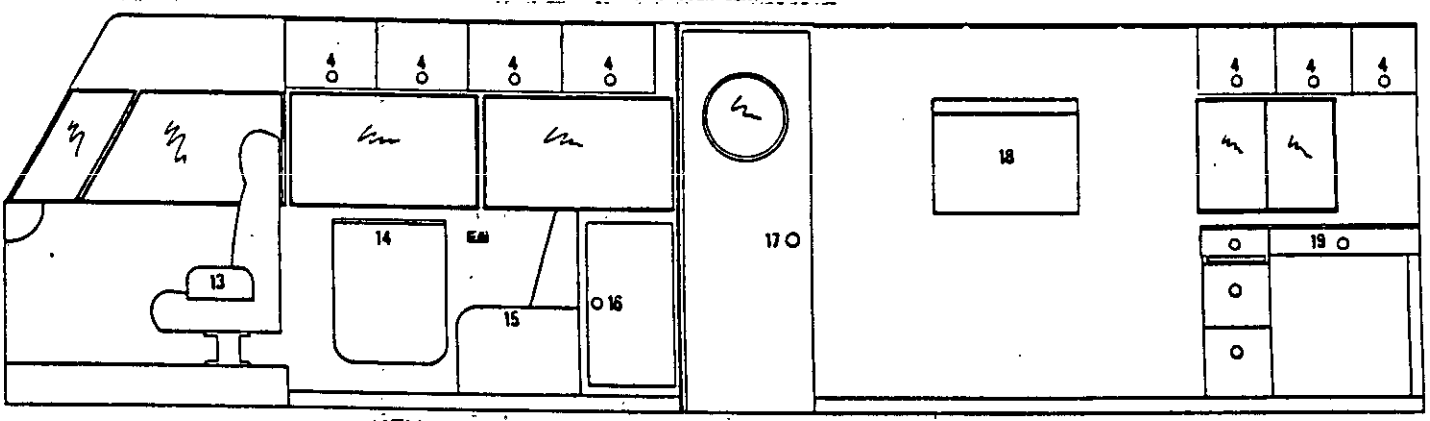

KEY

4. OVERHEAD CABINET
13. CO-PILOT SEAT
14. DINETTE TABLE
15. DINETTE SEAT
16. STORAGE CABINET
12. SIDE ENTRANCE DOOR
18. PROJECTION SCREEN
19. WORK DESK

CURBSIDE INTERIOR ELEVATION

Figure 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:12Z
Check the source to verify that this is the current version before use.