INCH-POUND

A-A-55169
April 9, 1993
SUPERSEDING
W-F-2190/9
December 13, 1983


COMMERCIAL ITEM DESCRIPTION

FILTER, RADIO FREQUENCY INTERFERENCE

The General Services Administration has authorized the use of this commercial item description.

Abstract. This commercial item description (CID) covers the general requirements for radio frequency interference (RFI) suppression power line filters. These filters consist of capacitors and inductors used in combination with each other and are provided with resistors as a safety feature. Filters covered by this CID are intended for commercial/industrial applications and should not be used in military systems needing stringent environmental and electrical requirements.

Part or Identifying Number (PIN). The PIN for this CID shall be as shown in the following example:



Salient characteristics.

Voltage rating. The voltage rating shall be 120 V ac at 60 Hz; 250 V ac at 50 Hz.

Operating frequency. The operating frequency shall be 50/60 Hz.

Current rating. The current rating shall be as specified in table I.

Operating ambient temperature range. The operating ambient temperature range shall be -10°C to +40°C at rated current.

Maximum leakage current, line-to-ground. The maximum leakage current, line-to-ground, shall be 0.5 mA at 120 V ac, 60 Hz; 1.0 mA at 250 V ac, 50 Hz.

Hipot rating (1 minute). The hipot rating shall be 2250 V dc line-to-ground; 1450 V dc line-to-line.

Insertion loss. Insertion loss is given for line-to-ground in a 50-ohm circuit. Values shall be as specified in table I.

Electrical schematics. The electrical schematics shall be as specified on figure 1.

Design and construction. The case configuration and dimensions shall be as specified on figure 2.

Marking. Filters supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Regulatory requirements. Not applicable.

AMSC N/A FSC 5915
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:44Z
Check the source to verify that this is the current version before use.

TABLE I. Current rating and insertion loss.

Dash number A-A-55169-	Current rating	Minimum insertion loss (dB) line-to-ground in 50-ohm circuit					
		Frequency (MHz)					
		.15	.5	1	5	10	30
01	1 A	30	65	65	65	65	65
02	2 A	5	44	60	65	65	60
03	3 A	30	65	65	65	65	65
04	5 A	5	44	60	65	65	60
05	10 A	5	44	60	65	65	60


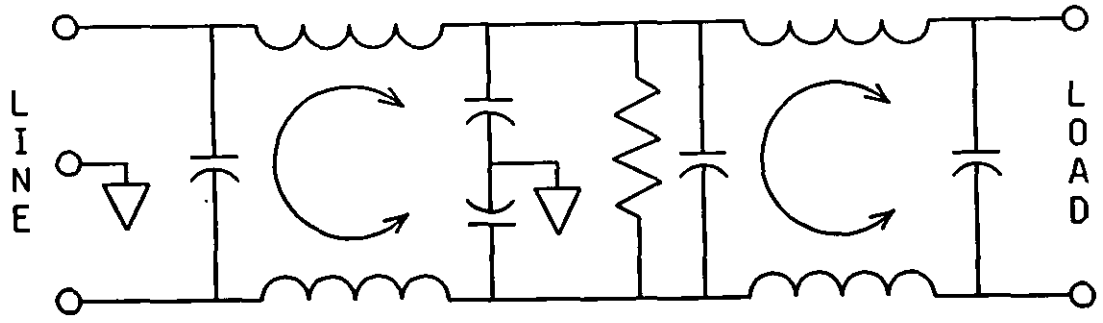


Figure 1. Electrical schematic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

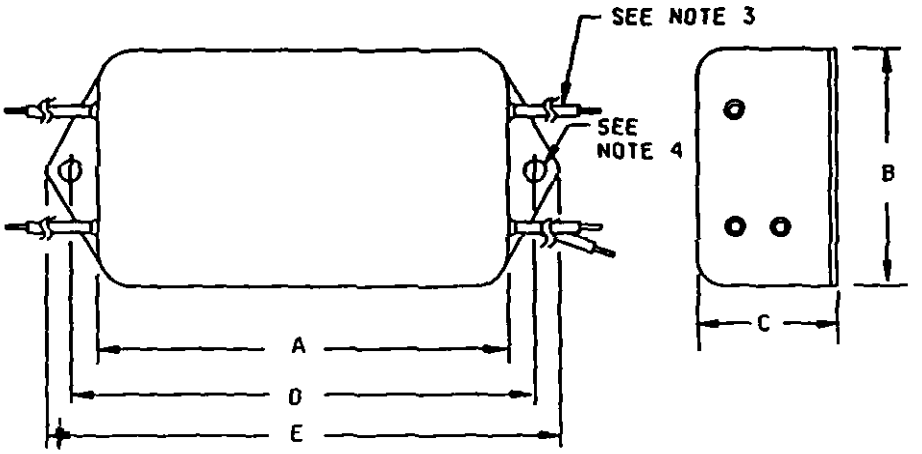

PIN A-A-55169-	A (max)		B (max)		C (max)		D ±.015/±.38		E (max)	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm
01	2.07	52.6	1.81	46.0	1.16	29.5	2.375	60.33	2.78	70.6
02	2.07	52.6	1.81	46.0	1.16	29.5	2.375	60.33	2.78	70.6
03	2.56	65.0	2.07	52.6	1.16	29.5	2.938	74.63	3.35	85.1
04	2.56	65.0	2.07	52.6	1.16	29.5	2.938	74.63	3.35	85.1
05	2.56	65.0	2.07	52.6	1.53	38.9	2.938	74.63	3.35	85.1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Wire leads: (Four) length 4.0 inches (101.6 mm) minimum; 18 AWG for -01 through -04, 16 AWG for -05.
4. Mounting holes: (Two) .188 inch (4.78 mm) diameter.

Figure 2. Case configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:44Z
Check the source to verify that this is the current version before use.

Quality assurance provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements specified herein. The contractor may use his own or any other facilities suitable for inspection requirements specified in the contract or purchase order, unless otherwise disapproved by the acquiring activity. The acquiring activity reserves the right to perform any of the inspections set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

Contractor certification statement. The contractor shall certify and maintain objective quality evidence that the product offered meets the requirements of this CID, and that the product conforms to the producer's own drawings, specifications, standards, quality assurances practices, and is the same as the product provided as a bid sample. The acquiring activity reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Certificate of compliance. A certificate of compliance shall accompany all filters supplied to this CID.

Packaging.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, labeling, and marking shall be as specified in the contract or purchase order.

Markings. Include PIN on packaging.

Notes. This section contains relevant information which is useful to buyers, users, and suppliers in the process of acquiring the item, but is not mandatory.

Ordering data. The contract or purchase order shall specify the following:

a. CID document number and revision.

b. Quality assurance provisions.

c. Any additional marking requirements.

d. Packaging requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:44Z
Check the source to verify that this is the current version before use.

Suggested sources of supply. Suggested sources of supply are listed in table II. Additional sources will be added as they become available.

TABLE II. Suggested sources of supply.

CID dash number (PIN)	Vendor CAGE number		
	05245	13050	13619
	Vendor commercial PIN		
A-A-55169-01	1VR3	620C1V	RME-A-301-W
A-A-55169-02	2VR3	620C2V	RME-A-302-W
A-A-55169-03	3VR3	620C3V	RME-A-303-W
A-A-55169-04	5VR3	620C5V	RME-A-305-W
A-A-55169-05	10VR3	620C10V	RME-A-310-W

Vendor CAGE number	Vendor name and address
05245	CORCOM, Incorporated 1600 Winchester Road Libertyville, IL 60048
13050	*Pulse Engineering* Potter Operation 942 Highway 51 North Wesson, MS 39191
13619	RME Filters, Incorporated 98 Route 101 A Amherst, NH 03031

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY:

DLA-ES

(Project 5915-0226)

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:44Z
Check the source to verify that this is the current version before use.