INCH-POUND

A-A-55170A
April 29, 1994
SUPERSEDING
A-A-55170
April 9, 1993


COMMERCIAL ITEM DESCRIPTION

FILTER, RADIO FREQUENCY INTERFERENCE

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Federal Specification W-F-2190/10 which is canceled.

Abstract. This CID covers the general requirements for radio frequency interference (RFI) suppression power line filters. These filters consist of capacitors and inductors used in combination with each other and are provided with resistors as a safety feature. Filters covered by this CID are intended for commercial/industrial applications and should not be used in military systems needing stringent environmental and electrical requirements.

Part or Identifying Number (PIN). The PIN for this CID shall be as shown in the following example:



Salient characteristics.

Voltage rating. The voltage rating shall be 120 V ac at 60 Hz; 250 V ac at 50 Hz.

Operating frequency. The operating frequency shall be 50/60 Hz.

Current rating. The current rating shall be as specified in table I.

Operating ambient temperature range. The operating ambient temperature range shall be -10°C to +40°C at rated current.

Maximum leakage current, line-to-ground. The maximum leakage current, line-to-ground, shall be 0.5 mA at 120 V ac, 60 Hz; 1.0 mA at 250 V ac, 50 Hz.

Hipot rating (1 minute). The hipot rating shall be 2250 V dc line-to-ground; 1450 V dc line-to-line.

Insertion loss. Insertion loss is given for line-to-ground in a 50-ohm circuit. Values shall be as specified in table I.

Electrical schematic. The electrical schematic shall be as specified on figure 1.

Design and construction. The case configuration and dimensions shall be as specified on figure 2.

Marking. Filters supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Regulatory requirements. This section is not applicable to this CID.

AMSC N/A
FSC 5915

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

TABLE I. Current rating and insertion loss.

Dash number A-A-55170-	Current rating	Electrical schematic	Minimum insertion loss (dB) line-to-ground in 50-ohm circuit					
			Frequency (MHz)					
			.15	.5	1	5	10	30
01	10 A	A	5	44	60	65	65	60
02	20 A	B	5	44	60	65	65	60


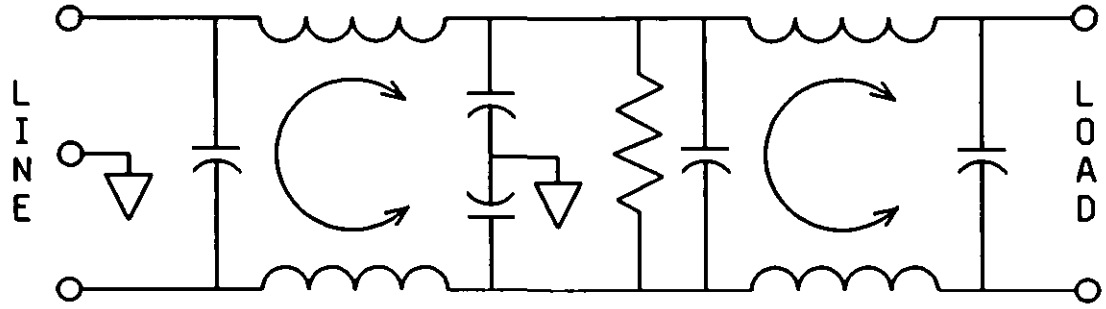



Figure 1. Electrical schematic.

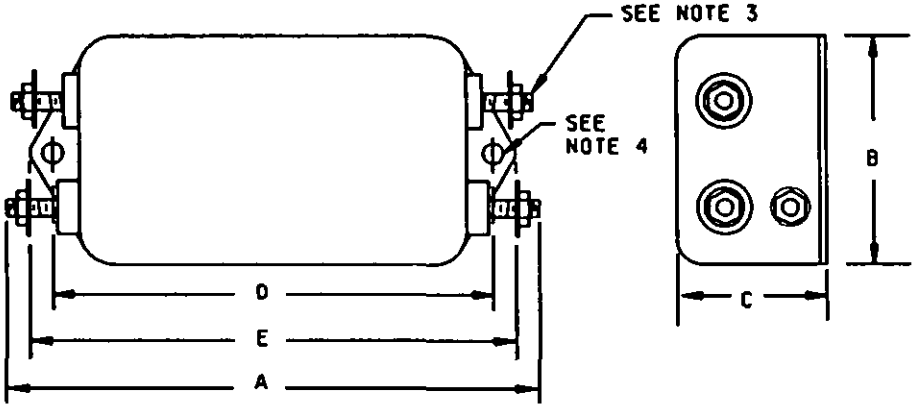

Case style A

Figure 2. Case configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

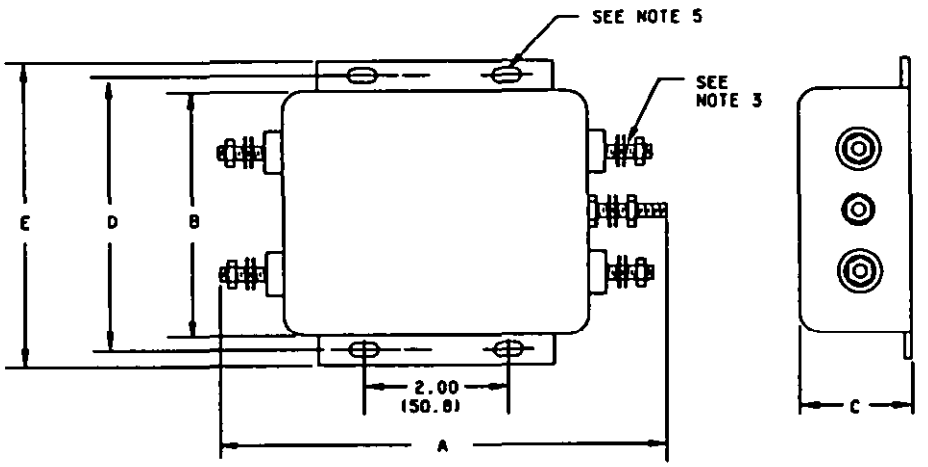

Case style B

PIN A-A-55170-	A (max)		B (max)		C (max)		D ±.015/±.38		E (max)		Case style
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	
01	3.96	100.6	2.07	52.6	1.53	38.9	2.938	74.63	3.35	85.1	A
02	5.34	135.6	3.37	85.6	1.53	38.9	3.750	95.25	4.20	106.7	B

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Terminals: No. 8-32 (five).
4. Mounting holes: (Two) .188 inch (4.78 mm) diameter.
5. Mounting slots: (Four) .250 inch (6.35 mm) X .156 inch (3.96 mm).
6. Metric equivalents are in parentheses.

Figure 2. Case configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Quality assurance provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the inspection requirements specified herein, unless otherwise disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

Contractor certification statement. The contractor shall certify and maintain objective quality evidence that the product offered meets the requirements of this CID, and that the product conforms to the producer's own drawings, specifications, standards, quality assurances practices, and is the same as the product provided as a bid sample. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Certificate of compliance. A certificate of compliance shall accompany all filters supplied to this CID.

Packaging.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, labeling, and marking shall be as specified in the contract or purchase order.

Markings. Include PIN on packaging.

Notes. This section contains relevant information which is useful to buyers, users, and suppliers in the process of acquiring the item, but is not mandatory.

Ordering data. The contract or purchase order shall specify the following:

a. CID document number and revision.

b. Quality assurance provisions.

c. Any additional marking requirements.

d. Packaging requirements.

Comments. Comments on this CID should be directed to Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-8271, or facsimile (FAX) (513) 296-8868.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Suggested sources of supply. Suggested sources of supply are listed in table II. Additional sources will be added as they become available.

TABLE II. Suggested sources of supply.

CID dash number (PIN)	Vendor CAGE number		
	0S2B1	05245	13050
	Vendor commercial PIN		
A-A-55170-01	RME-A-310-S	10VR6	620F10V
A-A-55170-02	RME-A-320-S	20VR6	620F20V

Vendor CAGE number	Vendor name and address
0S2B1	RME Filters, Incorporated P.O. Box 838 98 Route 101 A Amherst, NH 03031-0838
05245	CORCOM, Incorporated 1600 Winchester Road Libertyville, IL 60048-1298
13050	Pulse Engineering Potter Operation 942 Highway 51 North Wesson, MS 39191-9138

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY:

DLA-ES

(Project 5915-D241)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.