METRIC

A-A-52569
October 24, 1997

COMMERCIAL ITEM DESCRIPTION

SINK, PHOTOGRAPHIC PROCESSING AND SINK, LITHOGRAPHIC PROCESSING

The General Services Administration has authorized the use of this Commercial Item Description (CID) as a replacement for MIL-S-12781, for all federal agencies.

1. SCOPE

This CID covers a photographic print processing sink and a lithographic plate processing sink (hereinafter referred to as sink(s).

2. CLASSIFICATION The sinks shall conform to the following types.

2.1. Type I. - Sink, Photographic Processing 914.4 × 1168.4 mm (36 × 46 inches).

2.2. Type II. - Sink, Lithographic Processing, 812.8 × 914.4 mm (32 × 36 inches).

3. SALIENT CHARACTERISTICS

3.1. Description. The sinks shall consist of a trough mounted on a metal base. The sink shall support 453.6 kg (1,000 pounds) vertically and a force of 45.4 kg (100 pounds) applied laterally from any direction. The top edge of the sink (exclusive of the back splash panel, if any) shall be 939.8 mm ± 25.4 mm (37 inches, ± 1 inch) above the floor. Inside dimensions shall be exclusive of the dump gutter (if any). The maximum outside envelope of the sinks shall be as follows:

Type I - 1016 × 1270 mm (40 × 50 inches).

Type II - 914.4 × 1016 mm (36 × 40 inches).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: U.S. ARMY TOPOGRAPHIC ENGINEERING CENTER, ATTN: CETEC-TD-TE, 7701 TELEGRAPH ROAD, ALEXANDRIA, VA 22315-3864.

AMSC N/A FSC 3610

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

3.2. Trough. The sink trough shall be made of corrosion-resistant materials. The underside of the trough shall be treated to prevent sweating.

3.2.1 Drain. A drain shall be located on the right side of the sink as viewed from the front. The drain shall completely drain the sink and shall be provided with a mechanically operated drain plug or rubber stopper with chain, attached to the sink. The drain shall be of a corrosion-resistant material, and able to withstand the effects of chemicals normally used in photographic processing.

3.2.2 Overflow outlet. An overflow outlet, emptying directly into the drain shall be provided to prevent the liquid in the trough from reaching a depth greater than 101.6 mm (4 inches).

3.3. Base frame. The base frame shall be made from corrosion-resistant material and shall be rigid when assembled. The frame shall be bolted and fitted together so as to be readily assembled or disassembled for shipment and storage with common hand tools.

3.3.1. Shelf. A removable shelf shall be provided 228.6 mm, ± 25.4 mm (9 inches, ± 1 inch), above the floor. The shelf shall support a uniform load of not less than 226.8 kg (500 pounds) without damage, buckling, or otherwise distorting.

3.4. Type I. An example of a type I sink is shown in Figure 1 (see 7.4). Foot plates, approximately 63.5 mm (2.50 inches) square, shall be permanently attached to the bottom of each leg.

3.5. Type II. An example of a type II sink is shown in Figure 2 (see 7.4). Foot plates in accordance with Figure 3 shall be permanently attached to the bottom of each leg.

3.5.1. Drain board. A Drain board, 711.2 × 863.6 mm (28 × 34 inches), shall be provided in the sink. Means shall be provided to raise and lower the edge of the Drain board nearest the front of the sink not less than 114.3 mm (4.50 inches) and to hold it in position on three intermediate stops.

3.5.2. Sprinkler pipe. Sprinkler pipes shall be corrosion-resistant pipe or tubing. The pipe shall be mounted in such manner that the streams of water spray down the inclined plane of the Drain board. If the pipe enters the trough through the sidewall, the hole through which it enters shall be watertight. Water in the pipe shall be controlled by a valve located outside the trough near the right side front corner of the sink. A supply pipe shall extend from the valve to the back of the sink.

3.5.3. Storage cabinet. Each type II sink shall have a storage cabinet located in the base of the sink. The two doors on the front of the sink shall open to expose the full height and width of the cabinet, with the shelf located 228.6 mm (9 inches) from the bottom of the supports used as the cabinet bottom. The cabinet shall have durable handles and latches for individually securing the doors to the cabinet frame. The cabinet, handles, and latches shall be made of corrosion-resistant material suitable to the working environment described herein.

3.6. Transportability. When mounted in a vehicle both type I and type II sinks shall be of rigid construction and shall withstand the shock and vibration of road travel, including off-the-road (rough terrain) conditions when mounted in a vehicle. When specified (see 7.2) the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

contractor shall devise a road test, subject to the approval of the contracting officer, to determine the adequacy of the unit's transportability.

3.7. Ease of maintenance. Components requiring adjustment, maintenance, repair, or replacement shall be readily accessible, without requiring removal of other major components or assemblies. Covers or plates that must be removed for these purposes shall be provided with quick-disconnect fasteners.

3.8. Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable (see 7.5.2).

3.9. Fungus resistance. Materials selected for use in the sinks shall be fungus-inert or shall be treated with a commercially accepted, moisture and fungus-proofing compound. This requirement need not apply to components that are, or are within enclosures that are, hermetically sealed (see 7.5.1).

3.10. Treatment and painting. Unless otherwise specified (see 7.2), or unless the material is inherently corrosion resistant, the sinks shall be treated and painted for corrosion protection using the contractor's standard practice.

3.11. Inch-pound products. Products manufactured to inch-pound dimensions will be considered on an equal basis with those manufactured using metric units, provided they fall within specified tolerances and all other requirements of this CID are met. The contracting officer has the option of accepting or rejecting the product.

3.12. Certification. When specified in the contract or purchase order (see 7.2), original equipment manufacturer's certification of commercial products may be accepted in lieu of the examinations specified in 5.3.

4. REGULATORY REQUIREMENTS

4.1. Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1. Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2. Market acceptability. The manufacturer of the photographic and lithographic processing sinks shall have been producing sinks meeting the requirements of this CID for at least two years.

5.3. Examinations. Each sink shall be physically examined for compliance with the requirements specified in 3.1 through 3.12. Any redesign or modification following failure to meet the specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all examinations of performance, safety, human engineering, and dimensional requirements. Nonconformance to any specified requirement or the presence of one or more defects, lessening required efficiency, shall constitute cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

6. PACKAGING

6.1. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1. Intended use. Type I sinks are for use in developing large photographic materials. Type II sinks are for use in the processing of offset lithographic press plates. Both types are used in mobile, truck or van mounted, field sections.

7.2. Acquisition requirements. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Type of sink required (see section 2).

c. When a road test is required (see 3.6).

d. When treatment and painting shall be other than the standard practice (see 3.10).

e. When certification may be accepted in lieu of examination (see 3.12).

7.3. Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for CID A-A-XXXXX

AAXXXXX-2

└── Type II

7.4. Figures. The figures show limiting dimensions for type I and type II sinks, and depict a configuration that has been found acceptable. However, they are illustrative only and not intended to preclude the furnishing of other sinks that conform to the requirements of this specification.

7.5. Definitions. For the purposes of this specification, the following definitions apply.

7.5.1. Fungus-inert. A fungus inert material is a material that is not a nutrient to fungi.

7.5.2. Interchangeable parts. Interchangeable parts are defined as two or more parts possessing functional and physical characteristics equivalent in performance and durability. These parts are capable of being exchanged one for the other without alteration of the parts; of mating or adjoining parts, except for adjustment; and without selection for fit or performance.

7.5.3. Recovered materials. For the purpose of this requirement, recovered materials are those that have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. Used, rebuilt, or remanufactured components, pieces and parts shall not be incorporated in the sinks.

7.6. Data requirements. The contracting officer should include, in the contract or order, any data requirements, such as maintenance and operation manuals, instructional materials and technical publications to be furnished with each sink.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

7.7. Provisioning. The contracting officer should include, in the contract or order, provisioning requirements for repair parts; maintenance tools (including any special tools), as necessary; and instructions regarding packaging and shipment of the sinks.

7.8. Subject term (key words) listing.

Trough

Cabinet

Plates, photographic

Plates, lithographic

Equipment, photographic

Equipment, lithographic

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

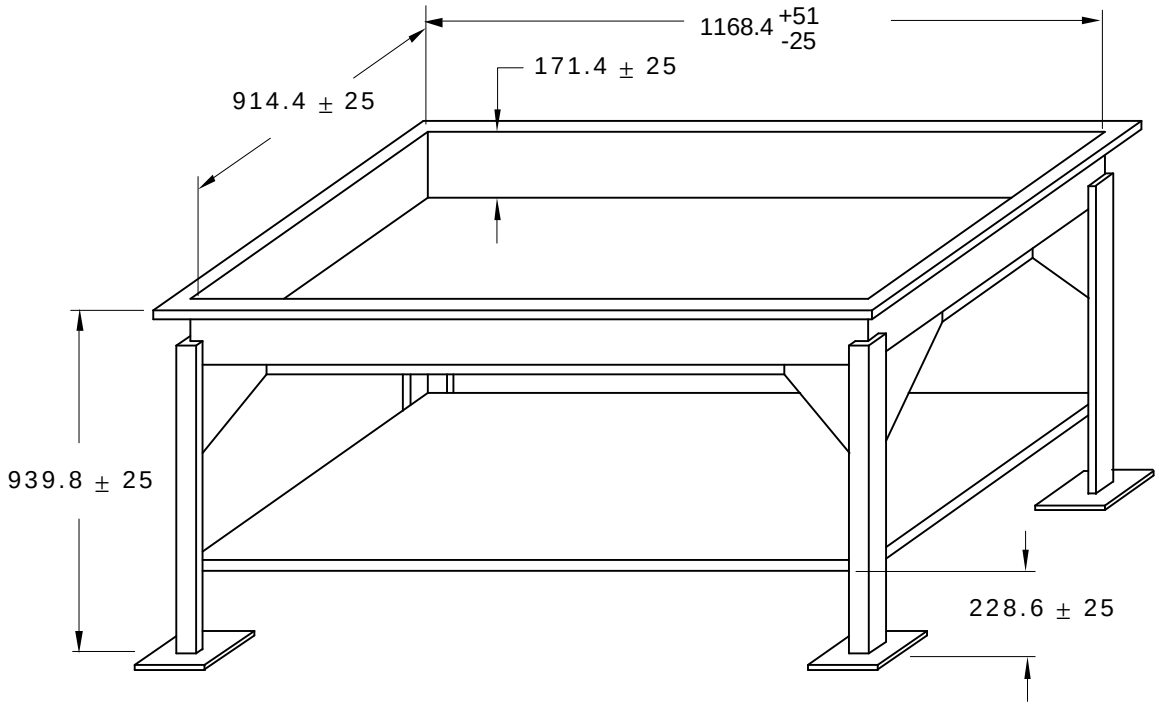

NOTES: 1. All trough dimensions are inside dimensions.

2. Dimensions are in millimeters.

Figure 1. Type I, Photographic Sink (Typical).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

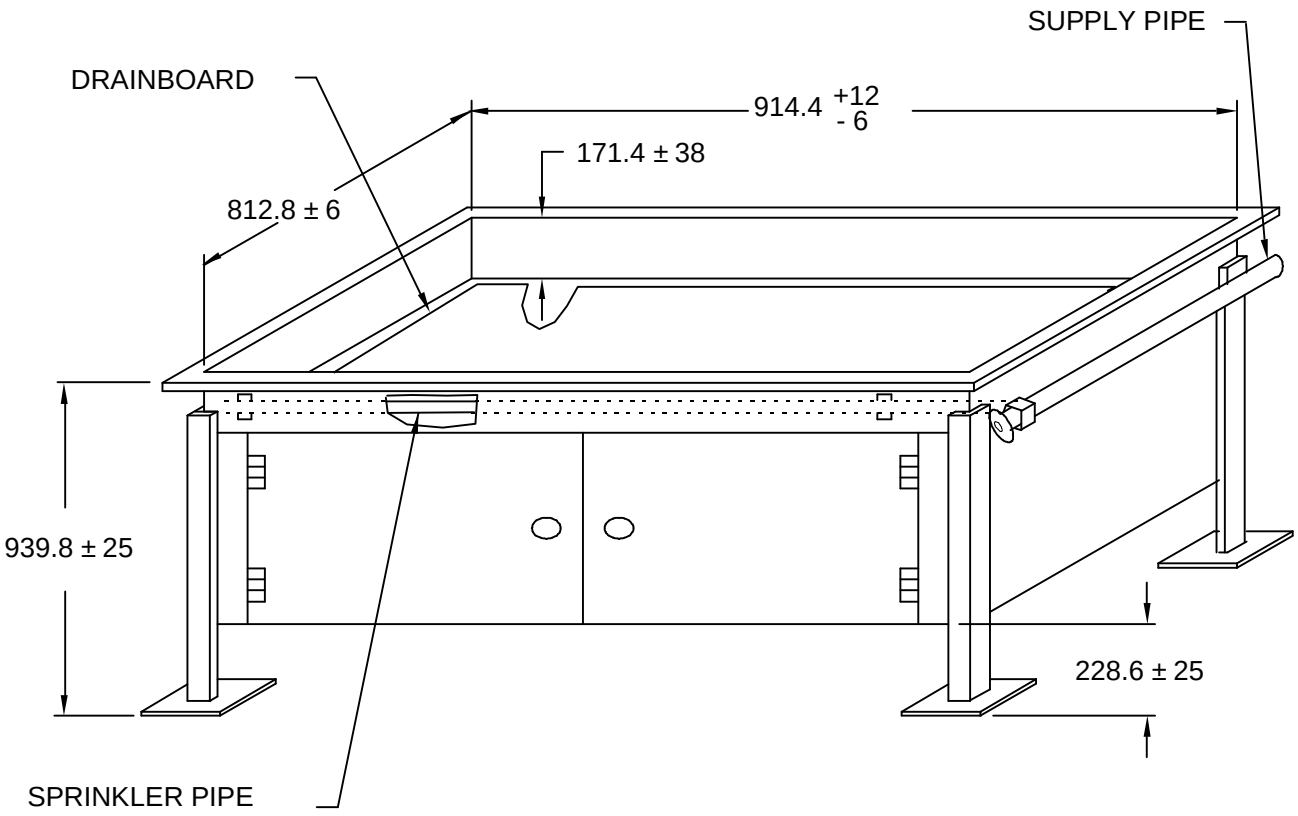

NOTES: 1. All trough dimensions are inside dimensions.

2. Dimensions are in millimeters.

Figure 2. Type II, Lithographic Sink (Typical).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

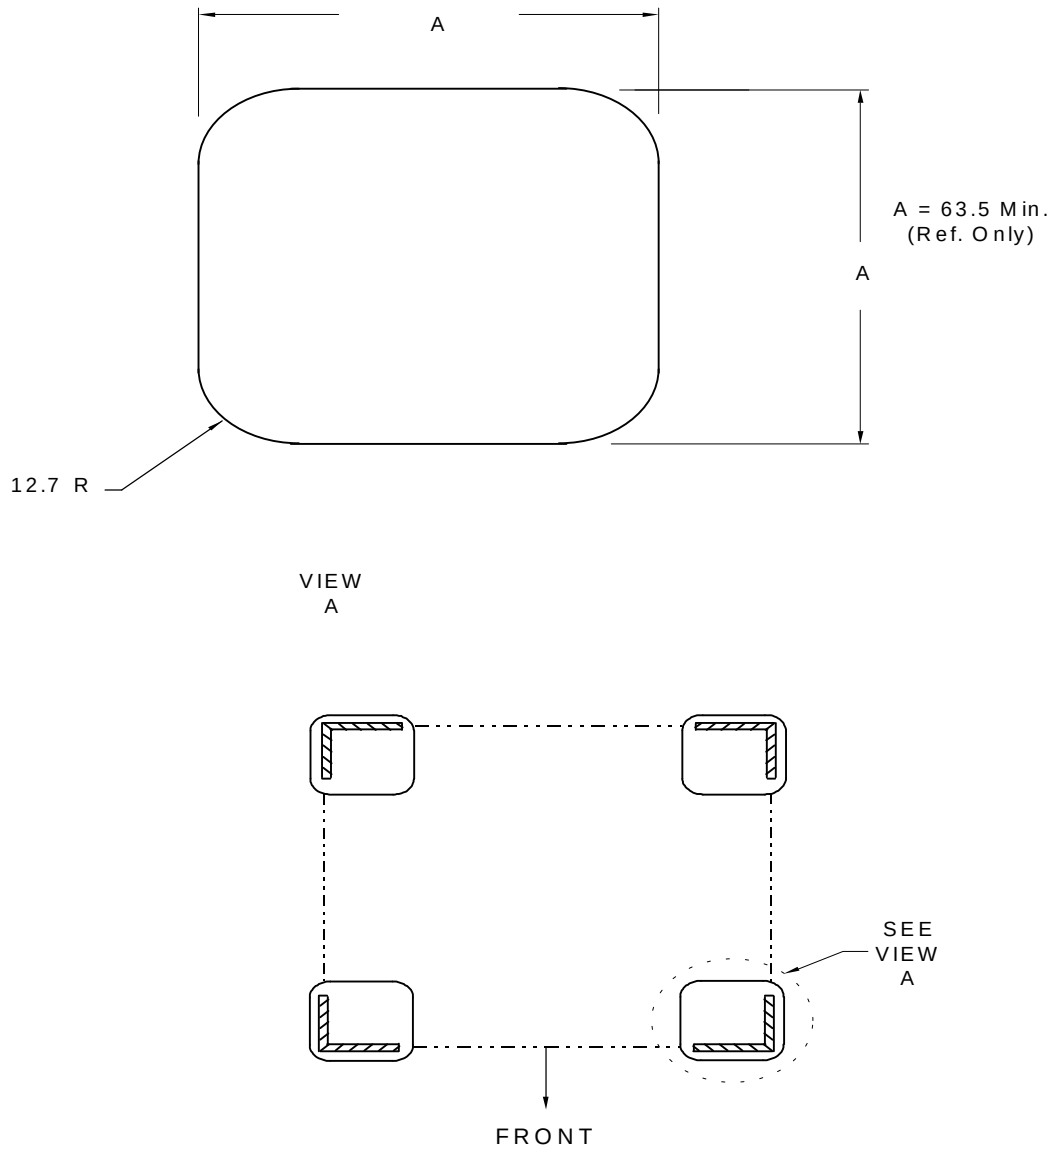

DETAIL AND POSITIONING OF FOOT PLATES ON SINKS

NOTES: 1. Dimensions are in millimeters.
2. Tolerances shall be ± .5mm.

Figure 3. Foot Plates.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

Preparing activity for this CID is: U.S. Army Topographic Engineering Center,
7701 Telegraph Road, Alexandria, VA 22315-3864.

Custodians:

Army - CE3

Navy - SA

Air Force - 99

Preparing activity:

Army - CE3

(Project 3610-0413)

Review activity:

DLA - GS

Army - GL

Navy - MC

Air Force - 84

Civilian Coordinating Activity:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.