MIL-A-14053C(EL)
25 October 1977
SUPERSEDING
MIL-A-14053B(EL)
7 September 1966

MILITARY SPECIFICATION

ANTENNA AT-450( )/ARC

This specification is approved for use by Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of lightweight airborne antenna for operation within the frequency range of 225 to 400 megahertz (MHz), designated as Antenna AT-450( )/ARC. (See 6.3)

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. - The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

NN-P-71	Pallets, Material Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial)
QQ-S-781	Strapping, Steel, and Seals
PPP-B-585	Boxes, Wood, Wirebound
PPP-B-601	Boxes, Wood, Cleated, Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-B-640	Boxes, Fiberboard, Corrugated, Triple-Wall
PPP-F-320	Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes
PPP-S-760	Strapping, Nonmetallic (and Connectors)
PPP-T-97	Tape, Pressure-Sensitive Adhesive, Filament Reinforced

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Electronics Command, ATTN: DRSEL-RD-TS-S, Fort Monmouth, New Jersey 07703, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5821

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	Preservation-Packaging, Methods Of
MIL-W-6858	Welding, Resistance, Aluminum, Magnesium, Non-Hardening Steels or Alloys, Nickel Alloys, Heat Resisting Alloys, and Titanium Alloys, Spot and Seam
MIL-C-10578	Corrosion Removing and Metal Conditioning Compound (Phosphoric Acid Base)
MIL-M-13231	Marking of Electronic Items
MIL-P-19644	Plastic Molding Material (Polystyrene Foam, Expanded Bead)
MIL-P-26514	Polyurethane Foam, Rigid or Flexible for Packaging

MILITARY

MIL-STD-22	Welded-Joint Designs
MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-108	Definition of and Basic Requirement for Enclosure for Electric and Electronic Equipment
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized Unit Load 40" by 48" Pallets
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods (with Notice 2(11))
MIL-STD-1188	Commercial Packaging of Supplies and Equipment

DRAWINGS

ELECTRONICS COMMAND

SC-DL-44953	Antenna AT-450( )/ARC

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity, or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. - Antenna AT-450( )/ARC is a lightweight rigid airborne antenna for operation within the frequency range of 225 to 400 MHz, with an input power of 25 watts maximum. The antenna provides a vertically polarized omnidirectional radiation pattern in the horizontal plane.

3.2 Construction. - Antenna AT-450( )/ARC shall be constructed in accordance with Drawing SC-DL-44953.

3.3 First Article Samples. - The contractor shall furnish two First Article samples for approval, if required by the invitation for bids and contract. (See 4.3)

3.4 Marking.

3.4.1 General. - Marking shall conform to Specification MIL-M-13231. (See 4.4)

3.4.2 Visibility. - Wherever practicable, parts shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

3.4.3 Serial Numbers. - The antennas shall be serial numbered.

3.5 Cleaning.

3.5.1 Parts. - After fabrication, parts shall be cleaned in accordance with good commercial practice or as specified on the equipment drawings. Cleaning processes shall have no deleterious effect. Corrosive material shall be removed completely before the parts are mounted on chassis, panels, etc.

3.5.2 Units. - After assembly, units shall be cleaned thoroughly and shall be free from particles of solder, flux and other foreign material. In addition, when necessary, such cleaning shall also be performed before final assembly of the units.

3.6 Welding. - Welding shall be in accordance with Requirement 13 of MIL-STD-454 and wherever practicable, welded joints shall conform to Standard MIL-STD-22 and shall be such that grinding on the finished weld will be unnecessary. Spot, stitch, and seam welds shall conform to Specification MIL-W-6858. Spot or other intermittent welds in aluminum or magnesium shall be limited to lightly stressed, noncritical structures. When spot or other intermittent welds are used to hold a part, the number of welds will be at least two.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

3.6.1 Cleaning prior to welding. - Surfaces to be welded shall be cleaned in accordance with good commercial practice and shall be free from rust, scale, paint, grease, and other foreign material.

3.6.2 Process. - Preheating shall be employed where distortion is likely to result from welding. Welds shall have thorough penetration and good fusion and shall be free from scabs, blisters, abnormal pock marks, cracks, voids, slag inclusions, and other harmful defects. Where undesirable internal stresses are likely to result from welding, welded items shall be stress-relieved. Inert gas-shielded arc welding shall be used, when practicable, for welding of aluminum, magnesium, or stainless steel.

3.6.3 Cleaning after welding. - Welded assemblies shall be cleaned to remove rust, scale, oxidation products, and excess flux by sandblasting, wire brushing, or other suitable means. Prior to painting steel parts that have been arc welded or acetylene welded shall, in addition, be subjected to vat passivation or a phosphoric acid etch in accordance with Specification MIL-M-10578. Acid used for cleaning shall be completely neutralized and removed.

3.7 Static loading.- The antenna, mounted in a horizontal position with the major cross sectional axis in a horizontal plane, shall withstand the following horizontal and vertical forces:

3.7.1 Horizontal loading. - The antenna shall withstand vertical loading of 10 pounds without excessive deflection or permanent deformation. (See 4.6.1)

3.7.2 Vertical loading.- The antenna shall withstand vertical loading of 25 pounds without excessive deflection or permanent deformation. (See 4.6.2)

3.8 Electrical requirements. - The antenna shall meet the electrical requirements listed below:

3.8.1 Omnidirectional characteristic. - The antenna, mounted on the ground plane (Figure 1), shall have a uniform vertically polarized omnidirectional radiation pattern in the horizontal plane which is plus or minus 2 dB of a perfect circle field strength pattern. (See 4.7.1)

3.8.2 Impedance and voltage standing wave ratio. - The antenna shall have nominal design center terminal impedance of 52 ohms resistive. The voltage standing wave ratio shall not exceed 2:1 at any frequency from 225 to 400 MHz. The VSWR shall be measured at every 25 MHz between 225 to 400 MHz with the antenna mounted on the ground plane (Figure 1) using an RG-58/U cable less than 10 feet long. (See 4.7.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

3.8.3 RF input power. - There shall be no evidence of corona or arc-over when tested in accordance with 4.7.3.

3.9 Altitude. - The antenna shall meet the requirments of this specification at any elevation up to 20,000 feet with no evidence of arc-over or corona. It shall also withstand elevations up to 40,000 feet (non-operating) without degradation. (See 4.8)

3.10 Humidity. - The antenna shall be operable without degradation in specified performance, and shall sustain no physical damage during and after prolonged exposure to extreme high humidity levels as encountered in tropical areas. (See 4.9.1)

3.11 Vibration. - The antenna shall meet the test of 4.12 without deterioration of material or electrical performance.

3.12 Splashproof protection. - The antenna shall meet the requirements of 3.8.2 after subjection to the Table I Requirements of MIL-STD-108 for Splashproof enclosures. There shall be no evidence of water inside the antenna. (See 4.13)

3.13 Workmanship. - The antenna shall be manufactured and assembled in accordance with Requirement 9 of MIL-STD-454 and the applicable portions of the following paragraphs herein:

3.2 Construction
3.5 Cleaning
3.6 Welding

3.14 Systems safety engineering. -

3.14.1 Personnel hazards. - Personnel hazards shall be kept to a minimum through compliance of configuration changes and parts selection with Requirement 1 of MIL-STD-454. Compliance with these requirements will be verified through a visual inspection. (See 4.14)

3.14.2 Edge rounding exposed. - Exposed edges shall be rounded to a minimum radius of 0.04 inch (1 mm), and exposed corners to a minimum of 0.5 inch (13 mm).

3.14.3 Radioactive materials. - Radioactive materials shall not be used (e.g., luminous dials/markings, electron tubes, surge arrestors and lenses).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. - Inspection shall be classified as follows:

(a) First article inspection (does not include packaging). (See 4.3.)

(b) Inspection covered by subsidiary documents. (See 4.4.)

(c) Quality conformance inspection.

(1) Quality conformance inspection of equipment before packaging. (See 4.5.)

(2) Quality conformance inspection of packaging. (See 4.15.)

4.3 First article inspection. - This inspection shall be performed by the contractor unless otherwise specified in the contract. It shall consist of the First Article inspection specified in Table I, the inspection specified in the subsidiary documents covering the items listed in 4.4, and the inspection specified for Group A, Group B, and Group C (See Tables II, III and IV, respectively). The First Article inspection will normally be performed in this order: (1) Vibration, (2) Splashproof protection. Other First Article inspection may precede, follow or be interspersed between the foregoing.

Table I - First article inspection

Inspection	Rqt. Para.	Insp. Para.
Omnidirectional characteristic	3.8.1	4.7.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

4.4 Inspection covered by subsidiary documents. - The following shall be inspected under the applicable subsidiary documents as part of the inspection of the units before preparation for delivery:

Item	Where Required
Marking	3.4

4.5 Quality conformance inspection of equipment before packaging. - The contractor, to demonstrate compliance with specified requirements, shall perform the inspection specified in 4.4 and 4.5.1 through 4.5.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition, the Government, at its discretion, may perform all or any part of the specified inspection to verify the contractor's compliance with specified requirements. (See 6.4.) Test equipment for Government verification inspection shall be made available by the contractor.

4.5.1 Group A inspection. - Each unit on contract or purchase order shall be inspected for conformance to the inspections specified in Table II. Discrete lots shall be formed from units that pass this inspection. Factors of lot composition not defined herein, or in the contract or purchase order, shall be in accordance with MIL-STD-105. Each lot shall be subject to sampling inspection, utilizing the procedures of MIL-STD-105, using the general inspection levels, and AQL's indicated in Table II.

Table II - Group A inspection

Inspection	Rqt. Para.	Insp. Para.	AQL Major	AQL Minor
Mechanical				
Visual and mechanical	3.13 & 3.14	4.14	1%	4%
Electrical				
Impedance and voltage standing wave ratio	3.8.2	4.7.2	1%	*

*Electrical defects are considered major category only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

4.5.2 Group B inspection. - This inspection, including sampling, shall conform to Table III and to special procedures for small-sample inspection of MIL-STD-105. Group B inspection shall normally be performed on inspection lots that have passed Group A inspection and on samples selected from units that have been subjected to and met the Group A inspection. The inspection level for each AQL listed shall be S-4.

4.5.2.2 Order of inspection within Group B. - Group B inspection shall be performed in any order which is satisfactory to the Government.

Table III - Group B inspection

Inspection	Rqt. Para.	Insp. Para.	AQL
RF input power	3.8.3	4.7.3	4.0%
Static loading	3.7	4.6 4.6.1 4.6.2	6.5%

4.5.3 Group C inspection. - This inspection shall consist of the tests specified in Table IV and shall be performed on sample units that have been subjected to and met Groups A and B inspection. Sample units shall be selected in accordance with paragraph 4.5.3.1.

Table IV - Group C inspection

Inspection	Rqt. Para.	Insp. Para
Vibration	3.11	4.12
Splashproof protection	3.12	4.13
Altitude	3.9	4.8
Humidity	3.10	4.9

4.5.3.1 Sampling for inspection. - Two sample antennas shall be selected at random for all inspections in Table IV from every 200 units and fraction thereof produced or every 30 days, whichever occurs first. The first samples selected shall be at the start of the contract from the first quality conformance inspection production lot. (See 4.5.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

4.5.4 Reinspection of conforming Group C sample units. - Unless otherwise specified, sample units which have been subjected to and passed both Group B and Group C inspection may be accepted on contract or order provided all damage is repaired and the sample units are resubjected to and pass Group A inspection.

4.5.5 Group C failures. - Actions required relative to Group C failures shall be as specified in the contract or purchase order.

4.6 Static loading. - The antenna shall be tested for compliance with the requirements of 3.7.

4.6.1 Horizontal loading. - With a horizontal force of 10 pounds applied gradually to the leading edge of the antenna, 8-1/2 inches from the bottom surface of the mounting plate, deflection shall be measured at a point 8-7/8 inches from the bottom surface of the mounting plate in the direction of the applied force. After being loaded for five minutes, deflection shall not exceed 0.10 inch. When the force is removed, the antenna shall return to within 0.006 inch of the zero reading. (See 3.7.1)

4.6.2 Vertical loading. - With a vertical force of 25 pounds applied gradually at a point 8-1/2 inches from the bottom surface of the mounting plate, deflection shall be measured at a point 7-7/8 inches from the bottom surface of the mounting plate. Deflection, after being loaded for five minutes shall not exceed 0.150 inch, and the antenna shall return to within 0.006 inch of the zero reading two minutes after the load has been removed. (See 3.7.2)


4.7 Electrical tests. - The ground plane for conducting the following tests shall be in accordance with Figure 1.

4.7.1 Omnidirectional characteristic. - The antenna mounted on the ground plane shall have radiation patterns taken in the horizontal plane for four frequencies throughout the antenna range. Measurements shall be made using a signal generator (Measurements Corp. Model 80, or equal) and a receiver (Technical Appliance Corp. Model APR-4 Modified, or equal). (See 3.8.1)

4.7.2 Impedance and voltage standing wave ratio. - The antenna mounted on the ground plane shall be tested using a signal generator (Measurement Corp. Model 80, or equal), a SWR meter (Hewlett-Packard Model 415A or equal), a slotted line (Andrew Corp. Model 3100, or equal). (See 3.8.2)

4.7.3 RF input power. - The antenna shall be tested at ambient atmospheric temperature and relative humidity, with a rf input power of 25 watts minimum. Tests shall be performed at power input frequencies every 25 MHz from 225 to 400 MHz inclusive. Test equipment used for the

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

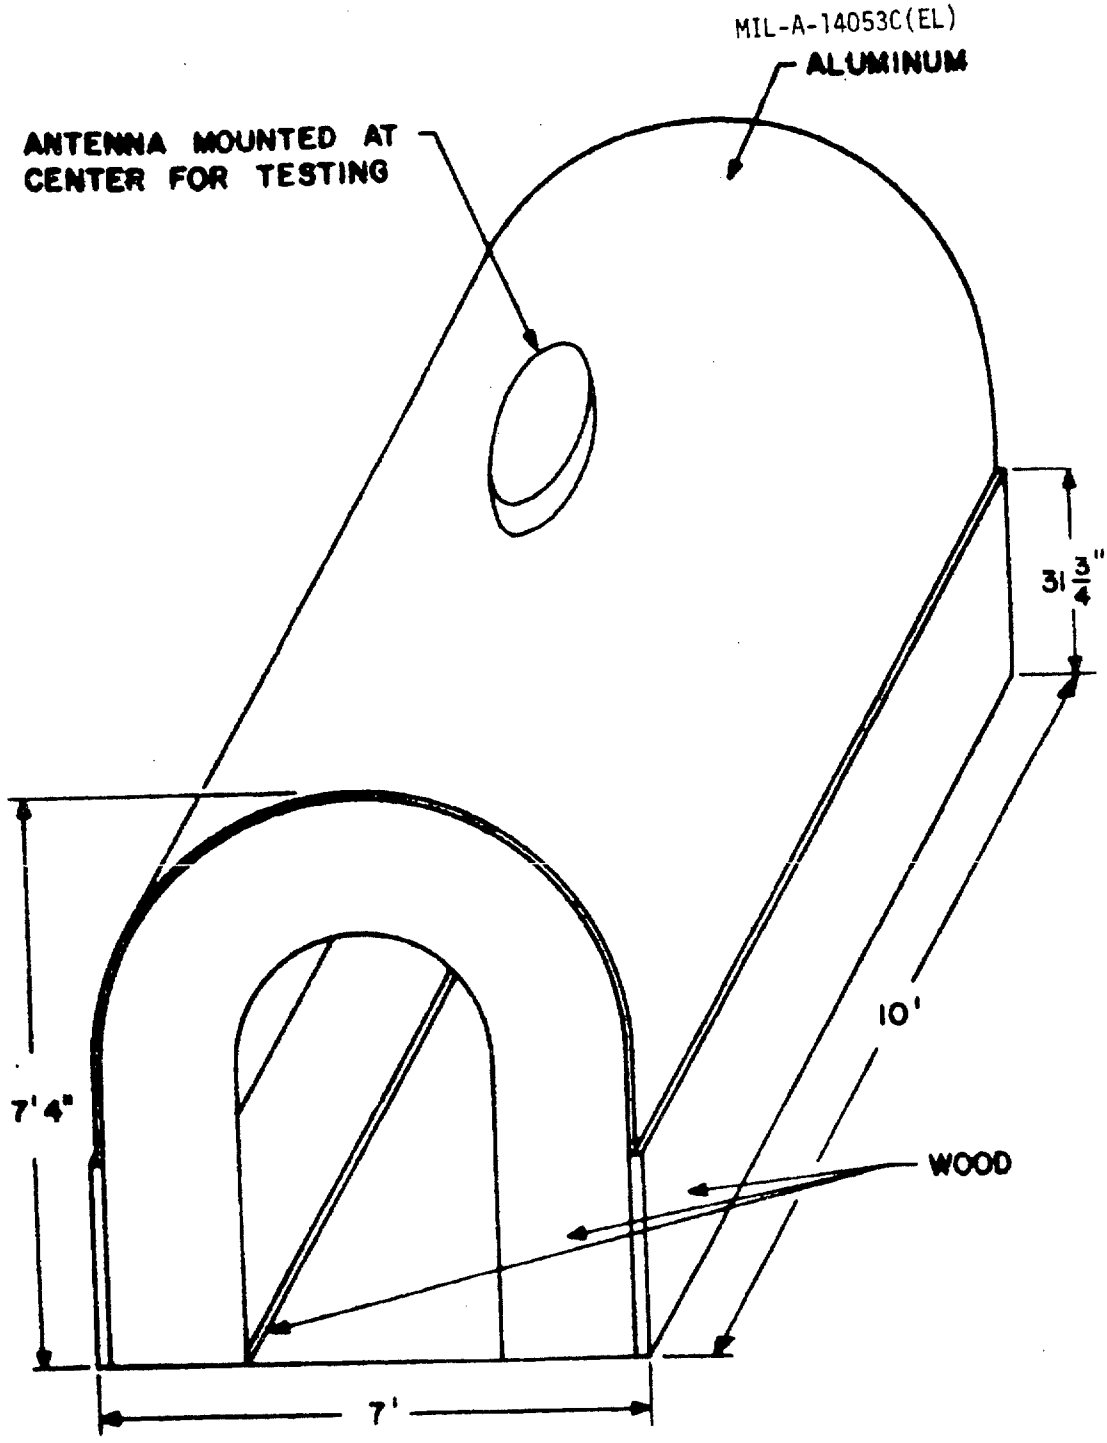

GROUND PLANE FOR MEASUREMENTS

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

4.7.3 RF input power (contd)

test shall be suitable source of rf power, a SWR meter (Hewlett Packard Model 415A, or equal), a slotted line (Andrew Corp. Model 3100, or equal), and a Thermaline R-F Wattmeter (Bird Electronic Corp. Model 61, or equal). the rf signal shall be tone-modulated at a frequency of 1000 Hz and at a level not less than 95 percent. (See 3.8.3)

4.8 Altitude. - The antenna shall be placed in the test chamber in a manner similar to that in which it would be used in service, and such electrical and mechanical connections and instrumentation as may be necessary shall be completed.

(a) The internal temperature of the chamber shall be maintained at 68° + 2°F and the internal atmospheric pressure of the chamber reduced to 3.4 inches of mercury maximum (40,000 ft). The equipment shall be non-operative. At the end of 4 hours, and without changing the conditions, a visual inspection of the equipment shall be made.

(b) The chamber internal atmospheric pressure shall be changed to 13.8 ± 0.1 inches of mercury maximum (20,000 feet) and the antenna operated as specified in 4.7.3, at any fixed frequency within the operating range, for a minimum of 4 hours. The antenna shall meet the requirements of 3.9.

4.9 Humidity.

4.9.1 Test procedure. - The antenna shall be tested in accordance with MIL-STD-810 Procedure II, Method 507.1 Humidity. Upon completion of the test subject antenna to electrical tests of paragraphs 4.7.1, 4.7.2 and 4.7.3. (See 3.10)

4.10 Vibration. - The antenna shall be rigidly installed on the vibrator and subjected to the following tests to demonstrate a minimum structural resistance fo vibration:

(a) With the antenna operating as specified in 4.7.3, at any fixed frequency within the operating range, vibration frequency shall be varied between 5 and 500 Hz at a double amplitude of 0.010 inch or applied vibratory acceleration of ± 2g whichever is the lower value. The rate of frequency cycling shall be logarithmic or other means of automatic cycling rates and such that 15 minutes is required to proceed from 5 to 500 back to 5 Hz. When there is no provision for logarithmic cycling, other means of automatic frequency change shall be used. The test shall be sustained for two (2) complete cycles along each of three (3) mutually perpendicular axis. All resonant points shall be noted. The antenna shall be monitored for compliance with the VSWR requirement of 3.8.2, and for evidence of corona or arc-over, for compliance with 3.8.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

(b) In addition to this cycling test, each resonant condition shall be sustained for 10 minutes at the vibratory double amplitude of acceleration shown in Figure 2. The equipment need not be operating during the resonance test. (See 3.11)

4.11 Splashproof protection test. - The antenna shall be mounted in its normal operating position (vertical, with base up), and subjected to the test specified in Table I of MIL-STD-108. Subsequent to, and within one hour of exposure to the water spray, the antenna shall be tested in accordance with 4.7.2, in the base-down position, and shall be examined for evidence of water leakage. (See 3.12)

4.12 Visual and mechanical inspection (See 3.13). - The antenna shall be examined for the defects listed in Standard MIL-STD-252. An inspection Systems Safety Engineering shall be performed to verify compliance with those portions of 3.14 which can be determined visually.

4.13 Quality conformance inspection of packaging. - Packaging shall be inspected in accordance with MIL-P-116 to determine conformance to the requirements of Section 5.

4.14 Rough handling test (packaging). - When rough handling test is required by the contract, the following functional tests shall be conducted to determine freedom from operational malfunction caused by the rough handling:

4.14.1 Electrical tests. - Electrical tests shall be repeated. (See 3.8)

5. PACKAGING

5.1 Preservation. - Preservation shall be level A, B or Commercial as specified. (See 6.2(b))

5.1.1 Level A.

5.1.1.1 Cleaning. - Each Antenna AT-450( )/ARC shall be cleaned in accordance with process C-1 of MIL-P-116.


5.1.1.2 Drying. - Each Antenna AT-450( )/ARC shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservative application. - Not required.

5.1.1.4 Unit packing. - Unit packing shall be in accordance with the methods prescribed in MIL-T-116 as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

FIGURE 2

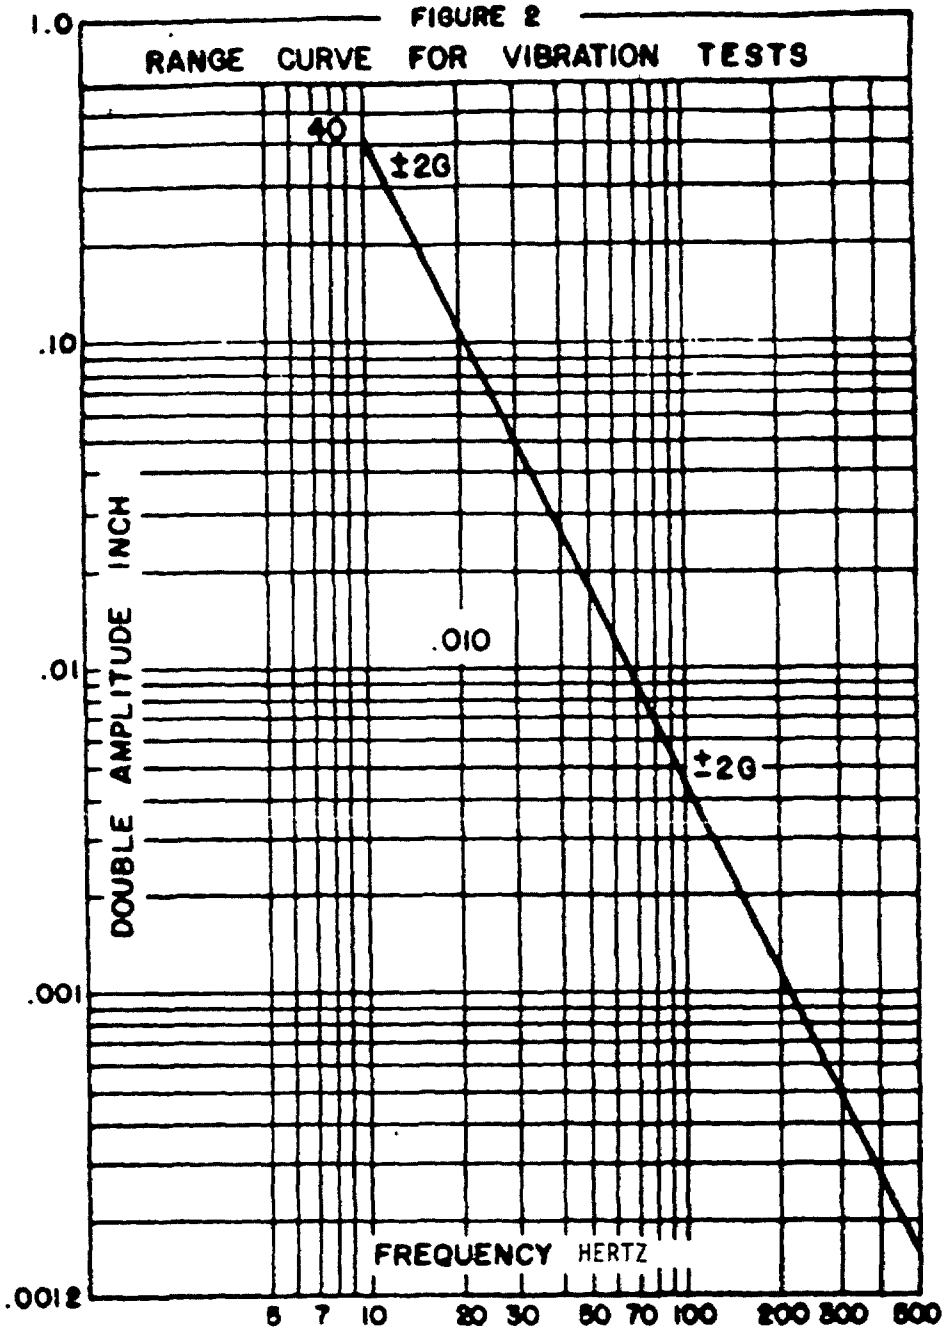

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

5.1.1.4.1 Technical literature. - Each technical literature shall be individually unit packed method IC-1.

5.1.1.4.2 Antenna AT-450( )/ARC. - Each antenna shall be individually unit packed method III as follows: cushion all surfaces with cells or pads or both fabricated of fiberboard conforming to PPP-F-320, type CF, class weather-resistant, variety SW, grade W5c, designed to protect the antenna from shock and vibration hazards during handling and transit. As an alternate, cushioning material may be fabricated of plastic molding material conforming to MIL-P-19644 or polyurethane foam conforming to MIL-P-26514. The cushioned item shall be enclosed within a close-fitting fiberboard box conforming to PPP-B-636, W5c. The technical literature, unit packed as specified in 5.1.1.4.1 shall be placed on top of the contents under the box flaps and the box closed in accordance with the appendix of the box specification.

5.1.2 Level B. - Cleaning, drying, preservative application and unit packing shall be as specified in 5.1.1.

5.1.3 Commercial preservation. - Preservation shall be in accordance with MIL-STD-1188.

5.2 Packing. - Packing shall be level A, B or Commercial, as specified (see 6.2(b)). Shipping containers for level A and B shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

5.2.1 Level A. - A quantity of Antenna AT-450( )/ARC, unit packed as specified in 5.1, shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type I, finish A.

5.2.1.1 Unitization. - Palletization shall be required when: containers specified in 5.2.1 do not require skids; quantities per destination comprise a pallet load; and container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of containers packed as specified in 5.2.1, except that container strapping may be

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

omitted, shall be placed on a pallet, load type I, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film.

5.2.2 Level B. - A quantity of Antenna AT-450( )/ARC, unit packed as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-640, class 2, style E, or PPP-B-636, type CF, class weather-resistant. The gross weight of boxes conforming to PPP-B-640 shall not exceed 250 pounds. Closure shall be in accordance with the appendix of the applicable box specification. Reinforcing shall be by pressure-sensitive filament tape banding or nonmetallic strapping conforming to PPP-T-97 and PPP-S-760, respectively; selection of the material and application shall be in accordance with the appendix of the applicable box specification. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, containers will be pallet-mounted on pallets conforming to NN-P-71, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film. When a single unit is shipped to a single destination no packing is required; the unit container shall serve as the shipping container. Reinforcing shall be as specified above.

5.2.2.1 Unitization. - Palletization shall be required when quantities per destination comprise a pallet load. A quantity of Antenna AT-450( )/ARC, unit packed as specified in 5.1, shall be placed on a pallet, load type 1, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. A fiberboard cap shall be employed over the load having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, class weather-resistant, W5s or V3c. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film.

5.2.3 Commercial packing. - Packing shall be in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Military marking. - In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

5.3.2 Commercial marking. - In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-1188.

6 NOTES

6.1 Intended use. - Antenna AT-450( )/ARC is intended for use in fixed and rotary-wing lightweight aircraft, with Radio Sets AN/ARC-45( ), AN/ARC-51( ) and AN/ARC-55( ).

6.2 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this specification and any amendment thereto.

(b) Level A, level B or commercial preservation and packing. (See 5.)

(c) When the rough handling test is required. (See 4.16)

(d) First Article Inspection. (See 4.3)

(e) Marking and shipping of samples. (See 4.5)

(f) Place of final inspection. (See 4.1)

6.3 Nomenclature. - The parentheses in the nomenclature will be deleted or replaced by the letter identifying the particular design; for example AT-450W/ARC. The contractor should apply for nomenclature in accordance with the applicable clause in the contract. (See 1.1)

6.4 Verification inspection. - Verification by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

6.5 Environmental. - Environmental pollution prevention measures are contained in the packaging material specifications referenced herein. Refer to material specifications or preparing activity for recommended disposibility methods.

Custodian:
Army EL

Preparing activity:
Army EL
Project No. 5821-A134

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-A-14053C(EL) ANTENNA AT-450( )/ARC

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Print or type name and address - Optional)	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:48Z
Check the source to verify that this is the current version before use.