MIL-A-55138B(EL)
19April 1965

Superseding
MIL-A-55138A(EL)
9 September 1963

MILITARY SPECIFICATION

ANTENNA AT-784( )/PRC

1. SCOPE

1.1 This specification covers one type of hand-held homing loop antenna, having a frequency range of 30 to 76 megacycles, designated as Antenna AT-784( )/PRC. The antenna equipment includes the following units:

a. Antenna AT-1082( )/PRC
b. Bag, Cotton Duck CW-445( )/PRC (See 6.1 and 6.6)

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-571	Solder; Lead Alloy, Tin Lead Alloy, and Tin Alloy; Flux Cored Ribbon and Wire, and Solid Form.
PPP-B-585	Boxes, Wood, Wirebound
PPP-B-591	Boxes, Fiberboard, Wood-Cleated
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Fiber
PPP-T-97	Tape; Pressure-Sensitive, Adhesive, Waterproof for Packaging and Sealing.

MILITARY

MIL-C-104	Crates, Open, Wood; Maximum Capacity 2500 Pounds.
MIL-P-116	Preservation, Methods Of.
MIL-C-132	Crates, Open, Wood (2500 to 10,000 Pounds).
MIL-C-3608	Connectors, "BNC", for Radio Frequency Cables.

FSC-5985

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

MILITARY (Cont'd)

MIL-C-3774	Crates, Open, Wood (2500 to 10,000 Pounds).
MIL-B-10377	Box, Wood, Cleated, Veneer, Paper-Overlaid.
MIL-M-10578	Metal Conditioner and Rust Remover(Phosphoric Acid Base).
MIL-P-11268	Parts, Materials and Processes Used in Electronic Communication Equipment.
MIL-M-13231	Marking of Electrical Items.
MIL-F-14072	Finishes for Ground Signal Equipment.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes .
MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-169	Extreme Temperature Cycle.
MIL-STD-170	Moisture Resistance Test Cycle for Ground Signal Equipment.
MIL-STD-252	Wired Equipment,Classification of Visual and Mechanical Defects.

DRAWINGS

ELECTRONICS COMMAND

SC-A-362100	Requirements for Preparation of Packaging and Packing Illustrations and Bills of Material.
SM-B-462381	Antenna AT-1082( )/PRC Schematic Diagram.

(Copies of specifications, standards and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer. Both the title and number should be stipulated when requesting copies).

3. REQUIREMENTS

3.1 Description. - Antenna AT-784( )/PRC is a light-weight, compact homing device designed to be employed with the series of frequency modulated Radio Sets AN/PRC-25 and AN/VRC-12. The antenna consists of a rectangular aluminum case,

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

3.1 Description (Cont'd)

loop antenna, triaxial cable assembly, and a canvas carrying bag. The loop is used to pick up the homing signal and is tuned to the proper frequency by means of a band switch and fine tuning control. The sensing antenna is a two-section, extendable whip concentrically fitted into the left half of the loop. The triaxial cable connects the loop to the 50-ohm antenna outlet on the radio set in use. The strength of the signal fed to the radio set from the loop can be varied by means of an attenuation control.

3.2 Procurement model. - A procurement model of the equipment will be available for inspection by prospective bidders and will be loaned to the contractor. The electrical circuit shall conform to Drawing SM-B-462381. Unless otherwise specified herein or in the invitation for bids physical construction of the equipment shall conform to the model with the following exceptions (Note: In case of conflict between specified performance characteristics for the equipment and the performance of the model (with exceptions), the specified performance characteristics govern):

a. Ball on Sense Antenna shall be button type knurled, in lieu of Ball type.

b. Add two boss (s) to case at cable input end of case, with a clearance, to the loop when it is in the folded position; such clearance to be "1/64" minimum and "1/16" maximum.Drill appropriate weight-reducing holes on same.

c. Sense antenna rod contacts shall have dual spring action against both the rod and the tube in lieu of rod only. Sense antenna rod shall be suitably retained by the retaining rings and shall withstand a pull force of 30 pounds applied axially.

d. Tolerances and dimensions of mechanical parts shall be checked and adjusted to insure correct assembly for watertightness. Gasket rubber for cover shall have a durameter to assure watertightness. Material shall not cold-flow or take a permanent set.

e. The Housing may be widened to allow for either internal or external bosses or both, for the pivoting loop antenna so that proper "O" Ring waterproofing may be employed to eliminate the side compressed, or thrust compressed "O" Ring used in the model. (Circumferential "O" Ring Compression for Waterproofing is Preferred.)

f. Methods shall be employed to waterproof the junction of the top cover and housing to prevent leakage of moisture and water into the housing.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

3.2 f. Procurement model (cont'd)

Additional fastening screws and bosses in the housing may be employed, or any other satisfactory engineering practice that will hold the cover down tightly on the waterproofing gasket. Methods shall be used to prevent "back off" of the cover hold down screws or devices when subject to drop, bounce or vibration. Surface waviness and lay of both the mating surfaces of the cover and housing shall be within total indicator limits as to be conducive to waterproofing.

g. Swivel joints shall be redesigned to assure watertightness, before and after drop test. Electrical characteristics of the Antenna AT-1082( )/PRC shall not be changed as a result of this redesign.

h. A waterproof cap shall be provided for the open end of the triaxial cable connector. The connector shall comply with STD-MS-35187, with a rubber gasket in the cap, and captivated with a 3" ± 1/4" nylon (or equal) cord, in lieu of the beaded chain.

i. The triaxial open end connector (modified to accommodate the triaxial cable) shall be UG-E/U, in lieu of UG-D/U modified. The connectors shall conform to Specification MIL-C-3608.

j. The Contact Terminals (at the swivel joints) shall be fastened into the Teflon Bushing (sleeve) by a suitable physical method such as splining, straight knurling, serration, etc., so that it does not rotate when a torque of 12 inch-oz is applied.

k. The contact spring shall be made wide to assure positive contact and alignment with the contact pin. In addition, the contact spring shall not have sharp bends in the area of electrical contact. The motion of the eccentric stud on the contact spring shall be as shown in Figure 1.

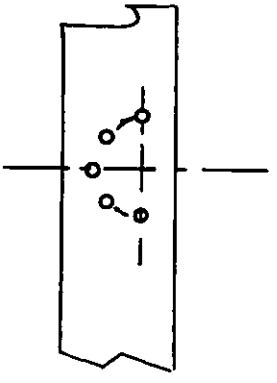


Figure 1

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

3.2 Procurement model (cont'd)

l. The design of the case and/or control knobs shall be such that the control knobs can be manipulated with ease by the operator with arctic gloves.

m. Corner projections shall be replaced by a continuous flange (fence) to prevent injury to a man carrying it in case of a fall, etc. Such modification(s) shall have no adverse effect on the electrical characteristics of the antenna.

n. Max and Null arrows shall be large enough to be readily read.

o. Rubber pads for the Loop Antenna shall be physically secured in addition to the adhesive securing so that they do not drop off.

p. Standard Variable Capacitor shall be used, if available, in the tank circuit.

q. The physical dimensions of Bag, Cotton Duck CW-445( )/PRC shall be modified, if necessary, to ensure that it will adequately house the Antenna AT-1082( )/PRC.

3.3 Preproduction samples. - The contractor shall furnish 4 preproduction samples of the equipment on order for approval, if required by the invitation for bids and contract.

3.4 Parts, materials, and processes. -

3.4.1 General.- Parts, materials, and processes shall be such as to enable the equipment to meet its performance and other requirements, as specified herein. Ratings and derated values of parts and materials shall not be exceeded when the equipment is subjected to specified service conditions. Component parts, such as resistors, capacitors, etc., shall conform to Specification MIL-P-11268. (See 3.14).

3.4.2 Cleaning. -

3.4.3 Parts. - After fabrication, parts shall be cleaned in accordance with good commercial practice, or as specified in an applicable document. Cleaning processes shall have no deleterious effect. Corrosive material shall be removed completely before the parts are mounted on chassis, panels, etc.

3.4.4 Units. - After assembly, units shall be cleaned thoroughly and shall be free from particles of solder, flux, and other foreign material. In addition, when necessary, such cleaning shall also be performed before final assembly of the units.

3.5 Finish. - The equipment shall be finished in accordance with Specification MIL-F-14072. (See 4.4). This includes finish of hardware, such as hinges, screws, etc., and necessary touch-up after mounting. The final paint film on type I surfaces shall be green color (Olive-drab), semi-gloss enamel matching a color chip provided by the procuring agency. (See 6.8).

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

3.6 Marking. -

3.6.1 General - Marking shall conform to Specification MIL-M-13231. (See 4.4) Case marking shall be Goup I as described in that Specification.

3.6.2 Visibility of markings. - Wherever practicable, parts shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

3.6.3 Serial numbers. - The Antenna AT-1082( )/PRC shall have serial numbers.

3.7 Securing of parts.-

3.7.1 General. - Mounting arrangements shall be such as to retain items securely when subjected to specified service conditions. Parts shall be so mounted that loosening, wear of mounting arrangements, or permanent separation of parts shall not occur when the equipment is subjected to specified bounce and shock tests. Any permanent deformation resulting from the tests shall not cause degradation of performance below full specification requirements. Parts shall be secured in such manner that failure of a single rivet or screw will not free the part completely.

3.7.2 Securing of parts by threaded fasteners. - Nylok or other screws with plastic devices, and Loctite or similar sealants, shall not be subjected to temperatures in excess of 250° Fahrenheit (F) (as during baking of paint). Loctite or similar sealants shall not be used where the connection must be electrically conductive; where used, such material shall be applied in accordance with manufacturer's instructions.

3.7.3 Brittle material. - Brittle castings, or parts made of ceramic or other brittle material, shall not be over-constrained by the means used to secure them. Not more than three points of contact shall be used between the brittle part and the mounting surface, unless the mating faces are accurately machined. Threaded holes in ceramic material shall not be employed for assembly or mounting of parts.

3.8 Soldering. -

3.8.1 Solder.-Solder shall conform to Specification QQ-S-571.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the currentversion before use.

3.8.2 Acid or acid salts. - No acid or acid salts shall be used in preparation for or during soldering; however, exception is permitted for preliminary tinning of electrical connections and for tinning or soldering of mechanical joints not used to complete electrical circuits, but in no case shall acid or acid salts be used where they can come in contact with insulation material. Where acid or acid salts are used, as permitted above, they shall be completely neutralized and removed immediately after use.

3.8.3 Process. - There shall be no sharp points or rough surfaces resulting from insufficient heating. The solder shall feather out to a thin edge, indicating proper flowing and wetting actions, and shall not be crystallized, overheated, or underheated. The minimum necessary amount of flux and solder shall be used for electrical connections. Any means employed to remove an unavoidable excess of flux shall not incur the risk of loose particles of flux, brush bristles, or other foreign material remaining in the equipment; flux being spread over a large area; or damage to the equipment. Insulation material that has been subjected to heating during the soldering operation shall be undamaged and parts fastened thereto shall not have become loosened.

3.9 Tropicalization of material. - Material shall be treated as follows:

3.9.1 Treating materials. - Treating materials containing a mercury-bearing fungicide shall not be used. The contractor shall determine that the treating material is compatible with the material or surface to be treated. Selection of treating materials shall be such that any increase in flammability of treated material will be held to the practical minimum.

3.9.2 Toxicity. - Treating materials shall cause no skin irritation or other injury to personnel handling the treated material during fabrication, transportation, operation, or maintenance of the equipment, or during use of the finished items when used for the purpose intended.

3.9.3 Flexibility. - The treatment shall not affect the flexibility of treated materials, to the extent that the equipment may fail to meet specified requirements when subjected to specified service conditions.

3.9.4 Statement of treatment. - The contractor shall submit for approval, to the Contracting Officer, a statement describing in detail the materials to be treated and the treating materials and processes that he proposes to use. (See 6.2.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.

3.10 Welding. -

3.10.1 Cleaning prior to welding.- Surfaces to be welded shall be cleaned in accordance with good commercial practice and shall be free from rust, scale, paint, grease, and other foreign material.

3.10.2 Process.- Preheating shall be employed where distortion is likely to result from welding. Welds shall have thorough penetration and good fusion and shall be free from scabs, blisters, abnormal pock marks, cracks, voids, slag inclusions, and other harmful defects. Where undesirable internal stresses are likely to result from welding, welded items shall be stress-relieved. Inert-gas-shielded arc welding shall be used, when practicable, for welding of aluminum, magnesium, or stainless steel.

3.10.3 Cleaning after welding.- Welded assemblies shall be cleaned to remove rust, scale, oxidation products, and excess flux by sandblasting, wire brushing, or other suitable means. Prior to painting, steel parts that have been arc welded or acetylene welded shall, in addition, be subjected to vat passivation or a phosphoric acid etch in accordance with Specification MIL-M-10578. Acid used for cleaning shall be completely neutralized and removed.

3.11 Wiring. - Wiring shall be neat and sturdy.

3.11.1 Slack.- Wires shall be as short as practical except that sufficient slack shall be provided for the following purposes:

(a) To prevent undue stress on wires and connections, including connections to resiliently supported parts.

(b) To enable parts to be removed and replaced during servicing without disconnecting other parts.

(c) To provide for at least two replacements of the part to which the part is connected.

3.11.2 Protection.- Wires shall be so placed and protected as to avoid contact, under specified service conditions, with rough or irregular surfaces or sharp edges. Wires shall not be bent sharply where they enter insulation material.

3.11.3 Support. - Wires shall be properly supported and secured, to prevent undue stress on the conductors and terminals and undue change in position of the wire (i) during and after subjection of the equipment to specified service conditions of (ii) after service or repair of the equipment in a normal manner. Twine or tape shall not be used for securing wires.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.

3.11.4 Clearance. - Clearance between wires and parts such as controls and resistors, shall be provided to assure proper operation of such parts when the equipment is subjected to specified service conditions. Clearance between solder connections or bare conductors, on terminal boards or other parts, shall be such that no accidental contact can occur between adjacent connections when subjected to specified service conditions.

3.11.5 Splicing.,- Wires in a continuous run between two terminals shall not be spliced during the wiring operation.

3.11.6 Inductive and capacitive effects. - Wires shall be so located that inductive and capacitive effects, unless used as a design feature, will be the minimum practicable.

3.11.7 Connections. -Before being soldered to terminal lugs or fixed terminals, wires shall be mechanically secured so that the connections are not dependent for strength on solder alone. Where practicable, wires soldered to fixed terminals shall be looped at least one-half turn but not more than three-quarters turn around the terminal before soldering. Bared ends of wire leads to be terminated in solder-type terminal lugs shall be tinned, silver plated, or lead-alloy coated. Electrical connections shall not be made by clamping between a metallic and nonmetallic material.

3.12 Controls. - All moveable controls shall operate properly without binding or other undue restriction. Controls shall not be assembled in a misalined condition.

3.13 Self-tapping screws. -Thread-forming screws shall not be used. They shall be used only if construction is improved thereby and only in places where the screws will not require loosening or removal during operation or maintenance. Their use shall be subject to approval by the Contracting Officer.

3.14 Service conditions. (see 4.8).- The equipment shall meet the following service conditions; where a test is referenced, meeting the test shall be considered as compliance with the requirement:

3.14.1 Operation. - Continuous use, for a period of one year, under the worldwide environmental conditions specified in 3.14.2 through 3.14.7, with no more than normal maintenance and replacement of parts. Approval of the pre-production sample (see 3.3) shall be considered as compliance with this requirement.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:28Z
Check the source to verify that this is the current version before use.

3.14.2 Temperature (see 4.8.1). -

(a) Operating: Ambient temperature in the range of + 150°F. to -40°F. (The 150°F. temperature includes effect of sun-load.) Exposure at the high temperature extreme not to exceed 4 hours, and at the low temperature extreme not to exceed 72 hours, at any one time.

(b) Nonoperating: Exposure in the range of +160° F. to -80°F.; exposure at the high temperature extreme need not exceed 4 hours, and at the low temperature extreme need not exceed 24 hours at any one time.

3.14.3 Relative humidity (see 4.8.2).- Exposure to 97 percent relative humidity for 20 hours and 100 percent relative humidity, with condensation, for 4 hours for each 24 hour period over the period of years stated in 3.13.1. Meeting the tests of 4.8.2 shall be considered compliance with this requirement.

3.14.4 Orientation. -

(a) Operating (see 4.8.8).- Any orientation up to 20 degrees from normal operating position.

(b) Nonoperating: Storage in any position for a period of two years. Approval of the preproduction sample (see 3.3) shall be considered as compliance with this requirement.

3.14.5 Immersion (see 4.8.3). Three feet of water for 2 hours.

3.14.6 Vibration, bounce, and shock. - As described in 3.15.

3.15 Vibration, internal. - The amplitude of vibration of any part, subassembly, or structural member of the equipment shall not exceed twice the amplitude of the vibration applied to the equipment at any frequency between 10 and 55 cycles per second (see 4.8.4).

3.15.1 Bounce and shock. - The equipment shall be capable of meeting the requirements of Table 1.

3.16 Bounce preconditioning. - The equipment shall be capable of meeting the requirements specified herein, without subsequent processing, after subjection to the bounce preconditioning of 4.6.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:28Z
Check the source to verify that this is the current version before use.

3.16 (Contd)

Table I. Bounce and shock

Para. heading	Para No.	Performance after test
Bounce.....	4.8.6	Specified performance No physical damage
Shock; drop..	4.8.7	Specified performance. (Note A) Any physical damage shall be minor
Note A: The equipment shall meet the following requirements: 3.19 Operational inspection.		

3.17 Electrical requirements (see 4.7).-

3.17.1 Frequency range. - The loop shall have a frequency range of 30 to 76 megacycles, without hiatus. The fine tuning dial calibration tolerance shall be ±2 Mc/c.

3.17.2 Null ratio.-The null ratio shall be not less than 20 decibels.

3.17.3 Bearing accuracy.- Excluding error due to propagation and site factors, the bearing error shall not exceed ± 5 degrees when receiving vertically polarized ground wave signals at all frequencies within the range of the equipment. The bearing shall read 0 degrees ± 5 degrees, and the reciprocal bearing shall read 180 degrees ± 5 degrees.

3.17.4 Sense indication. A "sense antenna" shall be provided for sense operation. An arrow marking shall be provided on the equipment such that it points in the direction of the signal source when sense antenna is in operation. The difference of the maximum signal level to the minimum signal level in the reverse direction (180 ± 10°) shall not be less than 6 db when measured in accordance with 4.7.5.

3.17.5 Attenuation.- A variable step attenuator shall be provided having five step positions. The total attenuation shall be 36 ± 3 db. Three (3) steps shall provide 10 ± 2 db of attenuation and the last step not less than 5 db of attenuation when measured in accordance with 4.7.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.

3.17.6 Sensitivity.- With the sense antenna rod depressed and the loop in the maximum pick-up position, the signal level indicated on the field strength meter shall not be less than 100 microvolts at 30 mc/s, 220 microvolts at 40 mc/s, 850 microvolts at 60 mc/s and 1500 microvolts in the 70 through 76 mc. (See 4.7.7)

3.17.7 Fabric and thread. - The color of fabric and thread shall be in accordance with the model. Fabric and thread shall be preshrunk, or allowance shall be made for shrinkage in order to provide for satisfactory fit of finished items both before and after they are soaked in water at normal room temperature for 24 hours and then dried thoroughly at normal room temperature.

3.18 Interchangeability.- Like units, assemblies and replaceable parts shall be physically and functionally interchangeable, without modification of such items or of the equipment. (See 4.9) Individual items shall not be hand-picked for fit or performance. Reliance shall not be placed on any unspecified dimension, rating, characteristic, etc.

3.19 Operational inspection. - To determine that the equipment is operable, at such times as required, the operational test specified in 4.10 shall be performed.

3.20 Technical literature.- Technical literature shall be furnished if specified in the contract. (See 6.2).

3.21 Workmanship.- The equipment shall be manufactured and assembled in accordance with the applicable portions of the following paragraphs herein:

3.4 Parts, materials, and processes; general.
3.7 Securing of parts.
3.8 Soldering.
3.9 Tropicalization of material.
3.10 Welding.
3.11 Wiring
3.12 Controls
3.13 Self-tapping screws

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:28Z
Check the source to verify that this is the current version before use.

4.1 Responsibility of inspection. (Cont'd)

of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. - Inspection shall be classified as follows:

(a) Preproduction inspection (does not include preparation for delivery) (see 4.3).

b) Inspection covered by subsidiary documents (see 4.4).

(c) Quality conformance inspection of equipment before preparation for delivery (see 4.5).

(d) Quality conformance inspection of preparation for delivery (see 4.11).

4.3 Preproduction inspection.- This inspection will be performed by the Government unless otherwise specified in the contract. It shall consist of the preproduction inspection specified in table II, and the inspection specified in the subsidiary documents covering the items listed in 4.4, and the inspection specified for group A, and group B, or group C (see tables III, IV and V, respectively). The preproduction inspection will normally be performed in this order: (1) vibration, (2) bounce, (3) shock; drop, and (4) immersion; other preproduction inspection may precede, follow, or be interspersed between the foregoing.

TABLE II. Preproduction inspection

Inspection (For additional preproduction inspection see 4.3)	Requirement paragraph	Inspection paragraph
Moisture resistance.....	3.14.3	4.8.2
Orientation.....	3.14.4	4.8.8
Shock; drop.....	3.15.1	4.8.7

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

4.4 Inspection covered by subsidiary documents. - The following shall be inspected under the applicable subsidiary documents as part of the inspection of equipment before preparation for delivery:

Item	Where required
Finish	3.5
Marking	3.6

4.5 Quality conformance inspection of equipment before preparation for delivery.- The contractor shall perform the inspections specified in 4.4 and 4.5.1 through 4.5.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition the Government-- at its discretion--may perform all or any part of the specified inspection, to verify the contractor's compliance with specified requirements. (See 6.9) Test equipment for Government verification inspection shall be made available by the contractor. Each unit which will be subjected to group A, group B, or group C inspection, except preproduction samples shall be preconditioned after final assembly (see 3.16.)

4.5.1 Group A Inspection. - This inspection, including sampling, shall conform to table III and the ordinary inspection procedures of Standard MIL-STD-105. Group A inspection shall be performed in any order which is satisfactory to the Government, except that the operational inspection 4.11 shall be last (see 6.5).

4.5.2 Group B inspection. -This inspection, including sampling, shall conform to table IV and to the special procedures for small sample inspection of Standard MIL-STD-105. The AQL shall be 6.5 percent defective and the inspection level shall be L-7 for normal and tightened inspection.

4.5.2.1 Order of inspection within group B.-Group B inspection shall be performed in any order which is satisfactory to the Government.

Table III. Group A inspection

Inspection	Requirement paragraph	Inspection paragraph	AQL Major	AQL Minor
Visual and Mechanical				
Antenna AT-1082( )/PRC	3.21	4.10	1.0%	4.0%
Bag CW-445( )/PRC	3.21	4.10	1.0%	4.0%
Operational	3.19	4.11	1.0%	

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

4.5.2.1 Order of inspection within group B- Cont'd)

Table IV. Group B inspection

Inspection	Requirement paragraph	Inspection paragraph	AQL
Frequency coverage	3.17.1	4.7.2)	6.5%
Null ratio	3.17.2	4.7.3)	for the
Bearing accuracy	3.17.3	4.7.4)	group
Sense indication	3.17.4	4.7.5)	combined
Attenuation	3.17.5	4.7.6)	
Sensitivity	3.17.6	4.7.7)	
Interchangeability	3.18	4.9	6.5%

4.5.3 Group C inspection. - This inspection shall be as listed in table V, and shall normally be performed on sample units that have been subjected to and met group A and group B inspection.

Table V. Group C inspection

Inspection	Requirement paragraph	Inspection paragraph
Temperature	3.14.2	4.8.1
Shrinkage	3.17.7	4.7.8
Immersion	3.14.5	4.8.3
Vibration	3.15	4.8.4
Bounce	3.15.1	4.8.6

4.5.3.1 Sampling for inspection of equipment.-Units selected for each group C inspection shall be selected without regard to their quality in accordance with the following:

4.5.3.2 Immersion and shrinkage. - Two units from the first 50 production units shall be selected for the first group C inspection. For subsequent group C inspection, one unit from each 250 (or fraction thereof) production units shall be selected.

4.5.3.3 Temperature, vibration and bounce.- Two units from the first 50 production units only shall be selected. No subsequent group C inspection for the tests will be required.

4.5.3.4 Noncompliance. -If a sample unit fails group C inspection, the contractor shall immediately investigate the cause of failure and shall report to the Government inspector the results thereof and details of the corrective action taken on the process and all units of product which were manufactured with the same conditions, materials, processes, etc.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

4.5.3.4 Noncompliance. - (Cont'd)

If the Government inspector does not consider that the corrective action will enable the product to meet specified requirements, or if the contractor cannot determine the cause of failure, the matter shall be referred to the Contracting Officer (see 6.4)

4.5.4 Reinspection of conforming group B and group C sample units. - Unless otherwise specified, sample units which have been subjected to and passed group B or group C inspection, or both, may be accepted on contract, provided that they are resubjected to and pass group A inspection after repair of all visible damage.

4.6 Bounce preconditioning.- The unit shall be placed in its normal operation position on the table of the Package Tester, Type 1000-SC, as made by the L.A. B. Corporation, Skaneateles, N.Y., or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a 1/32-inch-thick strip of material under one corner or edge of the unit to a distance of 3 inches as the unit bounces. The unit shall be subjected to this preconditioning for 1 minute. After bounce preconditioning, the unit shall not be repaired, alined, cleaned, or otherwise changed prior to subjection to acceptance inspection.

4.7. Electrical tests. Tests shall be conducted in an open field free from extraneous reflective objects. A standard signal generator such as the Hewlett-Packard Model 608C VHF Signal Generator or the equivalent shall be used as the transmitting source. A field strength meter such as the Empire Devices Model NF-105 Noise and Field Intensity Meter or the equivalent shall be used to measure the antenna loop characteristics. The contractor may select an alternate method for testing only after explicit approval of the Contracting Officer.

4.7.1 Test procedure. - The signal generator shall be placed on the ground with a vertical antenna 34 inches long connected directly to the r.f. coaxial output receptacle of the generator. The generator shall be set on its side such that the entire length of the antenna shall be above the generator top surface. The generator output shall be set at 1.0 v rms with no modulation at each test frequency. The field intensity meter shall be placed on a table or stand 25 inches in height and positioned as close as possible behind the test homing loop. The test unit shall be mounted on a tripod or stand 50 inches in height and centered over the 25 foot point of an imaginary line drawin between the signal generator antenna and the field strength meter r.f.input terminal. The 5 foot r.f. cable of the homing loop shall also extend diagonally back along this imaginary line for all applicable measurements.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:28Z
Check the source to verify that this is the currentversion before use.

4.7.2 Frequency range test. - The signal generator shall be set for frequencies of 30.0, 40.0, 50.0, 60.0, 70.0, and 76.0 megacycles. At each setting, it shall be possible to resonate the loop antenna. The frequency coverage of the loop between the minimum and maximum settings shall be continuous. The equipment shall meet the fine-tuning dial calibration requirement of 3.17.1, when tested at the above frequencies.

4.7.3. Null ratio test. - Conditions of this test shall be as specified in 4.7.1 and the frequencies shall be the same as 4.7.2. The reference output readings shall be the signal level readings indicated on the field strength meter. The loop shall be oriented to the lesser of the two signal levels at the maximum pickup positions. The loop shall then be oriented for the greater of the signal levels of the two minimum pickup positions. The ratio of the signal levels at the two reference pickup positions shall meet the minimum requirements as specified in 3.17.2.

4.7.4 Bearing accuracy. - This test shall be conducted under the conditions specified in 4.7.1. The loop shall be mounted on a non-metallic turntable capable of 360 degrees of rotation and provided with an azimuth scale calibrated in 1 degree division from 0 to 360 degrees. The o degree and 180 degree marking on the azimuth scale shall be on the imaginary line of paragraph 4.7.1. The accuracy of the scale calibration shall be not less than ± 0.5 degree. The loop and turntable shall be accurately centered to the signal generator antenna. The loop shall be rotated to the null position and the azimuth scale reading recorded. The loop shall then be rotated approximately 180 degrees to the reciprocal null and the azimuth scale reading recorded. The bearing accuracy shall be checked in this manner at the standard test frequencies given in 4.7.2 and shlll meet the requirements of 3.17.3. (Note: During this test, a temporary pointer shall be clipped or otherwise fastened to the back of Antenna AT-1082( )/PRC at a right angle to the loop and centered on the horizontal dimension of the loop.)

4.7.5 Sense indication.-This test shall be conducted with the signal generator set up as specified in 4.7.1 and at the frequencies given in 4.7.2. The field strength meter shall be positioned on the line so that an operator holding the loop antenna at a height of 6 feet will be at a distance of 25 feet from the generator. The 5 foot triaxial cable shall be suspended diagonally to the field strength meter and be positioned directly over the imaginary line. The homing antenna, with the sensing antenna rod extended 12 inches, shall meet the minimum requirements specified in 3.17.4

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

4.7.6 Attenuation test. - Conditions of this test shall be as specified in 4.7.1., except the distance shall be 11 feet instead of 25 feet. The frequencies shall be as specified in 4.7.2. The loop shall be orientated for maximum signal pickup when tuned to the generator frequency with the attenuator at the 0 db switch position. The field strength meter shall then be adjusted for a peak reference meter reading. The attenuator knob shall then be switched from the 0 to the 10 db position and the corresponding change in the meter reading in db from the reference level noted. The above procedure shall be used for each incremental step of the attenuator up to and including the maximum attenuation step. The attenuator shall be in accordance with the requirements outlined in 3.17.5.

4.7.7 Sensitivity tests. - The sensitivity shall be measured at the frequencies specified in 4.7.2 and under the conditions specified in 4.7.1. With the sense antenna rod depressed, the loop antenna shall be orientad to the maximum pickup position. The signal level indicated on the field strength meter at that position shall meet the minimum requirements specified in 3.17.6.

4.7.8 Test for shrinkage. Bag CW 445( )/PRC shall be inspected for conformance to 3.17.7.

4.8. Service conditions test.-

4.8.1 Temperature test. - The equipment less carrying bag shall be subjected to the temperature cycle shown on Standard MIL-STD-169. The following test shall be performed at steps 1, 3, 8 and 10.

(a) Antenna AT-1082( )/PRC shall be placed centrally and upright within a suitable test chamber. The homing loop cable shall be connected to a field intensity meter located outside the chamber. A signal generator located outside the chamber shall have the inner conductor of a 50 ohm coaxial cable extended into the chamber approximately 18 inches to act as a radiator. The radiator and the homing loop antenna physical positions shall be fixed in upright positions and noted and the relative position maintained throughout the test. The field intensity meter and the signal generator shall be those specified in 4.7.

(b) The signal generator output shall be adjusted to a reference microvolts input 10 db above noise level and a reading taken on the intensity meter as a reference. With the attenuator control on the homing loop set at a minimum attenuation, the output reading on the intensity meter shall be recorded at frequencies of 30.0, 50.0, and 70.0 megacycles. The output readings obtained on the intensity meter at steps 3, 8, and 10 shall not deviate more than ± 4 db from those obtained at step 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.

4.8.2 Moisture resistance. -

4.8.2.1 Test conditions. -

(a) Do not remove equipments from the humidity chamber for measurements.

(b) Start measurements not more tjan 5 minutes after power is applied to the equipment. Complete measurements as rapidly as possible. Do not leave power on after measurements have been completed.

(c) Perform this test with two equipments, one with the case sealed (cover in place) in the normal manner and the other one with the case open (cover removed). Place the equipments in the humidity chamber and subject them to the moisture resistance cycle in 4.8.2.2. Replace cover on the equipment with the case open, when taking measurements required by 4.8.2.3 at the conditions of 4.8.2.2(b) and (e).

4.8.2.2 Test procedure. -The equipment less carrying bag shall be tested as follows:

(a) Dry at 130° ± 5° F. for 24 hours.

(b) Condition at 77° ± 5° F. and 40 to 50 percent relative humidity for 24 hours.

(c) Take the measurements specified in 4.8.2.3.

(d) Subject to continuous cycling for a total of 5 48-hour cycles. Temperature, relative humidity, and period of time for each portion of the cycle shall conform to MIL-STD-170. Take the measurements specified in 4.8.2.3 at the times specified on the standard during the first five cycles.

(e) After cycling has been completed, condition the equipment for 24 hours at 77° ± 5° F. at 40 to 60 percent relative humidity. No repair or replacement of parts shall be made. After adjustment the equipment shall meet full specification performance for the measurements in 4.8.2.3.

4.8.2.3 Performance.- The measurements to be made during the test shall be those specified in 4.8.1. In addition, there shall be no mechanical deterioration, as evidenced by corrosion of metal parts or binding of movable parts. With the sealed and opened units, the limits shall not exceed ± 5 db from the initial reading.

4.8.2.4 Failure. - If any equipment fails to meet the performance specified in 4.8.2.3 during cycling, it shall be realined or readjusted once.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

4.8.2.4 Failure.- (Cont'd)

If the equipment then fails to meet 4.8.2.3 or fails subsequently during cycling, it does not pass the test. In addition, if the equipment fails to meet full specification requirements after conditioning and adjustment, as specified in 4.8.2.2(e) it does not pass the test.

4.8.3 Immersion test. -The Antenna AT-1082( )/PRC shall be immersed to a minimum depth of 3 feet of fresh water for 2 hours. Immediately prior to immersion, the temperature of the equipment shall be 40° F., or more, above the temperature of the water. The tank in which the equipment is immersed shall be of sufficient capacity to maintain the water within ± 2°F. of its initial temperature, or the temperature of the water shall be maintained within these limits by other means. After completion of the 2-hour period of immersion, the equipment shall be removed from the water and wiped dry on exterior surfaces. When the equipment is opened, there shall be no evidence of leakage.

4.8.4 Test for internal vibration.-Internal vibration of the equipment shall be measured as follows, to determine conformance to 3.15.

(a) Secure the equipment, less carrying bag, directly to a vibration table that can be controlled within 10 percent of the specified amplitude. During this test, the antenna loop shall be in the folded position and the telescoping whip shall be retracted. Mounting method shall be such that vibration within the equipment can be observed and measured. To facilitate this observation and measurement, subassemblies may be tested separately provided they are secured to the table in a manner similar to that used to mount them in the equipment.

(b) Place the equipment in its carrying bag as for field transport, on the bed of the package tester. Limit the lateral motion, by wooden fences, to not more than 3 inches and not less than 1 inch. Additional barriers may be used to prevent tumbling, provided that the fore-and-aft motion of the equipment against the backstop is not restrained.

(c) Operate the package tester, shaft in phase, for a total of 3 hours at 283 ± 1 rpm. Turn the equipment 90 degrees at the end of each 30 minutes, so it will rest on a new face.

(d) Measure vibration amplitudes by optical means, or by other means provided that vibration of the part is not affected by the measurement.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

4.8.5- Deleted.

4.8.6. - Bounce test; class L units. - The equipment shall be tested on the package tester, type 1000-SC, as made by the L.A.B. Corporation, Skaneateles, N.Y. or equal. The test shall be as follows:

(a) Cover the tester bed with a panel of 1/2-inch plywood, with the grain parallel to the drive chain. Space sixpenny nails, with the heads below the surface, at 6-inch intervals around all four edges and at 3-inch intervals in a 6-inch square in the center.

(b) Place the adapter plate on the bed of the package tester. Limit the lateral motion, by wooden fences, to not more than 3 inches and not less than 1 inch. Additional barriers may be used to safeguard personnel, provided that the fore-and-aft motion of the adapter plate against the backstop is not restrained.

(c) Operate the package tester, shafts in phase, for a total of 3 hours at 283 ± 1 rpm. Turn the adapter plate 90 degrees at the end of each 45 minutes, each time in the same direction.

4.8.7 Shock; drop.- Antenna AT-1082( )/PRC, in its carrying bag, shall be dropped from a height of 48" on each face, side, edge and corner for a total of 26 drops. The drop shall be made with the telescoping antenna and the loop in a closed position. The drops shall be made from a quick-release hook, or pendulum tester, as made by the L.A.B. Corporation, Skaneateles, NY., or equal. The floor or barrier receiving the impact shall be 2-inch fir backed by concrete or a rigid steel frame.

4.8.8 Orientation test (see 3.14.4.)- The equipment shall be inclined for a minimum of 5 minutes in each plane (that is, with front of chassis elevated, depressed, tilted left, and tilted right) to an angle of 20 ± 3 degrees. During inclination in each plane, the equipment shall meet specified performance for the following measurement:

Paragraph	Measurement
4.11	Operational inspection

4.9 Inspection for dimensional interchangeability.-The dimensions listed below shall be gaged or measured to determine compliance with the physical interchangeability requirements of 3.18. When a listed dimension is not within the specified or design limits, it shall be considered a major defect.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the currentversion before use.

4.9. Inspection for dimensional interchangeability.- (Cont'd)

(a) External and internal dimensions of cases and covers, when such dimensions affect mating parts.

(b) Dimensions of cavities, when such dimensions affect insertion of items.

(c) Location of hinges and fasteners on separable parts or assemblies which must mate such as cases, covers, and mounting.

4.10 Visual and mechanical inspection.- Antenna AT-1082( )/PRC shall be examined for the defects listed in Standard MIL-STD-252. The carrying bag shall be examined for compliance with applicable requirements.

4.11 Operational test. The signal generator shall be set up on a bench with a vertical antenna 34 inches connected directly to the RF output coaxial connector. The generator output shall be adjusted to 500 millivolts with no modulation. The Field Intensity Meter shall be set on a bench and the Homing Antenna AT-1082 ( )/PRC connected to input. The intensity meter shall be set away from the signal generator at a distance of 15 feet. Determine the RF voltage reading on the Field Intensity Meter picked up by the Homing Loop Antenna. The operational check shall be made at 30, 50 and 70 megacycles with the attenuator set at zero attenuation. Rotate the attenuator control to maximum attenuation, and determine the field intensity reading. Total attenuation shall be at least 20 db from zero attenuation to maximum attenuation setting of the control. The frequency dial shall be rotated to observe any abnormal discrepancies in frequency tuning.

4.12 Quality conformance inspection of preparation for delivery.- Preparation for delivery shall be in accordance with Specification MIL-P-116 to determine conformance to the requirements of section 5.

4.13 Rough handling test (preparation for delivery.- When a rough handling test in accordance with Specification MIL-P-116 is required by the contract (see 6.2.e(3), the following functional test shall be conducted to determine freedom from operational malfunction caused by rough handling: Operational test 4.11.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.-

5.1.1 Level A - Antenna AT-1082( )/PRC in Bag, Cotton Duck CW-445( )/PRC, shall be preserved, packaged and tested in accordance with the applicable provisions of Specification MIL-P-116 and in a manner that will afford adequate protection against corrosion, deterioration and damage during worldwide shipment, handling and open storage.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. - Antenna AT-1082( )/PRC in Bag, Cotton Duck CW-445( )/PRC, shall be afforded preservation and packaging in accordance with the suppliers normal commercial practice.

5.2 Packing. - Antenna AT-1082( )/PRC in Bag, Cotton Duck CW-445( )/PRC, packaged as specified, shall be packed in shipping containers conforming to the requirements of the specifications referenced below for the designated level. The gross weight shall not exceed the weight shown unless an individually packed item exceeds that amount. Closure and strapping shall be as prescribed in the applicable box specification or appendix thereto, except that bands of reinforced, pressure-sensitive tape, 1/2 inch wide and conforming to Specification PPP-T-97 for Grade IV, shall be used for fiberboard boxes in lieu of metal strapping.

5.2.1 Level A

Box specification		Max. gross wt
Fiberboard (Type I, Class 2	PPP-B-636	Table VI
Nailed Wood (Style 4, Class 2)	PPP-B-621	200 lbs.
Wirebound (Style 2 or 3, Class 2)	PPP-B-585	200 lbs.
Wood Cleated Fiberboard (Overseas)	PPP-B-591	200 lbs.
Wood Cleated Plywood (Overseas)	PPP-B-601	200 lbs.
Wood Cleated, Veneer, Paper Overlaid (Overseas)	MIL-B-10377	200 lbs.
Crate, Wood, Sheathed	MIL-C-104	Specification Unit
Crate, Wood, Open	MIL-C-3774	"
Crate, Wood, Open	MIL-C-132	"

5.2.2 Level B

Box specification		Max. gross wt
Fiberboard (Type I, Class I)	PPP-B-636	Table I
Nailed Wood (Style 4, Class I)	PPP-B-621	200 lbs.
Wirebound (Style 3, Class I)	PPP-B-585	200 lbs.
Wood, Cleated Fiberboard (Domestic)	PPP-B-591	200 lbs.
Wood Cleated Plywood (Domestic)	PPP-B-601	200 lbs.
Wood Cleated, Veneer, Paper Overlaid (Overseas)	MIL-B-10377	200 lbs.
Crate, Wood, Open	MIL-C-3774	Specification Limit
Crate, Wood, Open	MIL-C-132	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. - Antenna AT-1082( )/PRC in Bag, Cotton Duck CW-445( )/PRC, shall be packed in shipping containers of the type, size and kind commonly used for the purpose in a manner that will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with the rules or regulations of the common carrier, applicable to the mode of transportation.

5.2.4 Pilot Pack. - When Level A packaging and packing is specified above, one acceptable model of Antenna AT-1082( )/PRC, in Bag, Cotton Duck CW-445( )/PRC, will be pilot packed in a manner that will pass the preproduction tests prescribed in Specification MIL-P-116. Illustrations of the packaging and packing procedure, together with Bills of Material, will be prepared and furnished in accordance with the provisions of Signal Corps Drawing No. SC-A-362100.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with the applicable provisions of Standard MIL-STD-129.

6. NOTES

6.1 Intended use. -Provides for reception and homing from a known signal source when used with Radio Sets AN/PRC-25( ), AN/PRC-35, and AN/VRC-12.

6.2 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this specification and any amendment thereto.

(b) Type required.

(c) Level of packaging and level of packing required for shipment (Level A, level B, or level C.)

(d) The specific paragraphs of section 5 which are applicable to the particular procurement.

(e) For preproduction inspection, preproduction pack(s) as follows:
(1) Makeup of pack(s)
(2) Number of each kind of pack to be submitted.
(3) Inspection that will be performed thereon- including rough handling.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. - (Cont'd)

(f) Marking and shipping of samples.

(g) Place of final inspection.

(h) Technical literature required. (See 3.20)

(i) Submission of the statement of treatment referenced in 3.9.4 as soon as possible after award of contract. This statement should be submitted to the contracting officer.

6.3 Definitions.-

6.3.1 Equipment divisions. The terms used herein for equipment divisions conform to Standard MIL-STD-280.

6.3.2 Definitions of inspection terms. - The inspection terms used herein conform to Standard MIL-STD-109. The following are abbreviated definitions selected from those given therein for immediate reference:

6.3.2.1 Inspection. - Onspection is the examination or testing, or both, of supplies to determine compliance with applicable requirements. Sampling is an element of inspection.

6.3.2.2 Examination. - Examination consists of simple, generally nondestructive determinations of compliance, without use of special testing equipment.

6.3.2.3 Testing. - Testing consists of determinations of compliance, using technical means.

6.4 Group C inspection. - Approval to ship may be withheld, at the discretion of the Government, pending the decision from the contracting officer on the adequacy of corrective action. (See 4.5.3.4)

6.5 Location of operational inspection. It is desirable that the operational inspection (4.11) be performed at a location that will minimize handling (which might cause damage to the equipment) after this inspection is completed. It is recommended that the entire lot (including all previously inspected sample units) be sampled and inspected immediately prior to packaging.

6.6 Nomenclature. The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: AT-1082W/PRC. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:28Z
Check the source to verify that this is the currentversion before use.

6.7 Color of textiles. - Standard samples of Olive Drab No. 7 may be obtained from the Sample Loan Unit, Defense Clothing and Textile Supply Center, 2800 South 18th Street, Philadelphia, Pennsylvania 19101. When requesting samples, indication should be given as to type of material concerned.

6.8. Color.- The color chip furnished by the procuring agency (3.5) will be Color No. X-24087, and may be obtained upon request to Commanding General, U. S. Army Electronics Command, Procurement & Production Directorate, 225 South Eighteenth Street, Philadelphia, Pa. ATTN:

6.9 Verification inspection. Verification by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

Custodian:
Army-EL

Preparing activity:
Army-EL

Project No. 5985-A050

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved Budget Bureau No 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity

SPECIFICATION

ORGANIZATION | CITY AND STATE

CONTRACT NO | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES" IN WHAT WAY?

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1426
1 APR 63

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:28Z
Check the source to verify that this is the current version before use.