INCH-POUND

MIL-PRF-32037 (USAF)
12 February 1999

PERFORMANCE SPECIFICATION

BLAST CLEANING ROOM

This specification is approved for use by the Technology & Industrial Services Division, SA-ALC/TILDD, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This blast cleaning room (BCR) specification covers two sizes of field erected, cross draft (end-to-end), semi-manual dry abrasive facilities. The BCR are to have capabilities in removing particles and dust from exhausted air, recover abrasive media and debris, reclaim spend usable abrasive and dispose of dust, broken and worn abrasive and blasting debris.

1.2 Classification. The BCR covered by this specification are of the following 2 types and 2 sizes (see 6.2 and 6.5).

1.2.1 Types. The BCR can be delivered with or without a compressor.

a. Type 1 - without compressor (see 3.9.13)

b. Type 2 - with compressor (see 3.9.13)

1.2.2 Sizes. Each room is to have minimum clear interior dimension as follows:

a. Size L - 20 ft long by 15 ft wide by 12 ft high (see 3.9.1.1)

b. Size S - 20 ft long by 10 ft wide by 10 ft high (see 3.9.1.1)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Technology & Industrial Services Division, SA-ALC/TILDD, 485 Quentin Roosevelt Rd., Bldg 171, Kelly AFB, TX 78241-6425 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4940

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:23Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications. The following specifications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-P-85891 Plastic Media, For Removal Of Organic Coatings

(Unless otherwise indicated, copies of the above specifications, standards and handbooks are available from the Standardization Document Order Desk, 700 Robbins Ave., Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

STANDARDS

U.S. DEPARTMENT OF LABOR

OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

29 CFR 1910.94 Ventilation
29 CFR 1910.134 Respiratory Protection

(Unless otherwise indicated, copies of the regulation are available from the Superintendent of Documents, Government Printing Office, Washington, DC 20402-0001.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:23Z
Check the source to verify that this is the current version before use.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI-Z9.4 Ventilation and Safe Practices of Abrasive Blasting Operations (DoD Adopted)

(Application for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY l0036.)

JOINT INDUSTRIAL COUNCIL (JIC)

JIC-EMP-1/EGP-1 Electrical Standards forMass Production Equipment/Electrical Standards for General Purpose Machine Tools (DoD Adopted)

(Application for copies should be addressed to the National Tool Builders Association, 7901 Westpark Drive, McLean, VA 22101.)

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA-ICS 6 Enclosures for Industrial Controls and Systems (DoD Adopted)

NEMA 12.1 American National Standard for Electric Meters Code for Electricity Metering

(Application for copies should be addressed to the National Electrical Manufacturers Association, 2101 L Street N.W., Suite 300, Washington, D.C. 20037.)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70 National Electrical Code (DoD Adopted)

(Application for copies should be addressed to the National Fire Protection Association, Batterymarch Park, Quincy MA 02269-9101.)

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)

SAE-AMS2431/6 Peening Media, Glass Shot (DoD Adopted)

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:23Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS.

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.4).

3.2 Pre-existing design. The BCR shall be of a pre-existing design. The manufacturer similar construction shall have previous demonstrable satisfactory performance, reliability and durability. Minor changes to the design will be considered by the procuring activity provided significant performance, reliability, durability and safety characteristics of the design are retained.

3.3 General. The BCR shall meet all the design and performance requirements herein. BCR shall be suitable for its intended use. Structural elements shall be rigid and possess the requisite strength. Individual components shall be durable and reliable. Peculiar tools required to perform BCR maintenance and repair shall be furnished with each grit blast room. The BCR shall be free of defects affecting performance, strength, durability, safety, and reliability. The BCR shall comply with all pertinent OSHA requirements. The BCR shall comply with ANSI-Z9.4.

3.4 Components. The BCR shall consist of the following 12 major components:

a. Enclosure (see 3.9.1)

b. Reclaimer (see 3.9.2)

c. Blast machine (see 3.9.3

d. Dust collector (see 3.9.4)

e. Hopper (see 3.9.5)

f. Recovery blower (see 3.9.6)

g. Exhauster (see 3.9.7)

h. Control panel (see 3.9.8)

i. Nozzles and hoses (see 3.9.9)

j. Operator safety equipment (see 3.9.10)

k. Fire suppression system (see 3.9.11)

l. Air compressor may be ordered with the BCR if an air compressor is not already available to the users (see 3.9.13).

NOTE: Other components shall be furnished as required for a complete, safe, functional grit blast room facility. Unless otherwise specified in the contract, the BCR shall be furnished with all functions, components, and equipment customarily supplied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:23Z
Check the source to verify that this is the current version before use.

3.5 Completeness. The BCR shall be furnished complete except for dust conveyance which run from the enclosure and reclaimer to the dust collector and electrical wiring which connects the control panel and other components.

3.6 Assembly. The BCR shall be furnished non-assembled and ready for assembly. It shall be disassembled so that the minimum cubage is required for packaging and transportation. The BCR shall be designed and constructed for ease of assembly. The enclosure shall require no welding for assembly. An air-tight seal between panels shall be provided. Air tight seals shall also be provided to seal all penetrations to walls, wall panel to floor mating areas, observation window mounting and any other openings to include door frames from which dust may escape the room.

3.6.1 Caulk. If caulk (such as silicon rubber adhesive/sealant) is required for BCR assembly, sufficient amount of tube caulk shall be supplied. The caulk shall be of sufficient quality to preclude escape of blast media.

3.7 Installation. BCR assembly, erection and wiring will be accomplished by the Government (users and personnel that are at the location). The enclosure, reclaimer and blast machine will be installed within an existing building. The dust collector and exhauster will be located outside the building housing the enclosure, reclaimer and blast machine. Complete assembly and installation instructions shall be supplied. As a minimum, the necessary ducting, piping, wiring, air and fire suppression connections required shall be addressed.

3.8 Foundation. The BCR facility shall be suitable for installation on an existing smooth, flat, concrete floor.

3.9 Details of components. The room shall perform satisfactorily when using the following abrasive(s):

a. 12 to 60 mesh plastic abrasive media having manufacturers rated density of 1.15 to 1.5 grams per cubic centimeter and Knoop hardness of 120 to 165 (such as U.S. Technology, Polyextra, Polyplus and Type III) or plastic abrasive media conforming to MIL-P-85891.

b. All sizes of AMS 2431/6 glass shot.

c. 80 to 180 mesh aluminum oxide abrasive.

3.9.1 Enclosure. A complete enclosure shall be supplied that shall include the ceiling, walls, doors and lights.

3.9.1.1 Dimensions. The enclosure shall have minimum clear interior dimensions as follows:

a. Size L - 20 ft long by 15 ft wide by 12 ft high: 20 x 15 x 12

b. Size S - 20 ft long by 10 ft wide by 10 ft high: 20 x 10 x 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:23Z
Check the source to verify that this is the current version before use.

3.9.1.2 Doors. Enclosure shall be furnished with work entrance door(s) in a narrow side (one end). Work entrance door openings shall be nominal 8 ft wide by 9 ft high (or larger) for the 20 x 10 x 10 enclosure and nominal 13 ft wide by 11 ft high (or larger) for the 20 x 15 x 12 enclosure. An observation window and operator access door shall be furnished. The window shall be provided in one of the wall panels so that the users can install an emergency light outside the room. This window shall be safety glass.

3.9.1.3 Lighting. The BCR standard enclosure luminaries (with respect to number, type and rating) shall provide a minimum of 120 foot candle of illumination as measured at a height of 4 feet at the middle of the room, at the side wall midpoint. The 120 foot candle illuminations shall be tested during the operation of the blast room by utilizing a 3/8 inch nozzle at 40 psi and 300 pounds per hour flow rate. The media used shall be plastic.

3.9.2 Reclaimer. The reclaimer shall separate abrasive media from blasting debris and dust. The reclaimer shall also separate usable media from undersized, broken media. The reclaimer shall retain no less than 90 percent of the usable abrasive for re-use. The reclaimer shall retain no more than 10 percent of the blasting debris. When plastic abrasive media is being reclaimed a minimum of 95 percent of abrasive sized 75 um (200 mesh) and smaller shall be passed to the dust collector. Reusable abrasive media shall be retained in a eighteen cubic foot, minimum, hopper for further use. Dust, nonreusable media and blasting debris shall pass to the dust collector except that oversized particles may be collected in the reclaimer.

3.9.3 Blast machine. The blast machine shall have a minimum capacity of 6 cu ft of abrasive media. The blast machine shall be designed primarily for use with plastic abrasive. The blast machine shall also be suitable for use with other abrasives as specified (see 3.9). The blast machine shall be designed for a maximum working pressure of 125 psi. The blast machine shall be capable of regulating a pneumatic supply pressure of 125 psi to operating pressure of 20 to l00 psi for the room. The blast machine shall be designed, fabricated and stamped in accordance with the ASME code for unfired pressure vessels. Abrasive media shall automatically be replenished from the reclaimer storage. The blast machine shall be furnished complete with all required valves, regulators, traps and control devices. The blast machine shall be plumbed for one operator. If the blast machine depends on gravity for feeding of abrasive media, then it shall have a 60 degree conical bottom. The blast machine shall be capable of operation with or without a magnetic separator installed in the lower pressure vessel area. A magnetic separator shall be provided. The lower pressure vessel shall be aerated.

3.9.4 Dust collector. The dust collector shall be cartridge filter type with an air to cloth ratio of no more than 2.2:1 (cubic feet per minute (cfm) of air entering the dust collector, square foot of filter area). The filter cartridges shall have a minimum efficiency rating of 99.9 percent at one micron. The cartridges shall be jet pulse cleaned for continuous service. Dust shall be discharged into pyramidal shaped hopper(s) with slide gate and drum cover. A differential pressure gage shall be provided that indicates pressure drop across the filters. The pressure drop across clean filters shall not exceed 1 inch H20 at rated flow. The cartridges shall be easily removed and replaced through side access panels and be designed so that the filters can be easily replaced and held in place with holding fixtures. The dust collector shall be suitably designed, primed and painted for outside installation. The air exhausted from the dust collector must meet

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:23Z
Check the source to verify that this is the current version before use.

environmental regulatory standards (OSHA) with respect to particulate matter. The dust collector shall be a standard, commercially available, product. A Y-duct to vent dust from the cyclone separator and from the enclosure to the dust collector shall be provided. The Y-duct shall be intended for installation inside.

3.9.5 Low profile hopper. A low profile hopper of 4.25" maximum height shall be provided with the grit blast room for media loading. A low profile hopper hose shall pass through the back wall of the enclosure with an air tight seal. Sufficient hose shall be provided to allow for maneuverability and media loading of the hopper.

3.9.6 Recovery blower. The recovery blower shall be mounted on top of the cyclone reclaimer, storage hopper and blast machine assembly. The blower shall provide a minimum of 800 cfm at 25" of static pressure water gauge.

3.9.7 Exhauster. An electric driven, side or upward discharge, sound suppressed, exhaust fan shall be furnished. The exhaust rate produced shall be sufficient to provide a carry velocity over a minimum distance of 20 feet. The exhauster shall be suitable for outside installation.

3.9.8 Control panel. A prewired control panel with a fused main disconnect switch shall be furnished. Control panel shall conform to and be located in accordance with JIC-EMP-1/EGP-1. Control panel shall be NEMA 12.1 dust tight in accordance with NEMA-ICS 6.

3.9.9 Nozzles and hoses. The following equipment shall be furnished with each BCR:

a. Blast nozzle: Quantity of 2, either boron carbide or tungsten carbide, 3/8 or 1/2 inch ID.

b. Blast hose assembly: 40 ft long by 1 inch minimum ID for the size L room and 35 ft long by 1 inch minimum for the size S room. Shall be easily moveable by one person fully attired in the protective equipment. The operator's end of the blast hose shall have a small ID connected to the 1 inch ID hose, to provide for greater maneuverability.

c. One blow off hose assembly, 50 ft long x 1/2 inch ID, with thumb activated nozzle.

3.9.10 Operator safety equipment. The following operator safety equipment shall be supplied with each BCR:

a. Ventilated hood and air hose assembly. Approved ventilated hood with 50 ft X 3/8 inch ID air hose assembly meeting the requirements of 25 CFR 1910.94.

b. Belt. This belt shall have a hood ventilating hose connection and air flow regulator.

c. Air purifier. This purifier rating shall be no less than 15 scfm; shall remove harmful quantities of dust, oil, water, scale and odor so that the air delivered to the hood meets the air purity requirements of 29 CFR 1910.134(d), Respiratory Protection Standard. Two spare cartridges or filter elements shall be provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:23Z
Check the source to verify that this is the current version before use.

d. Carbon monoxide monitor. This monitor shall provide a continuous indication of CO level in the respiratory air lines. The enclosure shall be NEMA 12.1 dust tight in accordance with NEMA-ICS 6. The monitor shall be wired into the interlock shutdown system, so that when the alarm activates, the blasting stops automatically. It shall have an audible alarm of sufficient volume to permit the operator to hear it over the ambient blasting noise. Monitor shall be capable of operating from 110V AC electrical supply.

3.9.11 Fire suppression system. Plumbing and sprinkler heads shall be provided in the enclosure for connection to the existing building automatic fire suppression system (see 3.7).

3.9.12 Fire alarm hook up. Electrical connection points outside the enclosure shall be provided so that the users can connect the existing building fire alarm system to the carbon monoxide alarm. Facilities fire reporting system shall provide a normally closed dry contact, capable of disconnecting 120 watts at 10 amps rating.

3.9.13 Compressor. The BCR shall include an in-line CO breathing air monitor with the intent that one compressor can supply the blasting and breathing air. If a compressor is ordered with the BCR, the compressor shall be capable of providing 220 CFM compressed air at 100 psi with a 3/8" to ½" blast nozzle. A separate compressor for the breathing air can be supplied as an acceptable local option. This local optional compressor shall be provided with a pressure gauge (0-30 psig), quick disconnect fittings, and be of 3/4 to 3 HP. The optional compressor for breathing air shall be either an electric driven, oil-less pump or a non-electric, air operated, oil-less air pump.

3.10 Function. The BCR shall provide clear vision of the work piece by the blast nozzle operator. Control of the starting and stopping of the flow of air and abrasive media from the blast nozzle shall be initiated by a dead-man manual control mounted on either the blast nozzle or on the blast hose assembly near the blast nozzle. The dead-man switch shall activate with no delay. Debris and spend media collection will be accomplished manually (sweep-in) by the operator; however no lifting by the operator of debris and spent media shall be required. Reusable abrasive media shall be reclaimed for further use. Dust, broken abrasive media and blast debris shall be separated from the reclaimable abrasive media for disposal. Abrasive media shall automatically be replenished to the blast machine when the nozzle control is "off." Rate of abrasive delivery from the blast nozzle shall be adjustable from full to none. Interlocks shall be provided so that blasting cannot take place unless both doors are shut and the exhaust system is operating.

3.11 Performance. The BCR shall be designed primarily for use with plastic abrasive media; however, it shall be adjustable to perform satisfactorily when using all of the specified abrasive media (see 3.9). Empty enclosure cross draft air velocity shall be not less than average 100 ft/minute at any point on the flow cross section. Compressed air usage during blast cleaning on cycles shall not exceed a rate of 200 scfm at l00 psig. The abrasive stream leaving the nozzle shall be uniform and steady. At maximum abrasive delivery the room blast nozzle shall be uniform and steady. At maximum abrasive delivery the room blast nozzle shall discharge a minimum of 10 pounds per minute of aluminum oxide abrasive at 80 psig, and both types of rooms blast nozzles shall discharge a minimum of 3.5 pounds per minute of plastic abrasive at 40

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:23Z
Check the source to verify that this is the current version before use.

psig. Both types of grit blast rooms shall have a operating noise level not to exceed 84dBA slow scale when measured at the periphery of 3 ft from the grit blast room at the 4.5 ft height level and while blasting at 40 psi measured at the nozzle.

3.12 Electrical. Electrical requirements of construction, supply, components, and grounding are as follows:

3.12.1 Construction. Electrical wiring and equipment shall comply with NFPA 70, National Electrical Code. All wiring and equipment located inside the enclosure shall meet the requirements for Class II, Division II locations as defined by NFPA 70.

3.12.2 Supply. Unless otherwise specified (see 6.2), BCR shall be designed and constructed for connection to a source of 480 Volt, 3-phase, 60 Hertz electric power.

3.12.3 Components. Motors, controls and transformers shall be specifically intended for the voltage and frequency to which they will be connected; derating, re-name plating, etc., shall not be done. Electrical components (such as starters, relays, switches and enclosures) shall conform to and be located in accordance with JIC-EMP-1/EGP-1. Enclosures shall be NEMA 12.1 dust tight in accordance with NEMA-ICS 6.

3.12.4 Grounding. A complete electrical grounding system shall be provided. Within the enclosure, provisions shall be made to ground the operator and the component being worked. The nozzle and hose assembly as well as the recovery system shall be grounded. In addition, any component of the BCR facility that requires grounding for safe operation shall be grounded.

3.13 Air. The owner furnished compressed air supply shall be rated 220 scfm at 100 psi.

3.14 Safety. The BCR design shall comply with 29 CFR 1910.94 and ANSI Z9.4 for abrasive blasting operations and be such as to exclude the accumulations of dust and eliminate the potential for fires or explosions. Interlocks shall be fail safe. The shut down system shall provide adequate operator warning as to the reason for the shut down. Operation instructions shall include actions to be taken when any alarm system is activated. Procedures shall be recommended to ensure duct work, particle collectors and fans are inspected and cleaned frequently by properly trained personnel. Handbooks and technical orders will comply with OSHA and AFOSH Standards for abrasive operations. Appropriate warning devices shall be provided to alert personnel to the dangers present such as excessive noise and hazardous dusts and the measures needed for protection.

3.15 Exposure. Dust collector, exhauster and appurtenances shall be suitable for outside exposure to the weather.

3.16 Identical products. All BCR of the same size and type furnished under any one contract shall be identical and shall be identified by the same manufacturer's part number.

4. VERIFICATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:23Z
Check the source to verify that this is the current version before use.

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Quality conformance inspection (see 4.3).

4.2 First article inspection.

4.2.1 Test sample. The First Article inspection samples shall be representative of production units the contractor intends to furnish. One room of each size and type being procured shall be erected and subject to First Article inspection.

4.2.2 First article inspection method.

4.2.2.1 Examination of the room. Examination of the BCR shall be conducted to conform adherence to the requirements herein. This examination shall consist of visual inspection of the rooms, review of design and manufacturing drawings of the rooms, simple measurements, examination of certificates of compliance on purchased material and components. A functional check shall be made of the rooms to insure that they are operational. These examinations of the BCR shall be accomplished using a contractor developed checklist that shall identify all specific room attributes and characteristics for which inspection is made, how conformance is determined and results obtained.

4.2.2.2 Testing of the room. The room shall be tested to confirm adherence to the requirements paragraph 3. Test method, precision and instrumentation shall be of engineering quality. These tests of the rooms shall be accomplished using contractor developed procedures.

4.3 Quality conformance inspection. All production units shall be subjected to quality conformance, or acceptance inspection which shall consist of the same procedure and make use of the same documentation (check list and forms) as applied by the contractor to quality control similar rooms sold to non-military customers.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:23Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This BCR specification covers 2 types and 2 sizes that are military unique due to the specified room size requirements and the requirement for the unit to be used with MIL-P-85891 (plastic media). In addition, the unit must meet OSHA and AFOSH standards for abrasive operations, the dust collector must meet environmental regulatory standards of OSHA with respect to particulate matter and specified safety requirements. The BCR is intended for dry abrasive blast cleaning of support equipment to remove the following:

a. Polyurethane paint from aluminum and stainless steel surfaces prior to painting.

b. Paint and corrosion to produce a near white condition of mild steel surfaces prior to painting.

6.2 Acquisition requirements. Acquisition document should specify the following:

a. Title, number and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1, 2.2, and 2.3).

c. When first article is required (see 4.2).

d. The type and size of Grit Blast Room (see 1.2)

e. If electrical power supply characteristics are different from those specified (see 3.12.2).

g. If Compressor and optional compressor are required (see 3.9.13)

h. Packaging (see 5.1).

6.4 Test supplies. The contractor will furnish all necessary supplies (for example: blast media), facilities (for example: slab with trench) and utilities (for example: compressed air and electric power) and sample items to be blasted, except the Government may provide items of support equipment for blast cleaning.

6.5 Part or Identifying Numbers (PIN). The PIN to be used for BCR acquired to this specification are created as follows:

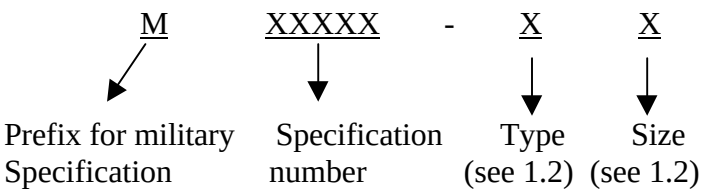

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:23Z
Check the source to verify that this is the current version before use.

6.6 Subject term (key work) listing.

Blower
Caulk
Compressor
Design
Dust collector
Electrical
Enclosure
Foundation
Glass beads
Hopper
Hoses
Lighting
Mesh
Nozzles
Plastic
Reclaimer
Seal

Custodians:
Air Force – 99

Preparing activity:
Air Force - 82

(Project 4940-0744)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete block 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-PRF-32037	12 Februasry 1999

3.. DOCUMENT TITLE:

BLAST CLEANING ROOM

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	D. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. Name San Antonio - Air Logistics Center	b. TELEPHONE (Include Area Code) (1) Commercial (210)925-6314 (2) DSN 945-6314
c. ADDRESS (Include Zip Code) SA-ALC/TILDD 485 Quentin Roosevelt Rd., Bldg 171 Kelly AFB, TX 78241-6524	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS CONTACT THE: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD FORM 1426, OCT 89 (EF) (COMPUTER GENERATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:23Z
Check the source to verify that this is the current version before use.